

Camshaft: Performer-Plus


Part #: #2177

Vehicle Type: CHRYSLER

Engine Application: 318-340-360 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 270°	EXHAUST: 270°
DURATION @ .050	INTAKE: 204°	EXHAUST: 204°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.28"
LIFT @ VALVE	INTAKE: 0.42"	EXHAUST: 0.42"
LOBE SEPERATION: 110°	INTAKE CENTERLINE: 106°	IDLE VAC @ 1000 RPM: 16"

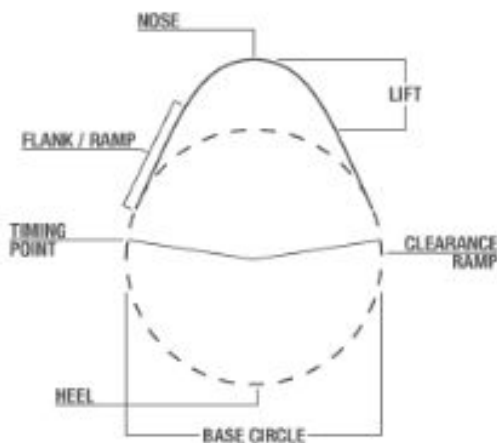

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 4° ATDC Closes: 28° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 36° BBDC Closes: 12° BTDC

OPTIONAL VALVE SPRINGS: #5877/#5977

CAM FEATURES: Produces 305 ft.-lbs. when matched with #2176 intake and stock heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Steel Gear Set #7803. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection.

Footnote 1: Not for 1985 and later engines with roller lifters.

Footnote 2: Do not use dual valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5877 (non-rotators) or #5977 (rotators).

Footnote 3: Use only stock ratio rocker arms.