

Camshaft: Performer-Plus


Part #: #2182

Vehicle Type: FORD

Engine Application: 351W V8

RPM Range: Idle-5500

| | | |
|------------------------|-------------------------|--------------------------|
| DURATION AS ADVERTISED | INTAKE: 270° | EXHAUST: 280° |
| DURATION @ .050 | INTAKE: 204° | EXHAUST: 214° |
| LIFT @ CAM (Lobe) | INTAKE: 0.28" | EXHAUST: 0.295" |
| LIFT @ VALVE | INTAKE: 0.448" | EXHAUST: 0.472" |
| LOBE SEPERATION: 112° | INTAKE CENTERLINE: 107° | IDLE VAC @ 1000 RPM: 15" |

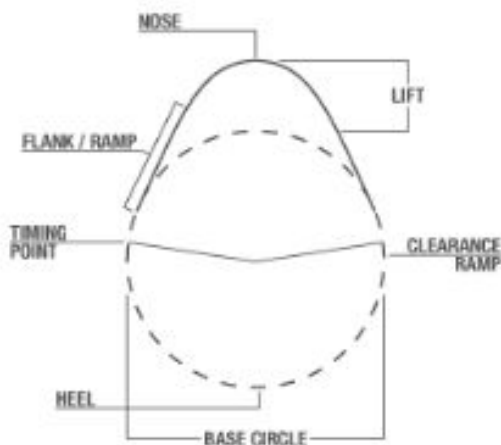

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

| | |
|------------------------------|-------------------------------------|
| INTAKE TIMING @ .050" LIFT: | Opens: 5° ATDC Closes: 29° ABDC |
| EXHAUST TIMING @ .050" LIFT: | Opens: 44° BBDC Closes: 10° BTDC |

OPTIONAL VALVE SPRINGS: #5822/#5922

CAM FEATURES: Produces 325 ft.-lbs. when matched with #2181 intake & stock heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Gear Set #7811 or #7820. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection.

Footnote 1: Do not use dual valve springs. Use only recommended stock or Edelbrock Sure Seat Valve Springs #5882 or #5982

Footnote 2: Use only stock ratio rocker arms.