



Camshaft: Performer-Plus

Part #: #2192

Vehicle Type: CHRYSLER

Engine Application: 383-400-440 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED

INTAKE: 270°

EXHAUST: 280°

DURATION @ .050

INTAKE: 204°

EXHAUST: 214°

LIFT @ CAM (Lobe)

INTAKE: 0.28"

EXHAUST: 0.295"

LIFT @ VALVE


INTAKE: 0.42"

EXHAUST: 0.442"

LOBE SEPERATION: 112°

INTAKE CENTERLINE: 107°

IDLE VAC @ 1000 RPM: 14"

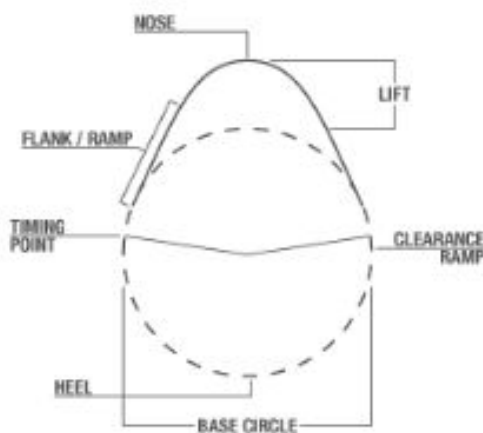

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT: Opens: 5° ATDC
Closes: 29° ABDC

EXHAUST TIMING @ .050" LIFT: Opens: 44° BBDC
Closes: 10° BTDC

OPTIONAL VALVE SPRINGS: #5892/#5992

CAM FEATURES: Produces 427 ft.-lbs. when matched with #2191 intake and stock heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Steel Gear Set #7804. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection; use the "0" keyway for Performer-Plus cams.

Footnote 1: For 1968 and later.

Footnote 2: Do not use dual valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5892 (nonrotators) or #5992 (rotators).

Footnote 3: Use only stock ratio rocker arms.