

Camshaft: Performer-Plus


Part #: #3702

Vehicle Type: CHEVROLET

Engine Application: 305-350 V8 T.B.I. & LG-4

RPM Range: 1500-5500

DURATION AS ADVERTISED	INTAKE: 244°	EXHAUST: 264°
DURATION @ .050	INTAKE: 194°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.265"	EXHAUST: 0.294"
LIFT @ VALVE	INTAKE: 0.398"	EXHAUST: 0.442"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 16"

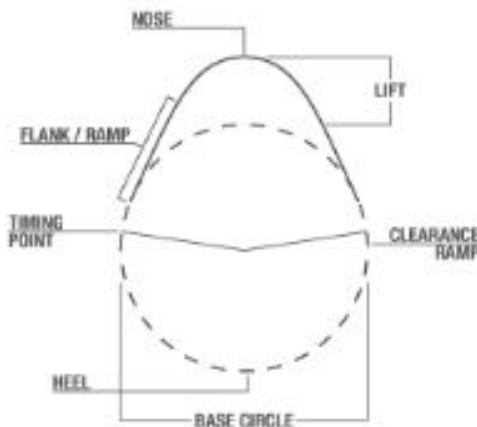

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 10° ATDC
	Closes: 24° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 44° BBDC
	Closes: 10° BTDC

OPTIONAL VALVE SPRINGS: #5802/#5902

CAM FEATURES: For 1976-95 small-block Chevrolet. Produces 245 ft.-lbs. when matched with #3701 intake and stock heads.

INSTALLATION NOTES: Use Performer-Link Timing Chain and Gear Set, #7802 . Do not use late model timing sets. They are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Performer-Link True Rolling Timing Sets feature three keyways for specific timing selection. Always use the straight-up timing marks when installing Performer-Plus camshafts with Performer-Link Timing Sets.

Footnote 1: Non-roller applications.

Footnote 2: Use only Sure Seat Valve Springs, #5802 or 5902

Footnote 3: Use only stock ratio rocker arms.