

Camshaft: Performer-Plus


Part #: #3712

Vehicle Type: OLDSMOBILE

Engine Application: 350-403 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 280°	EXHAUST: 290°
DURATION @ .050	INTAKE: 204°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.449"	EXHAUST: 0.473"
LOBE SEPERATION: 114°	INTAKE CENTERLINE: 106°	IDLE VAC @ 1000 RPM: 16"

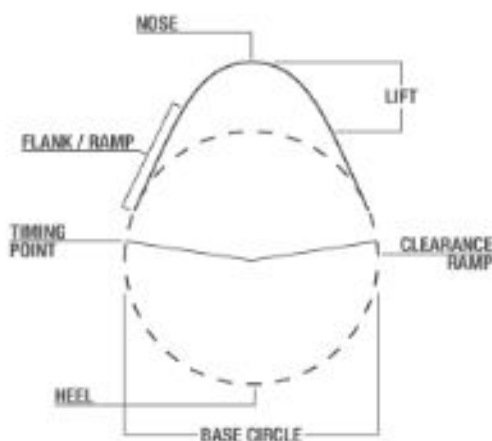

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 4° ATDC
	Closes: 28° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 49° BBDC
	Closes: 15° BTDC

OPTIONAL VALVE SPRINGS: #5812

CAM FEATURES: Produces 330 ft.-lbs. when matched with #3711 intake and stock heads.

INSTALLATION NOTES: Use Edelbrock Performer-Link Timing Chain and Gear Set #7813. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation.

Edelbrock Timing Sets feature three keyways for specified timing selection. Use - position for most applications.

Footnote 1: May require longer than stock pushrods.

Footnote 2: Will not fit 1966 & earlier.

Footnote 3: Use only recommended Edelbrock Sure Seat Valve Springs #5812 or original equipment equivalent.