

Camshaft: Rollin' Thunder Hydraulic Roller


Part #: #2221

Vehicle Type: FORD

Engine Application: 289-302 V8

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 298°	EXHAUST: 302°
DURATION @ .050	INTAKE: 227°	EXHAUST: 234°
LIFT @ CAM (Lobe)	INTAKE: 0.325"	EXHAUST: 0.325"
LIFT @ VALVE	INTAKE: 0.52"	EXHAUST: 0.52"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 12"

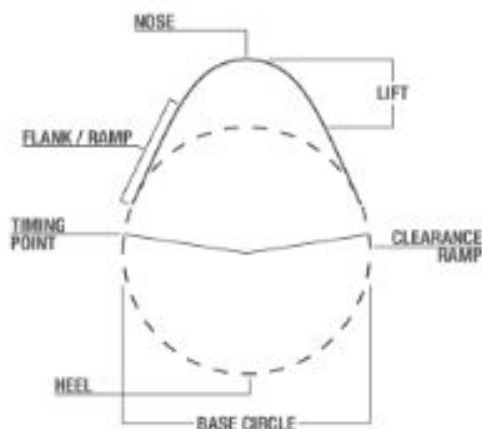

**CAM LOBE REFERENCE**

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 6° BTDC Closes: 41° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 54° BBDC Closes: 0° ATDC

**OPTIONAL VALVE SPRINGS: -**

**CAM FEATURES:** This camshaft works great when matched with Pro-Flo XT EFI system #3520 and Performer RPM cylinder heads #60259; this combo produces 384 HP / 347 ft.-lbs. of torque

**INSTALLATION NOTES:** Use Edelbrock Performer-Link Timing Chain and Gear Set #7811 or Accu-Drive gear drive #7892. Do not use late model timing chain and gear sets that are designed for emissioncontrolled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection. Use "0" position for most applications.

**Footnote 1:** Use with high stall torque converter only.

**Footnote 2:** Do not use dual valve springs. Use recommended valve springs with closed pressure of 110 lbs., open pressure of 320 lbs, and lift of .575".

**Footnote 3:** Use only stock ratio rocker arms.