

Camshaft: Torker-Plus


Part #: #5002

Vehicle Type: CHEVROLET

Engine Application: 283-400 V8 (1957-1986)

RPM Range: N/A

DURATION AS ADVERTISED	INTAKE: 292°	EXHAUST: 300°
DURATION @ .050	INTAKE: 232°	EXHAUST: 234°
LIFT @ CAM (Lobe)	INTAKE: 0.325"	EXHAUST: 0.325"
LIFT @ VALVE	INTAKE: 0.488"	EXHAUST: 0.488"
LOBE SEPERATION: 108°	INTAKE CENTERLINE: 106°	IDLE VAC @ 1000 RPM: N/A

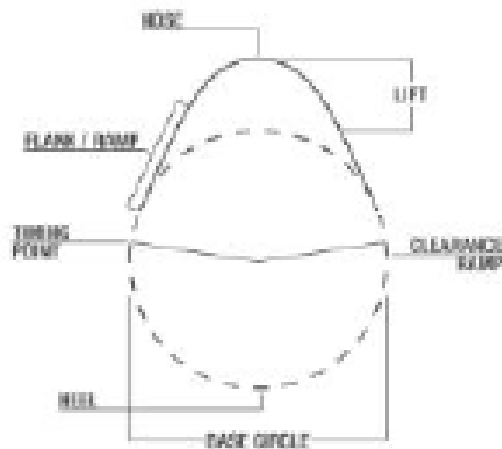

**CAM LOBE REFERENCE**

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 10° BTDC Closes: 42° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 47° BBDC Closes: 7° ATDC

OPTIONAL VALVE SPRINGS: #5703

CAM FEATURES: Hydraulic flat tappet lifters are included with each camshaft.

INSTALLATION NOTES: Use Edelbrock Performer-Link Timing Chain and Gear Set #7800 or Accu-Drive gear drive #7890. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection. Use "0" position for most applications.

Footnote 1: Use only stock ratio rocker arms.

Footnote 2: Do not use dual valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5703.