

Camshaft: Performer-Plus


Part #: #5487

Vehicle Type: BUICK

Engine Application: 231-252 V6 Even Fire

RPM Range: 1500-5500

DURATION AS ADVERTISED	INTAKE: 280°	EXHAUST: 290°
DURATION @ .050	INTAKE: 204°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.448"	EXHAUST: 0.472"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 15"

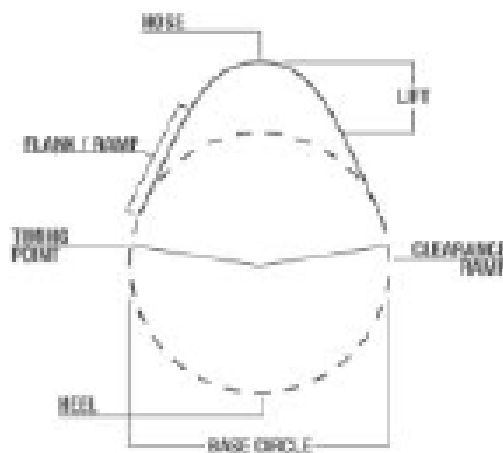

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 5° ATDC
	Closes: 29° ABDC

EXHAUST TIMING @ .050" LIFT:	Opens: 44° BBDC
	Closes: 10° BTDC

OPTIONAL VALVE SPRINGS: -

CAM FEATURES:

INSTALLATION NOTES: Use Performer-Link Timing Chain and Gear Set, #7829 . Do not use late model timing sets. They are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Performer-Link True Rolling Timing Sets feature three keyways for specific timing selection. Always use the - or straight-up timing marks when installing Performer-Plus camshafts with Performer-Link Timing Sets.

Footnote 1: For non computer-controlled vehicles.

Footnote 2: Use only stock replacement valve springs

Footnote 3: Use only stock ratio rocker arms.