

Camshaft: Performer RPM


Part #: #7102

Vehicle Type: CHEVROLET

Engine Application: 283-400 V8 (1957-1986)

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 308°	EXHAUST: 318°
DURATION @ .050	INTAKE: 234°	EXHAUST: 244°
LIFT @ CAM (Lobe)	INTAKE: 0.325"	EXHAUST: 0.34"
LIFT @ VALVE	INTAKE: 0.488"	EXHAUST: 0.51"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 11"

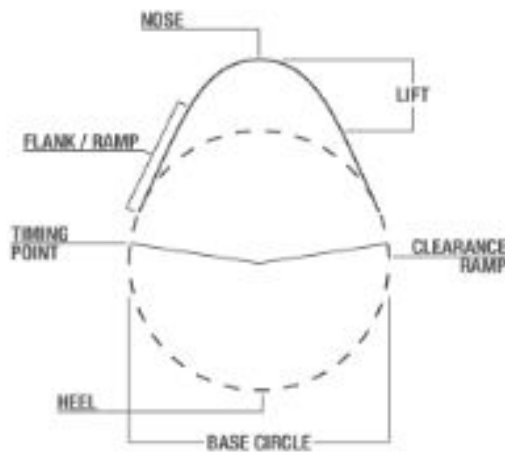

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 10° BTDC
	Closes: 44° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 59° BBDC
	Closes: 5° ATDC

OPTIONAL VALVE SPRINGS: #5703

CAM FEATURES: 410 HP & 408 ft.-lbs. with #7501 intake & #60899 heads.

INSTALLATION NOTES: Use Edelbrock Performer-Link Timing Chain and Gear Set #7800 or Accu-Drive gear drive #7890. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection. Use "0" position for most applications.

Footnote 1: Do not use dual valve springs .Use only recommended Edelbrock Sure Seat Valve Springs #5703.

Footnote 2: Use stock ratio rocker arms only.