

Camshaft: Performer RPM


Part #: #7106

Vehicle Type: FORD

Engine Application: 390-428 V8

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 296°	EXHAUST: 296°
DURATION @ .050	INTAKE: 236°	EXHAUST: 236°
LIFT @ CAM (Lobe)	INTAKE: 0.325"	EXHAUST: 0.325"
LIFT @ VALVE	INTAKE: 0.572"	EXHAUST: 0.572"
LOBE SEPERATION: 108°	INTAKE CENTERLINE: 103°	IDLE VAC @ 1000 RPM: 11"

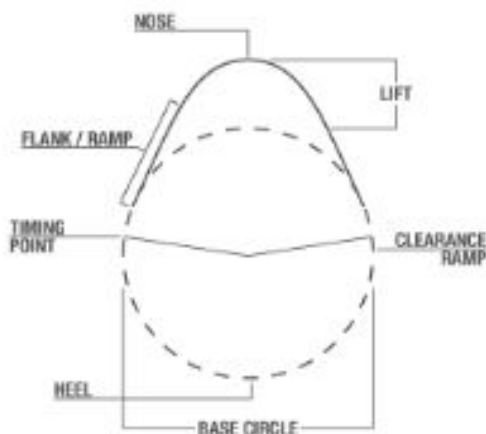

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 15° BTDC Closes: 41° ABDC
-----------------------------	---

EXHAUST TIMING @ .050" LIFT:	Opens: 51° BBDC Closes: 5° ATDC
------------------------------	---------------------------------------

OPTIONAL VALVE SPRINGS: #5767

CAM FEATURES: 418 HP & 434 ft.-lbs. with #7105 intake & #60069 heads.

INSTALLATION NOTES: Use Edelbrock Performer RPM Timing Chain and Gear Set #7808. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection. Use - position for most applications.

Footnote 1: Will not work in 427 side-oilers. Isky spacer #350AW required for all FE Fords 1962 & earlier required.

Footnote 2: Do not use dual valve springs .Use only recommended Edelbrock Sure Seat Valve Springs #5767.

Footnote 3: Use stock ratio rocker arms only (1.76:1).