

Camshaft: Performer RPM


Part #: #7112

Vehicle Type: OLDSMOBILE

Engine Application: 350-403 V8

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 290°	EXHAUST: 300°
DURATION @ .050	INTAKE: 224°	EXHAUST: 234°
LIFT @ CAM (Lobe)	INTAKE: 0.31"	EXHAUST: 0.325"
LIFT @ VALVE	INTAKE: 0.496"	EXHAUST: 0.52"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 12"

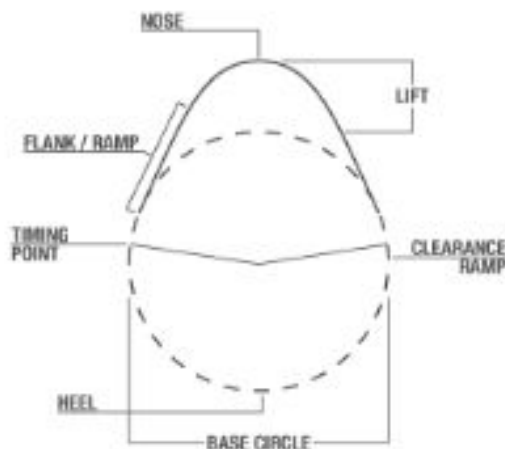

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 5° BTDC Closes: 39° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 54° BBDC Closes: 0° ATDC

OPTIONAL VALVE SPRINGS: #5712

CAM FEATURES: 397 HP & 400 ft.-lbs. with #7111 intake & stock iron heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Steel Gear Set #7813. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection.

Footnote 1: Adjustable pushrods or rocker arms required.

Footnote 2: Do not use high pressure racing valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5712.

Footnote 3: Use stock ratio rocker arms only.