

Camshaft: Performer RPM


Part #: #7132

Vehicle Type: AMC

Engine Application: 343-401 V8

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 310°	EXHAUST: 320°
DURATION @ .050	INTAKE: 234°	EXHAUST: 244°
LIFT @ CAM (Lobe)	INTAKE: 0.325"	EXHAUST: 0.34"
LIFT @ VALVE	INTAKE: 0.52"	EXHAUST: 0.544"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 11"

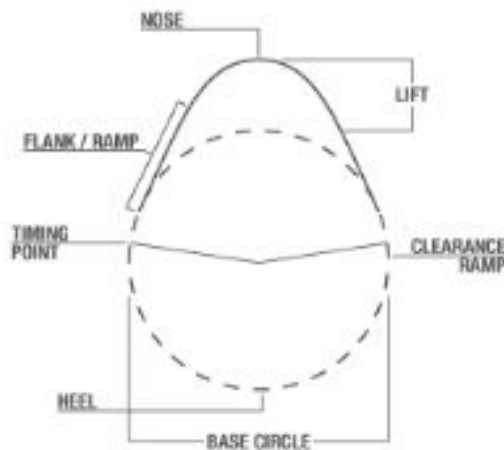

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 10° BTDC
	Closes: 44° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 59° BBDC
	Closes: 5° ATDC

OPTIONAL VALVE SPRINGS: -

CAM FEATURES: 433 HP & 489 ft.-lbs. with #7531 intake & #60119 heads.

INSTALLATION NOTES: Use Performer-Link Timing Set, #7818. Do not use late model timing sets. They are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Performer-Link True Rolling Timing Sets feature three keyways for specific timing selection. Always use the - or straight-up timing mark when installing Performer RPM camshafts with Performer-Link Timing Sets.

Footnote 1: Use only Edelbrock Cylinder Heads (Include Proper Valve Springs), or Crane # 99838 Valve Springs with Stock Iron Cylinder Heads. Use stock ratio rocker arms only.

Footnote 2: For non computer controlled vehicles.