

Camshaft: Performer RPM


Part #: #7157

Vehicle Type: PONTIAC

Engine Application: 350-455 V8

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 308°	EXHAUST: 320°
DURATION @ .050	INTAKE: 231°	EXHAUST: 240°
LIFT @ CAM (Lobe)	INTAKE: 0.313"	EXHAUST: 0.313"
LIFT @ VALVE	INTAKE: 0.47"	EXHAUST: 0.47"
LOBE SEPERATION: 113.5°	INTAKE CENTERLINE: 112°	IDLE VAC @ 1000 RPM: 10"

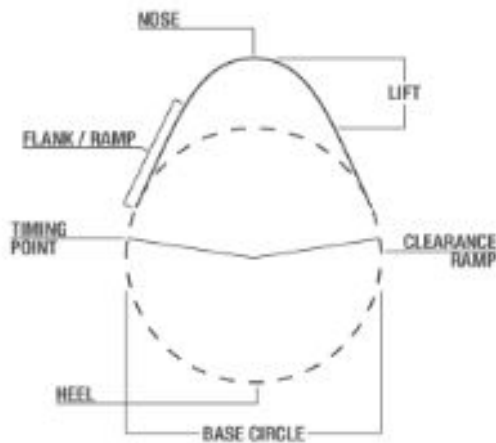

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 3° BTDC
	Closes: 48° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 54° BBDC
	Closes: 6° ATDC

OPTIONAL VALVE SPRINGS: #5757

CAM FEATURES: 422 HP & 441 ft.-lbs. with #7156 intake & #60599 heads.

INSTALLATION NOTES: Use Edelbrock Performer-Link Timing Chain and Gear Set #7812. Do not use late model timing chain & gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft. Edelbrock Timing Sets feature three keyways for specified timing selection. Use "0" position for most applications.

Footnote 1: Adjustable pushrods or rocker arms required.

Footnote 2: Do not use dual valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5757.

Footnote 3: Use stock ratio rocker arms only.