

Camshaft: Performer RPM


Part #: #7162

Vehicle Type: CHEVROLET

Engine Application: 396-427-454 V8

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 300°	EXHAUST: 306°
DURATION @ .050	INTAKE: 240°	EXHAUST: 246°
LIFT @ CAM (Lobe)	INTAKE: 0.33"	EXHAUST: 0.337"
LIFT @ VALVE	INTAKE: 0.56"	EXHAUST: 0.573"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 110°	IDLE VAC @ 1000 RPM: 10"

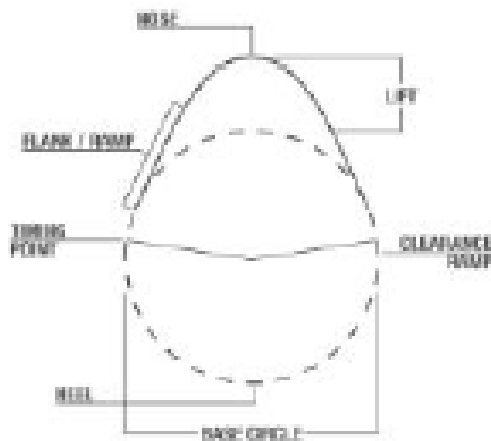

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 10° BTDC Closes: 50° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 57° BBDC Closes: 9° ATDC

OPTIONAL VALVE SPRINGS: #5762

CAM FEATURES: 540 HP & 530 ft.-lbs. with #7163 intake & #60559 heads.

INSTALLATION NOTES: Use Edelbrock Performer-Link Timing Chain and Gear Set #7810 or Accu-Drive gear drive #7881. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection. Use '0' position for most applications.

Footnote 1: Not for 1965-66 big-block Chevys requiring a grooved rear cam journal.

Footnote 2: Do not use dual valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5762.

Footnote 3: Use stock ratio rocker arms only.