

Camshaft: Performer RPM


Part #: #7167

Vehicle Type: FORD

Engine Application: 429-460 V8

RPM Range:

DURATION AS ADVERTISED	INTAKE: 290°	EXHAUST: 300°
DURATION @ .050	INTAKE: 234°	EXHAUST: 244°
LIFT @ CAM (Lobe)	INTAKE: 0.325"	EXHAUST: 0.34"
LIFT @ VALVE	INTAKE: 0.556"	EXHAUST: 0.581"
LOBE SEPERATION: 108°	INTAKE CENTERLINE: 103°	IDLE VAC @ 1000 RPM: 12"

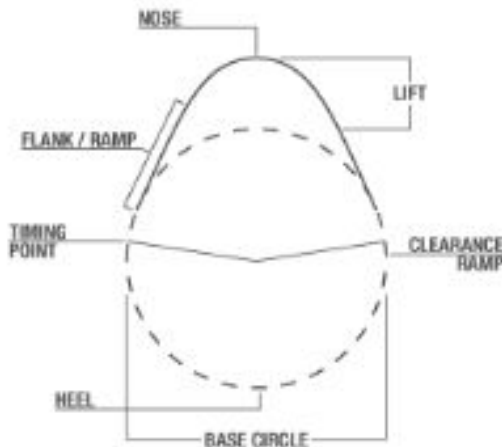

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 14° BTDC Closes: 40° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 55° BBDC Closes: 9° ATDC

OPTIONAL VALVE SPRINGS: #5767

CAM FEATURES: 506 HP & 536 ft.-lbs. with #7166 intake & #60669 heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Gear Set #7830. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature

Footnote 1: Adjustable pushrods or rocker arms required.

Footnote 2: Do not use racing type dual valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5767.

Footnote 3: Use stock ratio rocker arms only (1.73:1).