

Camshaft: Performer RPM


Part #: #7182

Vehicle Type: FORD

Engine Application: 351W V8

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 290°	EXHAUST: 300°
DURATION @ .050	INTAKE: 224°	EXHAUST: 234°
LIFT @ CAM (Lobe)	INTAKE: 0.31"	EXHAUST: 0.325"
LIFT @ VALVE	INTAKE: 0.496"	EXHAUST: 0.52"
LOBE SEPERATION: 110°	INTAKE CENTERLINE: 106°	IDLE VAC @ 1000 RPM: 11"

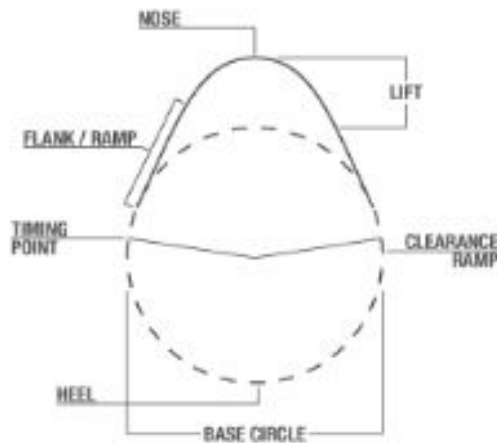

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 6° BTDC Closes: 38° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 51° BBDC Closes: 3° ATDC

OPTIONAL VALVE SPRINGS: #5722

CAM FEATURES: 400 HP & 412 ft.-lbs. with #7181 intake & #60259 heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Gear Set #7820 or Accu-Drive gear drive #7892. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection.

Footnote 1: Do not use dual valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5722.

Footnote 2: Use stock ratio rocker arms only (1.6:1).