

Camshaft: Performer RPM


Part #: #7194

Vehicle Type: CHRYSLER

Engine Application: 383-400-440 V8

RPM Range: 1500-6500

DURATION AS ADVERTISED	INTAKE: 300°	EXHAUST: 308°
DURATION @ .050	INTAKE: 238°	EXHAUST: 246°
LIFT @ CAM (Lobe)	INTAKE: 0.32"	EXHAUST: 0.33"
LIFT @ VALVE	INTAKE: 0.48"	EXHAUST: 0.495"
LOBE SEPERATION: 110°	INTAKE CENTERLINE: 105°	IDLE VAC @ 1000 RPM: 10"

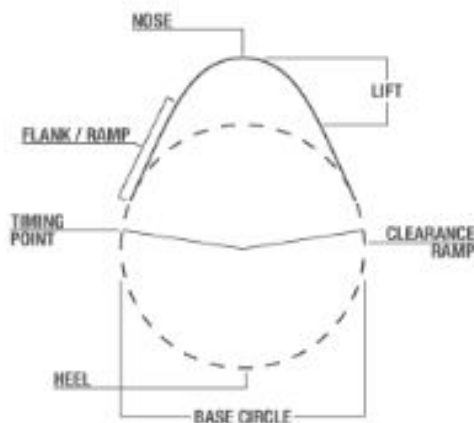

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 14° BTDC
	Closes: 44° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 58° BBDC
	Closes: 8° ATDC

OPTIONAL VALVE SPRINGS: #5792

CAM FEATURES: 469 HP & 515 ft.-lbs. with #7193 intake & #60929 heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Gear Set #7804. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection. Use the – (straight up) position for most applications.

Footnote 1: Adjustable pushrods or rocker arms required. For 1968-later

Footnote 2: Do not use dual valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5792.

Footnote 3: Use stock ratio rocker arms only.

Footnote 4: