

Installation Instructions

For set # 7.3118

00-03 NISSAN MAXIMA
FRONT CONTROL ARM BUSHING





It is recommended that if you are unfamiliar with this type of work that you refer to a qualified service center specializing in this type of work. It is also recommended that if you choose to do this work yourself that a factory service manual be obtained for the proper procedures pertaining to removal, replacement and proper torque specifications for your vehicle. This instruction set is intended as a guideline for the safe installation of Energy Suspension's polyurethane bushings, once you have removed the factory components from your vehicle.

PARTS LIST

- 4 ea **2395** Control Arm Bushing (front position)
- 2 ea **3447** Control Arm Bushing (rear position)
- 2 ea **15.10.384.39** Sleeve (1.000"x18mmX1.845")
- 4 ea **15.03.71.39** Washer (1.750"x18mmX0.125")

Press out O.E. outer metal shell from aluminum bracket, then press pivot pin on control arm out of bushing. A pressed fit sleeve will then need to be removed. Grease all metal parts that will touch bushing # 3447. Part numbers faces the rear.

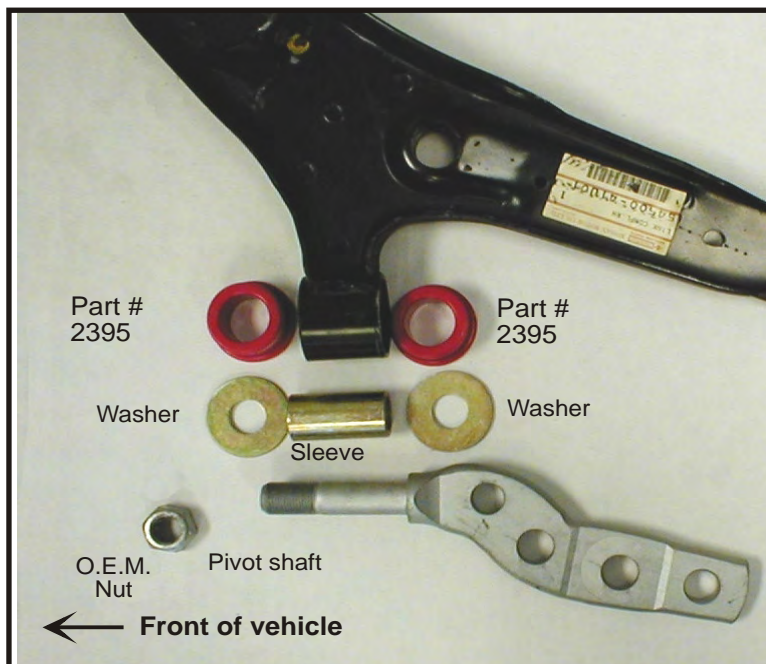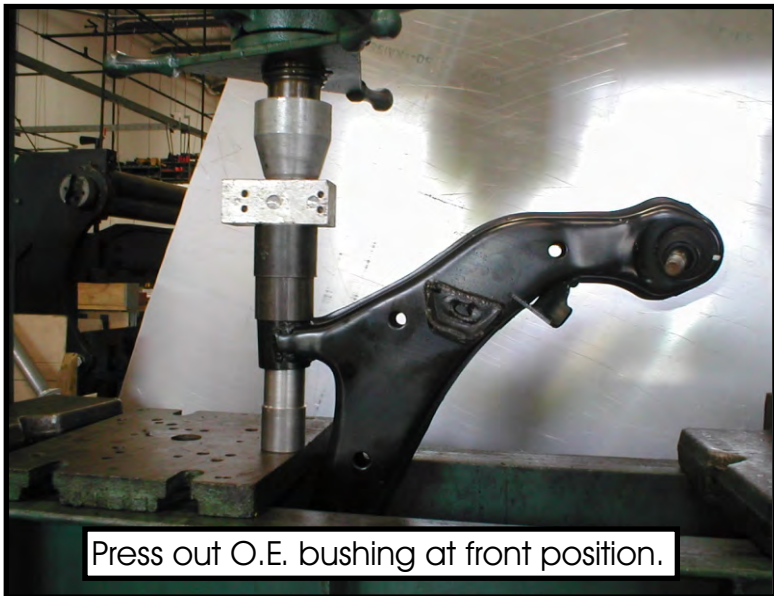

17419

[View other performance suspension parts made by Energy Suspension on our website.](#)