


Installation instructions

For set # 7.1108 / 7.1118
90-96 300ZX/95-98 240SX



Note: It is recommended that this set be professionally installed if you are unfamiliar with this type of work, and a factory service manual be purchased prior to performing any work on your vehicle for proper disassembly, reassembly and torque specs. These instructions are intended for bushing removal and install of Energy Suspension polyurethane bushings, once you have removed the factory component from your vehicle.

Front diff. position removal / install

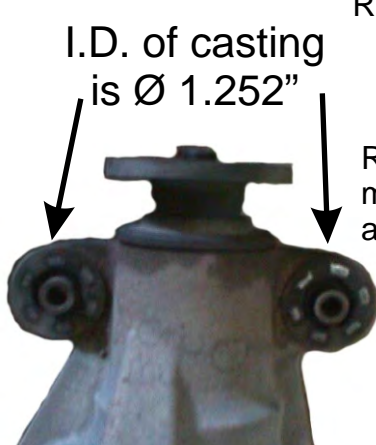


I.D. of casting is \varnothing 1.252"

Remove old rubber from O.E. cup washer.

Remove O.E. outer metal shell, bushing and inner sleeve.

Remove O.E. rubber washer.

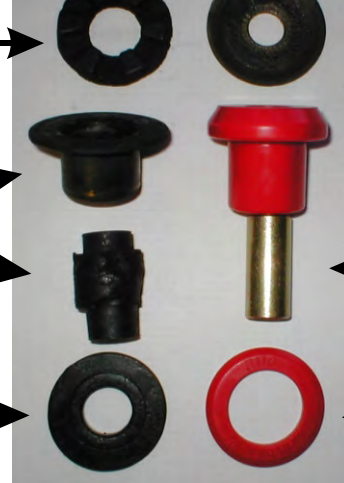


You must reuse O.E. cup washer with our polyurethane top bushing.

Top bushing P/N 2401

Supplied sleeve 15.10.86.39
.750" x .500" x 1.700"

Lower thrust washer P/N 3114

Rear diff. position removal / install

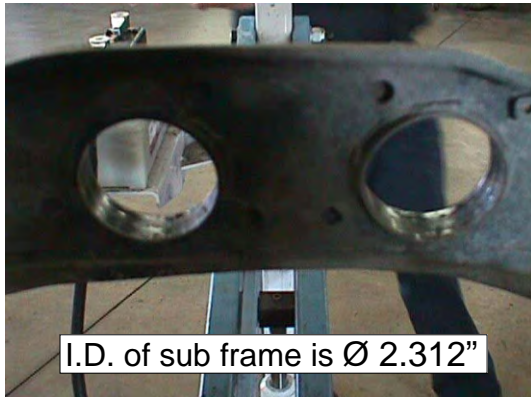

Remove O.E. outer metal shell, bushing and inner metal cup from sub frame.



After installing our polyurethane bushings P/N 4178/4906, reuse the inner metal cup from the O.E. bushings.

17295