

Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150

SAFETY

Your safety and the safety of others is very important.

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

Read and understand all safety precautions and instructions before installing this product.

THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR INSTALLATION AND USE RESTS WITH THE OWNER.

CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE.

SENSORS FIELD OF VIEW WILL BE ALTERED WITH USE OF THE REPLACEMENT BUMPER.

Injury hazard

Failure to observe these instructions could lead to severe injury or death.	
	Always remove jewelry and wear eye protection.
	Always use extreme caution when jacking up a vehicle for work. Set emergency
	brake and use tire blocks. Locate and use the vehicle manufacturers designated
	lifting points. Use jack stands.
	Always use appropriate and adequate care in lifting components into place.
	Always insure components will remain secure during installation and operation.
	Always wear safety glasses when installing this kit. A drilling operation will
	cause flying metal chips. Flying chips can cause serious eye injury.
	Always use extreme caution when drilling on a vehicle. Thoroughly inspect the
	area to be drilled (on both sides of material) prior to drilling, and relocate any
	objects that may be damaged.
	Always use extreme caution when cutting and trimming during fitting.
	Always tighten all nuts and bolts securely per installation instructions.
	Always route electrical cables carefully. Avoid moving parts, components that
	become hot and rough or sharp edges.
	Always insulate and protect all exposed wiring and electrical terminals.
	Always perform regular inspections and maintenance on mounts and





Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150

related hardware.

I. Overview

Congratulations on your new purchase of the industries' best and most stylish Rear Bumper available for the 2009 Ford F150! This Bumper has been **engineered** for strength while keeping the weight down.

Your Rear Bumper designed in 3-D from digitized data, CNC laser cut, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of a quality Ford F150 Rear Bumper from Fab Fours Inc.





Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150

II. Tools Required

- Socket Wrench with Extension
- Breaker Bar
- 3/4" & 18mm Sockets
- Flat and Phillips Head Screw Drivers
- 3/4" Box End Wrench
- Allen wrench set.
- Floor Jack and wood block.

III.Removal of Stock Bumper

- A. Unplug the Factory License Plate lights from the back side of the light housing from underneath the truck. Turn counter clockwise until loose. Secure up and out of harm's way.
- B. Disconnect the wiring harness from the back up sensors. This can either be done by unplugging the connectors at each sensor or removing the sensor from the trim piece holding them into the bumper.
- C. Remove the 7 plastic Christmas tree plugs holding the harness to the inside of the bumper. Fish the harness out of the bumper and out of the way.
- D. Remove the 6 bolts (3 per side) holding the factory bumper to the receiver hitch using a 10mm socket (ref. fig. 1 circles).



Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150



Figure 1

- E. Using two people each grasping one corner of the bumper lift and rotate towards the back of the vehicle. Note there are two plastic locating finger that pass through the hitch that need to be freed for the bumper to come off.
- F. Remove the 6 nuts (3 per side) and 2 bolt strips holding the factory bumper to the receiver hitch using a 21mm socket. Remove hitch receiver and set aside.
- G. Locating the exhaust hanger under the rear passenger side of the vehicle, loosen bolt and slide down hanger, then slide exhaust down to a lower position before tightening.



Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150



Figure 2

H. The outer edges of the plate on the trailer hitch above the steel loops, area indicated by the circle below, need to be bent up for the bottom of the Fab Fours bumper to clear (ref. fig. 3).



Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150



Figure 3 (image of bumper and hitch installed)

I. Your truck is now ready to have the Fab Fours Rear Bumper Installed!

IV. Pre-Installation





Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150

- A. Remove Fab Fours bumper from the shipping carton and lay all items out on a blanket to prevent damage.
- B. Install provided license plate lights in indicated locations (ref. fig. 4 arrows).



Figure 4

- C. Using a small flat head screw driver remove the snap ring on the back of the spare tire lock freeing it from the factory bumper. Re-install it into the Fab Fours bumper the same way. Installing the supplied plated spacer under the factory snap ring bracket
- D. FOR SENSOR BUMPER INSTALLATION: CAREFULLY remove sensors from all housings, taking care to avoid touching the front of the sensors, the side tabs on the housing must be pulled away as the sensor is pulled out (ref. fig.5 circles). Then pull housing from OEM bumper and install sensor housings in Fab Fours bumper by lining up plastic protrusions of the housing with the sensor profile (ref figures 6a-b).



Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150



Figure 5

E. Look at images below to confirm proper orientation. Passenger and driver side sensor placement are mirrored.



Figure 6a (inner passenger side: plug toward center of bumper)



Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150



Figure 6b (outer passenger side: plug toward ground)

V. Rear Bumper Installation

NOTE: The Following Installation steps apply to the installation of the. PLEASE READ THE ENTIRE MANUAL BEFORE ATEMPTING INSTALLATION! Ignoring these steps will increase your probability of scratching the vehicle during product Installation!

A. Place trailer hitch receiver on bumper (ref. fig. 7a), put square spacer on bottom stud of stud plate (ref. fig. 7b), and insert bolt strip with spacer (ref. fig. 7c) through both.





Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150



Figure 7a



Figure 7b





Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150



Figure 7c

B. With the help of two others and grasping the ends of the bumper and the steel loops on both sides, lift the assembly together. Install into the frame as shown below using the factory fasteners.



Figure 8





Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150

C. Very carefully open the tailgate watching the bottom edge of the tailgate in relation to the top of the bumper making sure they do not come in contact. Also make sure to allow space between the tailgate and the top of the bumper when tailgate is fully open.

D. Fully tighten all fasteners between bumper and brackets and brackets and frame.

E. Install supplied license plate plastic nut inserts and license plate.

F. Enjoy your New Rear Replacement Bumper from Fab Fours!




Ford F150 Vengeance Rear

Product Number: E1751 Application: 10-14 Ford Raptor 2009-2014 F150

VI. Maintenance/Care

- ☐ Periodically check and tighten all fasteners.
- ☐ Stripped, fractured, or bent bolts or nuts need to be replaced.
- ☐ After washing of the vehicle make sure to fully dry all surfaces

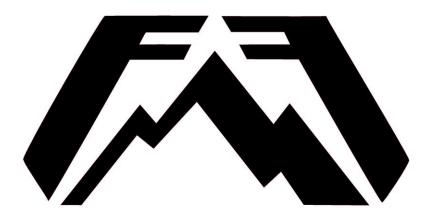

More than expected... Better than expected