



## *Installation Instructions*



### *6" Performance Suspension System*

*2001-2008 GM 2WD & 4WD 2500HD*

*2001- 2008 GM 2WD & 4WD 1500HD and 2500 Suburban, Avalanche*



**PARTS LIST**

<b>FTS21008BK 6" Box Kit 1</b>		
<b>Qty</b>	<b>Part #</b>	<b>Description</b>
1	FTS20246D	Spindle –Driver side
1	FTS20246P	Spindle - Passenger side
2	FT20247	CV Spacers
1	FT20069	Skid Plate
1	FT20061	Diff Drop Brkt pass
1	FT20062	Diff Drop Brkt drvr
1	FT20063	Frt Bump Stop Brkt drvr
1	FT20064	Frt Bump Stop Brkt pass
1	FT20071	Sway Bar link Kit
1	FT20075	Weld in Plate
1	FT20074	Carrier Bearing Drop Brkt
1	FT20076	Hardware
1	FT20385	Hdwr Sub-Assembly Kit

<b>FTS21009BK 6" Box Kit 2</b>		
<b>Qty</b>	<b>Part #</b>	<b>Description</b>
1	FT20057BK	Front Crossmember
1	FT20555BK	Rear Crossmember
2	FT20284BK	Crossmember Support Tube
1	FT20569	Hardware Subassembly
2	FT20065	Impact Strut
2	FT20106	Impact Strut Rear Mount
2	FT20067	Strut Mount Tab Nut
2	FT20144	Torsion Bar Drop Bracket
1	FT20078	Hardware Kit
2	FTBK4	4" Blocks
4	FT726U	U Bolts
1	FT20085	Hardware Kit

<b>FT20385 Hdwr Sub-Assembly Kit</b>		
<b>Qty</b>	<b>Part #</b>	<b>Description</b>
1	FT1044	Bushing Kit
1	FT90085	Bushing Kit
1	FT90086	Bushing Kit
1	FT20321	Hardware
1	FT21008i	Instructions
1	FTAS12	Sticker
1	FTAS16	Warning Decal
1	FTREGCARD	Registration Card

<b>FTS21010 6" Box Kit 2</b>		
<b>Qty</b>	<b>Part #</b>	<b>Description</b>
1	FT20057BK	Front Crossmember
1	FT20555BK	Rear Crossmember
2	FT20060BK	Crossmember Support Tube
1	FT20569	Hardware Subassembly
2	FT20065BK	Impact Strut
2	FT20106BK	Impact Tube Mount Dual Hole
2	FT20067	Strut Mount Nut Tab
2	FT20122BK	Torsion Bar Drop Bracket
2	FT20133BK	Rear Bump Stop Drop SUV
1	FT20140	Brake Hose Bracket RR
1	FT70014	Rr Brk Line Brkt (05 & Up)
1	FT20078	Hardware Kit
1	FT20139	Hardware Kit
2	FTBK41	4" Block
4	FT726U	U-Bolt
1	FT58H	U-Bolt Hardware

<b>FT20569 Hardware Subassembly</b>		
<b>Qty</b>	<b>Part #</b>	<b>Description</b>
2	FT30064BK	Impact Tube Mount
2	43141001081	7/16-14 x 1 Bolt
4	4300005081	7/16 SAE Washer
2	43140004181	7/16-14 C-Lock Nut
1	FT58H	5/8 Nut and Washer Kit
1	FT70014	E-Brake Bracket



**HARDWARE LIST:**

<b>Hardware Kit FT20139</b>	
<b>Qty.</b>	<b>Description</b>
2	10mm-1.5 x 25mm Bolt
1	10mm Flat Washer
1	10mm Split Lock Washer
1	1/4"-20 x 1 1/4" Bolt
1	1/4"-20 Nyloc Lock Nut
2	1/4" SAE Washer
1	8mm-1.25 x 25mm
1	8mm Flat Washer
1	5/16"-18 x 1 1/4" Hex Head
1	5/16"-18 Nylock Nut
2	5/16" SAE Flat Washer

<b>Hardware Kit FT20085</b>	
<b>Qty.</b>	<b>Description</b>
8	7/16"-14 x 1 1/4" Bolt
8	7/16"-14 Nyloc Nut
12	7/16" SAE Flat Washer

<b>Hardware Kit FT20076</b>	
<b>Qty.</b>	<b>Description</b>
2	5/8"-11 x 6 1/4" Bolt
2	5/8"-11 x 5" Bolt
4	5/8"-11 Steel Lock Nut
8	5/8" SAE Flat Washer
2	1/2"-13 x 1 1/4" Bolt
2	1/2"-13 Nyloc Lock Nut
4	1/2" SAE Flat Washer
2	3/8"-16 x 1" Bolt
4	3/8"-16 Nyloc Nut
8	3/8" SAE Flat Washer
1	9/16-12 x 5" Bolt
2	9/16"-12 x 1 3/4" Bolt
5	10mm x 1.5 x 60mm
6	9/16" SAE Flat Washer
5	10mm Flat Washer
3	9/16"-12 Steel Lock Nut

<b>Hardware Kit FT20321</b>	
<b>Qty.</b>	<b>Description</b>
12	10mm x 1.5 x 60mm Bolt
12	10mm Flat Washer
1	Thread Locking Compound
1	1/2"-13 x 1 1/4" Bolt
1	1/2" 13 Steel Lock Nut
2	1/2" SAE Flat Washer
2	1/4"-20 x 3/4" Bolt
2	1/4" SAE Flat Washer
2	1/4" Split Lock Washer

<b>Hardware Kit FT20078</b>	
<b>Qty.</b>	<b>Description</b>
4	7/16"-14 x 3 1/2" Bolt
2	1/2-13 x 1 1/4" Bolt
4	7/16"-14 x 1 1/4" Bolt
4	7/16"-14 Nylock Nut
2	1/2"-13 Steel Lock Nut
16	7/16" SAE Flat Washer
4	1/2" SAE Flat Washer
2	9/16"-12 x 2 1/2" Bolt
2	9/16"-12 Steel Lock Nut
4	1/2"SAE Flat Washer
2	3/8"-16 x 2" Bolt
8	3/8"-16 Nyloc Nut
16	3/8" SAE Washer
4	3/8"-16 x 1 1/2" Bolt
4	3/8"-16 x 1 1/4" Bolt
4	3/8"-16 x 1 1/4" Bolt

**TOOL LIST: (NOT INCLUDED)**

- FLOOR JACK
- JACK STANDS
- ASSORTED METRIC AND S.A.E SOCKETS, WRENCHES
- LARGE C CLAMP OR C CLAMP VISE GRIPS
- DIE GRINDER W/ CUTOFF WHEEL OR SAWZALL
- TORSION BAR REMOVAL TOOL
- TORQUE WRENCH
- MIG WELDER



**INSTALLATION OF THIS SUSPENSION SYSTEM WILL NOT ALLOW THE USE OF THE FACTORY WHEELS OR SPARE TIRE ON THE FRONT SUSPENSION**

**WITH THE INSTALLATION OF THIS KIT YOU MUST RUN A 16X8 OR 17X8 RIM WITH A 4 5/8" BACK SPACING.**

**NOTE- THIS SUSPENSION SYSTEM REQUIRES WELDING FOR INSTALLATION. ALL WELDING MUST BE PERFORMED BY A CERTIFIED WELDER. ONLY WELD THE SINGLE COMPONENT CALLED OUT IN THESE INSTRUCTIONS. DO NOT WELD ANY OTHER COMPONENTS IN THIS SYSTEM.**

**VEHICLES THAT WILL RECEIVE OVERSIZED TIRES SHOULD CHECK BALL JOINTS, TIE RODS ENDS AND IDLER ARM EVERY 2500-5000 MILES FOR WEAR AND REPLACE AS NEEDED**

**THE INSTALLATION OF THIS SUSPENSION SYSTEM SHOULD BE PERFORMED BY TWO PROFESSIONAL MECHANICS.**

**DO NOT ALTER THE FINISH OF THESE COMPONENTS, EXAMPLE- CHROMING, ZINC PLATING OR PAINTING. CHANGING THE FINISH CAN CAUSE STRUCTURAL FATIGUE OF COMPONENTS.**

**KIT DOES NOT FIT STANDARD CAB MODEL TRUCKS**

**EXHAUST MODIFICATION IS REQUIRED TO INSTALL THIS SYSTEM AND CAN BE PERFORMED BY A MUFFLER SHOP**

**SUSPENSION SYSTEM MUST BE INSTALLED WITH FABTECH SHOCK ASBORBERS**

**VEHICLES WITH ONE PIECE REAR DRIVESHAFTS MAY EXPERIENCE DRIVELINE VIBRATION**

**CHECK ALL PARTS INCLUDED IN THIS KIT TO THE PARTS LIST ABOVE BEFORE BEGINNING INSTALLATION OF THE KIT.**

**READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION! IF THESE INSTRUCTIONS ARE NOT PROPERLY FOLLOWED, SEVERE FRAME, DRIVELINE AND / OR SUSPENSION DAMAGE MAY RESULT.**

**NOTE- PRIOR TO THE INSTALLATION OF THIS SUSPENSION SYSTEM A FRONT END ALIGNMENT MUST BE PERFORMED AND RECORDED. DO NOT INSTALL THIS SYSTEM IF THE VEHICLE ALIGNMENT IS NOT WITHIN FACTORY SPECIFICATIONS. CHECK FOR FRAME AND SUSPENSION DAMAGE PRIOR TO INSTALLTION.**

**THIS SYSTEM IS DESIGNED TO FIT BOTH TWO (2wd) AND FOUR (4wd) WHEEL DRIVE TRUCKS. ON TWO WHEEL DRIVE MODELS, DISREGARD ANY AND ALL STEPS INVOLVING THE FRONT DIFFERENTIAL AND C.V. SHAFT REMOVAL AND INSTALLATION**

**SUSPENSION SYSTEM WILL NOT WORK ON VEHICLES EQUIPPED WITH FACTORY AUTO RIDE SUSPENSION**

**VERIFY DIFFERENTIAL FLUID IS AT MANUFACTURES RECOMMENDED LEVEL PRIOR TO KIT INSTALLATION. INSTALLATION OF THE KIT WILL RE-POSITION THE DIFFERENTIAL AND THE FILL PLUG HOLE MAY BE IN A DIFFERENT POSITION. (FOR EXAMPLE, IF THE MANUFACTURE RECOMMENDS 3 QUARTS OF FLUID, MAKE SURE THE DIFF HAS 3 QUARTS OF FLUID). CHECK YOUR SPECIFIC MANUAL FOR CORRECT AMOUNT OF FLUID.**

## FRONT SUSPENSION INSTRUCTIONS:

1. Disconnect the negative terminal on the battery. With the vehicle on level ground, set the emergency brake and block the rear tires. Jack up the front end of the truck and support the frame rails with jack stands. **NEVER WORK UNDER AN UNSUPPORTED VEHICLE!** Remove the front tires.
2. Locate the torsion bar adjusting cams and threaded bolts. Measure exposed threads of torsion bar adjusting bolts and record for reinstallation. Mark torsion bars indicating driver and passenger. Using a torsion bar removal tool unload the torsion bars and remove the crossmember and bars. Retain the hardware for reinstallation. NOTE- Do not attempt to unload or remove torsion bars without the proper torsion bar tool. Torsion Bars are under extreme spring load.
3. Remove the sway bar link ends from the sway bar and lower control arm. Discard links and bushings.
4. Remove the stock shocks and discard.
5. Remove the stock lower rubber bump stops from the frame and retain.
6. Remove front factory differential skid plate and splash shield and discard. Retain hardware for front crossmember installation.
7. Disconnect the tie rod ends from the steering knuckle by striking the knuckle to dislodge the tie rod end. Use care not to damage the tie rod end when removing. SEE PHOTO BELOW




8. Remove the brake hose bracket from the top of the steering knuckle. Unplug the ABS brake connection from the frame and control arm. Remove the caliper from the rotor and place above the upper control arm during this portion of the installation.
9. Remove brake rotor from the steering knuckle. Remove axle nut, washer and the 4 hub bolts on backside of knuckle. Remove bearing hub assembly including O ring from knuckle. Retain parts and hardware for reinstallation.

10. Remove the upper and lower ball joint nuts. Disconnect the upper and lower ball joints from the steering knuckle by striking the knuckle with a large hammer next to each ball joint on the knuckle to dislodge the ball joints. Use care not to hit the ball joints when removing. Retain nuts and discard knuckle. SEE PHOTO BELOW



11. Disconnect CV axles from differential housing and remove axle assembly.
12. Remove the lower control arms from the frame and retain the arms and hardware for reinstallation.
13. Disconnect front drive shaft from differential housing and retain bolts and u joint clamps for reinstallation.
14. Disconnect the differential housing electrical connection and vacuum line from differential housing.
15. Remove the stock differential rear crossmember and discard. Remove the differential housing assembly from vehicle. To ease removal, turn the steering wheel to the left for centerlink clearance. Note- Some diesel models may require step 16 first in order to remove housing. Retain hardware for reinstallation.
16. Locate the driver side lower control arm pocket closest to the rear of the vehicle, measure 1-3/4" from the backside of the pocket and mark a vertical cut line around entire pocket. Using a Sawzall or die grinder cut the backside of the pocket and rear differential crossmember off the frame. SEE PHOTO BELOW.

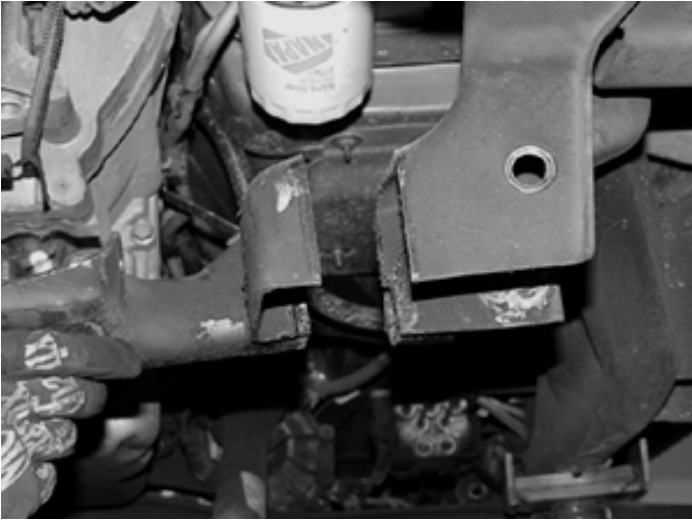


VIEW FROM FRONT OF TRUCK ON DRIVERS SIDE.

17. With the back of the pocket now removed place the FT20075 plate up to the frame and weld in place. Let the plate cool and paint with a corrosive resistant paint or undercoating. SEE PHOTO BELOW




18. Locate the mounting bushing eye on the upper front side of the differential housing and mark the housing with a cut line flush to the housing. Using a sawzall cut the entire ear off the housing. Take care not to cut into the flat portion of the housing. SEE PHOTOS BELOW.

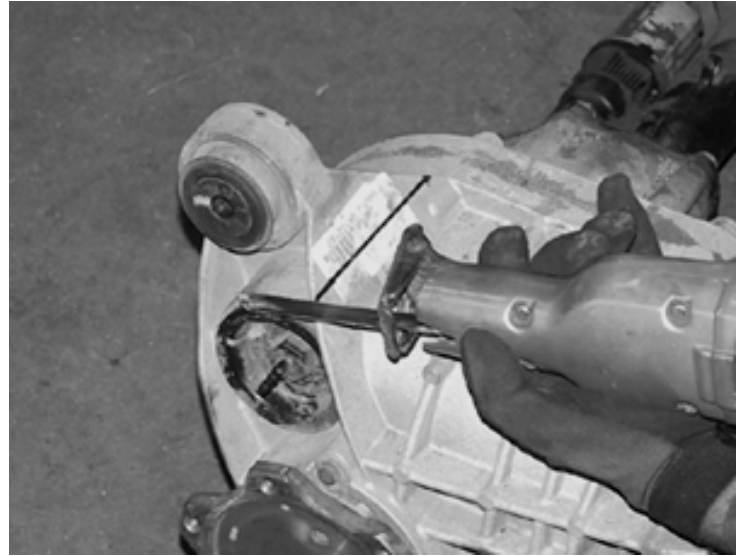

19. **On some 2006 model trucks, the differential has a small area the needs to be sanded down level to allow the supplied Drv. Diff bracket to fit flush against the diff. Using a sanding disc, sand the differential as shown in the following two picture. USE CARE TO NOT SAND TO FAR, YOU WILL ONLY NEED TO APPROX. 1/4". SEE PHOTOS BELOW**



Before Sanding

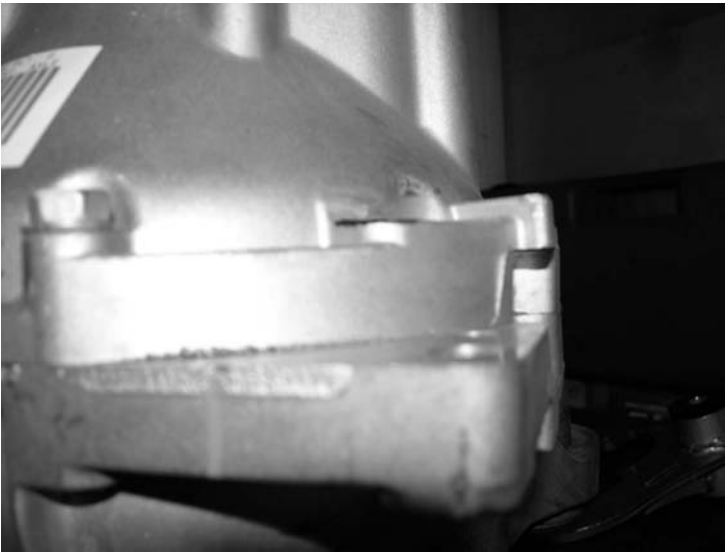


After Sanding

20. Locate the C shaped Fabtech differential bracket and install bushings and sleeve in bracket from Bushing Kit FT90085.
21. Place differential bracket to the differential housing and remove the appropriate 5 housing bolts. Bracket should be positioned with the bushing eye to the top side of the housing. Using provided the 10mm x 1.5 x 60mm bolts and washers in hardware kit FT20076 attach the differential bracket to housing using thread lock compound and torque to 30 ft-lbs. Note - Some leakage of the differential oil is normal during this process. Recheck and fill diff housing oil once differential is mounted in vehicle. SEE PHOTO BELOW



Diff Housing Bracket

22. Locate and install the Fabtech rear crossmember into the factory lower control arm pockets using the stock hardware with the nuts to the rear of the truck. Leave loose
23. Locate and install the Fabtech Passenger side Diff bracket to the bottom of the factory frame mount, with the wide end of the bracket to front of the vehicle. Attach using the stock hardware. Torque to 70 lb-lbs. SEE PHOTO BELOW.

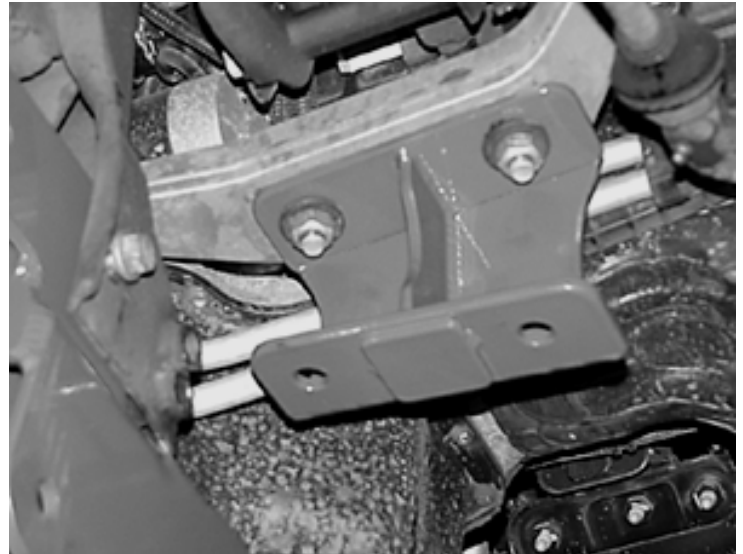

24. Place the differential housing into the Fabtech rear crossmember using the stock hardware on the driver side and 9/16"-12 x 1-3/4" bolts, nuts and washers on the passenger side from hardware kit FT20076, leave loose. SEE PHOTO BELOW







25. Attach the Fabtech front crossmember into the lower control arm pockets using the stock hardware. Leave loose. SEE PHOTO BELOW.



26. Position the front differential urethane bushing mount into the front crossmember tabs. Locate and install the differential skid plate around the differential housing bushing using 9/16" x 5" bolt, nut and washers from hardware kit FT20076. Leave loose.
27. Reconnect the electrical connection and the vacuum line to the differential housing.
28. Install the lower control arms into the new crossmembers with the FT20284BK support tubes placed over the pivot bolts between the crossmembers. Use the 5/8" x 5" and 5/8" x 6-1/4" bolts nuts and washers from hardware kit FT20076. Leave loose. SEE PHOTO BELOW.

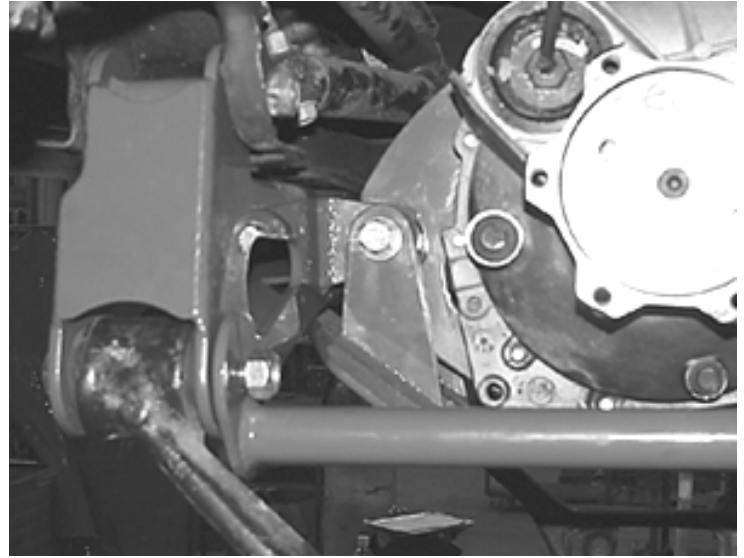


29. Using 1/2" x 1-1/4" Bolt, nut and washers attach the rear of the skid plate to the bottom of the rear crossmember and torque to 50lbs.
30. Torque the following bolts - Driver side diff bushing bolts to 70 ft-lbs, Passenger side diff bushing bolts to 70 ft-lbs, Crossmember frame pocket bolts to 105 ft-lbs, Control arm bolts to 105 ft-lbs, Crossmember tab bolts to 25 ft-lbs. Recheck all bolts on the front end for proper torque before proceeding to next step.
31. Locate the two front bump stop brackets, FT20063 & FT20064. Attach to the rear crossmember using 1/2" x 1-1/4" bolts, nuts and washers and to the stock frame mount using 3/8" x 1" bolts, nuts and washers. Torque the 3/8" to 20 ft-lbs and 1/2" to 35ft-lbs. Attach the stock rubber bump stop to the bottom of new bracket and torque to 15 ft-lbs. SEE PHOTO BELOW.

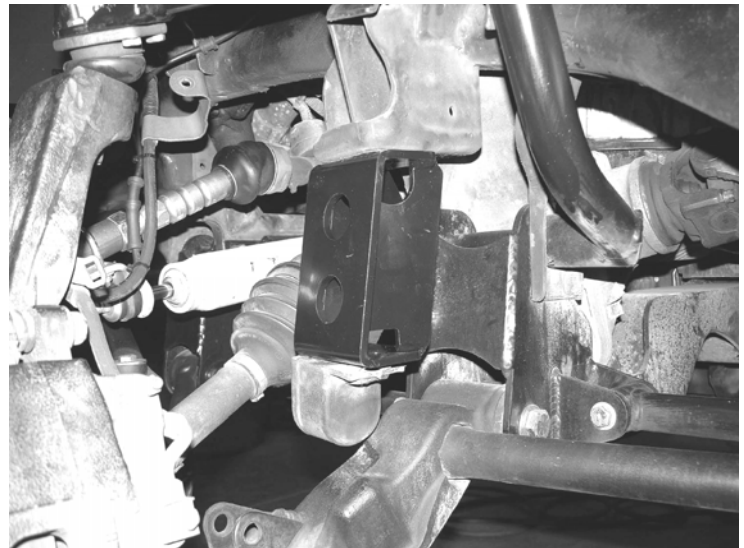


32. Locate the FT20246D & P steering knuckle and install the stock hub bearing assembly taking care to place O ring in the proper position. Apply thread lock compound to the stock hardware torque the flange bolts to 130 ft-lbs. SEE PHOTO BELOW.



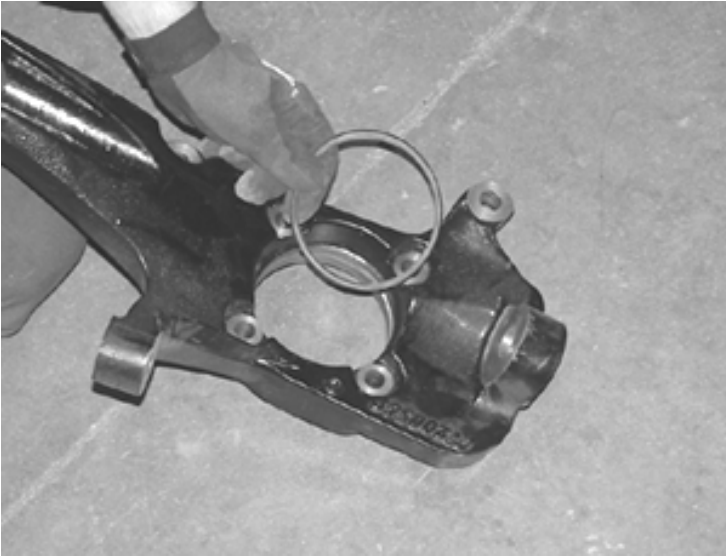


33. Attach the steering knuckle to the upper control arm and to the lower control arm using the stock hardware. Torque the upper ball joint to 35 ft-lbs and lower to 70 ft-lbs. Reattach the tie rod and torque to 30 ft-lbs.
34. Reinstall axle shaft through new knuckle and attach nut and washer. Locate and install the Fabtech CV spacers between the CV axle and the differential housing using 10mm x 40mm bolts and washers from Hardware kit FT20321 with the provided thread lock compound and torque to 55 ft-lbs in a cross pattern. Torque axle nut to 150 ft-lbs SEE PHOTO BELOW.

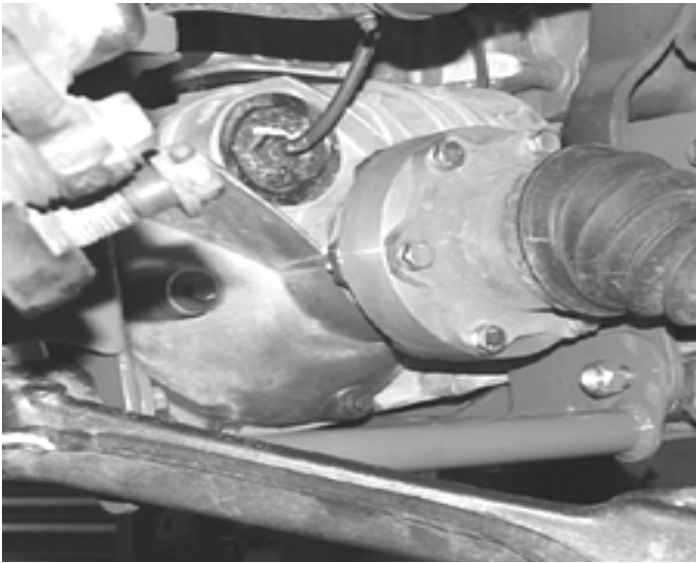


35. Install Fabtech shock part number FTS7191 (not included) using factory hardware. Torque the upper stem bushing to 15 ft-lbs and the lower bolt to 35 ft-lbs.
36. Locate the factory brake line mount on top of the upper control arm. Remove the brake line mount, and route the line with bracket to the bottom side of the control arm. Drill a 13/64" hole directly below the original hole on the upper control arm. Mount the factory bracket to the bottom side of the control arm using the original mounting hardware. SEE PHOTO BELOW




37. Reinstall brake rotor and caliper. **Note: If your brake caliper cage has the boss shown below, it must be ground / sanded flush with the cage before mounting the calipers. SEE PHOTOS.** Torque caliper bolts to 70 ft-lbs. Route the brake hose and ABS line to the steering knuckle using the factory steel guide clamp to the side of the steering knuckle and to the control arm bracket with 1/4" x 1" bolts, nuts and washers. Torque to 5 ft-lbs

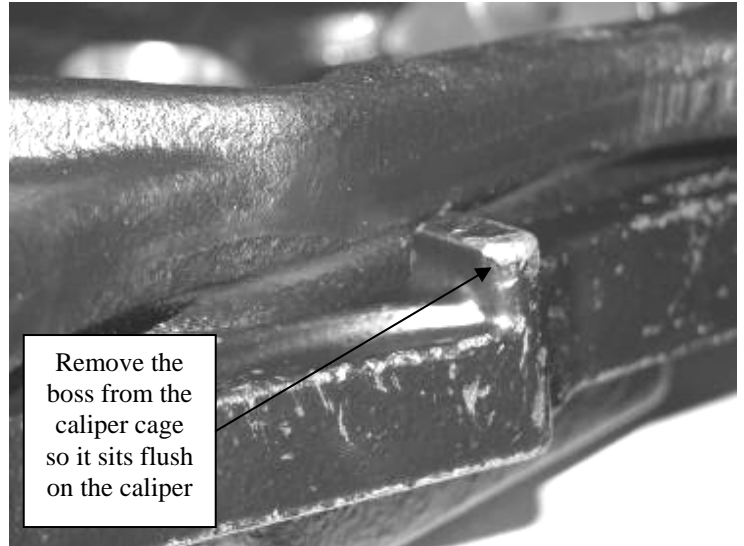

38. Reattach the drive shaft to the differential yoke using the stock hardware and torque u joint straps to 19 ft-lbs.
39. Remove sway bar and flip upside down and remount. Locate and install the Fabtech sway bar link ends and bushings. Torque to 10 ft-lbs. SEE PHOTO BELOW

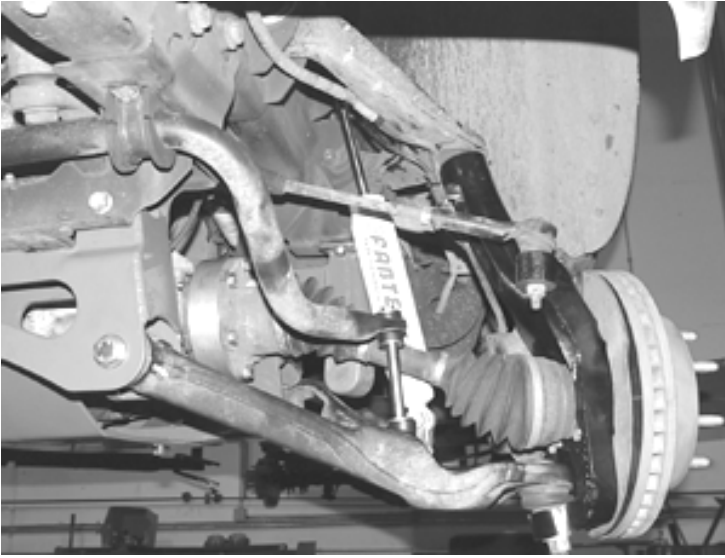

40. Recheck all bolts on front end for proper torque before proceeding to next step.
41. Locate the two FT30064BK impact tube mounts and attach to the back side of the rear crossmember using one 7/16 x 1" bolt, nut and washer per bracket. Torque to 58 ft-lbs. See Figure 1 at end of instructions.
42. Locate FT1044 Bushing Kit and install the bushings into the Impact Strut bars. Attach the impact struts into the FT30064BK using 7/16" x 3-1/2" bolts, nuts and washers from hardware kit FT20557 and leave loose. When attaching the impact tube to the crossmember, the end of the tube with the angle barrel will attach to the crossmember so the impact tube will angle inboard of the truck.
43. Locate and attach the Impact Strut mount to the other end of the strut, with the flair of the bracket to the rear of the vehicle. For vehicles with Allison transmissions place the bushing eye in the forward position, vehicles with 4L80-E transmissions rear position using 7/16" x 3-1/2" bolts, nuts and washers, leave loose.
44. Swing mount up to bottom of crossmember, mark and drill holes to 7/16" Diameter. Note- Some models may require cutting of the transfer case skid plate to allow the strut mount to become flush with the bottom of the crossmember. Locate and insert long tab nut bracket inside of crossmember and thread 7/16" x 1-1/4" bolts and washers through the impact mount into the tab nut bracket. Torque mounting bolts and bushing pivot bolts to 30 ft-lbs. SEE PHOTO BELOW

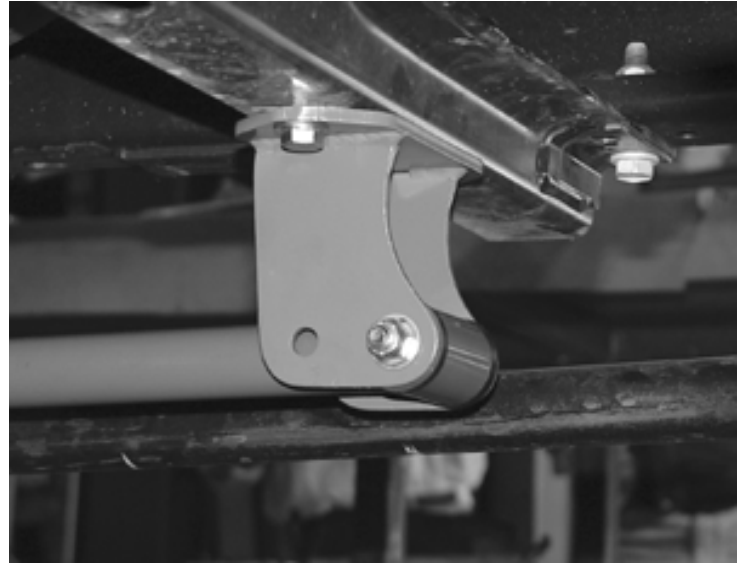

45. Locate the torsion bar drop down mounts and install bushings and sleeves from FT90086 Bushing Kit. Placing the Fabtech mount with the bushing eye directly below the factory torsion bar bushing eye, clamp to the bottom and side of the frame. **NOTE = MOUNT BOTH BRACKETS TO THE CROSSMEMBER THEN CLAMP TO FRAME BEFORE YOU DRILL THE HOLES.** Center punch and drill out frame to 7/16" diameter. Attach torsion bar mounts using 7/16" x 1-1/4" bolts, nuts and washers from hardware kit FT20085. Torque to 65 ft-lbs. Repeat same procedure for the opposite side. SEE PHOTO BELOW



46. Re install the driver and passenger side torsion bars with the factory torsion bar crossmember into the new Torsion Bar mounts using the factory hardware and torque to 70 ft-lbs.
47. Set Torsion Bar adjusters to the pre-recorded thread measurement from the disassembly.

REAR SUSPENSION INSTRUCTIONS:


48. Jack up the rear end of the vehicle and support the frame rails with jack stands. Supporting the rear differential, remove and

discard the rear shocks and u bolts. Lower axle down slowly. Use care not to over extend the brake hose.


**FOLLOW STEP #48 FOR ALL 01-05 SUV's MODELS AND 2000-2004 1500 H.D. MODELS.**

**FOLLOW STEP #49 FOR 2005 1500 H.D. MODELS**

49. Locate FT20140 rear brake hose extension bracket and install between differential housing and brake hose using 1/4" x 1-1/4" bolt, nut and washers and stock hardware. Torque to 10 ft-lbs. Check brake hose for proper extended length and routing as to allow full rear travel without over extending hose.
50. Disconnect the brake line distribution block at the axle and discard the factory bolt. Locate the FT70014 Brake Line Extension bracket, 1/4"-20 x 1 1/4" bolt, nylock nut and washers, 8mm x 25mm bolt and washer. Bolt the bracket to the axle using the 8mm hardware. Bolt the distribution block to the top of the bracket using the 1/4" hardware. Use care when routing / bending the hard brake line. SEE PHOTO BELOW

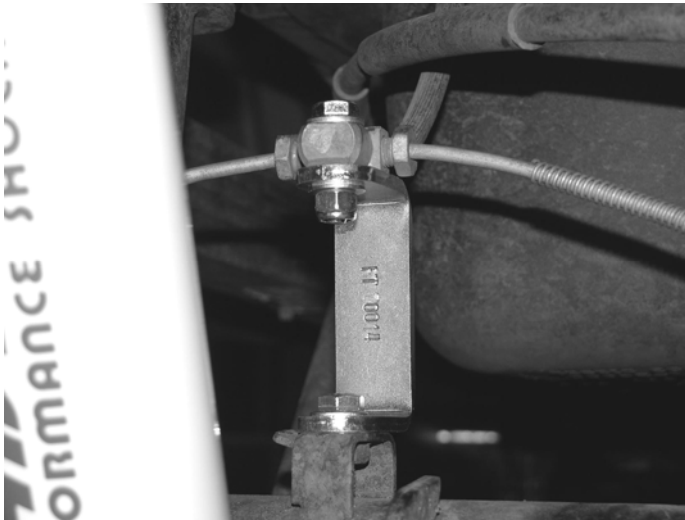


51. Locate and install the rear lift blocks with the provided short center pin on the bottom of the block, to the axle. The integrated bump stop should face to the inside of the vehicle. Using the provided U bolts, nuts and washers align axle, lift blocks, and springs and torque to U Bolts to 90 ft-lbs. SEE PHOTO BELOW

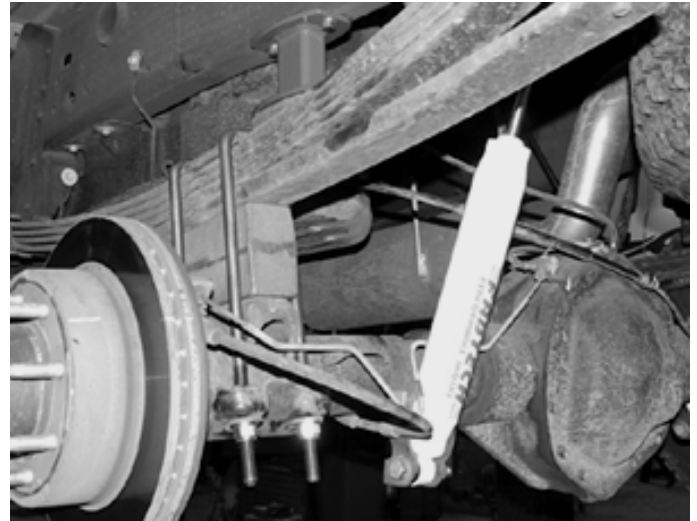

52. Install Fabtech shock part number FTS7333 (not included) with the factory hardware and torque bolts to 65lbs.
53. For vehicles with a two-piece rear driveshaft, locate and install FT20074 spacer between the carrier bearing and frame. Push out stock mounting bolts and use 3/8" x 2" bolts, nuts and washers. Torque to 30 ft-lbs SEE PHOTO BELOW



54. Recheck all bolts for proper torque. Recheck brake hoses and lines for proper clearances.
55. Check the fluid in the front differential and fill if need with factory specification differential oil.
56. Install tires and wheels and torque lug nuts to wheel manufacturer's specifications. Turn front tires left to right and check for appropriate tire clearance. Note - Some oversized tires may require trimming of the front bumper & valance.
57. Check front end alignment and set to factory specifications. Readjust headlights.

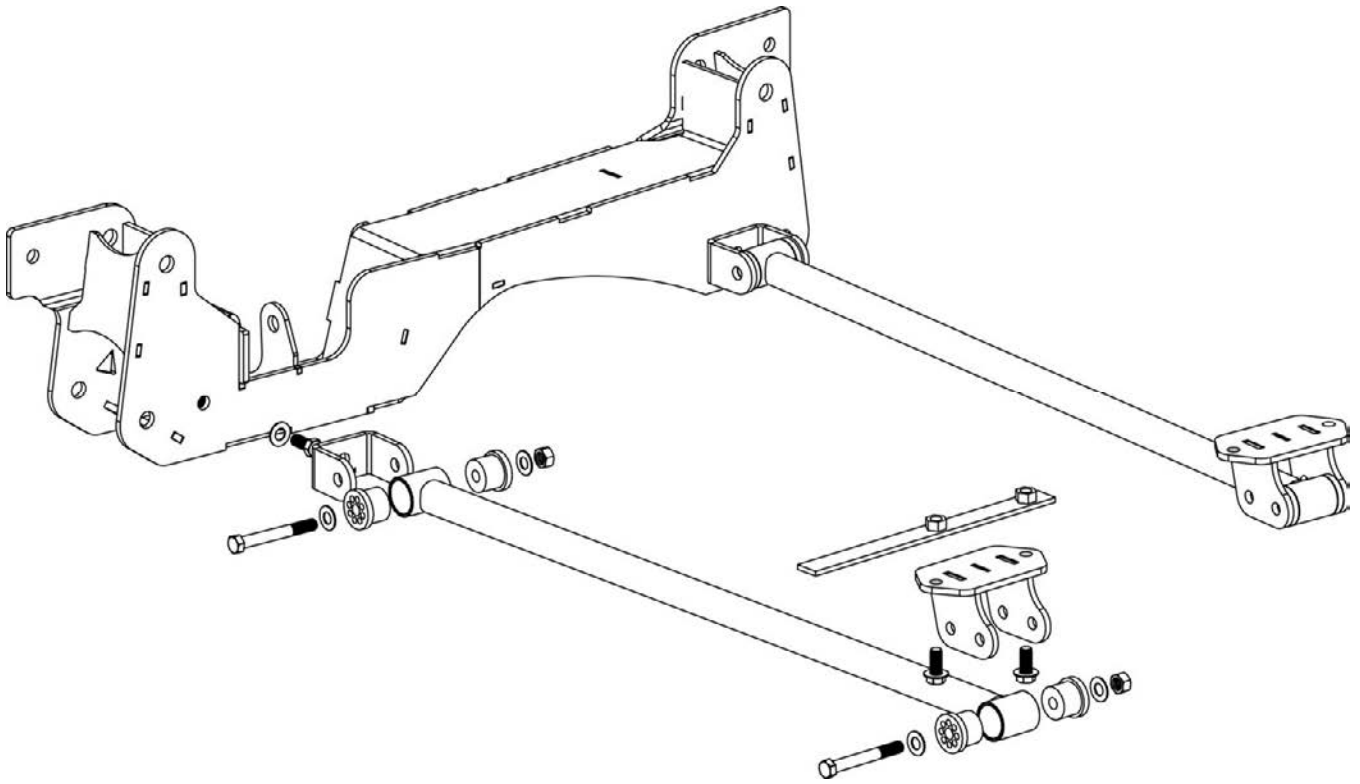

**FIGURE 1**

**INSTALLATION OF THIS SUSPENSION SYSTEM WILL NOT ALLOW THE USE OF THE FACTORY WHEELS OR SPARE TIRE ON THE FRONT SUSPENSION**