



FALKEN TIRES

2017 DATA BOOK





THE FALKEN STORY

Falken Tires, the Official Tire of Major League Baseball, continues to aggressively build a reputation as a leader in high performance tire technology for cars, trucks and SUVs. Falken Tires has successfully grown to become a flagship brand and a leading consumer choice for ultra high performance tires, as well as economical and value-priced lines in Light Truck, Commercial Medium Truck and Bus Radial tires. With its North American headquarters in Rancho Cucamonga, California, Falken has established five strategically located tire distribution centers across the United States—in California, Florida, Illinois, New Jersey and Texas—in order to quickly and efficiently supply its retailers throughout North America.



CONTINUING OUR MOTORSPORTS EXCELLENCE

Falken Tires strengthens its retailer and customer relationships by marketing its tires through multiple professional motorsports programs—drifting and off-road—as well as grassroots series and driving challenges that highlight the capabilities of the brand’s street tires. These racing and driving programs are used as technological platforms that feature Falken’s strengths in addition to aiding Falken’s engineers to improve its products. Falken’s allegiance to Formula Drift has resulted in multiple series championships, while its six-year participation in the Tudor United SportsCar (formerly American Le Mans) series, running a single-car team, earned multiple wins in the extremely competitive GT class, including back-to-back victories at the season-ending 10-hour endurance race, Petit Le Mans. And, in just a few short years of competing in the demanding, deep-rooted world of off-road racing, Falken Tires has scored excellent results with its WILDPEAK line of tires in numerous series throughout North America.



CONTENTS

WILDPEAK A/T3W	1–4
WILDPEAK M/T	5–8
WILDPEAK H/T	9–12
ZIEX S/TZ05	13–16
AZENIS FK510	17–20
AZENIS RT615K+	21–24
AZENIS FK450 A/S	25–28
ZIEX ZE950 A/S	29–32
SINCERA SN250 A/S	33–36
ESPIA EPZ II	37–40
ESPIA EPZ II SUV	41–44
EUROWINTER HS449	45–48
ORIGINAL EQUIPMENT	49
LOAD AND INFLATION CHARTS	51–52
SPEED SYMBOL CHART	53–54
QUICK REFERENCE GUIDE	55



WILDPEAK A/T3W

ALL-TERRAIN, ANY-WEATHER RUGGED CAPABILITY

The **WILDPEAK A/T3W** is engineered for adventure, any time and in any weather. The A/T3W combines aggressive off-road ability and rugged terrain driving without compromise on the pavement. An optimized tread design combined with a silica tread compound enable the A/T3W to excel in three areas: wear, winter and wet performance. Designed for severe snow conditions, every A/T3W tire is qualified by the Rubber Manufacturers Association for the Three Peak Mountain Snow Flake (3PMSF) symbol. The A/T3W is packed with technology, from Falken's patented 3D Canyon Sipes to an all-new proprietary lower sidewall. Full-depth sipes and grooves maintain consistent performance and appearance throughout the life of the tire.

AVAILABLE TIRE SIZES
54 SIZES

AVAILABLE RIM SIZING
15" – 20"

SPEED RATING
R • S • T

RATING
SEVERE SNOW CONDITIONS 

PERFORMANCE RATINGS*



OUTER APEX SIDEWALL

features a secondary bead apex that acts as a heat shield to protect the internal casing of the tire, resulting in confident handling and durability with the added benefit of sidewall protection on rough roads and trails.

*This tire is designed for severe snow conditions and meets the RMA (Rubber Manufacturers Association) snow traction performance requirements.
†Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.




POPULAR FITMENTS:
CHEVROLET COLORADO
CHEVROLET SILVERADO
FORD F-SERIES
JEEP CHEROKEE
NISSAN FRONTIER
NISSAN TITAN
RAM TRUCKS
TOYOTA 4RUNNER
TOYOTA TACOMA
TOYOTA TUNDRA

TIRE HIGHLIGHTS



HEAT DIFFUSER TECHNOLOGY
in the lower sidewall dissipates heat to protect the internal tire components. Keeping this critical area of the tire cool ensures vehicle stability even when towing or carrying heavy loads.



3D CANYON SIPE TECHNOLOGY
interlocks the shoulders to resist wear from high torque as well as providing additional handling stability.



RUGGED AND RIGID TREAD BLOCKS
feature support ramps and step-down features that provide tread-pattern rigidity in the contact patch, enhancing vehicle stability and handling while also preventing stones from becoming trapped in the grooves.



AGGRESSIVE UPPER SIDEWALL
along with offset shoulder blocks protect the tire from sharp rocks and provide additional off-road traction at low tire pressures or in off-camber situations.

SIZES AND SPECIFICATIONS

NEXT PAGE

WILDPEAK A/T3W

ALL-TERRAIN, ANY-WEATHER RUGGED CAPABILITY

Wheel Dia.	Size	Load Range	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
15"	235/75R15	-	XL	109T	28034108	6.5	6.0 - 8.0	28.9	9.1	732	7.2	10.9	14	35	50	2271	660-A-B
	30x9.50R15LT	C/6	SL	104S	28030112	7.5	6.5 - 8.5	29.5	9.5	708	7.3	13.6	17	44	50	1985	-
	31x10.50R15LT	C/6	SL	109S	28030114	8.5	7.0 - 9.0	30.5	10.4	685	8.2	14.1	18	50	50	2270	-
	32x11.50R15LT	C/6	SL	113R	28037115	9.0	8.0 - 10.0	31.5	11.3	664	9.0	15.1	19	56	50	2535	-
	33x12.50R15LT	C/6	SL	108R	28037116	10.0	8.5 - 11.0	32.5	12.5	645	9.6	15.6	20	57	35	2205	-
	35x12.50R15LT	C/6	SL	113R	28037117	10.0	8.5 - 11.0	34.5	12.5	608	9.4	15.6	20	70	35	2535	-
16"	235/70R16	-	XL	109T	28034109	7.0	6.0 - 8.0	29.0	9.4	729	7.5	10.3	13	37	50	2271	660-A-B
	P245/75R16	-	XL	112T	28034608	7.0	6.5 - 8.0	30.5	9.8	694	7.5	10.3	13	39	50	2469	660-A-B
	255/70R16	-	XL	115T	28034657	7.5	6.5 - 8.5	30.1	10.2	703	8.3	10.3	13	40	50	2679	660-A-B
	265/70R16	-	SL	112T	28034667	8.0	7.0 - 9.0	30.6	10.8	692	8.7	10.8	14	42	44	2469	660-A-B
	265/75R16	-	SL	116T	28034301	7.5	7.0 - 9.0	31.7	10.6	671	8.1	10.8	14	44	44	2756	660-A-B
	LT225/75R16	E/10	SL	115/112S	28030119	6.0	6.0 - 7.0	29.3	8.5	711	6.9	13.1	17	41	80	2680	-
	LT235/85R16	E/10	SL	120/116S	28030994	6.5	6.0 - 7.5	31.7	9.1	658	7.0	13.6	17	48	80	3085	-
	LT245/75R16	E/10	SL	120/116S	28030628	7.0	6.5 - 8.0	30.5	9.5	684	7.5	13.6	17	49	80	3085	-
	LT265/75R16	E/10	SL	123/120S	28030639	7.5	7.0 - 8	31.7	10.4	660	8.1	14.1	18	55	80	3415	-
	LT285/75R16	E/10	SL	126/123R	28037611	8.0	7.5 - 9.0	32.8	11.1	637	8.8	14.6	18	61	80	3750	-
	LT305/70R16	E/10	SL	124/121R	28037641	9.0	8.0 - 9.5	32.8	12.1	637	9.7	15.1	19	63	65	3525	-
	LT315/75R16	E/10	SL	127/124R	28037124	8.5	8.0 - 11.0	34.6	12.3	606	9.6	15.6	20	72	65	3860	-
17"	235/75R17	-	SL	109T	28034737	6.5	6.0 - 8.0	31.1	9.1	679	7.2	10.9	14	38	44	2271	660-A-B
	245/65R17	-	SL	111T	28034768	7.0	7.0 - 8.5	29.5	9.7	719	8.1	10.3	13	39	50	2403	660-A-B
	245/70R17	-	XL	114T	28034747	7.0	6.5 - 8.0	30.6	9.8	691	8.0	10.3	13	40	50	2601	660-A-B
	245/75R17	-	SL	112T	28034764	7.0	6.5 - 8.0	31.5	9.8	671	7.5	10.3	13	41	44	2469	660-A-B
	255/65R17	-	XL	114T	28034713	7.5	7.0 - 9.0	30.1	10.3	708	8.4	10.3	13	41	50	2601	660-A-B
	255/70R17	-	SL	112T	28034769	7.5	6.5 - 8.5	31.1	10.2	679	8.3	10.3	13	42	44	2469	660-A-B
	265/65R17	-	XL	116T	28034721	8.0	7.5 - 9.5	30.6	10.6	697	8.8	10.3	13	42	50	2756	660-A-B
	265/70R17	-	SL	115T	28034300	8.0	7.0 - 9.0	31.7	10.8	668	8.7	10.8	14	47	44	2679	660-A-B
	P285/70R17	-	SL	117T	28034306	8.5	7.5 - 9.5	32.8	11.3	647	9.2	10.8	14	50	44	2833	660-A-B
	LT235/80R17	E/10	SL	120/117R	28037616	6.5	6.0 - 7.5	31.8	9.1	655	6.9	13.6	17	49	80	3085	-
	LT245/70R17	E/10	SL	119/116S	28030718	7.0	6.5 - 8.0	30.8	9.8	676	8.0	13.6	17	48	80	3000	-
	LT245/75R17	E/10	SL	121/118S	28030711	7.0	6.5 - 7.5	31.7	9.5	657	7.5	13.6	17	51	80	3195	-
	LT265/70R17	E/10	SL	121/118S	28030712	8.0	7.0 - 8.5	31.9	10.7	653	8.7	14.1	18	53	80	3195	-
	LT285/70R17	E/10	SL	121/118S	28030612	8.5	7.5 - 9.0	33.0	11.6	632	9.3	14.6	18	59	80	3195	-
	LT285/75R17	E/10	SL	121/118S	28030129	8.0	7.5 - 9.5	33.9	11.1	617	8.7	14.6	18	65	80	3195	-
	LT315/70R17	E/10	SL	121/118S	28030123	10.0	8.0 - 11.0	34.6	12.7	604	10.0	15.6	20	73	65	3195	-
	35x12.50R17LT	E/10	SL	121R	28037113	9.5	8.5 - 11.0	34.8	12.5	602	9.8	15.6	20	75	65	3195	-

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire.
Always refer to vehicle owners manual for proper tire fitment.

No UTQG rating for LT sizes.

Wheel Dia.	Size	Load Range	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
18"	255/70R18	-	SL	113T	28034841	7.5	6.5 - 8.5	32.1	10.2	658	8.3	10.3	13	43	44	2535	660-A-B
	265/60R18	-	XL	114T	28034854	8.0	7.5 - 9.5	30.6	10.5	694	8.5	10.3	13	43	50	2601	660-A-B
	265/65R18	-	SL	114T	28034823	8.0	7.5 - 9.5	31.5	10.6	675	8.8	10.3	13	46	44	2601	660-A-B
	265/70R18	-	SL	116T	28034809	8.0	7.0 - 9.0	32.6	10.8	646	8.7	10.8	14	47	44	2756	660-A-B
	275/65R18	-	SL	116T	28034901	8.0	7.5 - 9.5	32.1	10.9	663	9.1	10.8	14	47	44	2756	660-A-B
	LT265/70R18	E/10	SL	124/121S	28030127	8.0	7.0 - 9.0	32.9	10.7	634	8.7	14.1	18	60	80	3525	-
	LT275/65R18	E/10	SL	123/120S	28030803	8.0	7.5 - 9.0	32.1	10.7	651	9.1	14.6	18	60	80	3415	-
	LT275/70R18	E/10	SL	125/122S	28030703	8.0	7.0 - 8.5	33.4	11.0	624	9.0	14.6	18	61	80	3640	-
	LT285/65R18	E/10	SL	125/122S	28030827	8.5	8.0 - 10	32.6	11.3	642	9.4	14.6	18	64	80	3640	-
	LT305/65R18	E/10	SL	124/121R	28037122	9.0	8.5 - 11.0	33.6	12.0	623	9.6	15.1	19	67	65	3525	-
20"	LT325/65R18	E/10	SL	127/124S	28030126	9.5	9.0 - 12.0	34.6	13.0	605	10.7	15.6	20	77	65	3860	-
	275/55R20	-	XL	117T	28034021	8.5	7.5 - 9.5	31.9	11.1	661	8.9	10.3	13	48	50	2833	660-A-B
	275/60R20	-	SL	115T	28034003	8.0	7.5 - 9.5	33.1	10.8	640	8.9	10.3	13	48	44	2679	660-A-B
	LT265/60R20	E/10	SL	121/118S	28030128	8.0	7.5 - 9.5	32.5	10.2	640	8.6	14.1	18	58	80	3195	-
	LT275/65R20	E/10	SL	126/123S	28030120	8.0	7.5 - 9.5	34.1	10.6	611	9.1	14.6	18	66	80	3750	-
	LT285/55R20	E/10	SL	122/119T	28034121	9.0	8.0 - 10	32.4	11.2	642	9.7	14.6	18	58	80	3305	-
	LT305/55R20	E/10	SL	121/118S	28030952	9.5	8.5 - 11.0	33.2	12.3	626	10.4	15.1	19	71	65	3195	-
	LT325/60R20	E/10	SL	126/123S	28030125	9.5	9.0 - 12.0	35.4	12.8	591	10.9	15.6	20	84	65	3750	-
	35x12.50R20LT	E/10	SL	121R	28037118	10.0	8.5 - 11.0	34.6	12.5	603	10.6	15.6	20	76	65	3195	-

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire.
Always refer to vehicle owners manual for proper tire fitment.

No UTQG rating for LT sizes.



WILDPEAK M/T

MAXIMUM OFF-ROAD TRACTION BUILT FOR THE TOUGHEST TERRAIN

Trusted by the pros to take on the harshest conditions, the tough **WILDPEAK M/T** is built to get you there and back whether you're on the pavement, mud, snow or rocks. The M/T features Falken's proprietary three-ply DURASPEC™ Sidewall Technology developed to sustain the most punishing off-road conditions. DURASPEC™ also features two high ply turn-ups that provide an additional layer of protection and durability. An aggressive upper sidewall provides additional traction at low air pressures on rugged terrain. The WILDPEAK M/T also features exceptional road manners thanks to an optimized variable three-pitch tread pattern and precision manufacturing technology.

AVAILABLE TIRE SIZES
25 SIZES

AVAILABLE RIM SIZING
15" – 20"

SPEED RATING
Q

PERFORMANCE RATINGS*



POPULAR FITMENTS:
CHEVROLET SILVERADO
FORD F-SERIES
JEEP CHEROKEE
JEEP WRANGLER
NISSAN TITAN
NISSAN XTERRA
RAM TRUCKS
TOYOTA FJ CRUISER
TOYOTA TACOMA
TOYOTA TUNDR

TIRE HIGHLIGHTS



RUGGED AND RIGID TREAD BLOCKS
feature step-down supports on the center blocks to provide tread-pattern rigidity in the contact patch, enhancing stability and handling while preventing stones from becoming trapped in the grooves.



AGGRESSIVE UPPER SIDEWALL
along with offset shoulder blocks protect the tire from sharp rocks and provide additional off-road traction at low tire pressures or in off-camber situations.



MUD AND ROCK DEFENSE FEATURES
shed mud from the tread grooves to prevent loss of traction, ensuring maximum grip while preventing rocks from puncturing the base of the tread.



OPTIMIZED TREAD PATTERN
with three variable pitches positions the tread blocks to provide an exceptionally quiet ride.



DURASPEC™ THREE PLY SIDEWALL
is a Falken proprietary technology developed to endure the most punishing off-road conditions. DURASPEC™ also features two high ply turn-ups that provide an additional layer of protection.

SIZES AND SPECIFICATIONS

NEXT PAGE

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

Product shown for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

WILDPEAK M/T

MAXIMUM OFF-ROAD TRACTION BUILT FOR THE TOUGHEST TERRAIN

Wheel Dia.	Size	Load Range	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
15"	30x9.50R15LT	C/6	SL	104Q	28516312	7.5	6.5 - 8.5	29.6	9.6	713	7.2	15	19	46.5	50	1985	-
	31x10.50R15LT	C/6	SL	109Q	28516322	8.5	7 - 9	30.7	10.5	687	8.0	15	19	54.0	50	2270	-
	33x12.50R15LT	C/6	SL	108Q	28516518	10.0	8.5 - 11	32.6	13.0	650	9.4	16	21	75.0	35	2205	-
	35x12.50R15LT	C/6	SL	113Q	28516920	10.0	8.5 - 11	34.5	12.9	617	9.4	16	21	76.7	35	2535	-
16"	LT235/85R16	E/10	SL	120/116Q	28516994	6.5	6 - 7.5	31.8	9.2	656	7.0	14	18	52.7	80	3042	-
	LT245/75R16	E/10	SL	120/116Q	28516628	7.0	6.5 - 8	30.4	9.9	686	7.8	15	18	55.3	80	3042	-
	LT265/75R16	E/10	SL	123/120Q	28516639	7.5	7 - 8	32.0	10.6	653	8.4	15	19	60.0	80	3415	-
	LT285/75R16	E/10	SL	126/123Q	28516611	8.0	7.5 - 9	32.7	11.5	638	9.1	16	20	67.7	80	3750	-
	LT315/75R16	E/10	SL	127/124Q	28516934	8.5	8 - 11	34.7	12.6	603	10.0	17	21	77.8	65	3860	-
17"	LT235/80R17	E/10	SL	120/117Q	28516616	6.5	6 - 7.5	32.0	9.2	651	7.0	14	18	51.6	80	3085	-
	LT255/75R17	C/6	SL	111/108Q	28516714	7.0	6.5 - 8.5	32.3	10.2	646	8.0	14	18	53.1	50	2405	-
	LT265/70R17	E/10	SL	121/118Q	28516702	8.0	7 - 8.5	31.7	10.6	659	8.4	15	19	56.9	80	3195	-
	LT285/70R17	E/10	SL	121/118Q	28516612	8.5	7.5 - 9	32.9	11.4	635	9.1	16	20	63.3	80	3195	-
	LT295/70R17	E/10	SL	121/118Q	28516936	8.5	7.5 - 10	33.4	11.7	625	9.4	16	20	69.0	80	3195	-
	LT315/70R17	E/10	SL	121/118Q	28516932	9.5	8 - 11	34.6	12.8	604	9.4	16	20	80.7	65	3195	-
	33x12.50R17LT	D/8	SL	120Q	28516710	10.0	8.5 - 11	32.7	12.5	643	10.1	16	21	68.8	65	3085	-
	35x12.50R17LT	E/10	SL	121Q	28516995	10.0	8.5 - 11	34.8	13.0	609	9.4	16	21	79.6	65	3195	-
	37x12.50R17LT	D/8	SL	124Q	28516921	10.0	8.5 - 11	36.7	12.9	577	9.4	16	21	81.8	50	3525	-

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire.
Always refer to vehicle owners manual for proper tire fitment.

Wheel Dia.	Size	Load Range	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
18"	LT275/70R18	E/10	SL	125/122Q	28516703	8.0	7 - 8.5	33.4	10.9	624	8.7	16	20	66.1	80	3640	-
	LT285/65R18	E/10	SL	125/122Q	28516827	8.5	8 - 10	32.8	11.6	637	9.1	15	19	64.6	80	3640	-
	35x12.50R18LT	E/10	SL	123Q	28516999	10.0	8.5 - 11	34.7	13.0	607	10.1	17	21	78.7	65	3415	-
20"	LT305/55R20	E/10	SL	121/118Q	28516952	9.5	8.5 - 11	33.3	12.3	625	10.1	15	19	70.1	65	3195	-
	33x12.50R20LT	E/10	SL	114Q	28516906	10.0	8.5 - 11	32.8	12.7	638	10.4	16	21	70.3	65	2600	-
	35x12.50R20LT	E/10	SL	121Q	28516905	10.0	8.5 - 11	34.7	12.6	604	9.4	16	21	72.5	65	3195	-
	37x13.50R20LT	E/10	SL	127Q	28516951	11.0	8.5 - 11	36.7	13.6	573	10.9	16	21	87.3	65	3860	-

Never mix tires of different size, construction or type on an axle except for temporary use as a spare tire.
Always refer to vehicle owners manual for proper tire fitment.



WILDPEAK H/T

ALL-SEASON PERFORMANCE HANDLING AND LONG TREAD LIFE

The **WILDPEAK H/T** offers a combination of superb dry handling and responsive wet braking on all roadway surfaces. Falken has optimized traction and control through the combination of a non-directional tread pattern, high-tension casing ply and stiff wide steel belts in order to provide stability and comfort for pick-up trucks and SUVs alike whatever the season. With excellent value from its long lasting tread and optimal ride comfort, the WILDPEAK H/T leaves the competition in the dust.

AVAILABLE TIRE SIZES
45 SIZES

AVAILABLE RIM SIZING
15" – 20"

SPEED RATING
S • T • H


RATING
M+S RATED

PERFORMANCE RATINGS*




POPULAR FITMENTS:
CADILLAC ESCALADE
CHEVROLET SILVERADO 1500
FORD F-150
FORD ESCAPE
FORD EXPLORER
HONDA PILOT
HONDA RIDGELINE
JEEP GRAND CHEROKEE
TOYOTA FJ CRUISER
TOYOTA HIGHLANDER

TIRE HIGHLIGHTS



SYMMETRIC NON-DIRECTIONAL FIVE-RIB TREAD DESIGN
provides optimal handling stability and comfort while allowing cross-rotation patterns to fight irregular wear.



MULTI-WAVE LATERAL SIPES
enhance wet traction and increase all-season performance.



VARIABLE-PITCH SHOULDER DESIGN
provides exceptional all-season performance while reducing tire noise.



FOUR LARGE CIRCUMFERENTIAL STRAIGHT GROOVES
effectively evacuate water and significantly enhance hydroplaning resistance for superb wet handling.

SIZES AND SPECIFICATIONS

NEXT PAGE

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

WILDPEAK H/T

ALL-SEASON PERFORMANCE HANDLING AND LONG TREAD LIFE

Wheel Dia.	Size	Load Range	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
15"	30x9.5R15LT†	C/6	SL	104S	28800512	7.5	6.5 - 8.5	29.5	9.7	716	7.2	12	15	41	50	1985	-
	31x10.5R15LT†	C/6	SL	109S	28800513	8.5	7.0 - 9.0	30.5	10.7	693	8.1	12	15	45	50	2270	-
	225/75R15†	-	SL	102T	28804528	6.0	6 - 7.5	28.3	8.9	749	6.4	9	11	33	44	1874	600-A-B
	LT235/75R15†	C/6	SL	104/101S	28800520	6.5	6.0 - 7.0	28.8	9.3	724	7.1	12	16	38	50	1985	-
	235/75R15†	-	XL	109T	28804529	6.5	6 - 8	28.8	9.1	734	6.7	9	12	33	50	2271	600-A-B
16"	215/70R16	-	SL	100T	28804603	6.5	5.5 - 7	27.8	8.7	757	6.5	9	11	28	44	1764	600-A-B
	225/70R16	-	SL	103T	28804693	6.5	6.0 - 7.5	28.3	8.6	733	6.8	9	12	32	44	1929	600-A-B
	LT225/75R16	E/10	SL	115/112S	28800627	6.0	6.0 - 7.0	29.3	8.4	711	6.8	12	15	41	80	2680	-
	225/75R16†	-	XL	108T	28804484	6.0	6 - 7.5	29.2	8.7	722	6.4	9	11	34	50	2205	600-A-B
	235/70R16	-	SL	106T	28804609	7.0	6 - 8	28.9	9.4	729	7.0	9	12	33	44	2094	600-A-B
	235/75R16	-	XL	112T	28804610	6.5	6 - 8	29.8	9.1	710	6.7	9	12	36	50	2469	600-A-B
	LT235/85R16	E/10	SL	120/116S	28800474	6.5	6 - 7.5	31.8	9.0	658	6.7	13	16	48	80	3042	-
	245/70R16†	-	SL	107T	28804604	7.0	6.5 - 8	29.6	9.6	704	7.4	9	12	35	44	2149	600-A-B
	245/75R16†	-	SL	111S	28800608	7.0	6.5 - 8.0	30.4	9.8	686	7.0	9	12	37	44	2403	600-A-B
	LT245/75R16	E/10	SL	120/116S	28800494	7.0	6.5 - 8.0	30.5	9.8	684	7.4	12	16	49	80	3042	-
	LT245/75R16	C/6	SL	108/104S	28800492	7.0	6.5 - 8.0	30.4	9.8	686	7.4	12	16	41	50	2205	-
	255/70R16	-	SL	111T	28804605	7.5	6.5 - 8.5	30.1	10.2	694	7.6	9	12	35	44	2403	600-A-B
	265/70R16	-	SL	112T	28804606	8.0	7 - 9	30.4	10.5	686	8.0	10	12	39	44	2469	600-A-B
	265/75R16	-	SL	116T	28804607	7.5	7 - 9	31.6	10.6	673	7.6	10	12	41	44	2756	600-A-B
	LT265/75R16	E/10	SL	123/120S	28800505	7.5	7 - 9	31.7	10.6	660	8.0	13	16	56	80	3415	-
	LT285/75R16	E/10	SL	126/123S	28800611	8.0	7.5 - 9.0	32.8	11.2	637	8.7	13	17	62	80	3750	-
17"	215/65R17	-	SL	99S	59000031	6.5	6.0-7.5	28.0	8.6	755	6.7	8	11	27	44	1709	500 B B
	225/65R17	-	SL	102H	28801775	6.5	6.0 - 8.0	28.5	8.9	743	7.1	9	11	30	51	1874	600-A-A
	235/60R17	-	SL	102H	28801717	7.0	6.5 - 8.5	28.1	9.2	753	7.4	10	13	32	51	1874	600-A-A
	235/65R17	-	SL	104H	28801790	7.0	6.5 - 8.5	29.1	9.3	729	7.5	9	11	34	51	1984	600-A-B
	P235/70R17	-	XL	108T	28804613	7.0	6.0 - 8.0	29.9	9.5	705	7.0	9	12	36	50	2205	600-A-B
	245/65R17†	-	SL	107T	28804768	7.0	7 - 8.5	29.4	9.7	721	7.8	9	12	37	44	2149	600-A-B
	245/70R17	-	SL	110T	28804617	7.0	6.5 - 8	30.5	9.8	682	7.4	9	12	37	44	2337	600-A-B
	265/65R17	-	SL	112T	28804721	8.0	7.5 - 9.5	30.4	10.7	701	8.4	9	12	40	44	2469	600-A-B
	LT265/70R17†	E/10	SL	121/118S	28800712	8.0	7.0 - 8.5	31.7	10.9	657	8.2	12	15	57	80	3195	-
	265/70R17	-	SL	115T	28804701	8.0	7 - 9	31.5	10.8	661	8.0	10	12	41	44	2679	600-A-B

†Outlined White Sidewall Letters

No UTQG rating for LT sizes.

Wheel Dia.	Size	Load Range	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
18"	235/60R18	-	XL	107H	28801816	7.0	6.5 - 8.5	29.1	9.2	725	7.4	10	13	33	50	2149	600-A-A
	235/65R18	-	SL	106H	28801815	7.0	6.5 - 8.5	30.0	9.4	705	7.4	9	11	32	51	2094	600-A-A
	245/60R18	-	SL	105H	28801811	7.0	7.0 - 8.5	29.6	9.6	716	7.7	11	13	36	51	2039	600-A-A
	255/65R18	-	SL	111H	28801822	7.5	7.0 - 9.0	31.1	10.2	683	8.0	9	12	39	51	2403	600-A-A
	255/70R18	-	SL	113H	28801841	7.5	6.5 - 8.5	32.2	10.2	656	7.6	9	11	41	51	2535	600-A-A
	265/60R18	-	SL	110H	28801854	8.0	7.5 - 9.5	30.4	10.6	696	8.3	11	14	39	51	2337	600-A-A
	265/65R18	-	SL	114H	28801823	8.0	7.5 - 9.5	31.7	10.5	671	8.3	9	12	42	51	2601	600-A-A
	265/70R18	-	SL	116T	28804809	8.0	7.0 - 9.0	32.5	10.8	650	8.0	10	12	45	44	2756	600-A-B
	LT275/65R18	E/10	SL	123/120S	28800803	8.0	7.5 - 9.0	32.1	10.7	651	8.7	12	16	61	80	3415	-
19"	275/65R18	-	SL	116H	28801901	8.0	7.5 - 9.5	32.1	10.8	663	8.6	9	12	45	51	2756	600-A-A
	255/60R19	-	SL	109H	28801813	7.5	7.0 - 9.0	31.1	10.2	680	8.0	11	13	39	51	2271	600-A-A
20"	275/55R20	-	XL	117H	28801021	8.5	7.5 - 9.5	31.9	10.9	663	8.9	11	14	46	50	2833	600-A-A
	275/60R20	-	SL	115H	28801003	8.0	7.5 - 9.5	33.0	10.8	642	8.7	10	12	45	51	2679	600-A-A
	LT275/65R20	E/10	SL	126/123S	28800025	8.0	7.5 - 9.5	34.1	10.7	611	8.7	12	16	65	80	3750	-

No UTQG rating for LT sizes.



ZIEX S/TZ05

ALL-SEASON PERFORMANCE AND COMFORT FOR LUXURY SUVs AND LIGHT TRUCKS

The **ZIEX S/TZ05** features the latest in tread compound and construction technology designed specifically for SUV and 1/2 ton sport-truck applications. With an advanced M+S all-season non-directional tread design, the S/TZ05 allows rotation in all directions, optimizing tread life. With double taper-cut tread blocks and staggered shoulder lug grooves, the S/TZ05 is a smooth, quiet and dynamic tire. Available from 18 to 24-inch applications, this tire covers many of today's popular SUV and LT wheel fitments. Whether you're cruising through the city or driving on the open highway, the S/TZ05 provides unparalleled performance and comfort.

AVAILABLE TIRE SIZES
22 SIZES

AVAILABLE RIM SIZING
18" – 24"

SPEED RATING
H • V

RATING
M+S RATED

PERFORMANCE RATINGS*




*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.



POPULAR FITMENTS:

- ACURA RDX
- AUDI Q5
- BMW X5
- CADILLAC ESCALADE
- CHEVROLET AVALANCHE
- CHEVROLET TAHOE
- DODGE NITRO
- FORD EXPLORER
- NISSAN ARMADA
- PORSCHE CAYENNE
- TOYOTA HIGHLANDER
- VOLVO XC90


TIRE HIGHLIGHTS



FIVE-RIB SYMMETRIC TREAD DESIGN
provides increased high-speed stability and the freedom of tire rotation, enhancing tread life.



WIDE SHOULDER BLOCKS
increase tread stiffness allowing for maximum wet and dry handling and stability.



SOLID CENTER RIB
offers excellent handling response especially in high-speed conditions.



WIDE AND NARROW SHOULDER LUG GROOVES
designed to optimize noise reduction.

SIZES AND SPECIFICATIONS

NEXT PAGE

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

ZIEX S/TZ05

ALL-SEASON PERFORMANCE AND COMFORT FOR LUXURY SUVs AND LIGHT TRUCKS

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
18"	235/60R18	XL	107V	28052816	7.0	6.5 - 8.5	29.1	9.3	726	7.6	8	10	33	50	2149	460-A-A
	255/55R18	XL	109V	28052845	8.0	7.0 - 9.0	29.0	10.4	728	8.7	8	10	38	50	2271	460-A-A
	265/60R18	SL	110V	28052644	8.0	7.5-9.5	30.5	10.7	696	8.3	9	12	38	51	2337	460-A-A
19"	245/55R19	SL	103H	28051814	7.5	7.0 - 8.5	29.6	9.9	711	7.9	10	13	35	51	1929	460-A-A
	255/60R19	SL	109H	28051813	7.5	7.0 - 9.0	31.1	10.2	680	8.0	9	12	37	51	2271	460-A-A
20"	245/50R20	SL	102H	28051026	7.5	7.0 - 8.5	29.7	9.9	708	8.2	10	13	36	51	1874	460-A-A
	255/50R20	XL	109H	28051946	8.0	7.0 - 9.0	30.2	10.2	697	8.5	10	13	39	50	2271	460-A-A
	265/50R20	XL	111H	28051011	8.5	7.5 - 9.5	30.5	10.7	690	8.9	11	14	40	50	2403	460-A-A
	275/40R20	XL	106H	28051947	9.5	9.5 - 11.0	28.6	10.9	727	9.5	10	13	37	50	2094	460-A-A
	275/45R20	XL	110H	28051016	9.0	8.5 - 10.5	29.7	10.6	701	9.1	11	14	38	50	2337	460-A-A
	275/55R20	XL	117H	28051021	8.5	7.5 - 9.5	31.9	11.0	663	8.9	11	14	45	50	2833	460-A-A
	275/60R20	SL	115H	28051003	8.0	7.5 - 9.5	33.0	11.0	641	8.7	10	13	46	51	2670	460-A-A
	295/45R20	XL	114H	28051018	10.0	9.5 - 11.0	30.3	11.7	688	9.8	11	14	42	50	2601	460-A-A
	305/50R20	XL	120H	28051015	9.5	8.5 - 11.0	31.9	12.4	662	10.2	11	14	49	50	3086	460-A-A

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
22"	265/35R22	XL	102H	28051218	9.5	9.0 - 10.5	29.5	10.5	701	9.3	10	13	37	50	1874	460-A-A
	265/40R22	XL	106H	28051217	9.5	9.0 - 10.5	30.3	10.6	683	9.2	10	13	37	50	2094	460-A-A
	285/40R22	XL	110H	28051216	10.0	9.5 - 11.0	31.0	11.4	670	9.9	11	14	42	50	2337	460-A-A
	285/45R22	XL	114H	28051219	9.5	9.0 - 10.5	32.1	11.0	648	9.4	11	14	43	50	2601	460-A-A
	305/40R22	XL	114H	28051220	11.0	10.0 - 12.0	31.6	12.3	658	10.6	11	14	45	50	2601	460-A-A
	305/45R22	XL	118H	28051215	10.0	9.5 - 11.5	32.7	12.0	637	10.1	11	14	48	50	2910	460-A-A
24"	295/35R24	XL	110H	28051401	10.5	10.0 - 11.5	32.0	11.6	646	10.3	11	13	45	50	2337	460-A-A
	305/35R24	XL	112H	28051402	11.0	10.0 - 12.0	32.4	12.0	639	10.6	11	13	45	50	2469	460-A-A



AZENIS FK510

SUMMER ULTRA HIGH PERFORMANCE

Falken’s latest generation ultra high performance summer tire, the **AZENIS FK510** is designed for drivers of premium vehicles looking for excellent grip and outstanding performance. 4D Nano Design enables Falken engineers to optimize new high-performance compounds at the molecular level, enhancing both wear and wet weather traction. Featuring hybrid undertread materials, the FK510 delivers confidence-inspiring handling and stability. The FK510 covers a wide range of today’s luxury sport vehicles, including staggered applications, and is available in sizes ranging from 17 to 21-inch.

AVAILABLE TIRE SIZES
45 SIZES

AVAILABLE RIM SIZING
17" – 21"

SPEED RATING
Y • (Y)


PERFORMANCE RATINGS*



4D NANO DESIGN

features new compound advancements through biomass materials to help improve tread flexibility and adhesion while simultaneously reducing polymer heat generation.


*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

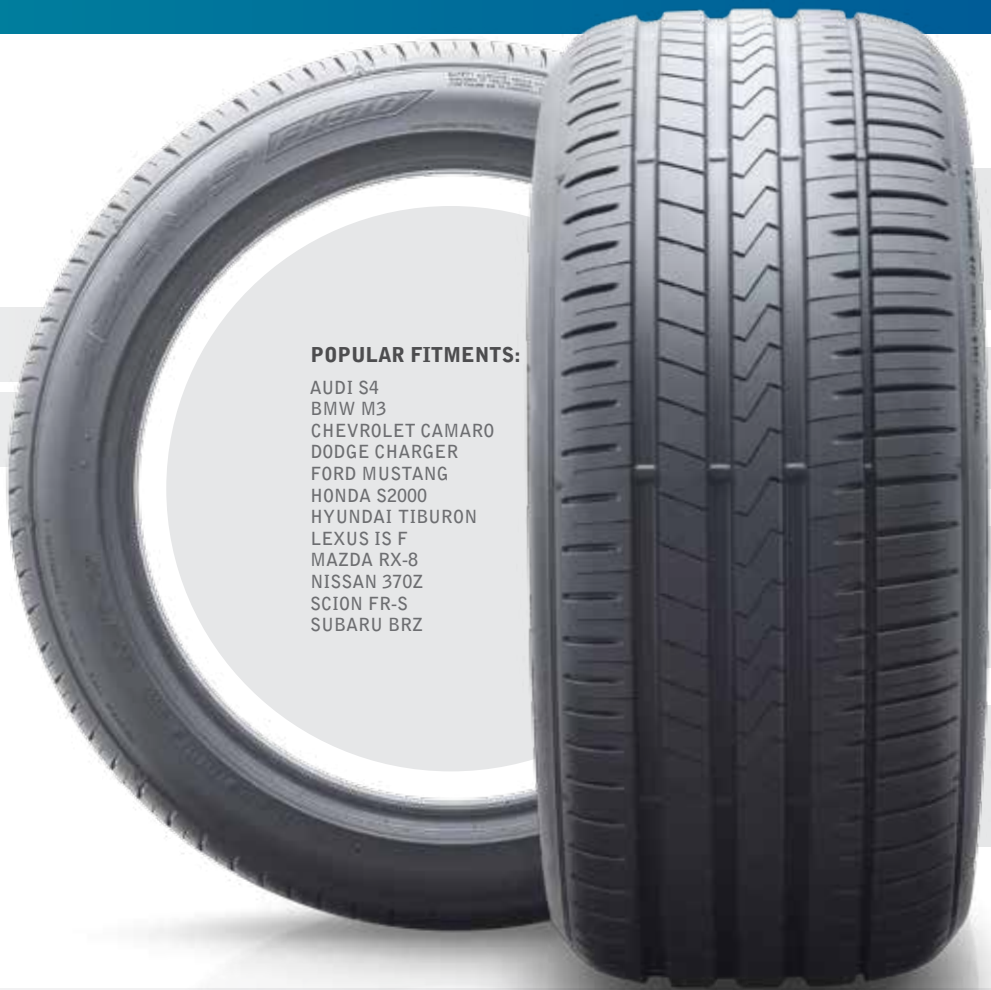

POPULAR FITMENTS:

- AUDI S4
- BMW M3
- CHEVROLET CAMARO
- DODGE CHARGER
- FORD MUSTANG
- HONDA S2000
- HYUNDAI TIBURON
- LEXUS IS F
- MAZDA RX-8
- NISSAN 370Z
- SCION FR-S
- SUBARU BRZ


TIRE HIGHLIGHTS



ADAPTIVE CONSTANT PRESSURE (ACP) PATTERN DESIGN
provides enhanced tire tread to road surface pressure distribution, improving both directional stability and vehicle-stopping distances.



HYBRID UNDERTREAD CAP PLY
provides added rigidity and high-speed stability through the use of both aramid and nylon materials.



SWITCHBACK SIPING
helps optimize contact surface while cornering in wet conditions, penetrating the water surface and enhancing cornering performance.



VARIABLE SIPE DEPTH
across the surface of the tread allows for controlled flexibility while maintaining overall block rigidity.

SIZES AND SPECIFICATIONS

NEXT PAGE

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

AZENIS FK510

SUMMER ULTRA HIGH PERFORMANCE

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
17"	215/45ZR17	XL	91Y	28032372	7.0	7.0 - 8.0	24.7	8.5	842	7.2	7.9	10.0	20.5	50	1356	300-AA-A
	225/45ZR17	XL	94Y	28039592	7.5	7.0 - 8.5	25.0	8.9	834	7.6	8.0	10.1	20.7	50	1477	300-AA-A
	235/45ZR17	XL	97Y	28036088	8.0	7.5 - 9.0	25.4	9.4	821	7.9	7.9	10.0	22.0	50	1609	300-AA-A
	245/40ZR17	XL	95Y	28032997	8.5	8.0 - 9.5	24.8	9.9	840	8.4	7.9	10.0	22.9	50	1521	300-AA-A
	245/45ZR17	XL	99Y	28038218	8.0	7.5 - 9.0	25.7	9.7	813	8.2	7.9	10.0	22.5	50	1709	300-AA-A
18"	225/40ZR18	XL	92(Y)	28033160	8.0	7.5 - 9.0	25.2	9.1	826	7.7	8.0	10.1	22.3	50	1389	300-AA-A
	225/45ZR18	XL	95(Y)	28032674	7.5	7.0 - 8.5	26.0	8.9	800	7.6	8.0	10.1	21.6	50	1521	300-AA-A
	235/40ZR18	XL	95(Y)	28039762	8.5	8.0 - 9.5	25.5	9.6	818	8.1	8.0	10.1	23.6	50	1521	300-AA-A
	245/35ZR18	XL	92Y	28031525	8.5	8.0 - 9.5	24.8	9.9	837	8.8	7.8	9.8	22.3	50	1389	300-AA-A
	245/40ZR18	XL	97Y	28034669	8.5	8.0 - 9.5	25.8	9.9	808	8.4	8.0	10.1	24.7	50	1609	300-AA-A
	245/45ZR18	XL	100(Y)	28036955	8.0	7.5 - 9.0	26.7	9.7	783	8.2	8.0	10.1	24.0	50	1764	300-AA-A
	255/35ZR18	XL	94(Y)	28036278	9.0	8.5 - 10.0	25.1	10.4	829	9.2	7.8	9.8	23.8	50	1477	300-AA-A
	255/40ZR18	XL	99(Y)	28038585	9.0	8.5 - 10.0	26.1	10.4	798	8.8	7.9	10.0	25.4	50	1709	300-AA-A
	265/35ZR18	XL	97(Y)	28039629	9.5	9.0 - 10.5	25.4	10.8	818	9.5	7.6	9.6	25.4	50	1609	300-AA-A
	275/35ZR18	XL	99(Y)	28038773	9.5	9.0 - 11.0	25.6	11.1	813	9.9	7.6	9.6	26.2	50	1709	300-AA-A
	275/40ZR18	SL	99Y	28031904	9.5	9.0 - 11.0	26.7	11.1	781	9.5	7.7	9.7	27.6	51	1709	300-AA-A
	225/35ZR19	XL	88(Y)	28036400	8.0	7.5 - 9.0	25.2	9.1	818	8.1	7.8	9.8	22.0	50	1235	300-AA-A
	225/45ZR19	XL	96Y	28037512	7.5	7.0 - 8.5	27.0	8.9	769	7.6	7.9	10.0	24.0	50	1565	300-AA-A
19"	235/35ZR19	XL	91(Y)	28032322	8.5	8.0 - 9.5	25.5	9.6	813	8.4	7.9	10.0	23.4	50	1356	300-AA-A
	245/35ZR19	XL	93(Y)	28037499	8.5	8.0 - 9.5	25.8	9.9	803	8.8	7.8	9.8	24.3	50	1433	300-AA-A
	245/40ZR19	XL	98(Y)	28031800	8.5	8.0 - 9.5	26.8	9.9	774	8.4	7.9	10.0	25.4	50	1653	300-AA-A
	245/45ZR19	XL	102(Y)	28034353	8.0	7.5 - 9.0	27.8	9.7	751	8.2	7.9	10.0	26.9	50	1874	300-AA-A
	255/30ZR19	XL	91(Y)	28037384	9.0	8.5 - 9.5	25.1	10.4	821	9.3	7.7	9.7	23.8	50	1356	300-AA-A
	255/35ZR19	XL	96(Y)	28035585	9.0	8.5 - 10.0	26.1	10.4	795	9.2	7.8	9.8	25.6	50	1565	300-AA-A
	255/40ZR19	XL	100(Y)	28039325	9.0	8.5 - 10.0	27.1	10.4	767	8.8	7.9	10.0	27.1	50	1764	300-AA-A
	275/35ZR19	XL	100(Y)	28034137	9.5	9.0 - 11.0	26.7	11.1	781	9.9	7.6	9.6	28.4	50	1764	300-AA-A
	275/40ZR19	XL	105(Y)	28038888	9.5	9.0 - 11.0	27.8	11.1	751	9.5	7.7	9.7	28.4	50	2039	300-AA-A
	285/35ZR19	XL	103(Y)	28032808	10.0	9.5 - 11.0	27.0	11.6	771	10.2	7.4	9.3	29.1	50	1929	300-AA-A
	295/30ZR19	XL	100Y	28033927	10.5	10.0 - 11.0	26.1	12.0	795	10.8	7.5	9.4	28.2	50	1764	300-AA-A

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
20"	245/30ZR20	XL	90(Y)	28039609	8.5	8.0 - 9.0	25.8	9.9	800	8.9	7.8	9.8	24.3	50	1323	300-AA-A
	245/35ZR20	XL	95(Y)	28033244	8.5	8.0 - 9.5	26.8	9.9	774	8.8	7.8	9.8	25.4	50	1521	300-AA-A
	245/40ZR20	XL	99(Y)	28031318	8.5	8.0 - 9.5	27.8	9.9	747	8.4	7.9	10.0	26.5	50	1709	300-AA-A
	245/45ZR20	XL	103Y	28039274	8.0	7.5 - 9.0	28.7	9.7	725	8.2	7.9	10.0	28.0	50	1929	300-AA-A
	255/30ZR20	XL	92(Y)	28034117	9.0	8.5 - 9.5	26.1	10.4	790	9.3	7.7	9.7	25.1	50	1389	300-AA-A
	255/35ZR20	XL	97(Y)	28036744	9.0	8.5 - 10.0	27.1	10.4	767	9.2	7.8	9.8	26.9	50	1609	300-AA-A
	255/40ZR20	XL	101(Y)	28036572	9.0	8.5 - 10.0	28.1	10.4	740	8.8	7.9	10.0	28.2	50	1819	300-AA-A
	255/45ZR20	XL	105Y	28039729	8.5	8.0 - 9.5	29.2	10.2	715	8.6	7.9	10.0	29.3	50	2039	300-AA-A
	275/30ZR20	XL	97(Y)	28032956	9.5	9.0 - 10.0	26.5	11.1	778	10.0	7.5	9.4	27.1	50	1609	300-AA-A
	275/35ZR20	XL	102(Y)	28036351	9.5	9.0 - 11.0	27.6	11.1	753	9.9	7.6	9.6	29.1	50	1874	300-AA-A
	275/40ZR20	XL	106Y	28036319	9.5	9.0 - 11.0	28.7	11.1	725	9.5	7.7	9.7	30.4	50	2094	300-AA-A
	285/30ZR20	XL	99(Y)	28038200	10.0	9.5 - 10.5	26.8	11.6	774	10.4	7.3	9.2	28.0	50	1709	300-AA-A
	285/35ZR20	XL	104(Y)	28032622	10.0	9.5 - 11.0	28.0	11.6	745	10.2	7.4	9.3	29.8	50	1984	300-AA-A
21"	295/30ZR20	XL	101(Y)	28031522	10.5	10.0 - 11.0	27.1	12.0	767	10.8	7.3	9.2	29.3	50	1819	300-AA-A
	245/35ZR21	XL	96(Y)	28039049	8.5	8.0 - 9.5	27.8	9.9	745	8.8	7.8	9.8	26.0	50	1565	300-AA-A
	265/35ZR21	XL	101(Y)	28032384	9.5	9.0 - 10.5	28.4	10.8	730	9.5	7.6	9.6	29.3	50	1819	300-AA-A

AZENIS RT615K+

COMPETITION-PROVEN PERFORMANCE


Developed for the maximum performance-minded driver, the **AZENIS RT615K+** is derived from the original competition-winning RT615K. The PLUS encompasses an all-new digitally-engineered, nanotech-formulated compound for superior grip and excellent handling. Its confidence inspiring straight line and cornering traits allow drivers to push the limits of their vehicle in safe, closed-course environments, while its street-capable durability and DOT approval allow for street-legal daily use as well. With 21 sizes from 14 to 18-inch rim diameters and a 200 A-A UTQG rating, the **AZENIS RT615K+** is the ultimate choice for performance compacts, sports coupes, sports sedans and muscle cars.

AVAILABLE TIRE SIZES
21 SIZES

AVAILABLE RIM SIZING
14" – 18"

SPEED RATING
H • W

PERFORMANCE RATINGS*

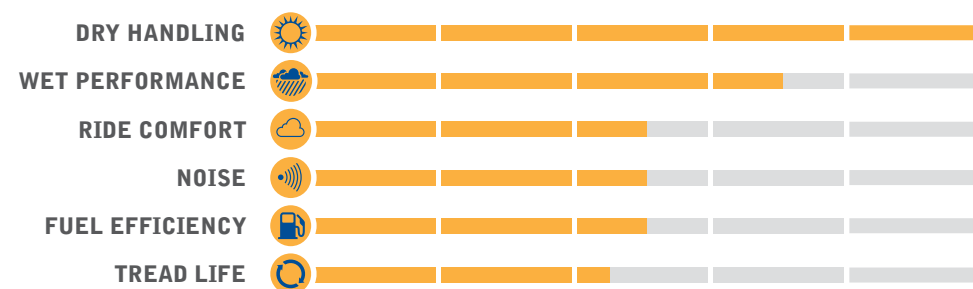

4D NANO DESIGN


features new compound advancements through biomass materials to help improve tread flexibility and adhesion while simultaneously reducing polymer heat generation.



POPULAR FITMENTS:


ACURA INTEGRA
AUDITT QUATTRO
BMW M3
BMW Z4
HONDA S2000
HYUNDAI TIBURON
MAZDA MIATA
MITSUBISHI LANCER EVO
NISSAN 370Z
PORSCHE 911
SCION FR-S
SUBARU BRZ

TIRE HIGHLIGHTS




RACE-INSPIRED TREAD COMPOUND

provides excellent traction in all racing conditions.




MASSIVE SPORT SIDE SHOULDER BLOCKS

deliver motorsports-level grip and unsurpassed cornering response.



SOLID CENTER RIB

significantly reduces wheel spin by reducing contact patch void ratio under heavy acceleration.



HIGH-TENSION CARCASS

increases handling response and high-speed stability.

SIZES AND SPECIFICATIONS

NEXT PAGE

AZENIS RT615K+

COMPETITION-PROVEN PERFORMANCE

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
14"	195/60R14	SL	86H	28533443	6.0	5.5 - 7.0	23.2	7.9	900	6.6	6.3	7.9	18.5	51	1168	200-A-A
15"	205/50ZR15	XL	89W	28533077	6.5	5.5 - 7.5	23.2	8.2	895	7.6	6.3	7.9	21.2	50	1279	200-A-A
16"	205/40ZR16	XL	83W	28534903	7.5	7.0 - 8.0	22.5	8.5	911	7.2	6.3	7.9	18.3	50	1074	200-A-A
	215/45ZR16	SL	86W	28533766	7.0	7.0 - 8.0	23.6	8.7	768	8.0	6.3	7.9	21.6	51	1168	200-A-A
	225/50ZR16	SL	92W	28538495	7.0	6.0 - 8.0	24.9	9.1	881	8.2	6.3	7.9	24.7	51	1389	200-A-A
17"	205/40ZR17	XL	84W	28537988	7.5	7.0 - 8.0	23.4	8.5	875	7.2	6.3	7.9	19.3	50	1102	200-A-A
	215/40ZR17	XL	87W	28532497	7.5	7.0 - 8.5	23.9	8.7	861	7.4	6.3	7.9	20.4	50	1202	200-A-A
	215/45ZR17	SL	87W	28531437	7.0	7.0 - 8.0	24.6	8.3	871	8.0	6.3	7.9	22.9	51	1201	200-A-A
	225/45ZR17	XL	94W	28537258	7.5	7.0 - 8.5	25.0	8.9	822	8.3	6.3	7.9	25.0	50	1477	200-A-A
	235/40ZR17	SL	90W	28534447	8.5	8.0 - 9.5	24.4	9.4	836	8.7	6.3	7.9	23.8	51	1323	200-A-A
	245/45ZR17	XL	99W	28534124	8.0	7.5 - 9.0	25.6	9.6	806	9.1	6.3	7.9	27.2	50	1709	200-A-A
	255/40ZR17	SL	94W	28538003	9.0	8.5 - 10.0	25.0	10.3	825	9.4	6.3	7.9	26.6	51	1477	200-A-A
	275/40ZR17	SL	98W	28535983	9.5	9.0 - 11.0	25.6	10.8	806	10.0	6.3	7.9	28.4	51	1653	200-A-A

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
18"	225/40ZR18	XL	92W	28539564	8.0	7.5 - 9.0	25.1	9.3	818	8.3	6.3	7.9	24.1	50	1389	200-A-A
	235/40ZR18	XL	95W	28537681	8.5	8.0 - 9.5	25.5	9.6	806	8.7	6.3	7.9	24.4	50	1521	200-A-A
	245/40ZR18	XL	97W	28533881	8.5	8.0 - 9.5	25.6	9.8	803	9.1	6.3	7.9	26.6	50	1609	200-A-A
	255/40ZR18	SL	95W	28532104	9.0	8.5 - 10.0	25.9	10.3	794	9.4	6.3	7.9	27.9	51	1521	200-A-A
	265/35ZR18	XL	97W	28538247	9.5	9.0 - 10.5	25.4	10.7	852	10.0	6.3	7.9	28.2	50	1609	200-A-A
	275/35ZR18	SL	95W	28537737	9.5	9.0 - 11.0	25.6	10.8	803	10.0	6.3	7.9	27.0	51	1521	200-A-A
	295/40ZR18	SL	103W	28535059	10.5	10.0 - 11.5	27.2	11.8	763	10.9	6.3	7.9	32.8	51	1929	200-A-A
	315/30ZR18	SL	98W	28533615	11.0	10.5 - 11.5	25.5	12.6	813	11.7	6.3	7.9	32.0	51	1653	200-A-A



AZENIS FK450 A/S

UNCOMPROMISED ALL-SEASON ULTRA HIGH PERFORMANCE

The all-new **AZENIS FK450 All-Season** is specifically designed for today’s premium sport coupes and sedans. Through an array of advanced technological features including Falken Tires’ exclusive Tension Control Technology (TCT) process, engineers achieved an excellent balance of handling, high-speed stability and confident all-weather traction. Advanced tread-design simulation has allowed for slightly rounded sculpted-rib edges to aid in preventing rain groove wandering, enhance straight-line stability and optimize on-road feel. With 51 available sizes ranging from 16 to 20-inch and 68%* Luxury Sport vehicle coverage, the FK450 A/S is the choice for drivers seeking dependable all-season ultra high performance, year round.

AVAILABLE TIRE SIZES
51 SIZES

SPEED RATING
W • Y

AVAILABLE RIM SIZING
16" – 20"

PERFORMANCE RATINGS†




4D NANO DESIGN
features new compound advancements through biomass materials to help improve tread flexibility and adhesion while simultaneously reducing polymer heat generation.

* Market Coverage based on 3rd Party 2015 Q1 U.S. Vehicle Registration Data.
† Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.



POPULAR FITMENTS:
ACURA TLX
AUDI A4
BMW 3-5 SERIES
CHEVROLET CAMARO
CADILLAC CTS
FORD MUSTANG
INFINITI Q50
LEXUS IS
LINCOLN MKZ
MERCEDES C-E CLASS


TIRE HIGHLIGHTS



ASYMMETRIC RIB AND BLOCK HYBRID TYPE DESIGN
allows for quick vehicle reaction, maneuverability and on-road feel.



TAPERED NOTCHED GROOVES
create break-off points for snow packed into tread surface.



LONG SWEEPING TREAD GROOVES
clear water with minimal cavitation for great wet-driving performance.



VERTICAL TREAD NOTCHES
help minimize any loss of traction when transitioning from straight-line driving to corners.

SIZES AND SPECIFICATIONS

NEXT PAGE

AZENIS FK450 A/S

UNCOMPROMISED ALL-SEASON ULTRA HIGH PERFORMANCE

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
16"	**195/55RF16	SL	87V	28172422	7.5	7.0 - 8.5	25.0	9.0	834	7.5	8.4	10.6	27.6	51	1356	400-A-A
	205/50ZR16	SL	87W	28173671	6.5	5.5 - 7.5	24.1	8.5	874	7.3	8.0	10.1	20.7	51	1201	500-A-A
	205/55ZR16	SL	91W	28173483	6.5	5.5 - 7.5	24.9	8.4	845	7.1	8.0	10.1	20.3	51	1356	500-A-A
	215/55ZR16	XL	97W	28173662	7.0	6.0 - 7.5	25.3	8.9	834	7.4	8.0	10.1	24.0	50	1609	500-A-A
	225/50ZR16	SL	92W	28173672	7.0	6.0 - 8.0	24.9	9.3	845	8.0	8.0	10.1	22.7	51	1389	500-A-A
	225/55ZR16	SL	95W	28173670	7.0	6.0 - 8.0	25.7	9.2	821	7.8	8.0	10.1	22.5	51	1521	500-A-A
17"	205/45ZR17	XL	88W	28173781	7.0	6.5 - 7.5	24.3	8.2	856	7.1	8.0	10.1	20.5	50	1235	500-A-A
	205/50ZR17	XL	93W	28173770	6.5	5.5 - 7.5	25.1	8.5	837	7.3	8.0	10.1	21.8	50	1433	500-A-A
	215/45ZR17	XL	91W	28173792	7.0	7.0 - 8.0	24.6	8.5	842	7.4	8.0	10.1	21.8	50	1356	500-A-A
	215/50ZR17	XL	95W	28173771	7.0	6.0 - 7.5	25.5	9.0	823	7.7	8.0	10.1	22.7	50	1521	500-A-A
	215/55ZR17	SL	94W	28173727	7.0	6.0 - 7.5	26.3	8.9	800	7.4	8.0	10.1	22.5	51	1477	500-A-A
	225/45ZR17	XL	94W	28173795	7.5	7.0 - 8.5	25.0	9.0	834	7.8	8.0	10.1	22.5	50	1477	500-A-A
	**225/45ZRF17	SL	91W	28173401	7.5	7.0 - 8.5	25.0	9.0	834	7.5	8.4	10.6	27.6	51	1356	400-A-A
	225/50ZR17	XL	98W	28173772	7.0	6.0 - 8.0	25.9	9.3	811	8.0	8.0	10.1	26.0	50	1653	500-A-A
	225/55ZR17	SL	97W	28173762	7.0	6.0 - 8.0	26.8	9.2	788	7.8	8.0	10.1	25.6	51	1609	500-A-A
	235/45ZR17	XL	97W	28173794	8.0	7.5 - 9.0	25.4	9.4	821	8.1	8.0	10.1	24.3	50	1609	500-A-A
	235/50ZR17	SL	96W	28173773	7.5	6.5 - 8.5	26.3	9.8	800	8.4	8.0	10.1	27.8	51	1565	500-A-A
	235/55ZR17	SL	99W	28173725	7.5	6.5 - 8.5	27.2	9.6	778	8.1	8.0	10.1	26.7	51	1709	500-A-A
	245/40ZR17	SL	91W	28173785	8.5	8.0 - 9.5	24.7	9.9	842	8.7	8.0	10.1	24.3	51	1356	500-A-A
	245/45ZR17	XL	99Y	28175784	8.0	7.5 - 9.0	25.7	9.7	813	8.5	8.0	10.1	24.9	50	1709	500-A-A
	245/50ZR17	SL	99W	28173776	7.5	7.0 - 8.5	26.7	10.1	790	8.7	8.0	10.1	28.4	51	1709	500-A-A
	255/40ZR17	SL	94Y	28175796	9.0	8.5 - 10	25.0	10.4	832	9.1	8.0	10.1	25.6	51	1477	500-A-A

**Runflat size

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
18"	215/45ZR18	XL	93W	28175899	7.0	7.0 - 8.0	25.6	8.5	811	7.4	8.0	10.1	22.9	50	1433	500-A-A
	225/40ZR18	XL	92Y	28175892	8.0	7.5 - 9.0	25.1	9.2	826	8.0	8.0	10.1	22.9	50	1389	500-A-A
	225/45ZR18	XL	95Y	28175824	7.5	7.0 - 8.5	25.9	9.0	803	7.8	8.0	10.1	23.6	50	1521	500-A-A
	225/50ZR18	SL	95W	28173805	7.0	6.0 - 8.0	26.9	9.3	781	8.0	8.0	10.1	27.3	51	1521	500-A-A
	235/40ZR18	XL	95Y	28175893	8.5	8.0 - 9.5	25.4	9.6	818	8.3	8.0	10.1	24.5	50	1521	500-A-A
	235/45ZR18	XL	98W	28173895	8.0	7.5 - 9.0	26.3	9.4	790	8.1	8.0	10.1	25.6	50	1653	500-A-A
	235/50ZR18	SL	97W	28173825	7.5	6.5 - 8.5	27.3	9.8	771	8.4	8.0	10.1	27.3	51	1609	500-A-A
	235/55ZR18	SL	100W	28173817	7.5	6.5 - 8.5	28.1	9.6	749	8.1	8.0	10.1	28.0	51	1764	500-A-A
	245/40ZR18	XL	97Y	28175894	8.5	8.0 - 9.5	25.7	9.9	808	8.7	8.0	10.1	25.6	50	1609	500-A-A
	245/45ZR18	XL	100Y	28175865	8.0	7.5 - 9.0	26.7	9.7	783	8.5	8.0	10.1	26.7	50	1764	500-A-A
	245/50ZR18	SL	100W	28173820	7.5	7.0 - 8.5	27.7	10.1	760	8.7	8.0	10.1	29.1	51	1764	500-A-A
	245/55ZR18	SL	103W	28173863	7.5	7.0 - 8.5	28.6	10.0	738	8.4	8.0	10.1	30.4	51	1929	500-A-A
	255/35ZR18	XL	94Y	28175896	9.0	8.5 - 10.0	25.0	10.2	832	9.1	8.0	10.1	25.6	50	1477	500-A-A
	255/40ZR18	XL	99Y	28175844	9.0	8.5 - 10.0	26.0	10.4	800	9.1	8.0	10.1	27.8	50	1709	500-A-A
19"	265/35ZR18	XL	97Y	28175806	9.5	9.0 - 10.5	25.3	10.7	821	9.5	7.8	9.8	27.8	50	1609	500-A-A
	225/45ZR19	XL	96Y	28175937	7.5	7.0 - 8.5	27.0	9.0	771	7.8	8.0	10.1	24.9	50	1565	500-A-A
	235/40ZR19	XL	96W	28173495	8.5	8.0 - 9.5	26.4	9.6	786	8.3	8.0	10.1	26.5	50	1565	500-A-A
	245/40ZR19	XL	98Y	28175974	8.5	8.0 - 9.5	26.7	9.9	776	8.7	8.0	10.1	27.1	50	1653	500-A-A
	**245/40ZRF19	XL	98Y	28175165	8.5	8.0 - 9.5	26.7	10.0	774	8.5	8.2	10.3	31.5	50	1653	400-A-A
	245/45ZR19	XL	102Y	28175904	8.0	7.5 - 9.0	27.7	9.7	753	8.5	8.0	10.1	28.7	50	1874	500-A-A
	255/35ZR19	XL	96Y	28175973	9.0	8.5 - 10.0	26.0	10.2	798	9.1	8.0	10.1	26.2	50	1565	500-A-A
	255/40ZR19	XL	100Y	28175996	9.0	8.5 - 10.0	27.0	10.4	769	9.1	8.0	10.1	27.8	50	1764	500-A-A
	255/45ZR19	XL	104Y	28175997	8.5	8.0 - 9.5	28.1	10.2	742	8.8	8.0	10.1	30.0	50	1984	500-A-A
	275/35ZR19	XL	100Y	28175998	9.5	9.0 - 11.0	26.6	10.9	783	9.8	7.8	9.8	29.8	50	1764	500-A-A
20"	285/35ZR19	SL	99Y	28175989	10.0	9.5 - 11.0	26.9	11.4	771	10.2	7.8	9.8	31.3	51	1709	500-A-A
	245/35ZR20	XL	95Y	28175985	8.5	8.0 - 9.5	26.8	9.8	774	8.8	8.0	10.1	26.9	50	1521	500-A-A
	245/45ZR20	XL	103Y	28175023	8.0	7.5 - 9.0	28.7	9.7	725	8.5	8.0	10.1	28.9	50	1929	500-A-A
	255/35ZR20	XL	97Y	28175001	9.0	8.5 - 10.0	27.0	10.2	767	9.1	8.0	10.1	28.4	50	1609	500-A-A
	255/45ZR20	SL	101Y	28175013	8.5	8.0 - 9.5	29.1	10.2	717	8.8	8.0	10.1	29.8	51	1819	500-A-A

**Runflat size



ZIEX ZE950 A/S

TRUE ALL-SEASON HIGH PERFORMANCE

The **ZIEX ZE950 All-Season** incorporates the latest in technology and design from Falken to create an excellent choice for drivers of today's sedans, sports cars and crossover vehicles where mileage, all-season and high-performance handling are a priority. Using the Falken-exclusive Dynamic Range Technology (DRT) in the all-new silica tread compound and asymmetric tread design, the ZE950 A/S provides optimum levels of dry, wet, ice and snow grip as well as delivering some of the longest mileage of any Falken high-performance tire. With over 100 sizes from 15 to 20-inch and speed ratings of H, V, and W, the ZIEX ZE950 A/S covers a wide range of fitments, from family sedans to crossover vehicles.

AVAILABLE TIRE SIZES
103 SIZES

AVAILABLE RIM SIZING
15" – 20"

SPEED RATING
H • V • W

RATING
M+S RATED

PERFORMANCE RATINGS*




DYNAMIC RANGE TECHNOLOGY
incorporates a Falken-exclusive silica tread compound that allows the rubber to remain pliable at low temperatures, increasing grip in wet, snow and icy conditions. During dry conditions, as the rubber heats up, chemical bonds remain strong, allowing for great dry handling and exceptional treadwear performance.



POPULAR FITMENTS:

- ACURA TL
- AUDI A4
- CHEVROLET MALIBU
- FORD FOCUS
- FORD TAURUS X
- HONDA ACCORD
- HYUNDAI SONATA
- INFINITI Q SERIES
- KIA OPTIMA
- NISSAN ALTIMA
- TOYOTA CAMRY
- VOLKSWAGEN JETTA


TIRE HIGHLIGHTS



3D CANYON SIPE TECHNOLOGY
increases edges for ice braking and interlocks under load for better handling and improved wear.



WIDE ANGLED TREAD SLOT
provides additional snow grip by allowing snow to be packed into the center of the tire.



SCULPTURED GROOVE WALL
provides better snow grip and eliminates rain groove wandering.



WIDE CIRCUMFERENTIAL GROOVES
effectively evacuate water and significantly enhance hydroplaning resistance for outstanding wet handling.

SIZES AND SPECIFICATIONS

NEXT PAGE

*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

ZIEX ZE950 A/S

TRUE ALL-SEASON HIGH PERFORMANCE

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
15"	175/65R15	SL	84H	28951563	5.0	5.0 - 6.0	24.0	7.0	880	5.6	8.0	10.1	17	51	1102	600-A-A
	185/60R15	SL	84H	28951516	5.5	5.0 - 6.5	23.8	7.4	889	6.0	8.1	10.2	18	51	1102	600-A-A
	185/65R15	SL	88H	28951542	5.5	5.0 - 6.5	24.4	7.4	865	5.9	8.1	10.2	18	51	1235	600-A-A
	195/50R15	SL	82H	28951571	6.0	5.5 - 7.0	22.8	7.9	925	7.0	8.0	10.1	18	51	1047	600-A-A
	195/55R15	SL	85V	28952561	6.0	5.5 - 7.0	23.4	7.9	898	6.7	8.0	10.1	19	51	1135	600-A-A
	195/60R15	SL	88H	28951551	6.0	5.5 - 7.0	24.3	7.9	871	6.4	8.2	10.3	20	51	1235	600-A-A
	195/65R15	SL	91H	28951543	6.0	5.5 - 7.0	25.0	7.9	848	6.2	8.2	10.3	20	51	1356	600-A-A
	205/60R15	SL	91H	28951552	6.0	5.5 - 7.5	24.7	8.2	856	6.7	8.2	10.3	20	51	1356	600-A-A
	205/65R15	XL	99W	28953544	6.0	5.5 - 7.5	25.5	8.2	832	6.5	8.0	9.8	22	50	1709	500-A-A
	205/65R15	XL	99H	28951544	6.0	5.5 - 7.5	25.5	8.2	832	6.5	8.0	10.1	23	50	1709	600-A-A
	215/60R15	SL	94H	28951553	6.5	6.0 - 7.5	25.2	8.7	840	7.0	8.3	10.5	23	51	1477	600-A-A
	215/65R15	SL	96H	28951545	6.5	6.0 - 7.5	26.0	8.7	816	6.9	8.3	10.5	22	51	1565	600-A-A
16"	185/55R16	SL	83H	28951677	6.0	5.0 - 6.5	24.0	7.6	874	6.4	7.9	10.0	19	51	1074	600-A-A
	195/50R16	SL	84V	28952660	6.0	5.5 - 7.0	23.7	7.9	883	7.0	8.0	10.1	19	51	1102	600-A-A
	195/55R16	SL	87V	28952615	6.0	5.5 - 7.0	24.4	7.9	862	6.7	8.0	10.1	20	51	1201	600-A-A
	205/45R16	XL	87V	28952690	7.0	6.5 - 7.5	23.3	8.1	895	7.1	8.1	10.2	20	50	1201	600-A-A
	205/50R16	SL	87V	28952671	6.5	5.5 - 7.5	24.1	8.4	871	7.3	8.1	10.2	21	51	1201	600-A-A
	205/55R16	XL	94W	28953483	6.5	5.5 - 7.5	24.9	8.4	845	7.1	7.6	9.6	21	50	1477	500-A-A
	205/55R16	XL	94H	28951661	6.5	5.5 - 7.5	24.9	8.4	845	7.1	7.6	9.6	21	50	1477	600-A-A
	205/60R16	SL	92V	28952652	6.0	5.5 - 7.5	25.7	8.2	821	6.7	8.2	10.3	22	51	1389	600-A-A
	205/65R16	SL	95V	28952626	6.0	5.5 - 7.5	26.5	8.2	800	6.5	8.3	10.5	22	51	1521	600-A-A
	215/55R16	XL	97V	28952662	7.0	6.0 - 7.5	25.3	8.9	834	7.4	8.2	10.3	24	50	1609	600-A-A
	215/60R16	SL	95H	28951479	6.5	6.0 - 7.5	26.2	8.7	808	7.0	8.6	10.8	24	51	1521	600-A-A
	215/60R16	XL	99V	28952479	6.5	6.0 - 7.5	26.2	8.7	808	7.0	8.6	10.8	24	50	1709	600-A-A
	215/65R16	SL	98H	28951681	6.5	6.0 - 7.5	27.0	8.7	786	6.9	8.3	10.5	23	51	1653	600-A-A
	225/50R16	XL	96V	28952672	7.0	6.0 - 8.0	24.9	9.2	845	8.0	8.3	10.5	25	50	1565	600-A-A
	225/55R16	SL	95V	28952670	7.0	6.0 - 8.0	25.7	9.2	821	7.8	8.3	10.5	24	51	1521	600-A-A
	225/60R16	SL	98V	28952480	6.5	6.0 - 8.0	26.7	9.0	795	7.3	8.3	10.5	26	51	1653	600-A-A
	225/65R16	SL	100H	28951673	6.5	6.0 - 8.0	27.5	9.0	771	7.2	8.3	10.5	27	51	1764	600-A-A
	235/60R16	SL	100W	28953655	7.0	6.5 - 8.5	27.1	9.4	783	7.7	7.8	9.8	29	51	1764	500-A-A
	235/65R16	SL	103H	28951629	7.0	6.5 - 8.5	28.0	9.4	760	7.5	8.3	10.5	27	51	1929	600-A-A
	245/50R16	SL	97H	28951674	7.5	7.0 - 8.5	25.7	10.0	821	8.7	8.3	10.5	26	51	1609	600-A-A
17"	205/40R17	XL	84W	28953740	7.5	7.0 - 8.0	23.5	8.3	886	7.2	7.6	9.6	19	50	1102	500-A-A
	205/45R17	XL	88W	28953781	7.0	6.5 - 7.5	24.3	8.1	856	7.1	7.6	9.6	20	50	1235	500-A-A
	205/50R17	XL	93W	28953770	6.5	5.5 - 7.5	25.1	8.4	837	7.3	7.6	9.6	23	50	1433	500-A-A
	215/45R17	XL	91W	28953792	7.0	7.0 - 8.0	24.6	8.4	842	7.4	7.7	9.7	22	50	1356	500-A-A
	215/50R17	SL	91W	28953771	7.0	6.0 - 7.5	25.5	8.9	823	7.7	7.7	9.7	23	51	1356	500-A-A
	215/55R17	SL	94W	28953727	7.0	6.0 - 7.5	26.3	8.9	800	7.4	7.7	9.7	24	51	1477	500-A-A
	215/55R17	SL	94V	28952727	7.0	6.0 - 7.5	26.3	8.9	800	7.4	7.7	9.7	23	51	1477	600-A-A
	215/60R17	SL	96H	28951729	6.5	6.0 - 7.5	27.2	8.7	776	7.0	8.3	10.5	25	51	1565	600-A-A
	215/65R17	SL	99H	28951782	6.5	6.0 - 7.5	28.0	8.7	755	6.9	8.3	10.5	26	51	1709	600-A-A
	225/45R17	XL	94W	28953795	7.5	7.0 - 8.5	25.0	8.9	834	7.8	7.8	9.8	23	50	1477	500-A-A
	225/50R17	SL	94W	28953772	7.0	6.0 - 8.0	25.9	9.2	811	8.0	7.8	9.8	24	51	1477	500-A-A
	225/55R17	XL	101W	28953762	7.0	6.0 - 8.0	26.8	9.2	788	7.8	7.8	9.8	27	50	1819	500-A-A
	225/60R17	SL	99V	28952728	6.5	6.0 - 8.0	27.7	9.0	764	7.3	8.3	10.5	26	51	1709	600-A-A
	225/65R17	SL	102H	28951775	6.5	6.0 - 8.0	28.5	9.0	742	7.2	8.3	10.5	28	51	1874	600-A-A
	235/45R17	SL	94W	28953794	8.0	7.5 - 9.0	25.4	9.3	821	8.1	7.8	9.8	24	51	1477	500-A-A
	235/50R17	SL	96W	28953773	7.5	6.5 - 8.5	26.3	9.6	800	8.4	7.8	9.8	26	51	1565	500-A-A
	235/55R17	SL	99W	28953725	7.5	6.5 - 8.5	27.2	9.6	778	8.1	7.8	9.8	27	51	1709	500-A-A
	235/60R17	SL	102H	28951717	7.0	6.5 - 8.5	28.1	9.4	751	7.7	8.3	10.5	31	51	1874	600-A-A
	235/65R17	XL	108V	28952790	7.0	6.5 - 8.5	29.1	9.4	732	7.5	8.3	10.5	32	50	2205	600-A-A
	245/40R17	XL	95W	28953785	8.5	8.0 - 9.5	24.7	9.8	842	8.7	7.8	9.8	24	50	1521	500-A-A
	245/45R17	XL	99W	28953784	8.0	7.5 - 9.0	25.7	9.6	813	8.5	7.8	9.8	26	50	1709	500-A-A
	245/50R17	SL	99W	28953776	7.5	7.0 - 8.5	26.7	10.0	790	8.7	7.8	9.8	28	51	1709	500-A-A
	255/40R17	SL	94W	28953796	9.0	8.5 - 10.0	25.0	10.2	832	9.0	7.8	9.8	25	51	1477	500-A-A
	265/60R17	SL	108V	28952012	8.0	7.5 - 9.5	29.6	10.7	719	8.7	8.3	10.5	35	51	2205	600-A-A

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
18"	215/35R18	XL	84W	28953882	7.5	7.0 - 8.5	23.9	8.6	862	7.7	7.8	9.8	21	50	1102	500-A-A
	215/40R18	XL	89W	28953891	7.5	7.0 - 8.5	24.8	8.6	837	7.6	7.7	9.7	21	50	1279	500-A-A
	215/45R18	XL	93W	28953899	7.0	7.0 - 8.0	25.6	8.4	811	7.4	7.7	9.7	23	50	1433	500-A-A
	215/55R18	SL	95H	28951900	7.0	6.0 - 7.5	27.3	8.9	771	7.4	8.2	10.3	24	51	1521	600-A-A
	225/40R18	XL	92W	28953892	8.0	7.5 - 9.0	25.1	9.1	826	8.0	7.8	9.8	22	50	1389	500-A-A
	225/45R18	XL	95W	28953824	7.5	7.0 - 8.5	25.9	8.9	803	7.8	7.8	9.8	24	50	1521	500-A-A
	225/50R18	SL	95W	28953805	7.0	6.0 - 8.0	26.9	9.2	781	8.0	7.8	9.8	26	51	1521	500-A-A
	225/55R18	SL	98V	28952889	7.0	6.0 - 8.0	27.8	9.2	758	7.8	8.3	10.5	27	51	1653	600-A-A
	225/60R18	SL	100V	28952826	6.5	6.0 - 8.0	28.7	9.0	738	7.3	8.3	10.5	28	51	1764	600-A-A
	235/40R18	XL	95W	28953893	8.5	8.0 - 9.5	25.4	9.5	818	8.3	7.8	9.8	23	50	1521	500-A-A
	235/45R18	SL	94W	28953895	8.0	7.5 - 9.0	26.3	9.3	790	8.1	7.8	9.8	25	51	1477	500-A-A
	235/50R18	XL	101W	28953825	7.5	6.5 - 8.5	27.3	9.6	771	8.4	7.8	9.8	30	50	1819	500-A-A
	235/55R18	XL	104V	28952817	7.5	6.5 - 8.5	28.1	9.6	749	8.1	8.3	10.5	31	50	1984	600-A-A
	235/60R18	XL	107V	28952816	7.0	6.5 - 8.5	29.1	9.4	725	7.7	8.3	10.5	34	50	2149	600-A-A
	235/65R18	SL	106H	28951815	7.0	6.5 - 8.5	30.0	9.4	705	7.5	8.3	10.5	34	51	2094	600-A-A
	245/40R18	XL	97W	28953894	8.5	8.0 - 9.5	25.7	9.8	808	8.7	7.8	9.8	25	50	1609	500-A-A
	245/45R18	XL	100W	28953865	8.0	7.5 - 9.0	26.7	9.6	783	8.5	7.8	9.8	26	50	1764	500-A-A
	245/55R18	SL	103W	28953863	7.5	7.0 - 8.5	28.6	10.0	738	8.5	7.8	9.8	32	51	1929	500-A-A
	245/60R18	SL	105H	28951811	7.0	7.0 - 8.5	29.6	9.8	713	8.0	8.3	10.5	34	51	2039	600-A-A
	255/35R18	XL	94W	28953896	9.0	8.5 - 10.0	25.0	10.2	832	9.2	7.8	10.0	25	50	1477	500-A-A
255/40R18	XL	99W	28953844	9.0	8.5 - 10	26.0	10.2	800	9.0	7.8	9.8	28	50	1709	500-A-A	
255/45R18	XL	103W	28953866	8.5	8.0 - 9.5	27.0	10.0	771	8.9	7.8	9.8	28	50	1929	500-A-A	
255/55R18	XL	109W	28953845	8.0	7.0 - 9.0	29.0	10.4	727	8.8	7.8	9.8	33	50	2271	500-A-A	
255/65R18	SL	111H	28951862	7.5	7.0 - 9.0	31.1	10.2	683	8.1	8.3	10.5	36	51	2403	600-A-A	
265/35R18	XL	97W	28953806	9.5	9.0 - 10.5	25.3	10.7	821	9.5	7.8	9.8	26	50	1609	500-A-A	
265/60R18	SL	110V	28952854	8.0	7.5 - 9.5	30.6	10.7	694	8.7	8.3	10.5	37	51	2337	600-A-A	
275/35R18	XL	99W	28953807	9.5	9.0 - 11.0	25.6	10.9	816	9.9	7.8	9.8	27	50	1709	500-A-A	
19"	225/40R19	XL	93W	28953971	8.0	7.5 - 9.0	26.1	9.1	793	8.0	7.8	9.8	24	50	1433	500-A-A
	225/55R19	SL	99W	28953955	7.0	6.0 - 8.0	28.8	9.2	730	7.8	7.8	9.8	28	51	1709	500-A-A
	235/55R19	XL	105W	28953970	7.5	6.5 - 8.5	29.2	9.6	721	8.1	7.8	9.8	31	50	2039	500-A-A
	245/40R19	SL	94W	28953974	8.5	8.0 - 9.5	26.7	9.8	776	8.7	7.8	9.8	26	51	1477	500-A-A
	245/45R19	SL	98W	28953904	8.0	7.5 - 9.0	27.7	9.6	753	8.5	7.8	9.8	27	51	1653	500-A-A
	245/55R19	SL	103H	28951814	7.5	7.0 - 8.5	29.6	10.0	711	8.5	8.3	10.5	33	51	1929	600-A-A
	255/35R19	XL	96W	28953973	9.0	8.5 - 10.0	26.0	10.2	798	9.2	7.8	9.8	25	50	1565	500-A-A
	255/40R19	XL	100W	28953996	9.0	8.5 - 10.0	27.0	10.2	769	9.0	7.8	9.8	28	50	1764	500-A-A
	255/45R19	SL	100V	28952997	8.5	8.0 - 9.5	28.1	10.0	742	8.9	8.3	10.5	31	51	1764	600-A-A
	255/50R19	XL	107V	28952949	8.0	7.0 - 9.0	29.1	10.4	723	9.1	8.3	10.5	34	50	2149	600-A-A
	255/60R19	SL	109H	28951813	7.5	7.0 - 9.0	31.1	10.2	681	8.3	8.3	10.5	36	51	2271	600-A-A
	275/40R19	SL	101W	28953903	9.5	9.0 - 11.0	27.7	10.9	753	9.7	7.8	9.8	30	51	1819	500-A-A
20"	235/55R20	SL	102H	28951031	7.5	6.5 - 8.5	30.2	9.6	698	8.1	8.3	10.5	34	51	18743	600-A-A
	245/40R20	XL	99W	28953002	8.5	8.0 - 9.5	27.7	9.8	749	8.7	7.8	9.8	28	50	1709	500-A-A
	245/45R20	XL	103W	28953023	8.0	7.5 - 9.0	28.7	9.6	725	8.5	7.8	9.8	29	50	1929	500-A-A
	245/50R20	SL	102V	28952026	7.5	7.0 - 8.5	29.7	10.0	705	8.7	8.3	10.5	33	51	1874	600-A-A
	255/35R20	XL	97W	28953001	9.0	8.5 - 10.0	27.0	10.2	767	9.2	7.8	9.8	27	50	1609	500-A-A
	255/45R20	XL	105W	28953013	8.5	8.0 - 9.5	29.1	10.0	717	8.9	7.8	9.8	30	50	2039	500-A-A
	275/35R20	XL	102W	28953005	9.5	9.0 - 11.0	27.6	10.9	753	9.9	7.8	9.8	29	50	1874	500-A-A
275/40R20	XL	106W	28953947	9.5	9.0 - 11.0	28.7	10.9	725	9.7	7.8	9.8	31	50	2094	500-A-A	



SINCERA SN250 A/S

LONG LASTING ALL-SEASON PERFORMANCE TOURING

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
14"	175/65R14	SL	82T	28294442	5.0	5.0 - 6.0	23.1	7.0	902	5.6	8.4	11.0	15.9	51	1047	720-A-B
	185/60R14	SL	82H	28291451	5.5	5.0 - 6.5	22.9	7.5	921	6.1	8.5	11.0	16.8	51	1047	720-A-A
	185/65R14	SL	86T	28294443	5.5	5.0 - 6.5	23.5	7.5	898	5.9	8.5	11.0	16.8	51	1168	720-A-B
	185/70R14	SL	88T	28294473	5.5	4.5 - 6.0	24.3	7.5	871	5.8	8.5	11.0	17.9	51	1235	720-A-B
	195/70R14	SL	91T	28294475	6.0	5.0 - 6.5	24.9	8.0	854	6.1	8.5	11.0	19.2	51	1356	720-A-B
15"	175/65R15	SL	84T	28294563	5.0	5.0 - 6.0	24.1	7.0	877	5.6	8.4	11.0	17.0	51	1102	720-A-B
	185/55R15	SL	82V	28292575	6.0	5.0 - 6.5	23.1	7.6	915	6.4	8.5	11.0	16.8	51	1047	720-A-A
	185/60R15	SL	84T	28294516	5.5	5.0 - 6.5	23.9	7.5	883	6.1	8.5	11.0	17.2	51	1102	720-A-B
	185/65R15	SL	88T	28294542	5.5	5.0 - 6.5	24.5	7.5	862	5.9	8.5	11.0	18.3	51	1235	720-A-B
	195/55R15	SL	85V	28298331	6.0	5.5 - 7.0	23.5	7.9	898	6.7	8.6	11.0	23.6	51	1135	720-A-A
	195/60R15	SL	88T	28294551	6.0	5.5 - 7.0	24.3	8.0	868	6.5	8.5	11.0	18.3	51	1235	720-A-B
	195/65R15	SL	91T	28294543	6.0	5.5 - 7.0	25.1	8.0	845	6.2	8.5	11.0	19.0	51	1356	720-A-B
	195/65R15	SL	91H	28291543	6.0	5.5 - 7.0	25.1	8.0	845	6.2	8.5	11.0	19.0	51	1356	720-A-A
	205/60R15	SL	91T	28294552	6.0	5.5 - 7.5	24.8	8.3	854	6.8	8.6	11.0	20.5	51	1356	720-A-B
	205/65R15	XL	99T	28294544	6.0	5.5 - 7.5	25.6	8.3	832	6.5	8.6	11.0	21.4	50	1709	720-A-B
	205/70R15	SL	96T	28294476	6.0	5.0 - 7.0	26.4	8.3	805	6.4	8.6	11.0	21.6	51	1565	720-A-B
	215/60R15	SL	94T	28294553	6.5	6.0 - 7.5	25.3	8.8	837	7.1	8.6	11.0	20.7	51	1477	720-A-B
	215/65R15	SL	96T	28294545	6.5	6.0 - 7.5	26.1	8.8	813	6.9	8.6	11.0	23.8	51	1565	720-A-B
	215/70R15	SL	98T	28294477	6.5	5.5 - 7.0	27.0	8.8	790	6.7	8.6	11.0	24.7	51	1653	720-A-B
	225/70R15	SL	100T	28294478	6.5	6.0 - 7.5	27.5	9.1	776	7.0	8.6	11.0	26.2	51	1764	720-A-B
	235/75R15	SL	105T	28294108	6.5	6.0 - 8.0	28.9	9.3	740	7.1	8.7	11.0	29.5	51	2039	720-A-B

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
16"	185/55R16	SL	83T	28294677	6.0	5.0 - 6.5	24.1	7.6	874	6.4	8.5	11.0	19.2	51	1074	720-A-B
	195/55R16	SL	87T	28294615	6.0	5.5 - 7.0	24.5	7.9	860	6.7	8.5	11.0	20.1	51	1201	720-A-B
	205/50R16	SL	87T	28294671	6.5	5.5 - 7.5	24.1	8.4	874	7.3	8.6	11.0	20.3	51	1201	720-A-B
	205/55R16	SL	91H	28291483	6.5	5.5 - 7.5	24.9	8.4	845	7.1	8.6	11.0	21.2	51	1356	720-A-A
	205/55R16	SL	91T	28294483	6.5	5.5 - 7.5	24.9	8.4	845	7.1	8.6	11.0	21.2	51	1356	720-A-B
	205/60R16	SL	92H	28291652	6.0	5.5 - 7.5	25.8	8.3	818	6.8	8.6	11.0	20.9	51	1389	720-A-A
	205/65R16	SL	95H	28291626	6.0	5.5 - 7.5	26.5	8.3	798	6.5	8.6	11.0	22.0	51	1521	720-A-A
	215/55R16	XL	97H	28291662	7.0	6.0 - 7.5	25.3	8.9	834	7.4	8.6	11.0	24.7	50	1609	720-A-A
	215/60R16	SL	95T	28294479	6.5	6.0 - 7.5	26.3	8.8	805	7.1	8.6	11.0	22.0	51	1521	720-A-B
	215/60R16	SL	95V	28291479	6.5	6.0 - 7.5	26.3	8.8	805	7.1	8.6	11.0	22.3	51	1521	720-A-A
	215/65R16	SL	98T	28294681	6.5	6.0 - 7.5	27.1	8.8	783	6.9	8.6	11.0	24.7	51	1653	720-A-B
	215/70R16	SL	100T	28294100	6.5	5.5 - 7.0	28.0	8.8	760	6.7	8.6	11.0	25.8	51	1764	720-A-B
	225/55R16	SL	95V	28296913	7.0	6.0 - 8.0	25.8	9.2	821	7.8	8.7	11.0	25.8	51	1521	720-A-A
	225/60R16	SL	98T	28294480	6.5	6.0 - 8.0	26.7	9.1	793	7.4	8.6	11.0	26.2	51	1653	720-A-B
	225/65R16	SL	100T	28294673	6.5	6.0 - 8.0	27.6	9.1	769	7.2	8.6	11.0	27.8	51	1764	720-A-B
	225/70R16	SL	103T	28294104	6.5	6.0 - 7.5	28.5	9.1	747	7.0	8.6	11.0	26.9	51	1929	720-A-B
	235/60R16	SL	100H	28291655	7.0	6.5 - 8.5	27.2	9.5	781	7.8	8.7	11.0	27.1	51	1764	720-A-A
	235/65R16	SL	103T	28294629	7.0	6.5 - 8.5	28.1	9.5	758	7.5	8.7	11.0	28.0	51	1929	720-A-B
	235/70R16	SL	106T	28294109	7.0	6.0 - 8.0	29.1	9.5	734	7.4	8.6	11.0	29.5	51	2094	720-A-B
17"	205/50R17	XL	93V	28294959	6.5	5.5 - 7.5	25.1	8.4	837	7.3	8.7	11.0	22.7	50	1433	720-A-A
	215/45R17	SL	87V	28296783	7.0	7.0 - 8.0	24.7	8.4	842	7.4	8.5	11.0	25.1	51	1201	720-A-A
	215/50R17	XL	95V	28292771	7.0	6.0 - 7.5	25.5	8.9	834	7.7	8.6	11.0	23.8	50	1521	720-A-A
	215/55R17	SL	94V	28292727	7.0	6.0 - 7.5	26.3	8.9	800	7.4	8.6	11.0	22.7	51	1477	720-A-A
	215/55R17	SL	94T	28294727	7.0	6.0 - 7.5	26.3	8.9	800	7.4	8.6	11.0	22.7	51	1477	720-A-B
	215/60R17	SL	96T	28294729	6.5	6.0 - 7.5	27.3	8.8	774	7.1	8.6	11.0	24.7	51	1565	720-A-B
	215/65R17	SL	99T	28294782	6.5	6.0 - 7.5	28.1	8.8	753	6.9	8.6	11.0	25.8	51	1709	720-A-B
	225/45R17	XL	94V	28295334	7.5	7.0 - 8.5	25.0	8.9	834	7.8	8.5	11.0	25.4	50	1477	720-A-A
	225/50R17	XL	98V	28292772	7.0	6.0 - 8.0	25.9	9.2	811	8.0	8.6	11.0	25.4	50	1653	720-A-A
	225/55R17	SL	97V	28292762	7.0	6.0 - 8.0	26.8	9.2	786	7.8	8.6	11.0	25.6	51	1609	720-A-A
	225/60R17	SL	99T	28294728	6.5	6.0 - 8.0	27.8	9.1	762	7.4	8.6	11.0	26.5	51	1709	720-A-B
	225/65R17	SL	102T	28294775	6.5	6.0 - 8.0	28.6	9.1	740	7.2	8.6	11.0	28.0	51	1874	720-A-B
	235/55R17	SL	99T	28294725	7.5	6.5 - 8.5	27.2	9.6	776	8.1	8.7	11.0	27.1	51	1709	720-A-B
	235/60R17	SL	102T	28294717	7.0	6.5 - 8.5	28.2	9.5	751	7.8	8.7	11.0	28.7	51	1874	720-A-B
	235/65R17	SL	104T	28294790	7.0	6.5 - 8.5	29.1	9.5	730	7.5	8.7	11.0	29.8	51	1984	720-A-B
18"	215/55R18	SL	95T	28294900	7.0	6.0 - 7.5	27.3	8.9	769	7.4	8.6	11.0	24.3	51	1521	720-A-B
	225/45R18	XL	95V	28294339	7.5	7.0 - 8.5	26.0	8.9	800	7.8	8.5	11.0	26.5	50	1521	720-A-A
	225/50R18	SL	95T	28294805	7.0	6.0 - 8.0	26.9	9.2	781	8.0	8.6	11.0	26.7	51	1521	720-A-B
	225/55R18	SL	98T	28294889	7.0	6.0 - 8.0	27.8	9.2	758	7.8	8.6	11.0	27.1	51	1653	720-A-B
	225/60R18	SL	100H	28291826	6.5	6.0 - 8.0	28.7	9.1	736	7.4	8.6	11.0	28.9	51	1764	720-A-A
	235/45R18	SL	94V	28295652	8.0	7.5 - 9.0	26.4	9.3	788	8.1	8.6	11.0	26.9	51	1477	720-A-A
	235/50R18	SL	97V	28299880	7.5	6.5 - 8.5	27.3	9.6	769	8.4	8.7	11.0	27.8	51	1609	720-A-A
	235/55R18	SL	100V	28295850	7.5	6.5 - 8.5	28.2	9.6	749	8.1	8.8	11.0	28.4	51	1764	720-A-A

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.



ESPIA EPZ II

CONFIDENT WINTER TRACTION

The **ESPIA EPZ II** ensures driving confidence in the harshest winter conditions. Using the latest technology in tread design, compound and construction, the EPZ II is an excellent blend of winter performance and longer treadwear. The EPZ II's non-directional tread design allows rotation in all directions, optimizing tread life. The zigzag shape of the main groove is designed to provide resistance to hydroplaning, while the tread notches create biting edges for traction on snow and ice. The ESPIA EPZ II is specifically designed for the most unforgiving winters.

AVAILABLE TIRE SIZES
24 SIZES

AVAILABLE RIM SIZING
14" – 18"

SPEED RATING
T

RATING
SEVERE SNOW CONDITIONS 

PERFORMANCE RATINGS†



NEWLY ENHANCED 3D CANYON SIPE TECHNOLOGY
with a much thinner sipe design increases sipe density by 25% (than its predecessor) which allows for more edges per tread block. This increases ice braking and enhances snow and wet traction.



- POPULAR FITMENTS:**
- AUDI A3
 - CHEVROLET CRUZE
 - CHEVROLET MALIBU
 - FORD FUSION
 - HONDA CIVIC
 - HYUNDAI ELANTRA
 - KIA SOUL
 - NISSAN ALTIMA
 - TOYOTA COROLLA
 - TOYOTA PRIUS
 - VOLKSWAGEN PASSAT

TIRE HIGHLIGHTS




HIGH-DENSITY SIPES
move water and snow away from the tread surface for continuous road connection with over 13,000 millimeters in edges added from its predecessor.



WIDE LATERAL GROOVES
work together with wide pockets built into the tire to allow more snow to pack into the tread, clearing the road surface quicker for increased snow traction in slushy or deep snow conditions.



STRATEGICALLY DESIGNED RIB PLACEMENT
with larger outer-edge block-style ribs provide a comfortable and stable drive while maneuvering the vehicle, no matter the road-surface condition.



WIDE CIRCUMFERENTIAL GROOVES
channel water away from the tread for consistent contact with the road surface, increasing wet traction and driver confidence.

SIZES AND SPECIFICATIONS

NEXT PAGE

*This tire is designed for severe snow conditions and meets the RMA (Rubber Manufacturers Association) snow traction performance requirements.
†Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

ESPIA EPZ II

CONFIDENT WINTER TRACTION

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs)	Max PSI (Cold)	Max Load (lbs)
14"	175/65R14	XL	86T	28314442	5.0	5.0 - 6.0	23.0	7.0	918	5.8	8.8	11.1	16.3	50	1168
	185/65R14	XL	90T	28314443	5.5	5.0 - 6.5	23.5	7.4	905	6.2	8.9	11.2	17.6	50	1323
15"	175/65R15	XL	88T	28314563	5.0	5.0 - 6.0	24.0	7.0	783	5.8	8.8	11.1	17.6	50	1235
	185/60R15	XL	88T	28314516	5.5	5.0 - 6.5	23.9	7.4	883	6.2	8.9	11.2	17.9	50	1235
	185/65R15	XL	92T	28314542	5.5	5.0 - 6.5	24.5	7.4	865	6.2	8.9	11.2	18.5	50	1389
	195/60R15	XL	92T	28314551	6.0	5.5 - 7.0	24.3	7.9	868	6.5	9.0	11.3	19.6	50	1389
	195/65R15	XL	95T	28314543	6.0	5.5 - 7.0	25.0	7.9	848	6.5	9.0	11.3	20.3	50	1521
	205/65R15	XL	99T	28314544	6.0	5.5 - 7.5	25.5	8.2	832	6.8	9.1	11.5	22.9	50	1709
	215/70R15	SL	98T	28314477	6.5	5.5 - 7.0	27.1	8.7	877	7.0	9.2	11.6	26.0	44	1653
16"	205/55R16	XL	94T	28314483	6.5	5.5 - 7.5	25.0	8.4	842	6.8	9.1	11.5	24.5	50	1477
	205/60R16	XL	96T	28314652	6.0	5.5 - 7.5	25.8	8.2	818	6.8	9.1	11.5	23.6	50	1565
	205/65R16	SL	95T	28314626	6.0	5.5 - 7.5	26.5	8.2	800	6.8	9.1	11.5	23.8	44	1521
	215/60R16	XL	99T	28314479	6.5	6.0 - 7.5	26.3	8.7	805	7.2	9.2	11.6	25.6	50	1709
	215/65R16	SL	98T	28314681	6.5	6.0 - 7.5	27.0	8.7	786	7.2	9.2	11.6	24.9	44	1653
	225/60R16	XL	102T	28314480	6.5	6.0 - 8.0	26.7	9.0	793	7.5	9.3	11.7	26.7	50	1874
	225/65R16	SL	100T	28314673	6.5	6.0 - 8.0	27.5	9.0	771	7.5	9.3	11.7	27.6	44	1764

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs)	Max PSI (Cold)	Max Load (lbs)
17"	215/55R17	XL	98T	28314727	7.0	6.0 - 7.5	26.5	8.9	798	7.1	9.2	11.6	25.1	50	1653
	225/45R17	XL	94T	28314795	7.5	7.0 - 8.5	25.2	8.9	826	7.4	9.2	11.6	24.5	50	1477
	225/50R17	XL	98T	28314772	7.0	6.0 - 8.0	26.1	9.2	808	7.4	9.2	11.6	26.0	50	1653
	225/55R17	XL	101T	28314762	7.0	6.0 - 8.0	26.9	9.2	783	7.5	9.2	11.6	26.9	50	1819
	235/55R17	SL	99T	28314725	7.5	6.5 - 8.5	27.3	9.6	778	7.8	9.3	11.7	28.2	44	1709
18"	225/40R18	XL	92T	28314892	8.0	7.5 - 9.0	25.1	9.1	826	7.4	9.2	11.6	24.3	50	1389
	225/45R18	XL	95T	28314824	7.5	7.0 - 8.5	26.1	8.9	803	7.4	9.2	11.6	26.2	50	1521
	235/50R18	XL	101T	28314825	7.5	6.5 - 8.5	27.5	9.6	769	7.8	9.3	11.7	29.0	50	1819




ESPIA EPZ II SUV

CONFIDENT WINTER PERFORMANCE DESIGNED FOR SUVs

The **ESPIA EPZ II SUV** ensures driving confidence in the harshest winter conditions. Using the latest technology in tread design, compound and construction, the EPZ II SUV is an excellent blend of winter performance and handling. The directional tread design coupled with wide circumferential grooves significantly enhance hydroplane resistance for superb wet handling, while the tread surface etching delivers exceptional traction in icy conditions. The ESPIA EPZ II SUV is specifically designed for the most unforgiving winters.




AVAILABLE TIRE SIZES 12 SIZES	AVAILABLE RIM SIZING 16" – 20"
SPEED RATING R	RATING SEVERE SNOW CONDITIONS 

PERFORMANCE RATINGS*

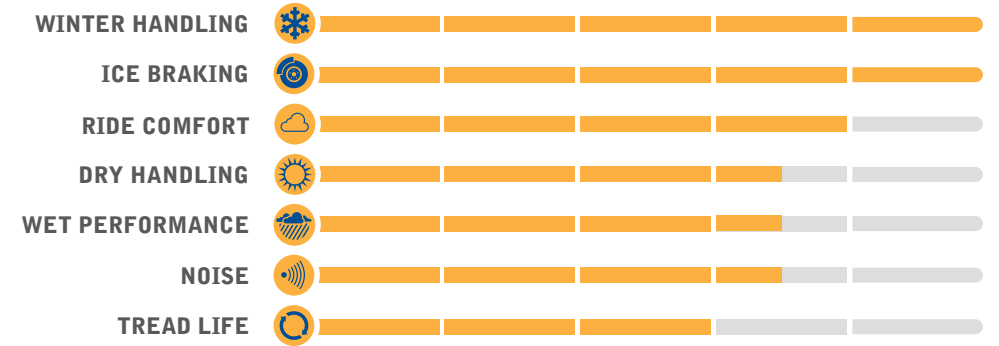

- POPULAR FITMENTS:**
- ACURA MDX
 - CHEVROLET EQUINOX
 - CHEVROLET SUBURBAN
 - CHEVROLET TAHOE
 - FORD ESCAPE
 - HONDA PILOT
 - JEEP GRAND CHEROKEE
 - JEEP PATRIOT
 - KIA SORENTO
 - LEXUS RX
 - SUBARU FORESTER

TIRE HIGHLIGHTS

-  **TREAD SURFACE ETCHING**
provides slip resistant contact for excellent ice traction and braking performance during severe winter conditions.
-  **HIGH DENSITY SIPES**
move water and snow away from the tread surface creating biting edges for continuous road connection.
-  **DIRECTIONAL TREAD DESIGN**
built for wet weather performance, the directional tread design improves hydroplaning resistance by quickly dispersing water.
-  **WIDE CIRCUMFERENTIAL GROOVES**
channel water away from the tread for consistent contact with the road surface, increasing wet traction and driver confidence.



NEWLY ENHANCED 3D CANYON SIPE TECHNOLOGY
increases ice braking, and enhances snow, wet and dry handling by allowing more edges per tread block, yet still provides individual block rigidity by working together to support each other, suppressing block flex.

SIZES AND SPECIFICATIONS

NEXT PAGE

*This tire is designed for severe snow conditions and meets the RMA (Rubber Manufacturers Association) snow traction performance requirements.
*Performance ratings are based on a scale of 1 to 5 with 5 being best. Ratings are in comparison to other Falken Tires products in the same category.

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

ESPIA EPZ II SUV

CONFIDENT WINTER TRACTION

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs)	Max PSI (Cold)	Max Load (lbs)
16"	215/70R16	SL	100R	28409969	6.5	5.5 - 7.0	27.8	8.7	757	6.9	10.8	13.6	29.0	44	1764
17"	225/60R17	SL	99R	28407747	6.5	6.0 - 8.0	27.7	8.6	761	7.2	10.8	13.6	30.9	44	1709
	235/60R17	SL	102R	28402960	7.0	6.5 - 8.5	28.2	9.3	751	7.6	10.8	13.6	33.5	44	1874
	215/65R17	SL	99R	28404905	6.5	6.0 - 7.5	28.2	8.6	751	6.8	10.8	13.6	27.0	44	1709
	225/65R17	SL	102R	28409020	6.5	6.0 - 8.0	28.5	8.9	744	7.1	10.8	13.6	31.0	44	1874
	235/65R17	XL	108R	28408092	7.0	6.5 - 8.5	29.2	9.3	729	7.4	10.8	13.6	34.8	50	2205
	265/70R17	SL	115R	28401905	8.0	7.0 - 9.0	31.5	10.9	672	8.3	11.0	13.9	43.0	44	2679

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs)	Max PSI (Cold)	Max Load (lbs)
18"	235/55R18	SL	100R	28401449	7.5	6.5 - 8.5	28.2	9.6	747	7.6	10.8	13.6	32.0	44	1764
	255/55R18	XL	109R	28405731	8.0	7.0 - 9.0	29.1	10.2	728	8.3	11.0	13.9	41.0	50	2271
	225/60R18	SL	100R	28401235	6.5	6.0 - 8.0	28.7	8.8	738	7.2	10.8	13.6	31.0	44	1764
	235/60R18	XL	107R	28403995	7.0	6.5 - 8.5	29.2	9.2	725	7.6	10.8	13.6	35.3	50	2149
20"	275/55R20	SL	113R	28404196	8.5	7.5 - 9.5	32.0	11.1	661	8.9	11.0	13.9	46.0	44	2535

EUROWINTER HS449

DEPENDABLE WINTER PERFORMANCE

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs)	Max PSI (Cold)	Max Load (lbs)
13"	175/70R13	SL	82T	28494372	5.0	4.5 - 6.0	22.8	7.0	925	5.4	8.9	11.2	17	44	1047
	175/65R14	SL	82T	28494442	5.0	5.0 - 6.0	23.1	7.0	918	5.6	8.7	11.0	17	44	1047
14"	175/70R14	XL	88T	28494472	5.0	4.5 - 6.0	23.9	7.0	883	5.4	8.9	11.2	18	50	1235
	185/60R14	SL	82T	28491451	5.5	5.0 - 6.5	22.8	7.4	928	6.0	8.8	11.1	17	44	1047
	185/65R14	SL	86T	28494443	5.5	5.0 - 6.5	23.6	7.4	898	5.9	8.7	11.0	19	44	1168
15"	175/65R15	SL	84T	28494563	5.0	5.0 - 6.0	24.1	7.0	877	5.6	8.7	11.0	17	44	1102
	185/55R15	SL	82H	28491575	6.0	5.0 - 6.5	23.2	7.5	908	6.4	8.8	11.1	17	51	1047
	185/60R15	SL	84T	28494516	5.5	5.0 - 6.5	23.8	7.4	886	6.0	8.8	11.1	19	44	1102
	185/65R15	SL	88T	28494542	5.5	5.0 - 6.5	24.5	7.4	860	5.9	8.7	11.0	20	44	1235
	195/55R15	SL	85H	28491561	6.0	5.5 - 7.0	23.6	7.8	895	6.7	8.9	11.2	19	51	1135
	195/60R15	SL	88T	28494551	6.0	5.5 - 7.0	24.3	7.8	871	6.4	8.9	11.2	20	44	1235
	195/65R15	SL	91T	28494543	6.0	5.5 - 7.0	25.0	8.0	848	6.2	8.9	11.2	21	44	1356
	205/60R15	SL	91H	28491552	6.0	5.5 - 7.5	24.7	8.2	856	6.7	9.0	11.3	21	51	1356
	205/65R15	SL	94T	28494544	6.0	5.5 - 7.5	25.6	8.2	829	6.5	9.1	11.5	23	44	1477
	215/70R15	SL	98T	28494477	6.5	5.5 - 7.0	27.0	8.7	845	6.7	9.3	11.7	25	44	1653
	195/55R16	SL	87H	28491615	6.0	5.5 - 7.0	24.6	7.8	856	6.7	8.9	11.2	20	51	1201
	205/50R16	XL	91H	28491671	6.5	5.5 - 7.5	24.2	8.2	871	7.3	9.0	11.3	22	50	1356
16"	205/55R16	SL	91H	28491483	6.5	5.5 - 7.5	24.9	8.4	845	7.1	9.0	11.3	23	51	1356
	205/60R16	XL	96H	28491652	6.0	5.5 - 7.5	25.8	8.1	821	6.7	9.0	11.3	24	50	1565
	205/65R16	SL	95H	28491626	6.0	5.5 - 7.5	26.6	8.2	795	6.5	9.1	11.5	25	51	1521
	215/55R16	SL	93H	28491662	7.0	6.0 - 7.5	25.3	8.9	834	7.4	9.1	11.5	23	51	1433
	215/55R16	XL	97H	28491664	7.0	6.0 - 7.5	25.3	8.9	834	7.4	9.1	11.5	25	50	1609
	215/60R16	XL	99H	28491479	6.5	6.0 - 7.5	26.3	8.7	805	7.0	9.1	11.5	24	50	1709
	215/65R16	SL	98H	28491681	6.5	6.0 - 7.5	27.1	8.7	783	6.9	9.2	11.6	26	51	1653
	225/55R16	SL	95H	28491670	7.0	6.0 - 8.0	25.7	9.2	821	7.8	9.2	11.6	25	51	1521
	225/60R16	XL	102V	28492480	6.5	6.0 - 8.0	26.7	9.0	795	7.3	9.2	11.6	28	50	1874
	225/65R16	SL	100T	28494673	6.5	6.0 ~ 8.0	27.6	9.0	769	7.2	9.5	12.0	28	44	1764
	235/60R16	SL	100H	28491655	7.0	6.5 - 8.5	27.1	9.5	783	7.7	9.3	11.7	29	51	1764

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs)	Max PSI (Cold)	Max Load (lbs)
17"	205/50R17	XL	93V	28492770	6.5	5.5 - 7.5	25.3	8.2	829	7.3	9.0	11.3	23	50	1433
	215/45R17	XL	91V	28492792	7.0	7.0 - 8.0	24.7	8.3	840	7.4	9.1	11.5	22	50	1356
	215/50R17	XL	95V	28492771	7.0	6.0 - 7.5	25.6	8.7	821	7.7	9.1	11.5	24	50	1521
	215/55R17	XL	98V	28492727	7.0	6.0 - 7.5	26.4	8.9	798	7.4	9.1	11.5	25	50	1653
	215/60R17	SL	96H	28491729	6.5	6.0 - 7.5	27.3	8.7	774	7.0	9.1	11.5	27	51	1565
	225/45R17	XL	94V	28492795	7.5	7.0 - 8.5	25.0	8.6	834	7.8	9.2	11.6	24	50	1477
	225/50R17	XL	98V	28492772	7.0	6.0 - 8.0	26.0	9.0	808	8.0	9.2	11.6	26	50	1653
	225/55R17	XL	101V	28492762	7.0	6.0 - 8.0	26.9	9.1	786	7.8	9.2	11.6	27	50	1819
	225/60R17	SL	99H	28491728	6.5	6.0 - 8.0	27.7	8.9	764	7.3	9.2	11.6	29	51	1709
	225/65R17	SL	102H	28491775	6.5	6.0 - 8.0	28.6	9.0	740	7.2	9.3	11.7	30	51	1874
	235/45R17	XL	97V	28492794	8.0	7.5 - 9.0	25.4	9.2	821	8.1	9.3	11.7	25	50	1609
	235/55R17	XL	103V	28492725	7.5	6.5 - 8.5	27.2	9.5	776	8.1	9.3	11.7	28	50	1929
	235/60R17	SL	102H	28491717	7.0	6.5 - 8.5	28.2	9.4	751	7.7	9.3	11.7	32	51	1874
	235/65R17	XL	108H	28491790	7.0	6.5 - 8.5	29.1	9.4	730	7.5	9.4	11.8	33	50	2205
	245/45R17	XL	99V	28492784	8.0	7.5 - 9.0	25.8	9.6	808	8.5	9.3	11.7	26	50	1709
18"	225/40R18	XL	92V	28492892	8.0	7.5 - 9.0	25.2	9.1	823	8.0	9.2	11.6	25	50	1389
	225/45R18	XL	95V	28492824	7.5	7.0 - 8.5	26.1	8.7	800	7.8	9.2	11.6	24	50	1521
	225/55R18	SL	98V	28492889	7.0	6.0 - 8.0	27.9	9.2	755	7.8	9.2	11.6	28	51	1653
	225/60R18	SL	100H	28491826	6.5	6.0 - 8.0	28.7	9.0	736	7.3	9.2	11.6	31	51	1764
	235/45R18	XL	98V	28492895	8.0	7.5 - 9.0	26.4	9.3	788	8.1	9.3	11.7	26	50	1653
	235/50R18	XL	101V	28492825	7.5	6.5 - 8.5	27.4	9.6	769	8.4	9.3	11.7	29	50	1819
	235/55R18	XL	104H	28491817	7.5	6.5 - 8.5	28.3	9.6	745	8.1	9.3	11.7	31	50	1984
	235/60R18	XL	107H	28491816	7.0	6.5 - 8.5	29.2	9.4	723	7.6	9.3	11.7	32	50	2149
	245/40R18	XL	97V	28492894	8.5	8.0 - 9.5	25.9	9.5	805	8.6	9.4	11.8	26	50	1609
	245/45R18	XL	100V	28492865	8.0	7.5 - 9.0	26.8	9.6	778	8.5	9.4	11.8	27	50	1764
	245/50R18	XL	104V	28492820	7.5	7.0 - 8.5	27.8	10.0	758	8.7	9.3	11.7	32	50	1984
	255/45R18	XL	103V	28492866	8.5	8.0 - 9.5	27.1	10.0	769	8.8	9.4	11.8	29	50	1929
	255/55R18	XL	109V	28492845	8.0	7.0 - 9.0	29.1	10.3	725	8.8	9.5	12.0	35	50	2271
	265/60R18	SL	110V	28492854	8.0	7.5 - 9.5	30.6	10.7	694	8.7	9.4	11.8	38	51	2337
19"	225/45R19	SL	92V	28493937	7.5	7.0 - 8.5	27.0	8.6	769	7.8	9.2	12.0	25	51	1389
	235/55R19	XL	105V	28492970	7.5	6.5 - 8.5	29.3	9.6	717	8.1	9.3	11.7	33	50	2039
	255/50R19	XL	107V	28492949	8.0	7.0 - 9.0	29.2	10.1	719	9.1	9.5	12.0	34	50	2149
20	275/45R20	SL	106V	28492016	9.0	8.5 - 10.5	29.9	10.7	698	9.5	9.5	12.0	35	51	2094

ORIGINAL EQUIPMENT

ADDITIONAL SAFETY WARNINGS

Tire Mix Usage: Never mix tires of different size or construction and/or type on an axle, except for temporary use as a spare tire. Always refer to vehicle owner’s manual for proper tire fitments.

Winter Tires: FALKEN recommends all four tires be replaced when installing snow tires. Never use just two snow tires – It could lead to adverse handling or loss of control, which could cause serious injury or death.

Speed Rating: The speed capability of the replacement tire(s) must always equal or exceed the original equipment tires. FALKEN does not recommend the use of mixing different speed ratings on a vehicle. This can cause poor handling and unpredictable steering. If the tire(s) have been repaired, damaged, or modified from its original condition, then the tire(s) should be treated as a non-speed rated tire.

Tire Repairs: If the interior of the tire, inside and/or outside sidewall are compromised from driving on the flat or underinflated tire for too long, the tire should be replaced. If the tire is deemed repairable after dismounting and inspection of interior is performed, it should be repaired with a plug and patch or plug/patch combination to correctly repair the tire. Never use a rope type plug, as this does not correctly seal the tire, and may lead to tire failure.

For Winter Tires: It is acceptable to use winter tires with a lower speed rating then the OE tires, but the vehicle maximum speed must be reduced to correspond with the new tires speed rating. FALKEN recommends reducing driving speed when driving in adverse weather conditions.

Tire Load: The load carrying capacity of the replacement tire(s) must always equal or exceed the carrying capacity of the original equipment tires. When changing tire sizes – commonly called “Plus Sizing”– please consult the vehicle’s tire information placard for original load carrying capacity and air pressures. Always ensure that the replacement tires’ load capacity is equal to or above the original tire to ensure safe operation.

Tire Aging: FALKEN recommends tires which have been in use for 6 years or more should be inspected regularly by a qualified tire specialist. Plus any tire that is 10 years or older from the date of manufacture, including spare tires should be replaced with new tires regardless of appearance, even if the tires have not reached the legal wear out limit.

Tire Inflation / Overloading: Serious injury or death may result from tire underinflation or overloading. Follow owner’s manual and the vehicle’s tire information placard for proper inflation pressures and load carrying capacities. Never exceed tire maximum air pressure as listed on tire’s sidewall.

Tire Overall Diameter: If you choose a replacement tire that exceeds the vehicle design criteria range for tire diameter, you may be changing the original handling characteristics of the vehicle. In some cases, vehicle systems such as brakes, suspensions and alignment may be affected. On sport utility vehicles (SUV) and light trucks, any increase in tire overall diameter, and the lifting of vehicle suspension to accommodate the larger size, may result in changes of vehicle ride height and resultant changes in rollover characteristics, braking distances, and handling. You must ensure any tire size and suspension changes allow for safe operating control under all driving conditions.



ZIEX ZE001 A/S

Nissan Rogue – OE REPLACEMENT

Wheel Dia.	Size	Extra Load	Load Index / Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs)	U.T.Q.G.
18"	225/60R18	SL	100H	59000060	6.5	6.0-8.0	28.7	9.2	726	7.4	8	10	27	46	1764	360-A-A



ZIEX CT50 A/S

Chrysler Pacifica – OE REPLACEMENT
Mazda CX-9 – OE REPLACEMENT

Wheel Dia.	Size	Extra Load	Load Index/ Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (/32")	Tread Depth (mm)	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs)	UTQG
20"	245/50R20	SL	102V	59000020	7.5	7.0–8.5	29.9	9.7	698	8.3	8.2	10	33	51	1874	480-A-A
	255/50R20	SL	104V	59000070	8.5	7.0–9.0	30.1	10.6	694	8.5	8.2	10	35	51	1984	300-A-A



WILDPEAK H/T (HT01A2)

Jeep Compass Trailhawk – OE REPLACEMENT
Jeep Renegade Trailhawk – OE REPLACEMENT


Wheel Dia.	Size	Extra Load	Load Index/ Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
17"	215/65R17	SL	99S	59000031	6.5	6.0–7.5	28.0	8.6	755	6.7	8	11	27	44	1709	500-B-B
	215/65R17	SL	99S	59000032	6.5	6.0–7.5	28.0	8.6	755	6.7	8	11	27	44	1709	500-B-B



SINCERA SN250A A/S

Volkswagen Golf Alltrack – OE REPLACEMENT
Nissan Rogue Sport – OE REPLACEMENT

Wheel Dia.	Size	Extra Load	Load Index/ Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
17"	205/55R17	XL	95H	59000110	6.5	5.5–7.0	26.0	8.7	802	7.1	8	9	21	50	1521	320-A-A
	215/60R17	SL	96H	59000280	7.0	6.0-7.5	27.2	8.8	774	7.1	9	11	25	51	1565	320-A-A



ZE914A ECORUN

Chrylser 200 – OE REPLACEMENT
Jeep Compass / Patriot – OE REPLACEMENT
Volkswagen Tiguan – OE REPLACEMENT

Wheel Dia.	Size	Extra Load	Load Index/ Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (mm)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load (lbs.)	UTQG
17"	215/55R17	SL	94W	28943727	7.0	6.0 - 7.5	26.3	8.9	800	7.4	8	10	23	51	1477	320-A-A
	215/60R17	SL	96H	28941729	6.5	6.0 - 7.5	27.2	8.5	763	6.4	8	8	25	51	1565	320-A-A
	215/65R17	SL	99V	59000240	7.0	6.0 - 7.5	28.2	9.0	715	7.1	8	10	24	51	1709	300-A-A

Product images are for illustrative purposes only. Tread design, technical information and tire construction subject to change without notice and may vary by size.

“STANDARD” TIRE SPECIFICATION LOAD (lbs.) AND INFLATION (PSI) TABLE
Based on ETRTO Data

Air Pressure (PSI)											
Load Index	26	27	28	29	30	31	32	33	34	35	36
80	761	778	794	827	860	882	904	926	948	970	992
81	783	800	816	849	882	904	926	948	972	995	1,019
82	805	822	838	877	915	937	959	981	1,003	1,025	1,047
83	827	844	860	899	937	959	981	1,003	1,036	1,069	1,074
84	849	866	882	921	959	985	1,010	1,036	1,058	1,080	1,102
85	871	893	915	954	992	1,014	1,036	1,058	1,084	1,109	1,135
86	904	921	937	976	1,014	1,040	1,065	1,091	1,117	1,142	1,168
87	926	948	970	1,009	1,047	1,073	1,098	1,124	1,150	1,175	1,201
88	948	970	992	1,031	1,069	1,098	1,128	1,157	1,183	1,209	1,235
89	982	1,004	1,025	1,069	1,113	1,143	1,172	1,202	1,228	1,253	1,279
90	1,014	1,036	1,058	1,102	1,146	1,176	1,205	1,235	1,264	1,294	1,323
91	1,047	1,069	1,091	1,135	1,179	1,209	1,238	1,268	1,297	1,327	1,356
92	1,069	1,091	1,113	1,163	1,213	1,242	1,272	1,301	1,330	1,360	1,389
93	1,102	1,124	1,146	1,196	1,246	1,279	1,312	1,345	1,374	1,404	1,433
94	1,135	1,163	1,190	1,240	1,290	1,319	1,349	1,378	1,411	1,444	1,477
95	1,168	1,196	1,224	1,274	1,323	1,356	1,389	1,422	1,455	1,488	1,521
96	1,202	1,230	1,257	1,312	1,367	1,400	1,433	1,466	1,499	1,532	1,565
97	1,235	1,263	1,290	1,345	1,400	1,437	1,473	1,510	1,543	1,576	1,609
98	1,268	1,296	1,323	1,378	1,433	1,470	1,506	1,543	1,580	1,616	1,653
99	1,312	1,340	1,367	1,428	1,488	1,525	1,561	1,598	1,635	1,672	1,709
100	1,356	1,384	1,411	1,472	1,532	1,572	1,613	1,653	1,690	1,727	1,764
101	1,400	1,428	1,455	1,521	1,587	1,624	1,661	1,698	1,738	1,779	1,819
102	1,444	1,472	1,499	1,565	1,631	1,672	1,712	1,753	1,793	1,834	1,874
103	1,488	1,521	1,554	1,615	1,676	1,720	1,764	1,808	1,848	1,889	1,929
104	1,521	1,560	1,598	1,665	1,731	1,771	1,812	1,852	1,896	1,940	1,984
105	1,565	1,604	1,642	1,709	1,775	1,819	1,863	1,907	1,951	1,995	2,039
106	1,609	1,648	1,687	1,753	1,819	1,867	1,914	1,962	2,006	2,050	2,094
107	1,653	1,692	1,731	1,803	1,874	1,918	1,962	2,006	2,054	2,101	2,149
108	1,698	1,737	1,775	1,847	1,918	1,966	2,013	2,061	2,109	2,156	2,204
109	1,742	1,781	1,819	1,896	1,973	2,024	2,076	2,127	2,175	2,223	2,271
110	1,797	1,836	1,874	1,951	2,028	2,079	2,131	2,182	2,234	2,285	2,337
111	1,852	1,891	1,929	2,012	2,094	2,146	2,197	2,249	2,300	2,352	2,403
112	1,896	1,940	1,984	2,067	2,149	2,204	2,260	2,315	2,366	2,418	2,469
113	1,951	1,995	2,039	2,122	2,204	2,259	2,315	2,370	2,425	2,480	2,535
114	1,995	2,039	2,083	2,172	2,260	2,319	2,377	2,436	2,491	2,546	2,601
115	2,061	2,105	2,149	2,238	2,326	2,385	2,443	2,502	2,561	2,619	2,678
116	2,116	2,166	2,216	2,304	2,392	2,454	2,517	2,579	2,638	2,696	2,755
117	2,182	2,227	2,271	2,370	2,469	2,528	2,586	2,645	2,708	2,770	2,833
118	2,238	2,288	2,337	2,436	2,535	2,597	2,660	2,722	2,785	2,847	2,910
119	2,304	2,354	2,403	2,508	2,612	2,675	2,737	2,800	2,866	2,932	2,998
120	2,370	2,425	2,480	2,585	2,689	2,755	2,822	2,888	2,954	3,020	3,086

“EXTRA LOAD” TIRE SPECIFICATION LOAD (lbs.) AND INFLATION (PSI) TABLE
Based on ETRTO Data

	Air Pressure (PSI)																
Load Index	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
80	670	691	717	738	760	785	796	818	829	853	876	887	911	935	955	979	992
81	692	713	739	760	771	797	818	840	851	876	897	919	944	969	977	1,002	1,019
82	713	734	762	782	793	819	840	861	883	909	919	941	966	992	999	1,024	1,047
83	735	745	773	793	814	841	862	882	904	931	941	963	989	1,015	1,031	1,057	1,074
84	749	766	782	816	849	871	893	915	937	959	981	999	1,018	1,036	1,058	1,080	1,102
85	771	788	805	849	882	904	926	948	966	985	1,003	1,025	1,047	1,069	1,091	1,114	1,136
86	793	816	838	871	904	926	948	970	992	1,014	1,036	1,058	1,080	1,102	1,124	1,147	1,169
87	816	838	860	893	926	952	977	1,003	1,025	1,047	1,069	1,091	1,114	1,136	1,158	1,180	1,202
88	838	860	882	915	959	981	1,003	1,025	1,047	1,069	1,091	1,117	1,143	1,169	1,191	1,213	1,235
89	849	882	915	948	992	1,014	1,036	1,058	1,084	1,110	1,136	1,162	1,187	1,213	1,235	1,257	1,279
90	904	926	948	981	1,025	1,051	1,076	1,102	1,128	1,154	1,180	1,202	1,224	1,246	1,272	1,297	1,323
91	926	948	970	1,003	1,047	1,073	1,099	1,125	1,151	1,176	1,202	1,228	1,253	1,279	1,305	1,330	1,356
92	948	970	992	1,036	1,069	1,099	1,128	1,158	1,184	1,209	1,235	1,261	1,286	1,312	1,338	1,363	1,389
93	981	1,003	1,025	1,069	1,102	1,132	1,161	1,191	1,217	1,242	1,268	1,297	1,327	1,356	1,382	1,407	1,433
94	1,003	1,031	1,058	1,102	1,147	1,173	1,198	1,224	1,253	1,283	1,312	1,341	1,371	1,400	1,426	1,451	1,477
95	1,036	1,058	1,080	1,136	1,180	1,209	1,239	1,268	1,297	1,327	1,356	1,382	1,407	1,433	1,462	1,492	1,521
96	1,069	1,091	1,113	1,157	1,213	1,242	1,272	1,301	1,330	1,360	1,389	1,418	1,448	1,477	1,506	1,536	1,565
97	1,102	1,124	1,146	1,190	1,246	1,275	1,305	1,334	1,367	1,400	1,433	1,462	1,492	1,521	1,550	1,580	1,609
98	1,124	1,152	1,179	1,223	1,279	1,312	1,345	1,378	1,407	1,437	1,466	1,499	1,532	1,565	1,594	1,624	1,653
99	1,168	1,196	1,223	1,267	1,323	1,356	1,389	1,422	1,455	1,488	1,521	1,550	1,580	1,609	1,642	1,676	1,709
100	1,201	1,229	1,256	1,311	1,367	1,400	1,433	1,466	1,499	1,532	1,565	1,598	1,632	1,665	1,698	1,731	1,764
101	1,245	1,273	1,300	1,356	1,400	1,437	1,473	1,510	1,547	1,583	1,620	1,653	1,687	1,720	1,753	1,786	1,819
102	1,278	1,306	1,333	1,389	1,444	1,481	1,517	1,554	1,591	1,628	1,665	1,702	1,738	1,775	1,808	1,841	1,874
103	1,311	1,345	1,378	1,433	1,488	1,525	1,561	1,598	1,635	1,672	1,709	1,746	1,782	1,819	1,856	1,892	1,929
104	1,356	1,384	1,411	1,477	1,532	1,572	1,613	1,653	1,690	1,727	1,764	1,801	1,837	1,874	1,911	1,947	1,984
105	1,389	1,411	1,433	1,510	1,576	1,617	1,657	1,698	1,735	1,772	1,809	1,849	1,889	1,929	1,966	2,002	2,039
106	1,433	1,461	1,488	1,554	1,620	1,661	1,701	1,742	1,782	1,823	1,863	1,900	1,936	1,973	2,013	2,054	2,094
107	1,466	1,499	1,532	1,598	1,665	1,705	1,746	1,786	1,826	1,867	1,907	1,947	1,988	2,028	2,068	2,109	2,149
108	1,510	1,543	1,576	1,642	1,698	1,742	1,786	1,830	1,874	1,918	1,962	2,002	2,043	2,083	2,123	2,164	2,204
109	1,554	1,587	1,620	1,686	1,753	1,797	1,841	1,885	1,929	1,973	2,017	2,061	2,105	2,149	2,190	2,230	2,271
110	1,598	1,631	1,664	1,730	1,808	1,852	1,896	1,940	1,984	2,028	2,072	2,116	2,160	2,204	2,248	2,293	2,337
111	1,642	1,675	1,708	1,785	1,852	1,900	1,947	1,995	2,043	2,090	2,138	2,182	2,227	2,271	2,315	2,359	2,403
112	1,686	1,725	1,763	1,829	1,907	1,955	2,002	2,050	2,098	2,145	2,193	2,241	2,289	2,337	2,381	2,425	2,469
113	1,730	1,769	1,807	1,884	1,962	2,010	2,057	2,105	2,153	2,201	2,249	2,297	2,344	2,392	2,440	2,487	2,535
114	1,774	1,813	1,851	1,929	2,006	2,057	2,109	2,160	2,212	2,263	2,315	2,363	2,410	2,458	2,506	2,553	2,601
115	1,829	1,868	1,907	1,995	2,072	2,124	2,175	2,227	2,278	2,330	2,381	2,429	2,476	2,524	2,575	2,627	2,678
116	1,884	1,923	1,962	2,050	2,127	2,183	2,238	2,293	2,344	2,396	2,447	2,498	2,550	2,601	2,652	2,704	2,755
117	1,929	1,973	2,017	2,105	2,193	2,245	2,296	2,348	2,403	2,458	2,513	2,568	2,623	2,678	2,730	2,781	2,833
118	1,984	2,028	2,072	2,160	2,249	2,304	2,359	2,414	2,469	2,524	2,579	2,634	2,689	2,744	2,799	2,855	2,910
119	2,050	2,094	2,138	2,226	2,315	2,374	2,432	2,491	2,550	2,608	2,667	2,722	2,778	2,833	2,888	2,943	2,998
120	2,105	2,155	2,204	2,292	2,381	2,443	2,506	2,568	2,627	2,685	2,744	2,799	2,855	2,910	2,969	3,027	3,086

LIGHT TRUCK TIRE LOAD AND INFLATION CHART
Tire Load Limits (lbs.) at Various Inflation Pressures (PSI)

Tire Size Designation	Usage				Load Range C			Load Range D			Load Range E
		35	40	45	50	55	60	65	70	75	80
30x9.50R15LT	Single	1565 (B)	1715	1855	1985 (C)						
31x10.50R15LT	Single	1765 (B)	1945	2100	2270 (C)						
32x11.50R15LT	Single	1985 (B)	2185	2360	2535 (C)						
LT235/75R15	Single	1530	1680	1825	1985 (C)	2100	2235	2335 (D)	2490	2610	2755 (E)
	Dual	1390	1530	1660	1820 (C)	1910	2035	2150 (D)	2265	2375	2535 (E)
LT225/75R16	Single	1500	1650	1790	1940 (C)	2060	2190	2335 (D)	2440	2560	2680 (E)
	Dual	1365	1500	1630	1765 (C)	1875	1995	2150 (D)	2220	2330	2470 (E)
LT235/85R16	Single	1700	1870	2030	2205 (C)	2335	2485	2623 (D)	2765	2905	3042 (E)
	Dual	1545	1700	1845	2006 (C)	2125	2260	2381 (D)	2515	2645	2778 (E)
LT245/75R16	Single	1700	1870	2030	2205 (C)	2335	2480	2623 (D)	2765	2900	3042 (E)
	Dual	1545	1700	1845	2006 (C)	2125	2255	2381 (D)	2515	2640	2778 (E)
LT265/75R16	Single	1910	2100	2280	2470 (C)	2625	2790	3000 (D)	3105	3260	3415 (E)
	Dual	1740	1910	2075	2270 (C)	2390	2540	2755 (D)	2825	2965	3085 (E)
LT285/75R16	Single	2130	2340	2540	2755 (C)	2925	3110	3305 (D)	3465	3635	3750 (E)
	Dual	1940	2130	2310	2535 (C)	2660	2830	3000 (D)	3155	3310	3415 (E)
LT305/70R16	Single	2270	2465	2680	2910(D)	3085	3275	3525 (E)			
	Dual	2040	2245	2440	2680(D)	2805	2980	3195(E)			
LT315/75R16	Single	2535 (C)	2715	2950	3195(D)	3395	3610	3860 (E)			
	Dual	2335 (C)	2470	2685	2910(D)	3090	3285	3525 (E)			
35x12.50R17LT	Single	2405 (C)	2625	2840	3000 (D)	3065	3130	3195 (E)			
LT235/80R17	Single	1725	1895	2055	2270	2370	2515	2680	2805	2940	3085 (E)
	Dual	1570	1725	1870	2040	2155	2290	2470	2555	2675	2835 (E)
LT245/70R17	Single	1690	1855	2010	2205 (C)	2315	2460	2600 (D)	2740	2875	3000 (E)
	Dual	1540	1690	1830	1985 (C)	2105	2240	2335 (D)	2495	2615	2755 (E)
LT245/75R17	Single	1770	1945	2110	2270	2430	2580	2755	2875	3020	3195 (E)
	Dual	1610	1770	1920	2040	2210	2350	2535	2615	2750	2910 (E)
LT255/75R17	Single	1870	2055	2230	2405 (C)						
	Dual	1700	1870	2030	2205 (C)						
LT265/70R17	Single	1890	2075	2255	2470 (C)	2595	2760	2910 (D)	3005	3100	3195 (E)
	Dual	1720	1890	2050	2270 (C)	2360	2510	2680 (D)	2735	2820	2910 (E)
LT285/70R17	Single	2105	2315	2510	2755 (C)	2900	3050	3195 (D)	3195	3195	3195 (E)
	Dual	1915	2105	2285	2535 (C)	2640	2775	2910 (D)	2910	2910	2910 (E)
LT295/70R17	Single	2215	2435	2645	2910	3005	3100	3195	3195	3195	3195 (E)
	Dual	2015	2215	2405	2680	2735	2820	2910	2910	2910	2910 (E)
LT285/75R17	Single	2215	2430	2640	2835 (C)	2955	3075	3195 (D)	3195	3195	3195 (E)
	Dual	2015	2210	2400	2600 (C)	2690	2800	2910 (D)	2910	2910	2910 (E)
LT315/70R17	Single	2535 (C)	2685	2915	3195 (D)	3195	3195	3195 (E)			
	Dual	2335 (C)	2445	2655	2910 (D)	2910	2910	2910 (E)			
LT265/70R18	Single	1960	2155	2340	2535	2690	2860	3085	3185	3345	3525 (E)
	Dual	1785	1960	2130	2335	2450	2605	2835	2900	3045	3195 (E)
LT275/65R18	Single	1940	2130	2310	2535 (C)	2660	2825	3000 (D)	3150	3305	3415 (E)
	Dual	1765	1940	2100	2335 (C)	2420	2570	2755 (D)	2865	3010	3085 (E)
LT275/70R18	Single	2070	2270	2470	2680 (C)	2840	3020	3195 (D)	3360	3530	3640 (E)
	Dual	1885	2065	2250	2470 (C)	2585	2750	2910 (D)	3060	3210	3305 (E)
LT285/65R18	Single	2035	2235	2425	2600	2790	2965	3195 (D)	3305	3470	3640 (E)
	Dual	1850	2035	2205	2335	2540	2700	2910 (D)	3010	3160	3305 (E)
LT305/65R18	Single	2335	2470	2680	2910	3085	3280	3525 (E)			
	Dual	2150	2250	2440	2680	2805	2985	3195 (E)			
LT325/65R18	Single	2535	2715	2945	3195 (D)	3390	3605	3860 (E)			
	Dual	2335	2470	2680	2910 (D)	3085	3280	3525 (E)			
35x12.50R20LT	Single	2095	2310	2495	2680	2845	3010	3195 (E)			
LT265/60R20	Single	1825	2000	2175	2335	2500	2660	2835	2960	3110	3195 (E)
LT275/65R20	Single	2080	2280	2475	2680	2850	3030	3195	3375	3540	3750 (E)
LT285/55R20	Single	1850	2030	2205	2405	2535	2695	2835 (D)	3005	3150	3305 (E)
LT305/55R20	Single	2095	2235	2425	2680	2795	2970	3195 (E)			
LT325/60R20	Single	2535	2680	2915	3195 (D)	3350	3560	3750 (E)			

SPEED SYMBOL CHART

Maximum speed rating at which tire can carry a load corresponding to its Load Index under specific service conditions.

SPEED SYMBOL	MAXIMUM SPEED (MPH)
Q	99
R	106
S	112
T	118
U	124
H	130
V	149
W	168
Y	186
(Y)	Above 186
**ZR (Open-ended speed category)	Above 149

EXAMPLE:

TIRE DESIGNATION

MAXIMUM SPEED

P275/40R17 93W168 MPH

P275/40R17 93Y186 MPH

P275/40ZR17 93W168 MPH

P275/40ZR17 93Y186 MPH

P275/40ZR17 (93Y)Above 186 MPH

P275/40ZR17 (No Speed Symbol) Above 149 MPH

TRUCK AND SPORT UTILITY VEHICLES

QUICK REFERENCE GUIDE

			WILDPEAK			ZIEX	WINTER	
Wheel Dia.	Series	Size	WILDPEAK A/T3W	WILDPEAK H/T	WILDPEAK M/T	ZIEX S/TZ05	ESPIA EP2 II SUV	
15"	9.5	30x9.5R15LT	104S C/6 SL	104S C/6 SL	104Q C/6 SL			
	10.5	31x10.5R15LT	109S C/6 SL	109S C/6 SL	109Q C/6 SL			
	11.5	32x11.5R15LT	113R C/6 SL					
	12.5	33x12.5R15LT	108R C/6 SL		108Q C/6 SL			
	12.5	35x12.5R15LT	113R C/6 SL		113Q C/6 SL			
	75	225/75R15		102T SL				
	75	235/75R15	109T XL	109T XL				
75	LT235/75R15		104/101S C/6 SL					
16"	70	215/70R16		100T SL			100R SL	
	70	225/70R16		103T SL				
	70	235/70R16	109T XL	106T SL				
	70	245/70R16		107T SL				
	70	255/70R16	115T XL	111T SL				
	70	265/70R16	112T SL	112T SL				
	70	LT305/70R16	124/121R E/10 SL					
	75	225/75R16		108T XL				
	75	LT225/75R16	115/112S E/10 SL	115/112S E/10 SL				
	75	235/75R16		112T XL				
	75	245/75R16	112T XL	111S SL				
	75	LT245/75R16	120/116S E/10 SL	108/104S C/6 SL; 120/116S E/10 SL	120/116Q E/10 SL			
	75	265/75R16	116T SL	116T SL				
	75	LT265/75R16	123/120S E/10 SL	123/120S E/10 SL	123/120Q E/10 SL			
17"	75	LT285/75R16	126/123R E/10 SL	126/123S E/10 SL	126/123Q E/10 SL			
	75	LT315/75R16	127/124R E/10 SL		127/124Q E/10 SL			
	85	LT235/85R16	120/116S E/10 SL	120/116S E/10 SL	120/116Q E/10 SL			
	12.5	33x12.5R17LT			120Q E/10 SL			
	12.5	35x12.5R17LT	121R E/10 SL		121Q E/10 SL			
	12.5	37x12.5R17LT			124Q D/8 SL			
	13.5	38x13.5R17LT			119Q C/6 SL			
	60	225/60R17					99R SL	
	60	235/60R17		102H SL			102R SL	
	65	215/65R17					99R SL	
	65	225/65R17		102H SL			102R SL	
	65	235/65R17		104H SL			108R XL	
	65	245/65R17	111T XL	107T SL				
	65	255/65R17	114T XL					
	65	265/65R17	116T XL	112T SL				
	70	235/70R17		108T XL				
	70	245/70R17	114T XL	110T SL				
	70	LT245/70R17	119/116S E/10 SL					
	70	255/70R17	112T SL					
	70	265/70R17	115T SL	115T SL			115R SL	
	70	LT265/70R17	121/118S E/10 SL	121/118S E/10 SL	121/118Q E/10 SL			
	70	LT285/70R17	121/118S E/10 SL		121/118Q E/10 SL			
	70	285/70R17	117T SL					
	70	LT295/70R17			121/118Q E/10 SL			
	70	LT315/70R17	121/118S E/10 SL		121/118Q E/10 SL			
	75	235/75R17	109T SL					
	75	245/75R17	112T SL					
	75	LT245/75R17	121/118S E/10 SL					
	75	LT255/75R17			111/108Q C/6 SL			
	75	LT285/75R17	121/118S E/10 SL					
	80	LT235/80R17	120/117R E/10 SL		120/117Q E/10 SL			
	18"	12.5	35x12.5R18LT			123Q E/10 SL		
		55	235/55R18				109V XL	100R SL
		55	255/55R18					109R XL
		60	225/60R18				107V XL	100R SL
60		235/60R18		107H XL			107R XL	
60		245/60R18		105H SL				
60		265/60R18	114T XL	110H SL				
65		235/65R18		106H SL				
65		255/65R18		111H SL				
65		265/65R18	114T SL	114H SL				
65		275/65R18	116T SL	116H SL				
65		LT275/65R18	123/120S E/10 SL	123/120S E/10 SL				
65		LT285/65R18	125/122S E/10 SL		125/122Q E/10 SL			
65		LT305/65R18	124/121R E/10 SL					
65		LT325/65R18	127/124S E/10 SL					
70		255/70R18	113T SL	113H SL				
70		265/70R18	116T SL	116T SL				
70		LT265/70R18	124/121S E/10 SL					
70		LT275/70R18	125/122S E/10 SL		125/122Q E/10 SL			
19"		55	245/55R19				103H SL	
	60	255/60R19		109H SL		109H SL		
20"	12.5	33x12.5R20LT			114Q E/10 SL			
	12.5	35x12.5R20LT	121R E/10 SL		121Q E/10 SL			
	13.5	37x13.5R20LT			127Q E/10 SL			
	40	275/40R20				106H XL		
	45	275/45R20				110H XL		
	45	295/45R20				114H XL		
	50	245/50R20				102H SL		
	50	255/50R20				109H XL		
	50	265/50R20				111H XL		
	50	285/50R20				116V XL		
	50	305/50R20				120H XL		
	55	275/55R20	117T XL	117H XL		117H XL	113R SL	
	55	LT285/55R20	122/119T E/10 SL					
	55	LT305/55R20	121/118S E/10 SL		121/118Q E/10 SL			
	60	LT265/60R20	121/118S E/10 SL					
	60	275/60R20	115T SL	115H SL		115H SL		
	60	LT325/60R20	126/123S E/10 SL					
65	LT275/65R20	126/123S E/10 SL	126/123S E/10 SL					
22"	35	265/35R22				102H XL		
	40	265/40R22				106H XL		
	40	285/40R22				110H XL		
	40	305/40R22				114H XL		
	45	285/45R22				114H XL		
24"	45	305/45R22				118H XL		
	35	295/35R24				110H XL		
	35	305/35R24				112H XL		

			AZENIS			ZIEX	SINCERA	WINTER	
Wheel Dia.	Series	Size	AZENIS FK450 A/S	AZENIS FK510	AZENIS RT615K+	ZIEX ZE950 A/S	SINCERA SN250 A/S	ESPIA EPZ II	EUROWINTER HS449
13"	70	175/70R13							82T SL
	60	185/60R14					82H SL		82T SL
	60	195/60R14			86H SL				
	65	175/65R14					82T SL	86T XL	82T SL
14"	65	185/65R14					86T SL	90T XL	86T SL
	70	175/70R14							88T XL
	70	185/70R14					88T SL		
	70	195/70R14					91T SL		
15"	50	195/50R15				82H SL			
	50	205/50R15			89W XL				
	55	185/55R15					82V SL		82H SL
	55	195/55R15					85V SL		85H SL
	60	185/60R15					84H SL	88T XL	84T SL
	60	195/60R15					88H SL	92T XL	88T SL
	60	205/60R15					91H SL		91H SL
	60	215/60R15					94H SL		
	65	175/65R15					84H SL	88T XL	84T SL
	65	185/65R15					88H SL	92T XL	88T SL
	65	195/65R15					91H SL	95T XL	91T SL
	65	205/65R15				99H XL; 99W XL	99T XL	99T XL	94T SL
	65	215/65R15				96H SL	96T SL		
	70	205/70R15					96T SL		
	70	215/70R15					98T SL	98T SL	98T SL
	70	225/70R15					100T SL		
	75	235/75R15					105T SL		
16"	40	205/40R16			83W XL				
	45	205/45R16				87V XL			
	45	215/45R16			86W SL				
	50	195/50R16				84V SL			
	50	205/50R16	87W SL			87V SL	87T SL		91H XL
	50	225/50R16	92W SL		92W SL	96V XL			
	50	245/50R16				97H SL			
	55	185/55R16				83H SL	83T SL		
	55	195/55R16	87V SL (RUNFLAT)			87V SL	87T SL		87H SL
	55	205/55R16	91W SL			94H XL; 94W XL	91H SL; 91T SL	94T XL	91H SL
	55	215/55R16	97W XL			97V XL	97H XL		93H SL; 97H XL
	55	225/55R16	95W SL			95V SL	95V SL		95H SL
	60	205/60R16				92V SL	92H SL	96T XL	96H XL
	60	215/60R16				95H SL; 99V XL	95T SL; 95V SL	99T XL	99H XL
	60	225/60R16				98V SL	98T SL	102T XL	102V XL
	60	235/60R16				100W SL	100H SL		100H SL
	65	205/65R16				95V SL	95H SL	95T SL	95H SL
	65	215/65R16				98H SL	98T SL	98T SL	98H SL
	65	225/65R16				100H SL	100T SL	100T SL	100T SL
	65	235/65R16				103H SL	103T SL		
	70	215/70R16					100T SL		
	70	225/70R16					103T SL		
	70	235/70R16					106T SL		
17"	40	205/40R17			84W XL	84W XL			
	40	215/40R17			87W XL				
	40	235/40R17			90W SL				
	40	245/40R17	91W SL	95Y XL		95W XL			
	40	255/40R17	94Y SL		94W SL	94W SL			
	40	275/40R17			98W SL				
	45	205/45R17	88W XL			88W XL			
	45	215/45R17	91W XL	91Y XL	87W SL	91W XL	87V SL		91V XL
	45	225/45R17	91W SL (RUN-FLAT) 94W XL	94Y XL	94W XL	94W XL	94V XL	94T XL	94V XL
	45	235/45R17	97W XL	97Y XL		94W SL			97V XL
	45	245/45R17	99Y XL	99Y XL	99W XL	99W XL			99V XL
	50	205/50R17	93W XL			93W XL	93V XL		93V XL
	50	215/50R17	95W XL			91W SL	95V XL		95V XL
	50	225/50R17	98W XL			94W SL	98V XL	98T XL	98V XL
	50	235/50R17	96W SL			96W SL			
	50	245/50R17	99W SL			99W SL			
	55	215/55R17	94W SL			94V SL; 94W SL	94T SL; 94V SL	98T XL	98V XL
	55	225/55R17	97W SL			101W XL	97V SL	101T XL	101V XL
	55	235/55R17	99W SL			99W SL	99T SL	99T SL	103V XL
	60	215/60R17				96H SL	96T SL		96H SL
	60	225/60R17				99V SL	99T SL		99H SL
	60	235/60R17				102H SL	102T SL		102H SL
	60	265/60R17				108V SL			
	65	215/65R17				99H SL	99T SL		
	65	225/65R17				102H SL	102T SL		102H SL
	65	235/65R17				108V XL	104T SL		108H XL

			AZENIS			ZIEX	SINCERA	WINTER	
Wheel Dia.	Series	Size	AZENIS FK450 A/S	AZENIS FK510	AZENIS RT615K+	ZIEX ZE950 A/S	SINCERA SN250 A/S	ESPIA EPZ II	EUROWINTER HS449
18"	30	315/30R18			98W SL				
	35	215/35R18				84W XL			
	35	245/35R18		92Y XL					
	35	255/35R18	94Y XL	94(Y) XL		94W XL			
	35	265/35R18	97Y XL	97(Y) XL	97W XL	97W XL			
	35	275/35R18		99(Y) XL	95W SL	99W XL			
	40	215/40R18				89W XL			
	40	225/40R18	92Y XL	92(Y) XL	92W XL	92W XL		92T XL	92V XL
	40	235/40R18	95Y XL	95(Y) XL	95W XL	95W XL			
	40	245/40R18	97Y XL	97Y XL	97W XL	97W XL			97V XL
	40	255/40R18	99Y XL	99(Y) XL	95W SL	99W XL			
	40	275/40R18		99Y SL					
	40	295/40R18			103W SL				
	45	215/45R18	93W XL			93W XL			
	45	225/45R18	95Y XL	95(Y) XL		95W XL	95V XL	95T XL	95V XL
	45	235/45R18	98W XL			94W SL	94V SL		98V XL
	45	245/45R18	100Y XL	100(Y) XL		100W XL			100V XL
	45	255/45R18				103W XL			103V XL
	50	225/50R18	95W SL			95W SL	95T SL		
	50	235/50R18	97W SL			101W XL	97V SL	101T XL	101V XL
	50	245/50R18	100W SL						104V XL
	55	215/55R18				95H SL	95T SL		
	55	225/55R18				98V SL	98T SL		98V SL
	55	235/55R18	100W SL			104V XL	100V SL		104H XL
	55	245/55R18	103W SL			103W SL			
	55	255/55R18				109W XL			
	60	225/60R18				100V SL	100H SL		100H SL
	60	235/60R18				107V XL			107H XL
	60	245/60R18				105H SL			
	60	265/60R18				110V SL			110V SL
	65	235/65R18				106H SL			
	65	255/65R18				111H SL			
19"	30	255/30R19		91(Y) XL					
	30	295/30R19		100Y XL					
	35	225/35R19		88(Y) XL					
	35	235/35R19		91(Y) XL					
	35	245/35R19		93(Y) XL					
	35	255/35R19	96Y XL	96(Y) XL		96W XL			
	35	275/35R19	100Y XL	100(Y) XL					
	35	285/35R19	99Y SL	103(Y) XL					
	40	225/40R19				93W XL			
	40	235/40R19	96W XL						
	40	245/40R19	98Y XL 98Y XL (RUNFLAT)	98(Y) XL		94W SL			
	40	255/40R19	100Y XL	100(Y) XL		100W XL			
	40	275/40R19		105(Y) XL		101W SL			
	45	225/45R19	96Y XL	96Y XL					92V SL
	45	245/45R19	102Y XL	102(Y) XL		98W SL			
	45	255/45R19	104Y XL			100V SL			
	50	255/50R19				107V XL			107V XL
	55	225/55R19				99W SL			
	55	235/55R19				105W XL			105V XL
	55	245/55R19				103H SL			
	60	255/60R19				109H SL			
20"	30	245/30R20		90(Y) XL					
	30	255/30R20		92(Y) XL					
	30	275/30R20		97(Y) XL					
	30	285/30R20		99(Y) XL					
	30	295/30R20		101(Y) XL					
	35	245/35R20	95Y XL	95(Y) XL					
	35	255/35R20	97Y XL	97(Y) XL		97W XL			
	35	275/35R20		102(Y) XL		102W XL			
	35	285/35R20		104(Y) XL					
	40	245/40R20		99(Y) XL		99W XL			
	40	255/40R20		101(Y) XL					
	40	275/40R20		106Y XL		106W XL			
	45	245/45R20	103Y XL	103Y XL		103W XL			
	45	255/45R20	101Y SL	105Y XL		105W XL			
	45	275/45R20							106V SL
21	35	245/35R21		96(Y) XL					
	35	265/35R21		101(Y) XL					