

WILDPEAK H/T

ALL-SEASON HIGHWAY PERFORMANCE

The **WILDPEAK H/T** offers a combination of superb dry handling and responsive wet braking on all roadway surfaces. With its non-directional tread pattern Falken has optimized traction and control, through the combination of a high tension casing ply and stiff wide steel belts, the WILDPEAK H/T provides stability and comfort for pick-up trucks and SUVs alike whatever the season. With excellent value from its high mileage tread, and optimal ride comfort the WILDPEAK H/T leaves the competition in the dust.




TIRE HIGHLIGHTS

60K Limited Mileage Warranty

S, T & H Speed Ratings

15" – 20" Rim

M+S Rated




LIMITED MILEAGE WARRANTY: 60,000

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Load Range	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load	UTQG
15"	30X9.5R15LT†	-	104S	C/6	28800512	7.5	6.5 - 8.5	29.5	9.7	716	7.2	15	41	50	1985	-----
	31X10.5R15LT†	-	109S	C/6	28800513	8.5	7.0 - 9.0	30.5	10.7	693	8.1	15	45	50	2270	-----
	225/75R15*	-	102T		28804528	6.0	6.0 - 7.5	28.2	8.8	738	6.4	11	33	44	1874	600-A-B
	LT235/75R15*	-	104/101S	C/6	28800520	6.5	6.0 - 7.0	28.8	9.3	724	7.1	16	38	50	1985	-----
	235/75R15*	XL	109T		28804529	6.5	6.0 - 8.0	28.8	9.2	726	6.7	11	34	50	2271	600-A-B
16"	215/70R16	-	100T		28804603	6.5	5.5 - 7.0	27.8	8.7	748	6.5	11	28	44	1764	600-A-B
	225/70R16	-	103T		28804693	6.5	6.0 - 7.5	28.3	8.6	733	6.8	12	32	44	1929	600-A-B
	LT225/75R16	-	115/112S	E/10	28800627	6.0	6.0 - 7.0	29.3	8.4	711	6.8	15	41	80	2680	-----
	225/75R16†	XL	108T		28804484	6.0	6.0 - 7.5	29.2	8.8	711	6.4	11	34	50	2205	600-A-B
	235/70R16	-	106T		28804609	7.0	6.0 - 8.0	28.9	9.7	722	7.0	12	34	44	2094	600-A-B
	235/75R16	XL	112T		28804610	6.5	6.0 - 8.0	29.8	9.2	700	6.7	12	35	50	2469	600-A-B
	LT235/85R16	-	120S		28800474	6.5	6.0 - 7.5	31.8	9.4	658	6.7	16	50	80	3042	-----
	245/70R16†	-	107T		28804604	7.0	6.5 - 8.0	29.6	9.6	704	7.4	12	35	44	2149	600-A-B
	245/75R16†	-	111S		28800608	7.0	6.5 - 8.0	30.4	9.8	686	7.0	12	37	44	2403	600-A-B
	LT245/75R16	-	120/116S	E/10	28800494	7.0	6.5 - 8.0	30.5	9.8	684	7.4	16	49	80	3042	-----
	LT245/75R16	-	108/104S	C/6	28800492	7.0	6.5 - 8.0	30.4	9.8	686	7.4	16	41	50	2205	-----
	255/70R16	-	111T		28804605	7.5	6.5 - 8.5	30.1	10.3	694	7.6	12	35	44	2403	600-A-B
	265/70R16	-	112T		28804606	8.0	7.0 - 9.0	30.4	10.6	686	8.0	12	39	44	2469	600-A-B
	265/75R16	-	116T		28804607	7.5	7.0 - 9.0	31.5	10.7	664	7.6	12	39	44	2756	600-A-B
	LT265/75R16	-	123S		28800505	7.5	7.0 - 8.0	31.7	10.5	660	8.0	16	53	80	3415	-----
LT285/75R16	-	126/123S	E/10	28800611	8.0	7.5 - 9.0	32.8	11.2	637	8.7	17	61.5	80	3750	-----	
17"	225/65R17	-	102H		28801775	6.5	6.0 - 8.0	28.5	8.9	743	7.1	11	30.2	51	1874	600-A-A
	235/60R17	-	102H		28801717	7.0	6.5 - 8.5	28.1	9.2	753	7.4	13	32	51	1874	600-A-A
	235/65R17	-	104H		28801790	7.0	6.5 - 8.5	29.0	9.3	720	7.5	11	34	44	1984	600-A-B
	P235/70R17	XL	108T		28804613	7.0	6.0 - 8.0	29.9	9.5	705	7.0	12	36	50	2205	600-A-B
	245/65R17†	-	107T		28804768	7.0	7.0 - 8.5	29.4	9.7	709	7.8	12	37	44	2149	600-A-B
	245/70R17	-	110T		28804617	7.0	6.5 - 8.0	30.5	9.8	682	7.4	12	37	44	2337	600-A-B
	265/65R17	-	112T		28804721	8.0	7.5 - 9.5	30.4	10.8	688	8.4	12	41	44	2469	600-A-B
	LT265/70R17†	-	121/118S	E/10	28800712	8.0	7.0 - 8.5	31.7	10.9	657	8.2	15	57	80	3195	-----
	265/70R17	-	115T		28804701	8.0	7.0 - 9.0	31.5	10.9	661	8.0	12	41	44	2679	600-A-B

(†) Denotes Outlined White Sidewall Letters.
NO UTQG RATING FOR LT SIZES

More sizes on the next page

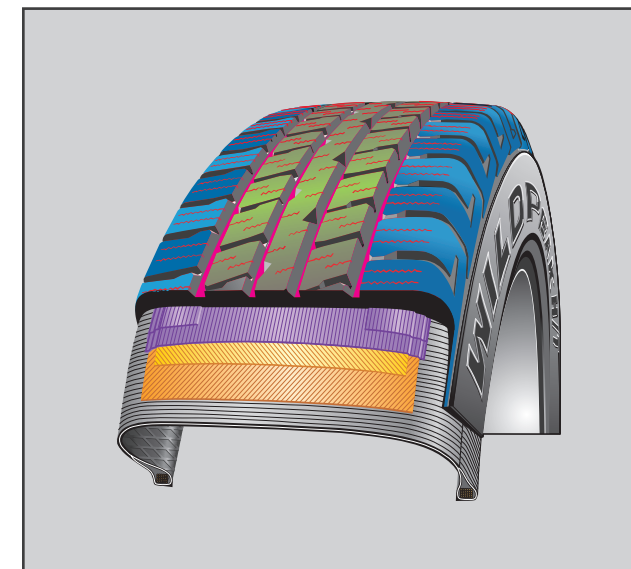

MULTI-WAVE LATERAL SIPES
enhance wet traction and increase all-season performance.

VARIABLE PITCH SHOULDER DESIGN
provides exceptional all-season performance while reducing tire noise.

FOUR LARGE CIRCUMFERENTIAL STRAIGHT GROOVES
effectively evacuate water and significantly enhance hydroplaning resistance for enhanced wet handling.

SYMMETRIC NON-DIRECTIONAL 5 RIB TREAD DESIGN
provides optimal handling stability and comfort, while allowing cross rotation patterns to help fight irregular wear.

WILDPEAK H/T

LIMITED MILEAGE WARRANTY: 60,000

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Load Range	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load	UTQG
18"	235/60R18	XL	107H		28801816	7.0	6.5 - 8.5	29.1	9.2	725	7.4	13	33.3	50	2149	600-A-A
	235/65R18	-	106H		28801815	7.0	6.5 - 8.5	30.0	9.4	705	7.4	11	32.2	51	2094	600-A-A
	245/60R18	-	105H		28801811	7.0	7.0 - 8.5	29.6	9.6	716	7.7	13	36.4	51	2039	600-A-A
	255/65R18	-	111H		28801822	7.5	7.0 - 9.0	31.1	10.2	683	8.0	12	38.6	51	2403	600-A-A
	255/70R18	-	113H		28801841	7.5	6.5 - 8.5	32.2	10.2	656	7.6	11	41.0	51	2535	600-A-A
	265/60R18	-	110H		28801854	8.0	7.5 - 9.5	30.4	10.6	696	8.3	14	38.6	51	2337	600-A-A
	265/65R18	-	114H		28801823	8.0	7.5 - 9.5	31.7	10.5	671	8.3	12	45.2	51	2601	600-A-A
	265/70R18	-	116T		28804809	8.0	7.0 - 9.0	32.5	10.8	650	8.0	12	41.7	44	2756	600-A-B
	LT275/65R18	-	123/120S	E/10	28800803	8.0	7.5 - 9.0	32.1	10.7	651	8.7	16	61	80	3415	-----
	275/65R18	-	116H		28801901	8.0	7.5 - 9.5	32.1	10.8	663	8.6	12	45.0	51	2756	600-A-A

NO UTQG RATING FOR LT SIZES

LIMITED MILEAGE WARRANTY: 60,000

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Load Range	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load	UTQG
19"	255/60R19	-	109H		28801813	7.5	7.0 - 9.0	31.1	10.2	680	8.0	13	39	51	2271	600-A-A
20"	275/55R20	XL	117H		28801021	8.5	7.5 - 9.5	31.9	10.9	663	8.9	14	46	50	2833	600-A-A
	275/60R20	-	115H		28801003	8.0	7.5 - 9.5	33.0	10.8	642	8.7	12	45	51	2679	600-A-A
	LT275/65R20	-	126/123S	E/10	28800025	8.0	7.5 - 9.5	34.1	10.7	611	8.7	16	65	80	3750	-----

NO UTQG RATING FOR LT SIZES