

# INSTALLATION MANUAL

## BBRK-1002



### ACCESSORY:

[Banjo Bolt Removal Kit](#)


Application:  
Cummins 94-98  
P7100 Injection Pump



**FASS**<sup>®</sup>  
Diesel Fuel Systems

ENGINEERED EXCELLENCE

# CONTENTS

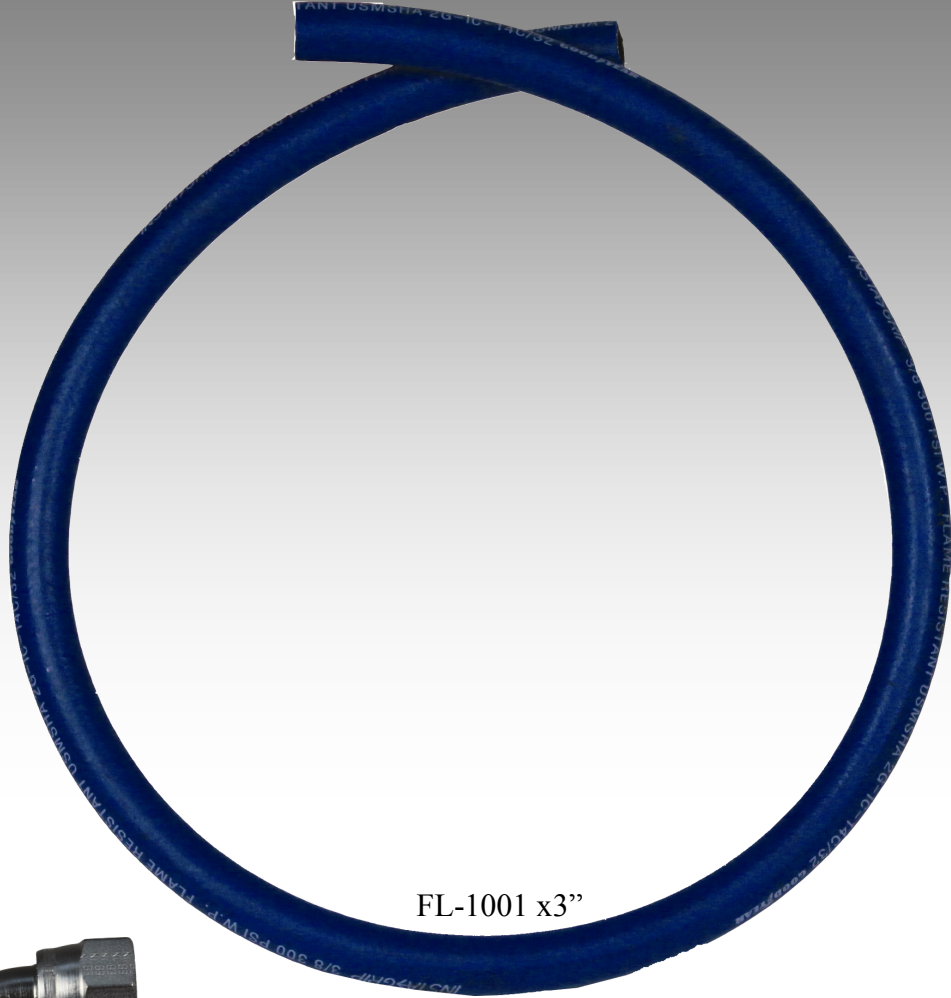

FL-1001 x3"



PI-1003



DIPF-1001



DIPF-1002

# BBRK-1002 INSTALLATION MANUAL

## (Banjo Bolt Removal Kit)

1994 - 1998 Dodge Cummins

1. Place a container under the factory filter housing and drain.

2. Remove banjo bolt and factory fuel line to injection pump inlet. Install the 14mm DIPF-1002 into inlet port and torque to 18 lb./ft.



3. Remove banjo bolt and factory fuel line from the outlet of the factory fuel filter housing. The factory line can be discarded. If kept in place, blow out line and cap each end.




4. Insert the 12mm DIPF-1001 into the outlet port of the factory fuel filter housing. Torque to 18 lb./ft.



**Caution:** Do Not use sealant on AN fittings. Only use sealant on threads installed into pump assembly.

**Note:** Use oil on fittings and inside fuel line when installing Push-Lok fittings.

5. Insert a PL-1003 push lock fitting into each end of the provided fuel line.

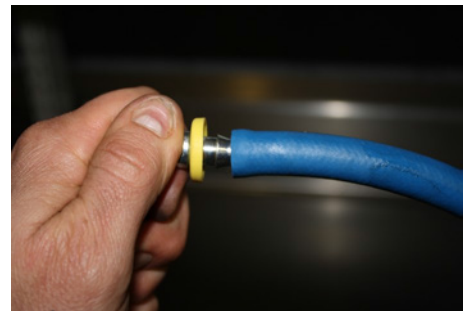

6. Attach the PL-1003 to the Outlet fitting on the factory filter canister. Torque to 18 lb./ft.



7. Route fuel line to the Inlet port of the P7100 Injection pump. Attach PL-1003 to the DIPF-1002. Torque to 18 lb./ft.



8. Prime system according to Manufacturer's recommendations.