

FISHBONE
OFFROAD



INSTALLATION INSTRUCTIONS

PART No.

FB25137

Jeep® '07-'18 JK Wrangler
Tailgate Table



REQUIRED TOOLS

½" Drill Bit
Drill
3mm Allen
6mm Allen
8mm Socket
13mm Socket
M10 Nutsert Tool
Marker
Spirit Level
Friend

KIT CONTAINS

M10 Button Head Bolt
M3 Button Head Bolt
M10 Nutsert
M3 Nyloc Nut
M10 Washer

QTY

4
4
4
4
4

Note: There are two different methods of installation: On the **inner tailgate panel**, and on the **outer tailgate panel**. Please read the instructions carefully before beginning to help you decide where you want to install the table and what tools you will need for the process.

1) ASSEMBLY

Assemble the table's cup holders. On the bottom tray, and with a 3mm Allen and 8mm socket, install the two cup holder brackets with 2 bolts and 2 washers each. We recommend installing the bolts such that the head faces the user, if the table were open and being used.



2) [OUTER] REMOVE YOUR TIRE CARRIER

Remove your vehicle's tire carrier while retaining the (8) 13mm retaining bolts, as they will be reused in the following step.



3) [OUTER] INSTALL THE TABLE

Hold the table up to the tailgate and align it with the 8 carrier bolt holes. Loosely secure it by reinstalling the 8 carrier bolts. Tighten them down with a 13mm socket. Be careful to not overtighten as it may bend and warp the tailgate panel.




4) [INNER] REMOVE WIRE PANEL

Open your tailgate and remove the plastic wire retaining panel by gently and evenly pulling at the body clips.



5) [INNER] MARK THE PILOT HOLES

Open the table and hold it up against the tailgate. Using a spirit level and a marker, mark the (4) hole locations of where you'd like the nutserts to be installed. We recommend it be as centered and level on the tailgate as possible.

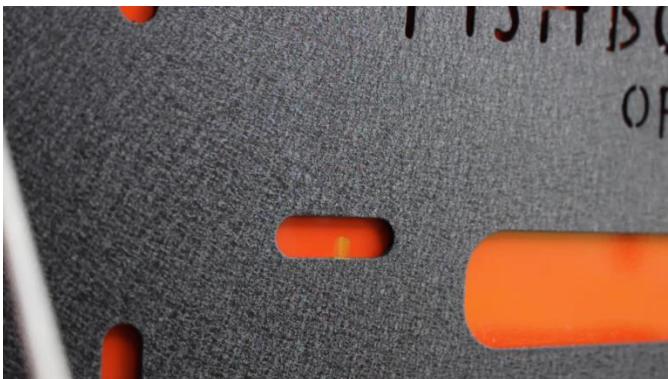


6) [INNER] DRILL

Begin drilling starting with pilot holes and stepping up to a 1/2" bit.




7) [INNER] INSTALL NUTSERTS

With an M10 Nutsert Tool, install the included nutserts into the drilled holes.

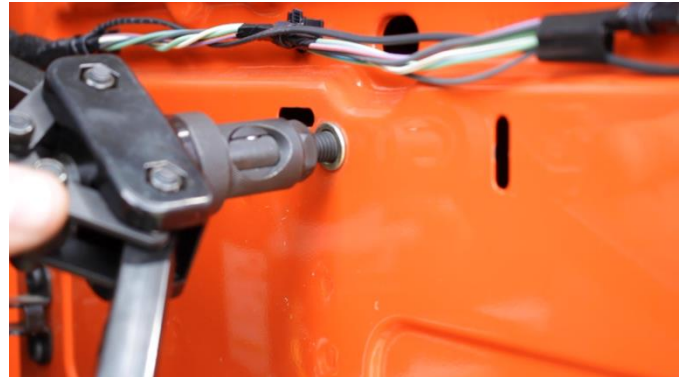

8) [INNER] INSTALL TABLE

Begin securing the table with the included M10 bolts and washers with a 6mm Allen.

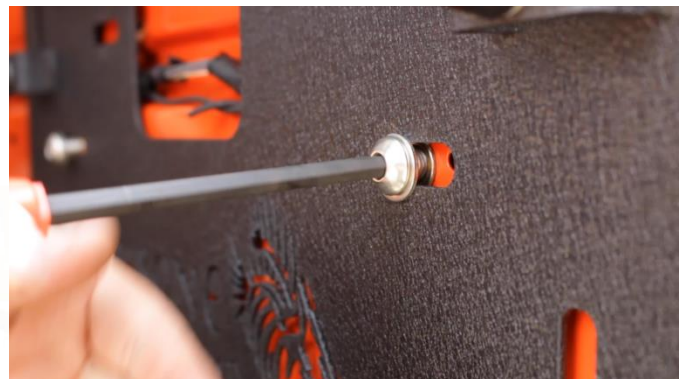

9) ENJOY YOUR NEW FISHBONE OFFROAD JK TAILGATE TABLE!

