



PRODUCT CATALOGUE 2022

 **MADE IN
THAILAND**





A Singapore company with its factories in Germany and Thailand, offices located in Los Angeles, USA.

Forceland is a tire supplier specializing in UHP and On/Off Road Light Truck segments, providing the most cost effective A/T, M/T, R/T tires as well as the most valuable services.



Table of Content

01	<i>REBEL HAWK A/T</i>
02	<i>REBEL HAWK R/T</i>
03	<i>REBEL HAWK M/T</i>
04	<i>Kunimoto F22</i>
05	<i>Kunimoto F38</i>
06	<i>Kunimoto F28</i>
07	<i>Kunimoto F36</i>
08	<i>Kunimoto F26</i>
09	<i>Kunimoto F20</i>

REBEL HAWK A/T




INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
15	LT235/75R15	104/101S C	6.5	6.0—8.0	13.86	1985/1820	50
	31X10.50R15LT	109S C	8.5	7.0—9.0	14.49	2270	50
16	235/70R16	106S	7.0	6.0—8.0	11.97	2094	44
	265/70R16	112S	8.0	7.0—9.0	12.60	2470	44
	LT225/75R16	115/112Q E	6.0	6.0—7.5	13.86	2680/2470	80
	LT245/75R16	120/116S E	7.0	6.5—8.0	14.49	3042/2755	80
	LT265/75R16	123/120R E	7.5	7.0—9.0	14.49	3415/3085	80
	LT235/85R16	120/116R E	6.5	6.0—7.5	14.49	3042/2755	80
	LT215/85R16	115/112Q E	6.0	5.5—7.0	13.86	2680/2470	80
17	265/65R17	116T XL	8.0	7.5—9.5	12.60	2755	51
	265/70R17	115T	8.0	7.0—9.0	12.60	2680	44
	LT245/70R17	119/116R E	7.0	6.5—8.0	14.49	3000/2755	80
	LT265/70R17	121/118S E	8.0	7.0—9.0	14.49	3195/2910	80
	LT285/70R17	121/118S E	8.5	7.5—9.5	14.49	3195/2910	80
	* LT315/70R17	121/118S D	9.5	8.0—10.5	14.49	3195/2910	65
	LT245/75R17	121/118S E	7.0	6.5—7.5	14.49	3195/2910	80
	LT235/80R17	120/117R E	6.5	6.0—7.5	14.49	3085/2835	80
18	235/60R18	107T XL	7.0	6.5—8.5	11.97	2149	51
	* LT275/65R18	123/120S E	8.0	8.0—9.5	14.49	3415/3085	80
	LT265/70R18	124/121S E	8.0	7.0—9.0	14.49	3525/3195	80
	* LT275/70R18	125/122S E	8.0	7.0—9.0	14.49	3640/3305	80
	* 33X12.50R18LT	118Q E	10	8.5—11.0	14.49	2910	65
	* 35X12.50R18LT	123R E	10	8.5—11.0	14.49	3415	65
20	265/50R20	111T XL	8.5	7.5—9.5	12.60	2403	51
	255/55R20	110H XL	8.0	7.0—9.0	12.60	2337	51
	275/55R20	117T XL	8.5	7.5—9.5	12.60	2833	51
	* 33X12.50R20LT	119Q F	10	8.5—11.0	14.49	3000	80
	* 35X12.50R20LT	121R E	10	8.5—11.0	14.49	3195	65
22	285/45R22	114H XL	9.5	9.0—10.5	12.60	2601	51
	305/45R22	118T XL	10J	9.5—11.5	12.60	2910	51



REBEL HAWK R/T

- The design is inspired by hawk claw.
- Dual Sidewall design, one more choice for user to select favorite sidewall.
- Each tread blocks designed with computer optimized sipes. It's not only to offer driving comfort by reducing tire noises , but also provide great grip performance on wet surface.
- Central tread circumferential grooves provide excellent wet grip, while oblique grooves increase aquaplaning resistance
- Stone Ejector prevented damage to groove bottom.
- Proven Compound contribute to longer mileage, increase cut and chipping resistance

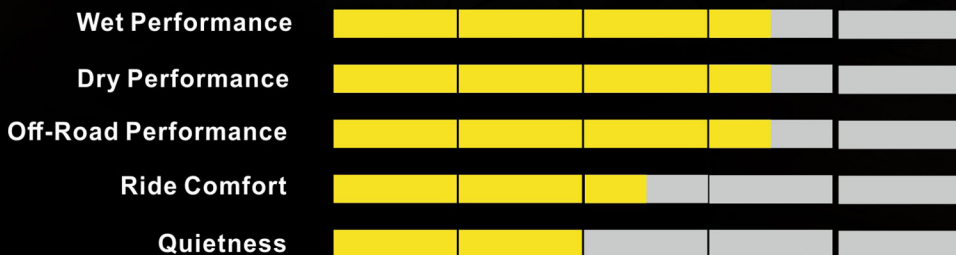

REBEL HAWK R/T



INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
15	31X10.50R15LT	109Q C	8.5	7.0—9.0	15.75	2270	50
16	LT265/75R16	123/120Q E	7.5	7.0—9.0	15.75	3415/3085	80
17	265/65R17	116T XL	8.0	7.5—9.5	13.23	2755	51
	LT265/70R17	121/118Q E	8.0	7.0—9.0	15.75	3195/2910	80
	LT285/70R17	121/118Q E	8.5	7.5—9.5	15.75	3195/2910	80
	33X12.50R17LT	120Q E	10	8.5—11.0	15.75	3085	65
	35X12.50R17LT	121Q E	10	8.0—10.5	15.75	3195	65
	*37X12.50R17LT	124Q D	10	8.0—10.5	15.75	3525	50
	*37X13.50R17LT	121Q E	11	9.0—11.5	15.75	3195	65
18	265/65R18	116T XL	8.0	7.5—9.5	13.23	2755	51
	*275/65R18	116T	8.0	7.5—9.5	13.23	2755	44
	LT285/60R18	122/119Q E	8.5	8.5—10.0	15.75	3305/3000	80
	LT265/70R18	124/121Q E	8.0	7.0—9.0	15.75	3525/3195	80
	LT275/70R18	125/122Q E	8.0	7.0—9.0	15.75	3640/3305	80
	*LT285/75R18	129/126Q E	8.0	7.5—9.5	15.75	4080/3750	80
	33X12.50R18LT	118Q E	10	8.5—11.0	15.75	2910	65
	35X12.50R18LT	123Q E	10	8.5—11.0	15.75	3415	65
	*37X12.50R18LT	128Q E	10	8.0—10.5	15.75	3970	65
20	265/50R20	111T XL	8.5	7.5—9.5	13.23	2405	51
	*275/60R20	116T XL	8.0	7.5—9.5	13.23	2755	51
	LT275/55R20	120/117Q E	8.5	8.0—9.5	15.75	3085/2835	80
	LT285/55R20	122/119Q E	9.0	8.5—10.0	15.75	3305/3000	80
	*LT305/55R20	121/118Q E	9.5	9.0—11.0	15.75	3195/2910	65
	33X12.50R20LT	114Q E	10	8.5—11.0	15.75	2600	65
	35X12.50R20LT	121Q E	10	8.5—11.0	15.75	3195	65
	*35X13.50R20LT	121Q E	11	9.5—12.0	15.75	3195	65
	37X12.50R20LT	126Q E	10	8.5—11.0	15.75	3750	65
	*37X13.50R20LT	127Q E	11	9.5—12.0	15.75	3860	65
22	33X12.50R22LT	109Q E	10	8.5—11.0	15.75	2270	65
	35X12.50R22LT	117Q E	10	8.5—11.0	15.75	2835	65
	*37X12.50R22LT	123Q E	10	8.5—11.0	15.75	3415	65
	*37X13.50R22LT	123Q E	11	9.5—12.0	15.75	3415	65



REBEL HAWK M/T

- Aggressive Tread Block Design.
- Large surface tread area with angled blocks to provide powerful grip and traction for handling extreme off-road terrain.
- Engineered with optimized void ratio enhanced mud and dirt cleanout to provide continuous off-road traction.
- Shoulder groove bottom protector design helps to eject stones and protects the carcass from possible puncture.
- Absolute off-road application rubber compound contributes excellent performance of puncture /tear /wear resistance, safe and secured.



REBEL HAWK M/T



INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
16	LT265/75R16E	123/120Q	7.5	7.0—9.0	17.01	3415/3085	80
17	LT265/70R17E	121/118Q	8.0	7.0—9.0	17.01	3195/2910	80
	LT285/70R17E	121/118Q	8.5	7.5—9.5	17.01	3195/2910	80
	* LT315/70R17E	121/118Q E	9.5	8.0—10.5	17.01	3195/2910	80
	* LT285/75R17 (34x11.50R17)	121/118P E	8.0	7.5—9.5	17.01	3195/2910	80
	33X12.50R17LT	120Q	10	8.5—11.0	18.27	3085	65
	35X12.50R17LT	121Q	10	8.0—10.5	18.27	3195	65
	* 37X12.50R17LT	124Q D	10	8.0—10.5	18.27	3525	50
	* 37X13.50R17LT	121Q E	11	9.0—11.5	18.27	3195	65
	18	* LT275/70R18 (33x11.00R18)	125/122P E	8.0	7.0—9.5	17.01	3640/3305
* LT285/70R18 (34x11.50R18)		127/124Q E	8.5	7.5—9.5	17.01	3860/3525	80
33X12.50R18LT		118Q	10	8.5—11.0	18.27	2910	65
35X12.50R18LT		123Q	10	8.5—11.0	18.27	3415	65
20		LT285/55R20E	122/119Q	9.0	8.5—10.0	17.01	3305/3000
	* LT305/55R20	125/122Q F	9.5	9.0—11.0	17.01	3640/3305	80
	33X12.5R20LT	114Q	10	8.5—11.0	18.27	2600	65
	35X12.5R20LT	121Q	10	8.5—11.0	18.27	3195	65
	* 35X13.50R20LT	126Q F	11	9.5—12.0	18.27	3750	80
	* 37X13.50R20LT	127Q E	11	9.5—12.0	18.27	3860	65
	22	33X12.50R22LT	109Q	10	8.5—11.0	18.27	2270
35X12.50R22LT		117Q	10	8.5—11.0	18.27	2835	65
* 37X13.50R22LT		123Q E	11	9.5—12.0	18.27	3415	65



KUNIMOTO F22

- Luxury & Comfort
- Asymmetric UHP Tread Pattern Design
- Advanced Silica & Fuel-Eco Compound
- Computer Optimized Pitches For Noise Reduction
- Excel Performance On Wet & Dry roads
- Precise Control With High Speed Confidence



KUNIMOTO F22



INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
17	215/45R17	91W XL	7.0	7.0—8.0	9.45	1356	51
	225/45R17	94W XL	7.5	7.0—8.0	9.45	1477	51
	215/55R17	98W XL	7.0	6.0—7.5	9.45	1653	51
	225/50R17	98W XL	7.0	6.0—8.0	9.45	1653	51
18	225/40R18	92W XL	8.0	7.5—9.0	9.45	1389	51
	225/45R18	95W XL	7.5	7.0—8.5	9.45	1521	51
	245/45R18	100W XL	8.0	7.5—9.0	9.45	1764	51
20	225/35R20	90W XL	8.0	7.5—9.0	9.45	1323	51
	245/35R20	95W XL	8.5	8.0—9.5	9.45	1521	51
	245/40R20	99W XL	8.5	8.0—9.5	9.45	1709	51
	275/40R20	106W XL	9.5	9.0—11.0	9.45	2094	51
	245/45R20	103W XL	8.0	7.5—9.0	9.45	1929	51



FORCELAND

KUNIMOTO F38

- Street / Sport Vehicle All Season Tire
- Advanced Silica-based Tread Compound
- Noise Reduction Pitches With Directional Pattern Design
- Excellent Handling & Braking
- Outstanding Water Drainage



KUNIMOTO F38



INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
20	275/45R20	110H	9.0	8.5—10.5	11.72	2337	44
	285/50R20	112H	9.0	8.0—10.0	10.08	2469	44
	275/55R20	117H XL	8.5	7.5—9.5	11.72	2833	51
22	265/35R22	98H	9.5	9.0—10.5	11.72	1653	44
	305/40R22	110H	11	10.0—12.0	12.35	2337	44
	305/45R22	118H XL	10	9.5—11.5	12.35	2910	51
24	305/35R24	112H XL	11	10.0—12.0	12.35	2469	51



KUNIMOTO F28

- Luxury & Comfort
- Advanced Silica & Fuel-Eco Tread Compound
- Noise Reduction Pitches Design
- Anti-Skidding Design
- Excellent Handling & Braking



KUNIMOTO F28



INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
20	275/45R20	110V XL	9.0	8.5—10.5	10.96	2337	51
	265/50R20	111V XL	8.5	7.5—9.5	10.96	2403	51
	275/55R20	117H XL	8.5	7.5—9.5	10.96	2833	51
	275/60R20	115H	8.0	7.5—9.5	10.96	2679	44
22	265/35R22	102V XL	9.5	9.0—10.5	10.96	1874	51
	285/35R22	106V XL	10	9.5—11.0	10.96	2094	51
	305/40R22	114V XL	11	10.0—12.0	10.96	2601	51
	265/40R22	106V XL	9.5	9.0—10.5	10.96	2094	51
	285/45R22	114V XL	9.5	9.0—10.5	10.96	2601	51
24	305/35R24	112V XL	11	10.0—12.0	10.96	2469	51
	295/35R24	110V XL	10.5	10.0—11.5	10.96	2337	51
	305/45R22	118V XL	10	9.5—11.5	10.96	2910	51



FORCELAND

KUNIMOTO F36

- H/T Tire Construction Design For Urban Crossover Vehicle
- Comfort & Low Noise Design
- Excellence For Wet And Dry Conditions
- Wide Tread Design Offers Extra Grip
- Fuel Efficiency Tread Compound

FORCELAND

DOT 00K LFHHCJ

MADE IN THAILAND

MAX. LOAD 850 kg (1875 lbs)
350kpa (51 psi) MAX. PRESS.

KUNIMOTO F36



SAFETY



HANDLING



ECO



WET GRIP



SILENCE

INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
17	235/55R17	99H	7.5	6.5—8.5	11.09	1709	44
	225/60R17	99H	6.5	6.0—8.0	11.09	1709	44
	235/60R17	102H	7.0	6.5—8.5	11.09	1874	44
	255/60R17	106H	7.5	7.0—9.0	11.09	2094	44
	245/70R17	110H	7.0	6.5—8.0	11.09	2337	44
18	225/55R18	98V	7.0	6.0—8.0	11.09	1653	44
	235/55R18	100V	7.5	6.5—8.5	11.09	1764	44
	225/60R18	104V XL	6.5	6.0—8.0	11.09	1984	51
	245/60R18	105H	7.0	7.0—8.5	11.09	2039	44
	255/60R18	112H XL	7.5	7.0—9.0	11.09	2469	51
	265/65R18	114H	8.0	7.5—9.5	11.09	2601	44
	255/70R18	113H	7.5	6.5—8.5	11.09	2535	44
	265/70R18	116H	8.0	7.0—9.0	11.09	2755	44
19	225/55R19	99V	7.0	6.0—8.0	11.09	1709	44
	235/55R19	101V	7.5	6.5—8.5	11.09	1819	44
	245/55R19	103V	7.5	7.0—8.5	11.09	1929	44
	255/55R19	111V XL	8.0	7.0—9.0	11.09	2403	51
	255/60R19	109H	7.5	7.0—9.0	11.09	2271	44
20	245/50R20	102V	7.5	7.0—8.5	11.09	1874	44
	235/55R20	102V	7.5	6.5—8.5	11.09	1874	44



KUNIMOTO F26

- Design For Urban Crossover Vehicle
- Excellence For Wet And Dry Conditions
- Extra Grip On Hard Turns
- Fuel-Eco Tread Compound
- Excel Handling Control



KUNIMOTO F26



INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
16	215/70R16	100T	6.5	5.5—7.0	11.09	1764	44
	235/70R16	106T	7.0	6.0—8.0	11.09	2094	44
	245/70R16	111T XL	7.0	6.5—8.0	11.09	2403	51
	255/70R16	111T	7.5	6.5—8.5	11.09	2403	44
	265/70R16	112T	8.0	7.0—9.0	11.09	2469	44
17	225/65R17	102H	6.5	6.0—8.0	11.09	1874	44
	235/65R17	104H	7.0	6.5—8.5	11.09	1984	44
	245/65R17	111T XL	7.0	7.0—8.5	11.09	2403	51
	265/65R17	112H	8.0	7.5—9.5	11.09	2469	44
	265/70R17	115T	8.0	7.0—9.0	11.09	2679	44
18	235/60R18	103H	7.0	6.5—8.5	11.09	1929	44
	265/60R18	110H	8.0	7.5—9.5	11.09	2337	44
	235/65R18	106H	7.0	6.5—8.5	11.09	2094	44
	275/65R18	116H	8.0	7.5—9.5	11.09	2755	44



FORCELAND

KUNIMOTO F20

- Low Noise Pitches Design
- Excellence For Wet And Dry Conditions
- Extra Grip On Hard Turns
- Strong Shoulder Improves Handling & Breaking
- Perfect Water Drainage



KUNIMOTO F20



INCH	SIZE	LI/SS	RIM WIDTH Inches	APPROVED RIM WIDTH Inches	TREAD DEPTH 32nds	MAX LOAD lbs	MAX.INFL. PRESSURE psi
14	185/60R14	82H	5.5	5.0-6.5	10.08	1047	44
	195/60R14	86H	6.0	5.5-7.0	10.08	1168	44
	175/65R14	82H	5.0	5.0-6.0	10.08	1047	44
	185/65R14	86H	5.5	5.0-6.5	10.08	1168	44
	175/70R14	84T	5.0	4.5-6.0	10.08	1102	44
	185/70R14	88T	5.5	4.5-6.0	10.08	1235	44
	195/70R14	91T	6.0	5.0-6.5	10.08	1356	44
	205/70R14	94T	6.0	5.0-7.0	10.08	1433	44
15	185/60R15	84H	5.5	5.0-6.5	10.08	1102	44
	195/60R15	88H	6.0	5.5-7.0	10.08	1235	44
	205/60R15	91H	6.0	5.5-7.5	10.08	1356	44
	185/65R15	88H	5.5	5.0-6.5	10.08	1235	44
	195/65R15	91H	6.0	5.5-7.0	10.08	1356	44
	205/65R15	94H	6.0	5.5-7.5	10.08	1477	44
	205/70R15	96H	6.0	5.0-7.0	10.08	1565	44
	215/70R15	98H	6.5	5.5-7.0	10.08	1653	44
16	205/50R16	87V	6.5	5.5-7.5	10.08	1202	44
	205/55R16	91V	6.5	5.5-7.5	10.08	1356	44
	205/60R16	92H	6.0	5.5-7.5	10.08	1389	44
	215/60R16	95H	6.5	6.0-7.5	10.08	1521	44
	225/60R16	98H	6.5	6.0-8.0	10.08	1653	44
	235/60R16	100H	7.0	6.5-8.5	10.08	1764	44
	205/65R16	95H	6.0	5.5-7.5	10.08	1521	44
	215/65R16	98H	6.5	6.0-7.5	10.08	1653	44
	225/65R16	100H	6.5	6.0-8.0	10.08	1764	44
	235/65R16	103H	7.0	6.5-8.5	10.08	1929	44