


FREEMAN

MODEL: FS4ATI

ANALOG TIRE INFLATOR WITH LIQUID FILLED GAUGE

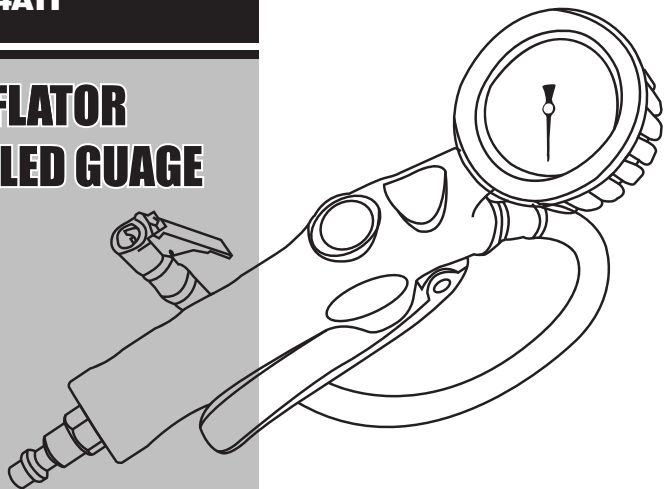

WARNING:

Failure to follow warnings could result in
DEATH OR SERIOUS INJURY.

SAVE THE MANUAL FOR FUTURE REFERENCE
KEEP YOUR DATED PROOF OF PURCHASE FOR WARRANTY PURPOSE



SYMBOLS	3
GENERAL SAFETY INSTRUCTIONS	4 - 6
UNPACKING	6 - 7
SPECIFICATIONS	7
FEATURES	7
OPERATION	8
INFLATING / DEFLATING	8
USER NOTES	8
MAINTENANCE	8 - 9

WARNING

The warnings and precautions discussed in this manual cannot cover all possible conditions and situations that may occur. Please be aware of the potential hazards, and take all necessary precautions to avoid risk of injuries.

SYMBOLS

- In this manual, on the labels, packages and all other information provided with this tool, the following signal words and meanings are intended to explain the levels of risk associated with this tool.

SYMBOLS	SIGNAL	MEANING
	WARNING:	Indicates a potentially hazardous situation, which, if not avoided, could result in death or serious injury.
	CAUTION:	Indicates a potentially hazardous situation, which, if not avoided, may result in minor or moderate injury.
	CAUTION:	(Without symbol) Indicates a situation that may result in property damage.

SAVE THIS MANUAL

To avoid serious personal injury, do not attempt to use this product until you read the manual thoroughly and understand it completely. Save this manual and review frequently for safe operation and instructing others who may use this tool. Keep this manual for the safety warnings, precautions, operations, inspections and maintenance information. Store this manual and the receipt in a safe and dry place for future reference.

GENERAL SAFETY INSTRUCTIONS

CALIFORNIA PROPOSITION 65

▲ WARNING:

The product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. The dust created while using this tool could also contain chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. Wash hands after handling.

WORK AREA

- **Keep the work area clean and well lit.** Cluttered benches and dark areas increase the risk of accidents.
- **Keep bystanders, children, and others away while operating the tool.** Distractions could result in improper use of tool and cause injury.
- **Keep proper footing and balance at all times.** Proper footing and balance enables better control of the tool in unexpected situations.

PERSONAL SAFETY

- **Always wear eye protection.** Operator and others in the work area should always wear ANSI-Z87.1 approved safety goggles with side shields. Eye protection is used to guard against flying debris, which may cause severe eye injury
- **Stay alert.** Do not use tool while tired or under the influence of drugs, alcohol, or medication. A moment of inattention while operating the tool may cause serious injury.
- **Make sure the hose is free of obstructions or snags.** Entangled or ensnared hoses can cause loss of balance or footing and may become damaged, resulting in possible injury.
- **Maintain the tool with care.** Keep tool clean. A properly maintained tool, reduces the risk of binding and is easier to control.
- **Wash hands after handling this product or its power cord.** They may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

TOOL USE AND CARE

- **Know this tool.** Read manual carefully, learn its applications and limitations, as well as the specific potential hazards related to this tool.

- **Do not use the tool if the trigger does not actuate properly.** Any tool that cannot be controlled with the trigger is dangerous and must be repaired.
- **Keep the tool and it's handle dry, clean and free from oil and grease.** Always use a clean cloth when cleaning. Never use brake fluids, gasoline, petroleum-based products, or any strong solvents to clean your tool.
- **Never carry the tool by the air hose or pull the hose to move the tool or a compressor.** Keep hoses away from heat, oil, and sharp edges. Replace any hose that is damaged, weak or worn. Personal injury or tool damage could occur.
- **Do not drop or throw the tool.** Dropping or throwing the tool can result in damage that will make the tool unusable or unsafe. If the tool has been dropped or thrown, examine the tool closely for bent, cracked or broken parts and air leaks. STOP and repair before using, or serious injury could occur.
- **Clean and check all air supply hoses and fittings before connecting the tool to an air supply.** Replace any damaged or worn hoses or fittings. Tool performance or durability may be reduced.
- **Do not operate the tool if it leaks air or does not function properly.**

- **Never use this tool for anything other than the application it was originally designed for.**
- **Never modify this tool in any way.**
- **Never connect this tool under pressures over the specified range.** This could cause death or serious injury.
- **Store the tool out of reach of children or untrained people.** The tool can be dangerous in the hands of untrained users.

TOOL SERVICE

- **Only use accessories that are identified by the manufacturer for the specific tool model.**
- **Use of unauthorized parts or failure to follow maintenance instructions may create a risk of injury.**
- **Tool service must only be performed by a qualified repair personnel.**

AIR SUPPLY AND CONNECTION

- Never connect to an air source that is capable of exceeding the maximum pressure range of the tool. Over pressurization of the tool could result in the tool bursting, abnormal operation, breakage of the tool or serious personal injury. Always verify prior to using the tool that the air source has been adjusted to the rated air pressure or within the rated air-pressure range.
- Only use clean, dry, regulated compressed air at the rated pressure range marked on the tool.
- Never attach a connector to the tool that can hold pressure. If a fitting that holds pressure is connected it could hold a charge after the tool is disconnected from the hose. This could allow the tool to be unintentionally activated and possibly cause injury.
- Always disconnect air supply:
 - 1) When servicing the tool.
 - 2) When tool is not in use.
 - 3) When moving to a different work area.

▲ WARNING:

Inspect air connections for any wear and damage before use. If connector is damaged replace before using tool. Do not exceed maximum air pressure. If exceeded tool could burst and possibly cause injury to user or other persons in work area. Make sure that hose is not kinked, twisted or knotted before use.

▲ WARNING:

If any parts are missing do not operate this tool until the missing parts are replaced. Failure to do so could result in possible serious personal injury.

UNPACKING

- This tool has been shipped completely assembled.
- Carefully remove the tool and any accessories from the box.
- Inspect the tool carefully to make sure no breakage or damage occurred during shipping.

SPECIFICATIONS

PRESSURE RANGE	0 - 230 PSI
RESOLUTION	1 PSI
ACCURACY	± 1%
WORKING TEMP.	-4°F to 158°F

FEATURES

- **TWO POSITION LEVER**
For inflating and deflating.
- **OIL FILLED GAUGE**
For increased accuracy.
- **LIGHTWEIGHT COMPOSITE CONSTRUCTION**
Fiber reinforced nylon tool body for durability.
- **PROTECTIVE RUBBER COVERED GAUGE**
For extra shock protection.
- **20" RUBBER SWIVEL HOSE**
- **HEAVY-DUTY BRASS CONSTRUCTION LOCK-ON AIR CHUCK**
- **1/4" NPT INDUSTRIAL BRASS FITTING**

- Do not discard the packing material until you have carefully inspected and satisfactorily operated the tool.


▲ WARNING:

Do not attempt to modify this tool or create accessories not recommended for use with this tool. Any such alteration or modification is misuse and could result in hazardous conditions leading to possible serious personal injury.

OPERATION

INFLATING / DEFLATING

1. Connect the tool to the air source.
2. Remove the tire's dust cap.
3. Depress the air chuck clip. Then press onto the tire valve stem firmly and release the chuck clip once the chuck is attached. Ensure there is no air leaking.
4. Press the trigger until resistance is felt to deflate the tire. Press the trigger down fully to inflate the tire.
5. Once the pressure gauge reaches the desired pressure remove the air chuck from the tire valve.

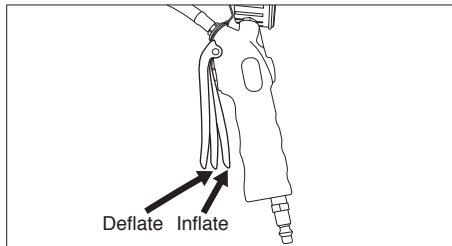

USER NOTES

1. The inflator needs an air source to inflate. It CANNOT inflate by itself.

MAINTENANCE

⚠ WARNING:

Disconnect the tool from the air source before performing any maintenance on the tool.

CLEANING

Clean the entire tool with a cotton rag after each use. Avoid using solvents when cleaning plastic parts. Most plastics are susceptible to damage from various types of commercial solvents and maybe damaged by their use. Use clean cloths to remove dirt, dust, oil, grease, etc.

⚠ WARNING:

Do not let brake fluids, gasoline, petroleum-based products, penetrating oils, etc. come in contact with plastic parts. Chemicals can damage, weaken or destroy plastic which may result in serious personal injury.

⚠ WARNING:

Do not connect with an air compressor that can potentially exceed the maximum recommended air pressure. The tool may burst, possibly causing injury.