# FURRION

2021 Master Catalog

# We Design Products That Inspire You To Explore Life.

Behind every Furrion product is a story of transformation, and through a decade of innovation we challenged the status quo to redefine luxury mobile living. Now we create immersive digital experiences through home entertainment, design appliances that inspire culinary creativity, and power a new generation of off-grid, sustainable living. In your home, vehicle, yacht and beyond.

Our Locations




# Our Philosophy.

We have a vision for how life could be. Everything we design exists to bring us closer to a smarter, more sustainable future, faster.

# We Challenge the Elements.

Inspired by wind, terrain, water and sun, we are motivated to deliver experiences to the adventurous who roam the world and ride to the edge of possibility.



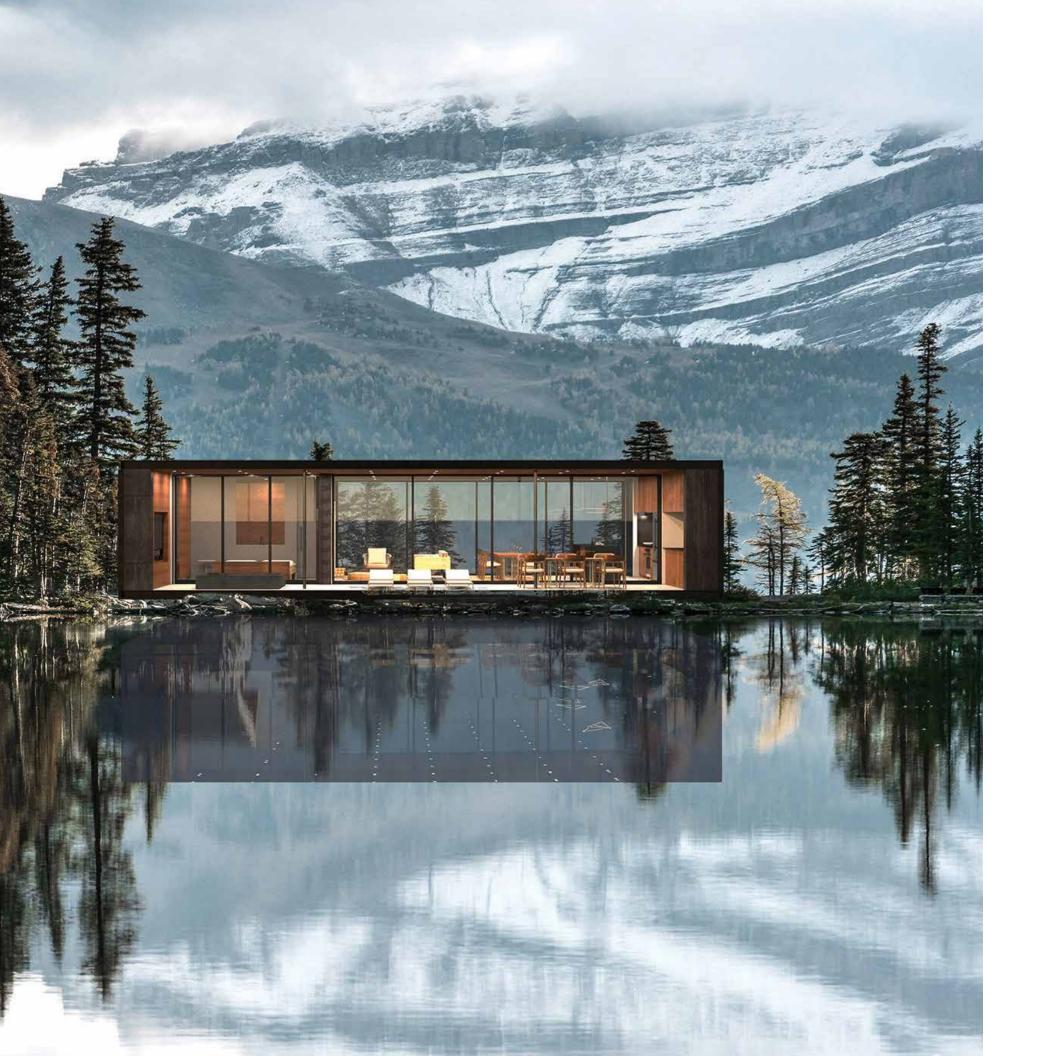

# The Art of Design.

Since 2010 we have advanced the goals of our customers by co-creating the future of electric mobility, off-grid ecosystems, compact living, luxury hotels, yachting and more.



Limitless™

## The Connected Journey.


Limitless is a 5th wheel like no other. It features 6 slide outs expanding to 350 square feet of smart living space.



#### **Adonis**

# **Technology in Motion.**

We built an entirely new experience on water with innovation that underlines the opulence and style of yachting.

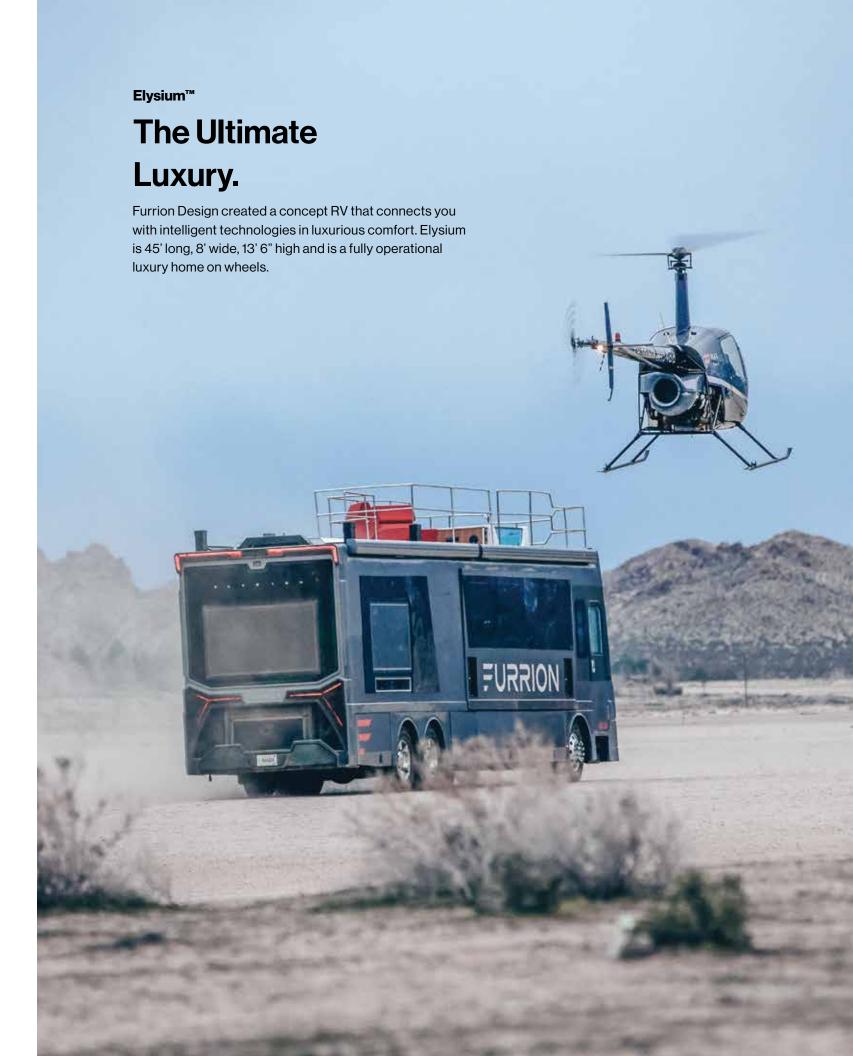

## Contents.

#### **Electronics**

AV Entertainment		Navigation	
TV's	16-17	Cameras	30-35
Stereos	18-22		
Speakers, Soundbars & Subwoofers	23-25	Network	
Bluetooth Speakers	26-29	Antennas and Routers	36-39
Appliances			
Cooking		Refrigeration	
Ranges	46-49	Refrigerators	64-73
Cooktops	50-53		
Ovens	54-57	Comfort	
Microwaves	58-59	Air Conditioning	74-79
Grills	60-63	Electric Fireplaces	80-83
		Water Heater	84-87
Energy			
Off-Grid Energy		Power Distribution	
Solar Panels	92-97	AC/DC Power Centers	98
		Inverters & Converters	99
		Cordsets & Adapters	100-105
		Power Inlets	106-107
		Connectors & Adapters	108-109
Furrion Product List			
AV Entertainment	110	Appliances & Comfort	112-113
Navigation & Network	111	Power Distribution & Energy	114-115





**TV's** 16-17

Stereos 18-22

Speakers, Soundbars & Subwoofers 23-25

Bluetooth Speakers 26-29

## **Navigation**

Cameras 30-35

## Network

**Antenna and Routers** 36-39





# **Engineered to Elevate Life.**

Furrion electronics offer unparalleled levels of technology designed specifically for luxury living. From TV's to speakers, cameras and connectivity, Furrion has all your AV needs covered.

AV Entertainment | LED TV's

#### FDHK32V1A

#### 32" Furrion Sense® HD LED All-In-One Entertainment Systen



Max. Resolution	1366 x 768	Power Supply	12V DC`
Audio	2 x 40W (Max) 2 zones	Viewing Range	178° / 178°
Remote	Unismart <sup>™</sup> remote	Wall Mounting	Vesa 400 x 200mm
Product Dimension (TV without Stand)	29 x 21.81 x 4.25" (736.7 x 554 x 107.7mm)	Net Weight (lbs/kg)	14lbs / 6.35kg
Tuner/broadcasting			
Analog	NTSC	Digital	ATSC
Connections			
No. of HDMI Inputs	3	No. of Composite AV Inputs	1
No. of Component (YPbPr) Inputs	1	No. of USB Inputs	1
No. of Antenna (RF) Inputs	1	No. of USB Power Output (1A)	1
No. of Optical Audio Output	1		
Soundbar			
Support media format	MP3/JPEG	AUX-IN support	✓
Tuner Type	AM/FM	IR Control Jack	✓
Bluetooth	Class 1 v4.2		

#### FDHS32M4A

#### 32" HD L FD TV



Max. Resolution	1366 x 768	Power Supply	100-240V AC
Audio	2 x 10W (Max)	Viewing Range	178° / 178°
Remote	Unismart™remote	Wall Mounting	Vesa 200 x 100mm
Product Dimension (TV without Stand)	29 x 17.6 x 3" (735 x 447 x 74mm)		
Tuner/broadcasting			
Analog	NTSC	Digital	ATSC
Connections			
No. of HDMI Inputs	3	No. of USB Inputs	1
No. of Antenna (RF) Inputs	1	No. of Optical Audio Outputs	1
No. of Composite AV Inputs	1		

 ${}^{\star}\text{Features and specifications that do not affect product performance are subject to change without notice}$ 

#### FDFS40M4

#### 40" FHD LED T\



Max. Resolution	1920 x 1080	Power Supply	100-240V AC
Audio	2 x 10W (Max)	Viewing Range	178° / 178°
Remote	Unismart™ remote	Wall Mounting	Vesa 200 x 200mm
Product Dimension (TV without Stand)	35.69 x 22.63 x 8.19" (906.5 x 520.7 x 79.5mm)		
Tuner/broadcasting			
Analog	NTSC	Digital	ATSC
Connections			
No. of HDMI Inputs	3	No. of USB Inputs	1
No. of Component (YPbPr) Inputs	1	No. of 3.5mm Headphone Outputs	1
No. of Antenna (RF) Inputs	1	No. of Optical Audio Outputs 1	1
No. of Audio L/R Outputs	1		

#### FDUS50F1A

#### 50" 4K L FD T



Max. Resolution 3840 x 2160 Power Supply 100-240V AC Audio 2 x 8W (Max) Viewing Range 178° / 178° Wall Mounting Vesa 200 x 200mm Remote Unismart™ remote Product Dimension 44.2 x 25.5 x 3.3" (TV without Stand) (1121.7 x 646.6 x 82.6mm) Tuner/broadcasting NTSC Digital ATSC Analog Connections No. of HDMI Inputs No. of USB Inputs 3 1 No. of Component (YPbPr) Inputs No. of 3.5mm Headphone Outputs No. of Antenna (RF) Inputs No. of Optical Audio Outputs 1

#### FDUS50M7A

#### 50" 4K LED TV

No. of Audio L/R Outputs



Max. Resolution	3840 x 2160	Power Supply	100-240V AC
Audio	2 x 8W	Viewing Range	178° / 178°
Remote	Unismart™ remote	Wall Mounting	Vesa 200 x 200mm
Product Dimension (TV without Stand)	44.3 x 25.8 x 2.5" (1126x653x62mm)		
Tuner/broadcasting			
Analog	NTSC	Digital	ATSC
Connections			
No. of HDMI Inputs	3	No. of Component (YPbPr) Inputs	1
No. of Antenna (RF) Inputs	1	No. of USB Inputs	1
No. of Composite AV Inputs	1	No. of Optical SPDIF Outputs	1



#### **Stereos**

# **3-Zone Entertainment System with DVD.**

The DV1230 series boasts 260 Watts of power, independent speaker outputs and a built-in DVD player to provide the ultimate all-in-one stereo system. With a variety of connectivity and playback options, including USB, AUX-IN, HDMI-IN, optical and coaxial audio with video support, it offers the next generation of multi-room entertainment.

















AUXILIARY IN







WORKS WITH UNIMOTE




APP CONTROL



Optimized to add powerful bass tones and explosive performance, with a built-in DVD player, to your stereo experience on the road.



The ultimate all-in-one stereo system, boasting 3-Zone audio and 2-Zone independent controls.



Built to withstand constant vibrations and extreme climates thanks to Vibrationsmart<sup>™</sup> and Climatesmart<sup>™</sup> Technology.

Stereos | AV Entertainment | Stereos

DV1230

260W 3-Zone Entertainment System with Independent Zone Control and DVD









Audio	4 x 50W + 2 x 30W (Max)	Zones	3-zone
Power Supply	12V DC	Supported Media Format	MP3 / WMA / MP4
Bluetooth®	4.0	Product Dimension (W x H x D)	9.8 × 4.7 × 7.1"
			(248.6 x 118.3 x 108.1mm)
Connections			
No. of RCA (Audio L/R) Inputs, Rear Panel	2	No. of AUX-In, Front panel	1
No. of Video Inputs, Rear Panel	1	No. of RCA (Audio L/R) Outputs, Rear Panel	1
No. of Subwoofer Outputs, Rear Panel	1	No. of Video Outputs, Rear Panel	1
No. of Optical Audio Inputs, Rear Panel	1	No. of HDMI Outputs, Rear Panel	1
No. of HDMI Inputs, Front panel	1	No. of Coaxial Audio Inputs, Rear Panel	1
No. of USB Inputs, Front panel	1		

DV31009

120W 2-Zone Entertainment System with DVD







 Product Dimension
 10 x 5.75 x 10°

 (W x H x D)
 (253 x 146 x 253mm)

#### Connections

No. of RCA (Audio L/R) Inputs, Rear Panel	1	No. of RCA (Audio L/R) Outputs, Rear Panel	2
No. of Video Outputs, Rear Panel	2	No. of Subwoofer Outputs, Rear Panel	1
No. of HDMI Inputs, Front Panel	1	No. of IR Control Jack	1
No. of AUX-in, Front panel	1	No. of USB Inputs, Front panel	1

DV3300S

120W 2-Zone Entertainment System with DVD









Audio	4 x 30W (Max)	Zones	2-zone	
Power Supply	12V DC	Supported Media Format	MP3 / WMA / MP4 / AVI	
Bluetooth®	4.0	Product Dimension (W×H×D)	7.9 x 4.4 x 7.9" (200 x 110 x 198.9mm)	
Connections				
No. of RCA (Audio L/R) Inputs, Rear Panel	1	No. of RCA (Audio L/R) Outputs, Rear Panel	1	
No. of Video Outputs, Rear Panel	1	No. of Subwoofer Outputs, Rear Panel	1	
No. of HDMI Outputs, Rear Panel	1	No. of IR Control Jack	1	
No. of Video Supported AUX In, Front Panel	1	No. of USB Inputs, Front panel	1	
No. of AUX-in. Front panel	1			

Stereos | AV Entertainment | Soundbar, Speakers & Subwoofer

0V7200


40W 2-Zone Mono Entertainment System







Audio	4 x 10W (Max)	Zones	2-zone	
Power Supply	12V DC	Supported Media Format	MP3 / WMA	
Bluetooth®	4.0	Product Dimension (W x H x D)	5.1 × 4.5 × 3.4" (129.8 × 112.9 × 85.3mm)	
Connections				
No. of RCA (Audio L/R) Inputs, Rear Panel	2	No. of AUX-in, Front panell	1	
No. of Video Inputs, Rear Panel	1	No. of RCA (Audio L/R) Outputs, Rear Panel	1	
No. of Subwoofer Outputs, Rear Panel	1	No. of Video Outputs, Rear Panel	1	
No. of HDMI Inputs, Front panel	1	No. of HDMI Outputs, Rear Panel	1	
No. of USB Inputs, Front panel	1			

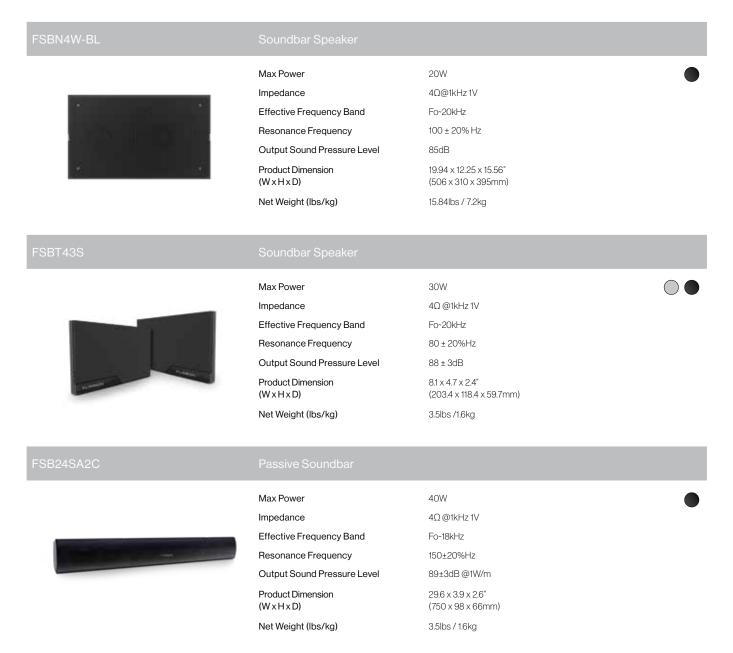


<sup>\*</sup>Features and specifications that do not affect product performance are subject to change without notice

Soundbar, Speakers & Subwoofer | AV Entertainment | Soundbar, Speakers & Subwoofer | AV Entertainment

#### 110W Max Power 4Ω@1kHz 0dB Impedance Effective Frequency Band Fo~ 15kHz Resonance Frequency F0=140Hz Output Sound Pressure Level >88dB Product Dimension 31.9 x 4.9 x 3.9" (80 x 124 x 98.3mm) (WxHxD) Net Weight (lbs/kg) 4.8lbs / 2.2kg Models Color Description FSB2N25MC 2-zone Soundbar

FSW8P12-CF	8" Active Subwoofer	
	Max Power	120W
	Impedance	4Ω @100Hz
	Effective Frequency Band	40Hz - 160Hz
	Resonance Frequency	40 ± 20%Hz
	Output Sound Pressure Level	
	Product Dimension (WxHxD)	15.75 x 9.9 x 3.7" (400 x 250 x 93mm)
	Net Weight (lbs/kg)	8.8lbs / 4kg

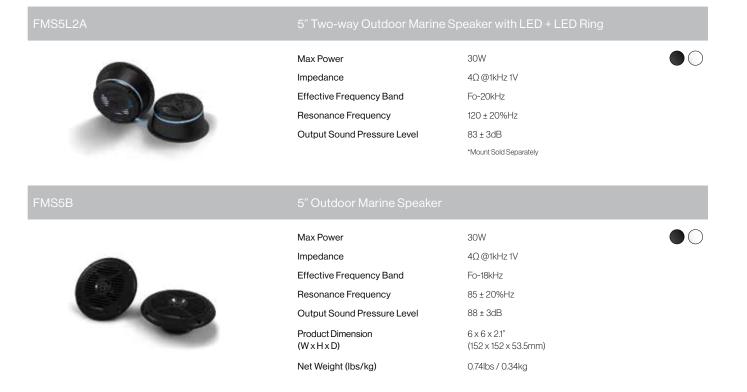



**Furrion LIT™** 

# Portable Bluetooth Speaker.

Capable of delivering up to 15 hours of clear and crisp sound, the portable Furrion LIT™ Bluetooth speaker allows you to stylishly play music on the go. The rugged and waterproof design makes it the perfect speaker for you to take to the beach or pool and can be submersible up to 3.2 ft/1m under water for up to 30 minutes. The Furrion LIT™ is also equipped with a flashlight and can give off SOS signals in an emergency situation. Choose from a range of accessories from Furrion's interchangeable eco-system designed specifically for our products.



EXPLOSIVE DIGITAL SOUND PROCESSOR



SANDPROOF



PLAYTIME (15hrs)\*



WIRELESS DOCK 3hrs USB 5hrs #



SHOCKPROOF



WATERPROOF & SUBMERSIBLE UP TO 3.2ft/1m for 30min



FLASHLIGHT



EMERGENCY SOS LIGHT & SIREN



Mounting kits for all kinds of adventures.



Distortion free sound with 2 powerful speakers with optimized bass.



Waterproof, IPX7 rated up to 3.2ft for 30 mins.

Bluetooth Speakers | AV Entertainment **AV Entertainment** I Bluetooth Speakers

#### FURRIONLIT





Rated Power

Signal To Noise Ratio

Speaker Phone

Input

Battery

10W x 2RMS

1800mAh x 2 ≥ 500 dB

Playtime Up to 15 hours\* Flashlight ≥ 500 lumens

Waterproof IPX7

NFC

Micro USB Input

USB Charging Out SOS Light Effect

2.9 x 1.4 x 7.7" Product Dimension (W x H x D) (73.7 x 47.5 x 194.5mm)

Net Weight (lbs/kg) 1.4lbs / 0.6kg





FBS012NCU WIRELESS CHARGING DOCK

#### FBS012NCU


DC 9-16V

USB Output

USB Socket 1 1A (Optimized for iPhone®) USB Socket 2 1A (Optimized for Android™)

12V Output PINS Up to 1A

-14°F to 122°F / -10°C to 50°C





FBS012NBS RAIL/BIKE MOUNT



FBS012NSM STRAP MOUNT



FBS012NHS HAND STRAP







- Portable Bluetooth Speaker (Black)
- Rail/Bike Mount
- Strap Mount
- Hand Strap



#### FBS012NVP-PS Adventure Pack

- Portable Bluetooth Speaker (White)
- Rail/Bike Mount
- Strap Mount
- Hand Strap



#### FBS012NAP Accessories Pack

- · Rail/Bike Mount
- Strap Mount
- Hand Strap

28 | Furrion 1 29

 $<sup>{}^{\</sup>star}\text{Features and specifications that do not affect product performance are subject to change without notice}$ 



#### **Furrion Vision S™**

# **Vehicle Observation System.**

Furrion Vision S™ Vehicle Observation Systems are easy to install in a RV, commercial truck or trailer. Monitors are available in 3 sizes with side, rear cameras and doorway security options. All cameras offer a wide viewing angle and night vision while the motion detector and auto-wake function adds extra security when the vehicle is stationary. Furrion Vision S™ Vehicle Observation Systems are wireless and feature a high-speed chip-set which provides real-time high definition viewing up to 24fps. The 2.4GHz wireless connection digitally locks the cameras to the display (up to 50ft) to prevent interference and lagging even at high speeds.



Monitor



#### FCN48TASF

Doorway Security / Rear Camera





#### FCE48TASH\* Side Camera with LED Marker

Light (Left & Right)

## FCN48TASK Marker Rear Camera with Marker

Light

#### Monitor



4.3" / 5" / 7" DISPLAY OPTIONS

REAR ASSIST MARKER LINES



DIGITAL WIRELESS

DISPLAY UP TO

4 CAMERAS\*



TOUCH SCREEN\*



) ANTI-GLARE



SECURITY CAMERA AUTO-WAKE



AUDIO

#### Side Camera with Marker Light (left & right)



65° WIDE VIEWING ANGLE

MOTION DETECT



INFRARED NIGHT VISION

WATERPROOF



CAMERA RESOLUTION



NIGHT VISION FILTER



BLIND SPOT TURN SIGNAL



OPTIONAL BUILT-IN RUNNING LIGHT

#### Doorway Security / Rear Camera with Marker Light



120° WIDE VIEWING ANGLE



INFRARED NIGHT VISION



CAMERA RESOLUTION



INTELLIGENT



MOTION DETECT



WATERPROOF



MICROPHONE

Cameras | Navigation Navigation | Cameras

#### **FURRION** VISION S Night Vision <16ft (5m) **CMOS Size** 1/3" F2.0 Optical Lens IR Cut Filter 850nm Automatic View Angle 120° Current (IR On) <400mA@12V Current (IR Off) <250mA@12V Camera Pixel 720 x 480 IP65 Waterproof Product Dimension (W x H x D) 6.6 x 3.1 x 2.6" / (168.1 x 78 x 64.8mm)

#### **FURRION** VISION S Night Vision <16ft (5m) CMOS Size 1/3" Optical Lens F2.0 IR Cut Filter 850nm Automatic View Angle 120° Current (IR On) <400mA@12V Current (IR Off) <250mA@12V Camera Pixel 720 x 480 Waterproof 7.3 x 2.1 x 1.8" / (184 x 53.7 x 44.1mm) Product Dimension (W x H x D)

FCE48TASH	Vision S™ Side Camera with LED Marker Light (Left and Right) For 5" and 7" Monitor		
<b>FURRION</b> VISION S	Night Vision	<39ft (12m)	
	CMOS Size	1/3"	
_	Optical Lens	F2.5	
	IR Cut Filter	850nm Automatic	
	View Angle	65°	
	Current (IR On)	<500mA@12V	
G L	Current (IR Off)	<250mA@12V	
	Camera Pixel	720 x 480	
	Waterproof	IP65	
	Marker Light	LED	
	Product Dimension (W x H x D)	5.8 x 3.2 x 1.4" / (144.7 x 81.5 x 34.8mm)	



#### FOS07TAPM

#### Vision S<sup>™</sup> 7" 4-Camera System with Marker Lights

- 7" Monitor
- Doorway Security / Rear Camera
- Rear Camera With Marker Light
- Side Camera with Marker Light (Left and Right)
- Windshield Mount and Table Stand



FOS07TAEM

#### Vision S™ 7" 3-Camera System with Marker Lights

- 7" Monitor
- Rear Camera With Marker Light
  Gide Camera with Marker Light (Left and Right)
- Windshield Mount and Table Stand



#### FOS07TASF

#### Vision S<sup>™</sup> 7" Monitor with Rear Camera

- 7" Monitor
- Doorway Security / Rear Camera
- Windshield Mount and Table Stand



#### FOS07TASM

#### Vision S<sup>™</sup> 7" Monitor with Rear Marker Light Camera

- 7" Monitor
- Rear Camera With Marker Light
- Windshield Mount and Table Stand



#### FOS05TAEM

#### Vision S<sup>™</sup> 5" 3-Camera System with Marker Lights

- 5" Monitor
- Rear Camera with Marker Light

  Side Camera with Marker Light (Left and Right)
- Windshield Mount and Table Stand



#### FOS05TASF

#### Vision S<sup>™</sup> 5" Monitor with Rear Camera

- 5" Monitor
- Doorway Security / Rear Camera
- Windshield Mount and Table Stand



#### FOS05TASM

#### Vision S<sup>™</sup> 5" Monitor with Rear Marker Light Camera

- 5" Monitor
- Rear Camera With Marker Light
- Windshield Mount and Table Stand



#### FOS43TASF

#### Vision S™ 4.3" Single Camera System

- 4.3" Monitor
- Doorway Security / Rear Camera
- Windshield Mount

#### FOS43TASM Vision S™ 4.3" Single Camera System with Marker Light

#### • 4.3" Monitor

- Rear Camera With Marker Light
- Windshield Mount

32 | Furrion 1 33 Cameras | Navigation | Cameras

#### ACCESSORIES



#### C-FOS07TAPK-005

2.4GHz Antenna for Camera

#### ACCESSORIES





F2BC001XXBK

F2BC002XXBK

7-way Vision S Camera System Adapter

Camera System 7-Way Adapter with Power Switch



Furrion Access™

# TV/Radio/VHF/UHF/LTE/Wi-Fi All-In-One Antenna.

Furrion Access™ is a result of our desire to explore new destinations while staying connected. With its omni-directional technology, the antenna is capable of receiving 360-degree signal and enhancing signals to deliver boosted Wi-Fi, HDTV and radio signals. When Wi-Fi isn't available, the dual 4G LTE receivers ensure fast and secured wireless internet everywhere\*. Our Signalsmart™ technology is a high-gain noise filter that removes the interference that causes static and instability in the product ecosystem, delivering powerful connectivity to equipment efficiently.



VIBRATIONSMART™



CLIMATESMART™



360° SIGNAL RECEPTION



UV RESISTANT



WATERPROOF



HD TV COMPATIBLE



DUAL 4G ANTENNAS OPTIMIZE RECEPTION



LIGHTWEIGHT (only 2.6 lbs)



AERODYNAMIC DESIGN





AM & FM SIGNAL



All-in-one antenna with AM / FM radio, HD TV and high speed internet.



Fast and secure LTE connectivity with antenna, providing up to 150 MBPS download speed.



Automatic 4G / Wi-Fi selection with router, securing the best connection available for up to 32 devices.

Antenna & Router I Network

Network I Antenna & Router I

#### FAN73B7C

#### Omni-directional Rooftop Antenna



	AM/FM	LTE/Wi-Fi	TV
Frequency Range	AM: 520 - 1,710kHz / FM: 88 - 108MHz	698 - 2,700MHz	UHF: 470 - 700MHz / FM/VHF: 47 - 230MHz
Frequency Band	AM/FM	LTE/Wi-Fi/4G	UHF/FM/VHF
Antenna Gain	15dB Max	4dBi Max	UHF: 28dB Max / FM/VHF: 20dB / 24dB Max
Max Output Level	106dBµV		UHF: 105dBµV / FM/VHF: 106dBµV
Impedance	75ohm	50ohm	75ohm
Noise	<7dB		UHF: <6dB/FM/VHF: <7dB
Product Dimension (W x H x D)	28.8 x 8.1 x 10.3" (730 x 205.4 x 260mm)		

# FAN17B83 LTE Wi-Fi Router Wi-Fi (LAN): 802.11b/g/n/ac Wi-Fi (Ext.): 802.11b/g/n LTE: B2/B4/B13 Wi-Fi Booster Range >400ft with >10Mbps throughput Antenna Gain Internal LAN Wi-Fi: 1dBi Antenna Port Impedance 50Ω Power Rating Typical: 12V @500mA. Peak 1A Operation Temperature -4°F to 140°F / -20°C to 60°C

6.7 x 6.6 x 1.3"

0.3 lbs / 0.7kg

(169 x 168.2 x 22.9mm)

Product Dimension

Net Weight (lbs/kg)

 $(W \times H \times D)$ 

FAN17B87	LTE Wi-Fi Router Unlocked		New
	Supported System	Wi-Fi (LAN): 802.11b/g/n/ac LTE: B2/B4/B5/B12/B13/B14/B66/B71 UMTS: B2/B4/B5	$\bigcirc$
Constitution of the consti	Wi-Fi Booster Range	>400ft with >10Mbps throughput	
	Sim interface Type	Nano Sim (4FF)	
	Network options	Unlocked choice of Verizon / AT&T / T-mobile / Rogers / Telus / Bell	
	Antenna Gain	Internal LAN Wi-Fi: 1dBi	
	Antenna Port Impedance	50Ω	
	Power Rating	Typical: 12V @ 500mA, Peak 1A	
	Operation Temperature	-4°F to 140°F / -20°C to 60°C	
	Product Dimension (W x H x D)	6.7 x 6.6 x 1.3" (169 x 168.2 x 22.9mm)	
	Net Weight (lbs/kg)	0.3 lbs / 0.7kg	

<sup>\*</sup> Data plans can be purchased separately.



#### **Appliances**

## Cooking

Ranges 46-49

Cooktops 50-53

**Ovens** 54-57

Microwaves

58-59

**Grills** 60-63

## Refrigeration

**Refrigerators** 64-73

## Comfort

**Air Conditioning** 74-79


Electric Fireplaces 80-83

**Water Heater** 84-87



# Where Precision Meets Style.

Upgrade your cooking experience with appliances designed to complement any kitchen environment. Modern design, ease of use and high performance ensure all your culinary needs are met – whether you're living life on the move, or in your dream home.

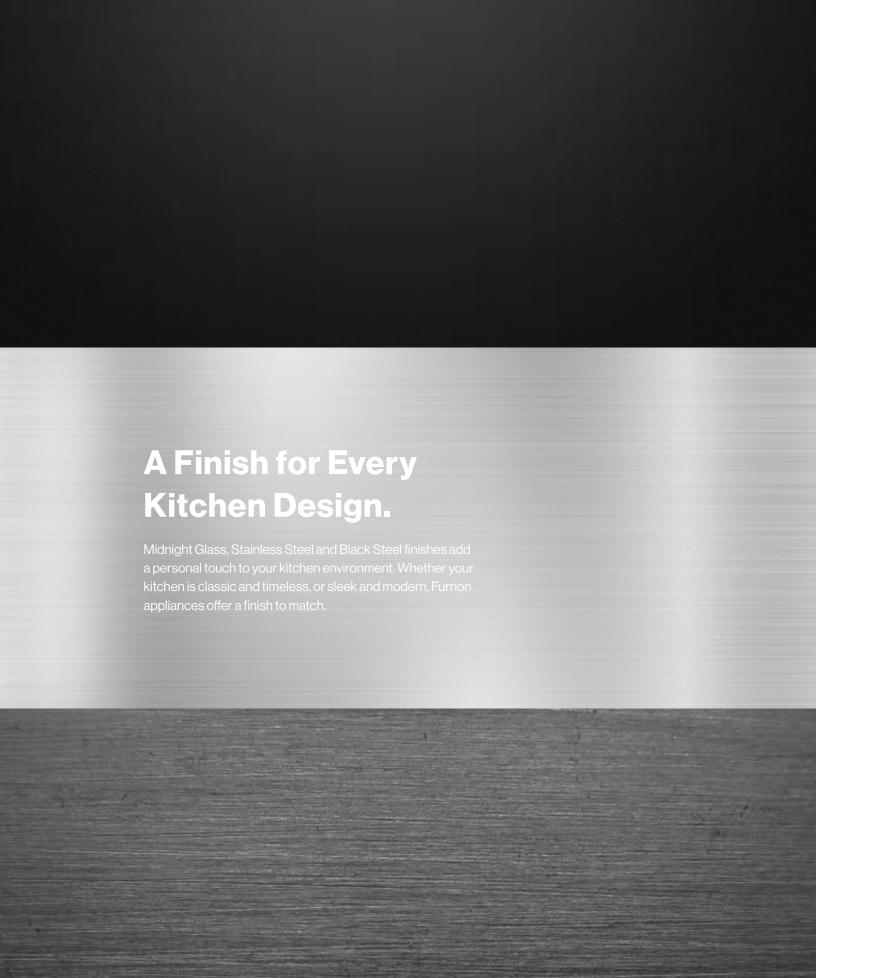

## Midnight Glass.

Sleek and contemporary, reflecting bold design.

## **Stainless Steel.**

Versatile and classic, designed to match a variety of kitchen styles.

## **Black Steel.**

Bold and modern, adding a touch of luxury.





#### Furrion Signature™

# **RV Gas Range.**

Discover the convenience and ease of cooking with Furrion's 2-in-1 Range Oven. Featuring a thermal radiator burner to improve heat distribution for more even cooking, a glass cover, cavity lighting, LED knobs and broiler function, this oven has all you need to create professional-quality meals without installing multiple appliances. Luxurious black or stainless steel design options complement any décor, while removable grates make cleaning simple.



CLIMATESMART™



PROFILE OPTIONS



CAVITY LIGHTING



BROILER FUNCTION



FLUSH MOUNTED



 $\mathsf{VIBRATIONSMART}^{\scriptscriptstyle\mathsf{TM}}$ 



GLASS COVER



LED KNOBS



IMPROVED HEAT DISTRIBUTION



Foldable glass cover prevents splashes for easy cleaning even in small spaces.



Storage Drawer Front for OEM to custom made storage drawer.



Interective LED knob indicates operation and gives a sleek and modern design.

Ranges | Appliances Appliances | Ranges







Rear Right Burner 6,500BTU 9,000BTU Front Burner

Rear Left Burner 6,500BTU 7,100BTU Oven Burner Cavity Light 12V DC

Electrical Ignition Aluminium Steel Coating

Gas Safety Cut Off Valve Triple Layer Glass Door

Splashguard Glass Cover 2 pcs Folding Cover

Product Dimension 21.5 x 16 x 21.6" (546.1 x 406.4 x 549.3mm)  $(W \times H \times D)$ 










Rear Right Burner 6,500BTU Front Burner 9,000BTU 6,500BTU Rear Left Burner Oven Burner 7,100BTU 12V DC Cavity Light Electrical Ignition Aluminium Steel Coating

Gas Safety Cut Off Valve Triple Layer Glass Door Splashguard

Glass Cover 2 pcs Folding Cover **Product Dimension** 21.5 x 20 x 21.6" (546.1 x 508 x 549.3mm)  $(W \times H \times D)$ 



C-FSRE21A-002 Cooktop Grate

- Die-cast Grates
- Compatible with S17WB4A-BL/SS & FGHWCLDA-BL/SS



CF1SL02ABLA1 / CF1SL02ASSA1 Drawer Front



C-F1S17L02A-002 / C-FSRE21SA-003 Top-tray Module

48 | Furrion I 49



#### **Furrion Chef Collection™**

# **Built-in Gas Cooktop.**

The RV chef collection cooktop delivers perfect, consistent heat. The beautiful flush-mount design, professional cast-iron grills and griddle option will redefine the way you use your RV kitchen. Residential 3-burner layout with dual 7500BTU side burners and middle 7500BTU flex burner gives you the diversity that will inspire you to take on any recipe.



CLIMATESMART™



VIBRATIONSMART™



7500 BTU



3 GAS BURNERS



GAS SAFETY CUT-OFF VALVE



PULSE IGNITION



CAST IRON GRATE



3 Burner layout with electric ignition.



7500 BTU output cooking performance.




Cast iron grills ensure easy use of all your favorite pots and pans.

Cooktops | Appliances | Cooktops

#### Pulse Ignition 1.5 V DC Gas Type Propane Grate Type Cast Iron Burner Capacity 7,500BTU For Each Burner Number of Gas Burners 3 Sealed Burners Gas Safety Cut-off Valve Product Dimension 24.4 x 15 x 4.1" $(W \times H \times D)$ (619.8 x 381 x 83.8mm)

#### 12V DC Electrical Input Gas Type Propane Grate Type Wired Grate Burner No.1 6,500BTU 8,000BTU Burner No.2 6,500BTU Burner No.3 Pulse Ignition LED Knobs Gas Safety Cut-off Valve Glass Cover 0 0 0 0 **Product Compatibility** Solo, or With Range Hood **Product Dimension** 24.4 x 15 x 2.6" $(W \times H \times D)$ (619.8 x 381 x 63.5mm)

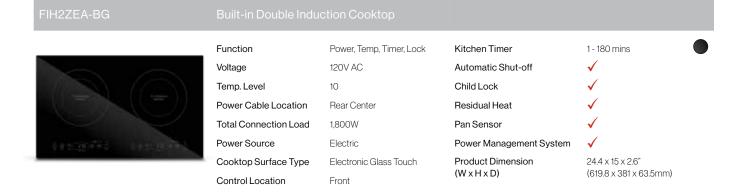



**Furrion Chef Collection™** 

## **Built-In Electric Oven.**

The RV chef collection built-in oven is a perfect blend of precision, performance, safety and style.



VIBRATIONSMART™



CLIMATESMART™



OVEN CAPACITY



UP TO 24HRS



150-475°F TEMP. SETTING



AUTO PAN DETECTION



TEMPERATURE CONTROL



AUTO SAFETY SHUT-OFF



CHILD LOCK



2.0cu. ft. oven with large capacity cooks everything from pizza, to your holiday roast.



Oval shape burner and broil functions make cooking your favorite meal simple.



Advanced safety features ensure ease of use and peace of mind.

Appliances | Oven Ovens | Appliances



Voltage Heat Input Oven Capacity Timer

**Product Dimension**  $(W \times H \times D)$ 

12V DC 9,000BTU (Gas) 2 cu. ft.

Manual up to 23 hours 59 minutes 24.8 x 22.2 x 25.9" (628 x 562 x 656mm)

Pulse Ignition Cooling Fan

Triple Layer Glass Door





Cavity Light Gas Safety Cut Off Valve





Voltage 120V AC Electric Input 120V 1,400W Oven Capacity 2 cu. ft. Digital up to 23 hours 59 minutes Timer

**Product Dimension** 24.8 x 22.2 x 21" (628 x 562 x 532mm)  $(W \times H \times D)$ 

Pulse Ignition Cooling Fan

Cavity Light LED Digital Temperature Display

Gas Safety Cut Off Valve

Triple Layer Glass Door



Voltage Heat Input Oven Capacity Timer

Product Dimension  $(W \times H \times D)$ 

12V DC 9,000BTU (Gas)

2 cu. ft. Manual up to 23 hours 59 minutes

Triple Layer Glass Door 29 x 26.38 x 25.13" (736 x 669 x 637mm)

Pulse Ignition

Cooling Fan Cavity Light

Gas Safety Cut Off Valve

56 | Furrion I 57 Appliances | Microwave Ovens

# FMCM15-BL 1.5 cu. ft. Over-the-Range Convection Microwave Oven Oven Capacity 1.5 cu. ft. Power Source 120V / 60Hz Rated Output Power 1450W



900W 1,450W (Microwave) (Convection) Rated Input Power 1.500W Power Level 10 (Microwave) LED MW Type Ø 13.6" Glass Turntable Display type Door Opening Type Handle Child Lock Max. Cooking Time 99'99" Auto Cook 29.9 x 15.8 x 15" Reminder End Signal **Product Dimension** (759 x 419.1 x 381mm)  $(W \times H \times D)$ 

## MSMA16-SS 1.6 cu. ft. Over-the-Range Microwave Oven



Oven Capacity 1.6 cu. ft. Power Source 120V / 60Hz Rated Output Power 1,000W Power Level 10 Rated Input Power 1,500W MW Type Ø 13.6" Glass Turntable (Microwave) LED Display type Auto Cook Door Opening Type Handle Reminder End Signal Max. Cooking Time 99'99" 29.9 x 15.8 x 15" Product Dimension  $(W \times H \times D)$ (759 x 429 x 464.1mm)

#### MCM15-SS-A

#### .5 cu. ft. OTR Convection Microwave Oven



Oven Capacity 1.5 cu. ft. Power Source 120V / 60Hz Rated Output Power 900W Power Level (Microwave) Rated Input Power 1.500W MW Type Ø 13.6" Glass Turntable (Microwave) Control Panel Display type Green LED Door Opening Type Handle Safety Lock Max. Cooking Time Recirculation Mode 33.3 x 20.1 x 19.3" Product Dimension  $(W \times H \times D)$ (845 x 510 x 490mm)

#### FMSN09-BL

#### 0.9 cu. ft. Solo Microwave Ove



Oven Capacity 0.9 cu. ft. Rated Output Power 900W (Microwave) Rated Input Power 1,350W (Microwave) LED Display type Button Door Opening Type Max. Cooking Time 99'99" 19.1 x 14.1 x 15.9" **Product Dimension** (483 x 356 x 402mm)  $(W \times H \times D)$ 

Power Source 120V / 60Hz

Power Level 10

MW Type Ø 136\* Glass Turntable


Child Lock ✓

Auto Cook ✓

Reminder End Signal ✓



FMSM09-SS-TK Silver plastic trim kit



FMSM09-BL-TK Black plastic trim kit FMSM09-SB-TK Black VCM plastic trim kit

#### FMSM13-BI

#### 1.3 cu. ft. OTR Convection Microwave Ove



Capacity 1.3 cu.ft. Wattage 1,500W Display Blue LED Display dimension 2.2 x 1.1" (56 x 27mm) Cooking power 10 level Door Side open Control Touch panel CFM 300CFM, 2 speed vent High / Low (microwave mode) Rangehood feature High / Low / Off (Standby mode)

Cavity Powder coating
Light 2 x light bulbs
Turntable 12.8"

Filter 2 x AL carbon filter

Product Dimension 23.9 x 16.7 x 17.5"

(W x H x D) (607 x 424 x 444mm)

Net Weight (lbs/kg) 50.71lbs / 23kg

58 | Furrion | 59

<sup>\*</sup>Features and specifications that do not affect product performance are subject to change without notice.



#### Grill

# **RV Drop-in Grill.**

High output grill for the outdoor RV kitchen. This product is made out of Stainless steel for weather resistance, is easy to clean and easily installed. The innovative design allows the grill to remain securely attached while driving your RV while the splashguard acts as both a lid, a windshield, and a warming rack.



WEATHERPROOF





STAINLESS STEEL GREASE TRAY





STAINLESS STEEL GRATE



PIEZO IGNITION






Easy to install in your RV outdoor kitchen or BBQ slide-out.



Durable construction and weatherresistant stainless steel withstands all outdoor weather.



Industry leading powerful 10,000 BTU output makes cooking your favorite outdoor meals a breeze.

Grill | Appliances | Grill

#### Piezo Ignition Type Fuel Type Propane 10.000 BTU Burner Output Installation Type Drop-in Grates Material Stainless Steel 304 Warming Rack Grease Tray Splash Guard Product Dimension (W x H x D) 21.2 x 7.4 x 15.1" (538 x 187.3 x 383mm)



Furrion Arctic®

# 10 cu. ft. 12V Built-In Refrigerator.

With its sleek and innovative design, the 10 cu. ft. Furrion Arctic® 12V Built-In Refrigerator is built to keep food fresher for longer as you head off on your off-grid adventure. A stunning addition to any RV and the perfect companion.



POWERFUL COOLING







VIBRATIONSMART™



BUILT-IN



LOCK



CLOSED-LOOP



OFF-GRID MODE




CHARCOAL FILTER



Powerful deep freeze performance in a large storage space to store cold foods like ice cream without worrying about them melting.



Advanced Compressor technology avoids the inherent safety risks associated with absorption gas refrigeration, including fire hazards, gas leaks, and explosions.



Closed loop air flow design eliminates the heat from the cabinet enclosure for greater efficiency.

**Appliances** | Refrigerators Refrigerators | Appliances

Capacity Power Consumption 8 cu. ft.

12V DC

0.998 kWh / day

Sold Separately

24.3 x 53.2 x 25.8"

(616 x 1350 x 654mm)

Voltage Defrosting

Manual

Refrigerant

R134a

Adjustable Thermostat Reversible Door

Low Vibration and Low Noise

Adjustable Feet

Auto Light

Optional Door Insert Panel

Product Dimension  $(W \times H \times D)$ 

Power Consumption

Voltage

Defrosting

Refrigerant

Adjustable Thermostat

Reversible Door

Capacity

Low Vibration and Low Noise

Adjustable Feet

Auto Light

Optional Door Insert Panel

Product Dimension  $(W \times H \times D)$ 

10 cu. ft.

1.02 kWh / day

12V DC Manual

R134a

Sold Separately

24.3 x 60.2 x 25.8" (616 x 1528 x 654mm)



Matte Black C-FCR08DCDTA-A02 C-FCR10DCDTA-A02



High Gloss Black C-FCR08DCGTA-A03a C-FCR10DCGTA-A03a



Stainless Steel C-FCR08DCGTA-A01 C-FCR10DCGTA-A01

66 | Furrion I 67

## Feature Product



**Furrion Chef Collection™** 

# 14 cu. ft. 4-Door Built-in Refrigerator.

Built with durable and reliable compressor technology, this four-door refrigerator design offers flexible layout options and is optimized for home, yacht and vehicle use. It features a wine cellar compartment with wood interior and an easy-view glass door.



VIBRATIONSMART™



CLIMATESMART™



AUTO LIGHT FUNCTION



MULTI-AIRFLOW SYSTEM



POWER SAVING



DOOR-LATCHING SYSTEM



ADJUSTABLE THERMOSTAT



WINE CELLAR COMPARTMENT



QUIET OPERATION



FAST FREEZE



BUILT-IN



COMPATIBLE WITH FURRION INVERTER



Powerful cooling performance packed in a sleek and modern design.



Separated cooling zone with an intergrated Wine Cooler to better preserve your favorite food and beverages.



Closed loop air flow design eliminates the heat from the cabinet enclosure for greater efficiency.



#### Refrigerators

# 15.6 and 20.6 cu. ft. Side by Side Refrigerator.

With four sleek finishes, and 2 generous sizes, this Side by Side Refrigerator is designed to complement your personal style. Keep food fresher for longer, and preserve better with Super Freeze, whilst consuming less power with eco-friendly technology.



INVERTER COMPRESSOR



SUPER FREEZER



ECO-FRIENDLY



RECESSED HANDLE



LED DIGITAL DISPLAY



COUNTER DEPTH



SPILL PROOF SHELVES



DOOR OPEN ALARM



LOW ENERGY CONSUMPTION MODE



COMPATIBLE WITH FURRION INVERTER



Designed for built-in cabinetry, allowing seamless integration into your kitchen design.



Preserve food better with a Super Freeze function that allows freezing up to -7.6° F.



Recessed door handles improve ergonomics and give a sleek design.

#### Available in:

Stainless Steel

Black Gloss





Appliances | Appliances | Refrigerators and Electric Cooler

#### Wine Compartment Capacity 14 cu. ft. 1.268 kWh/day Individual Temperature Power Consumption Frequency 60Hz Vibration Resistance And Low Noise Voltage AC 115V Adjustable Feet Defrosting Non-frost Auto Light R134a Refrigerant Door open alarm **Product Dimension** 37.3 x 78.6 x 25.8"

(945 x 1995 x 655mm)

 $(W \times H \times D)$ 


Cooling Type


FCR15ACATA-VS	14.5 cu. ft. Top Freezer Refrigerator			
	Total Capacity	15 cu. ft.	Refrigerant	R600a
*	Freezer Capacity	3.5 cu. ft.	Rated Voltage	AC 115V/60Hz
_	Fresh Food Compartment	11 cu. ft.	Power consumption	325 kWh/year
_	Door Type	Double door with top mounted	Storage Temp Range	
Comment of the Commen	Handle	Recessed Handle	(Refrigerator Compartment)	1 to 9°C, adjustable
-	Control Type	Electronic Control	(Small Freezer)	≤-17.8°F, adjustable
_	Front Door Panel	VCM Stainless Steel with Metal Brushed	Working Temp Range	34°C to 48°C
_	Storage Compartments	Refrigerator compartment	Defrost	Automatic
_		and freezer compartment	Certification	UL, DOE
-	No. of Shelves	3	Product Dimension	27.56 x 66.14 x 27.56"
	No. of Crisper	1	(WxHxD)	(700 x 1680 x 700mm)

Compression cooling system

Net weight (lbs/kg)

149.9/68

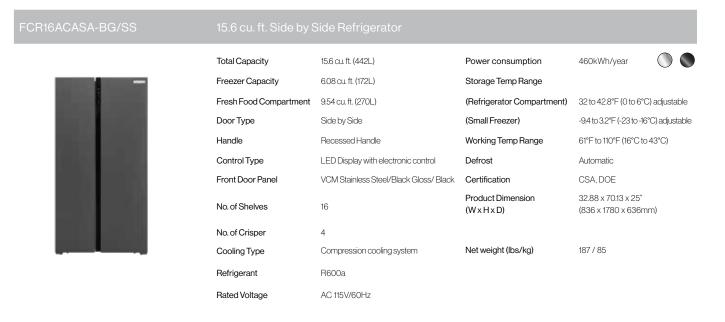

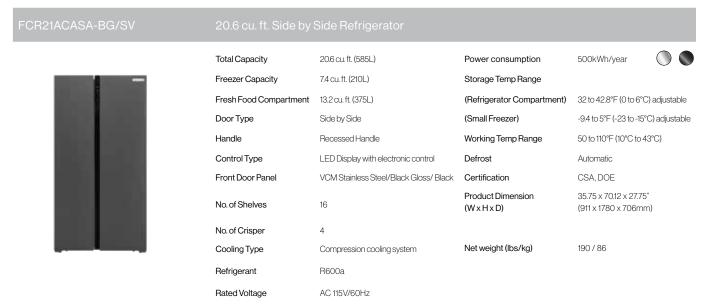



# **Furrion Chill™**

# **RV** Rooftop Air Conditioner.

The Furrion Chill™ mid-profile rooftop air conditioning comes in 14.5K BTU and 15.5K BTU capacity models, all available in contemporary black or white finishes to accommodate all RV sizes and finishes. Offering superior cooling performance, the Furrion Chill™ utilizes dual fan technology to operate up to 25% more effciently (EER) compared to competitive leading single-fan models. It cools down your RV faster and reduces ambient noise for enhanced comfort. Advanced features such as "Sleep mode" ensure your comfort needs are always answered regardless of the weather condtions. Conversion kits are available to upgrade your existing air conditioning system to the Furrion Chill™.



HIGH COOLING









AERODYNAMIC DESIGN





ULTRA QUIET



VIBRATIONSMART™



CLIMATESMART™



UV RESISTANT



Mid-profile aerodynamic design for reduced air resistance and optimized efficiency.



Vibrationsmart<sup>™</sup>technology reduces compressor vibration for ultra-quiet operation.




Climatesmart<sup>™</sup>technology uses lightweight EPP foam housing to make cooling more efficient.

Air Conditioning | Comfort Air Conditioning | Comfort

#### **FURRION**CHILL™ 3,760W Capacity 2.19 Energy Efficiency Ratio 60°F to 86°F (16°C to 30°C) Set Temperature Range Outdoor Sound Pressure Level 80dB IP Rating IP24 R410a Refrigerant Volts/Frequency/Phase 115V / 60Hz / 1Ph Cooling Amps Product Dimension (W x H x D) 34.8 x 27.6 x 13.6" / (884 x 700 x 345mm) Description Model Capacity Energy Efficiency Ratio Cooling Amps Color Furrion CHILL™ 14.5K Rooftop Air Conditioner FACR14SA-PS/BL 3450W 2.13 14.6 FACR15SA-PS/BL Furrion CHILL™ 15.5K Rooftop Air Conditioner 3760W 2.19 15.4

FACT11MA-PS	Furrion Chill™ Air Distribution Box With Manual Control		
FURRIONCHILL	Temperature Control Detachable Filter Two Way Air Outlet Indoor Sound Pressure Level Input Power Frequency Compressor & Condenser Fan 3 Evaporator Fan Motor Relay Temperature Range Fan Control Product Dimension (W x H x D)	8 Positions  60dB  115V AC  60Hz  115V AC / 20A  115V AC / 5A  64 °F to 86°F (18°C to 30°C)  3 Positions  19.7 x 13.6 x 19.7° / (500 x 242.6 x 500mm)	

FACT11CA-PS	Furrion Chill™ Standard Air D	Furrion Chill™ Standard Air Distribution Box with Manual Control		
FURRION CHILL™	Mechanical Control Fast Cool	8 Positions ✓		
	Voltage	AC 115V		
(11.18)	Frequency for AC	60Hz (AC)		
	Compatible with:	Rooftop AC Unit		
		Heat Strip		
å	Product Dimension (W x H x D)	17.25 x 4.43 x 17.25" / (438 x 112.5 x 438mm)		

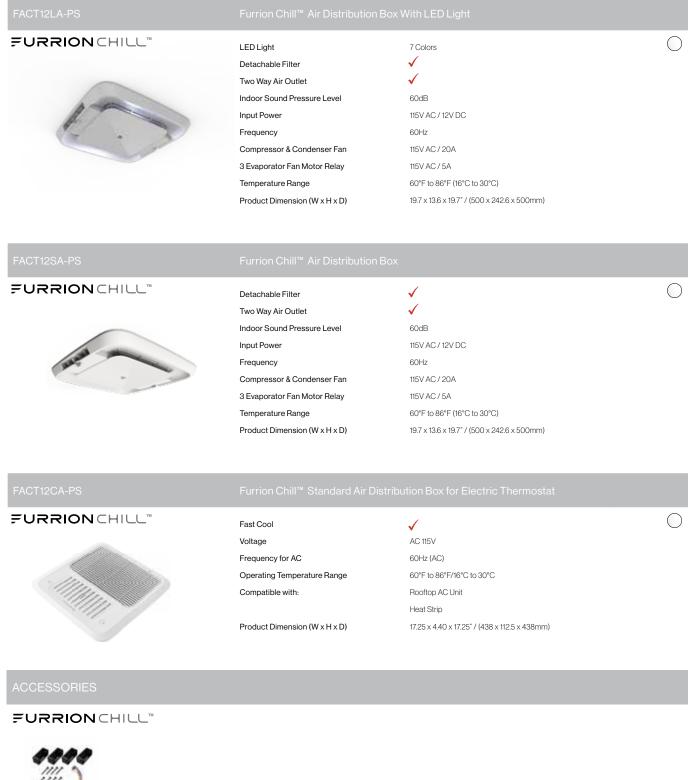




C-FACR15SA-A01

Universal Conversion kit with wiring harness

76 | **Furrion** 1 77 Comfort | Air Conditioning

## FURRIONCHILL Power Supply 12V DC Communication Port Operation Buttons 2 Fan Speeds Temperature Range 60°F to 86°F Memory Function (16°C to 30°C) Auto Fan Speed Zone Control Auto Reset Product Dimension (Dia x D) Ø3×0.9" (Ø 75 x 22.5mm) FURRIONCHILL Power Supply 12V DC Communication Port Operation Buttons 3 Fan Speeds Temperature Range 60°F to 86°F Memory Function (16°C to 30°C) Auto Fan Speed Auto Reset Zone Control Product Dimension (Dia x D) Ø 3 x 0.9" (Ø 75 x 22.5mm) **FURRION CHILL** Power Supply 12V DC Communication Port 3 Fan Speeds Operation Buttons 6 Temperature Range 60°F to 86°F Memory Function (16°C to 30°C) Auto Fan Speed Program Timers Auto Reset Zone Control LED Mood Light Product Dimension (Dia x D) Ø3×0.9" Sleep Function (Ø 75 x 22.5mm) FURRION CHILL" Power Supply 12V DC Communication Port 3 Fan Speeds Operation Buttons 9 61°F to 86°F Temperature Range Memory Function (16.1°C to 30°C) Auto Fan Speed Program Timers Auto Reset Zone Control LED Mood Light Product Dimension (Dia x D) $\emptyset 4.4 \times 0.9$ " Sleep Function (Ø 111.3 x 22.6mm)

 ${}^{\star}\text{Features and specifications that do not affect product performance are subject to change without notice.}$ 

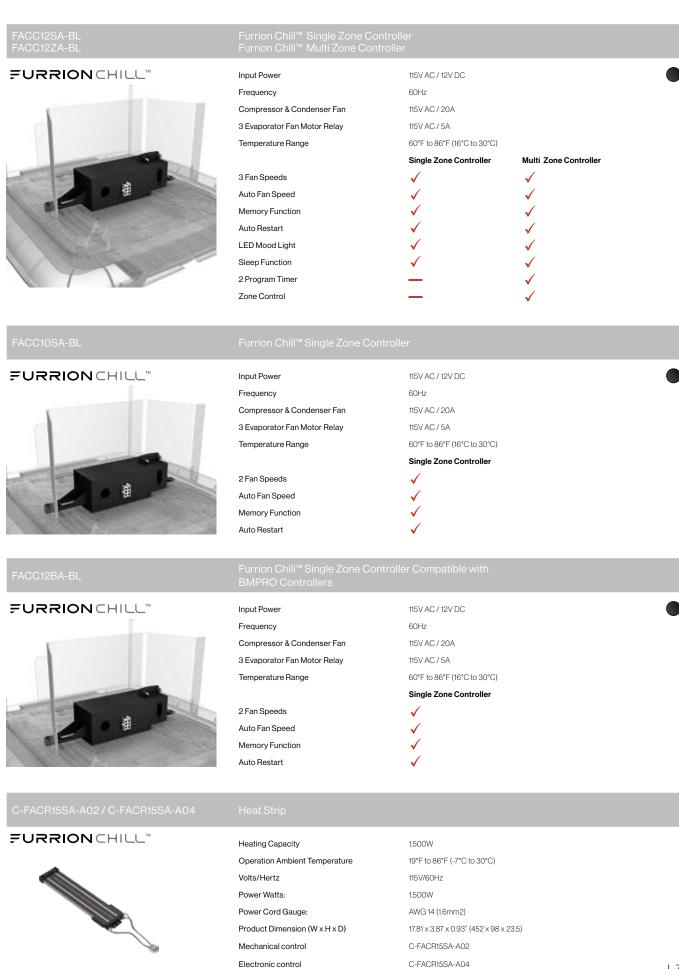



# **Fireplaces**

# 30" Built-In Electric Crystal Fireplace with Wall Mount.

Create the perfect ambience wherever you are. Our superior 30" stainless steel fireplaces combine elegance and functionality in one, offering modern, luxurious design and robust heating capabilities. Consistent heat control makes it easy to find the perfect temperature, with a safety cut-off that intuitively and automatically switches power off to prevent overheating. Designed with innovative four-level LED flame technology, the simulated crystal design creates a beautiful, warm and cozy environment.



WORKS WITH UNIMOTE



OVERHEATING SAFETY CUT-OFF



TEMPERATURE CONTROL SETTINGS



HEAT UP TP 500 SQ.FT






TIMER



Consistent heat control makes it easy to heat up to a 500 sq.ft room.



Works with Furrion Unimote<sup>™</sup> to allow control of various functions, such as temperature and LED flame color.



Engineered with advanced safety features, such as a safety cut-off that intuitively and automatically switches power off to prevent overheating.

Comfort | Fireplaces Fireplaces | Comfort

# 48" Built-In Electric Wood Fireplace with

120V AC 60Hz Rated Voltage LED Control Board

750W / 1465W Log Fuel Effect IR

Flame Effect Orange

**Heating Output** 

Remote Type

**Product Dimension** 48.1" x 17.8 x 6.3" / (1220 x 450 x 158mm)  $(W \times H \times D)$ 



Rated Voltage 120V AC 60Hz

LED Control Board

Log Fuel Effect

Timer

Heating Output 750W / 1465W

IR Remote Type

Flame Effect Orange

**Product Dimension**  $(W \times H \times D)$ 

39.4 x 17.8 x 6.3" / (1001 x 450 x 158mm)



# 34" Built-In Electric Wood Fireplace with Wall Mount

Rated Voltage Heating Output 120V AC 60Hz

750W / 1500W

LED Control Board

Log Fuel Effect

Remote Type IR

Flame Effect Orange

**Product Dimension**  $(W \times H \times D)$ 

33.875 x 17.75 x 6.25" / (860 x 450 x 158mm)



Rated Voltage Heating Output

120V AC 60Hz 750W / 1465W

IR

LED Control Board Timer

Log Fuel Effect

Flame Effect Orange

**Product Dimension**  $(W \times H \times D)$ 

Remote Type

30 x 17.8 x 6.3" / (762 x 450 x 158mm)



Rated Voltage **Heating Output** 750W / 1400W

120V AC 60Hz LED Control Board Timer

Remote Type IR Log Fuel Effect

Flame Effect

**Product Dimension**  $(W \times H \times D)$ 

27.3 x 21.3 x 8.5" / (693 x 540 x 215mm)



120V AC 60Hz Rated Voltage **Heating Output** 750W / 1465W IR Remote Type

Timer

LED Control Board

Log Fuel Effect

Flame Effect Orange, Blue, Red

Product Dimension 48.1 x 17.8 x 6.25" / (1220 x 450 x 158mm)  $(W \times H \times D)$ 

# Flame Effect

Rated Voltage **Heating Output** Remote Type

LED Control Board Timer

Log Fuel Effect

Orange, Blue, Red

IR

120V AC 60Hz

750W / 1465W

**Product Dimension**  $(W \times H \times D)$ 

39.4 x 17.8 x 6.3" / (1001 x 450 x 158mm)



Rated Voltage

Heating Output

**Heating Output** 

Remote Type

Flame Effect

 $(W \times H \times D)$ 

**Product Dimension** 

Remote Type

LED Control Board 120V AC 60Hz 750W / 1465W

Timer Log Fuel Effect

Flame Effect Orange, Blue, Red

**Product Dimension** 33.9 x 17.8 x 6.3" / (860 x 450 x 158mm)  $(W \times H \times D)$ 





Rated Voltage

120V AC 60Hz 750W / 1465W IR

Orange, Blue, Red

LED Control Board Timer

Log Fuel Effect

30 x 17.8 x 6.3" / (762 x 450 x 158mm)

82 | Furrion I 83



# Water Heater

# **Tankless Gas Water Heater.**

Engineered with Furrion's latest technology including smart electronic ignition with a lock-out safety function and an intelligent flow meter to reduce the risk of scalding.



HOT WATER CAPACITY



CONSISTENT TEMPERATURE



ELECTRONIC IGNITION



OVER TEMP. PROTECTION



AUTO TURN OFF



BLOWER BLOCK PROTECTION



WALL CONTROLLER



LOW PRESSURE ALARM



PRESSURE RELIEF VALVE



Mixing Valve with vortex technology to reduce temperature fluctuations and scalding.



Advanced safety features including a pressure relief valve, over temperature protection, blower block protection and automatic shut off.



Wall controller allows easy and convenient temperature control.

Water Heater | Comfort Comfort | Water Heater



Retrofit door for 2.4GPM **Tankless Water Heater** 





1.FWH09EA-PS 2.FWH41EA-PS



3.FWH46EA-PS

Gas Supply Propane Max. Water Inlet Pressure 65PSI (4.5bar) DC 12V Power Supply Standard Water Outlet Temp. 95-124°F (35-51°C) Max. Setting Temperature 124°F (51°C) Temperature Sensor  $9.77k\Omega$ 

Hot Water Capacity 2.4 Gallons Hot Water Per Minute

60,000 BTU / hr

Gas Inlet Pressure 11" W.C - 14" W.C Relief Valve Release Pressure 87PSI (6bar) Power Input <3A

Automatic Ignition

Input

Exhaust Blocking Protection

Over Temperature Protection

Product Dimension  $(W \times H \times D)$ 

√ 135°F (75°C) last 3s will stop running) **1.** 161/8 x 161/8 x 17/25" (410 x 410 x 17mm) **2.** 161/8 x 181/8 x 17/25" (410 x 460 x 17mm) **3.** 181/<sub>8</sub> x 181/<sub>8</sub> x <sup>17</sup>/<sub>25</sub>" (460 x 460 x 17mm)





# Energy

# **Energy**

**Solar Panel** 92-97

# **Power Distribution**

AC/DC Power Centers 98

Inverters & Converters 99

Cordsets & Adapters 100-105

Power Inlets 106-107

**Connectors & Adapters** 108-109



# **Energy for Off-Grid Living.**

Created for off-grid lifestyles, Furrion energy ecosystems offer the ability to power your home, RV or yacht. Enjoy the conveniences of luxury living, wherever your next adventure takes you.



# **Solar Panel**

# 100W Portable Solar Panel.

Power your adventures with efficient and lightweight monocrystalline panels engineered to provide stable and reliable power in varying weather conditions. Providing up to 100W of total rated output, the IP65-rated panels withstand hail, rain, dust, high winds and snow. Built-in bypass diodes ensure excellent performance in low-light.



100W RATED POWER



WATERPROOF



ALUMINIUM FRAME WITH CORNER PROTECTION



HANDLE FOR EASY MOBILITY



CARRYING CASE INCLUDED



12' LEAD CABLE



OPTIMAL PERFORMANCE UNDER LOW LIGHT ENVIRONMENT



WITHSTANDS HAIL AND SNOW LOADS




ADJUSTABLE KICKSTAND




INCLUDE FURRION 10A PWM CHARGER (IP65)\*




FURRION PV CONNECTORS



Monocrystalline cell technology improves energy efficiency.



Kickstand and lightweight, portable design ensure easy and convenient use, in whatever weather you encounter.



Furrion ePod™Power Station is compatible with Furrion 100W portable solar panel.

Solar Panels | Energy Energy | Solar Panels

100W



5.18A Rated Current (Impp) Short Circuit Current (Isc) 5.59A Rated Voltage (Vmpp) 19.3V Open Circuit Voltage (Voc) 23.8V Max. System Voltage

Solar Cell Type Monocrystalline

Furrion 10A PWM Controller

Max. Power (Pmax)

Carrying Case

DC barrel connector 5.5 x 2.5mm Solar Port Output Type

Compatible with Furrion Solar Port and DC barrel connector 6.5 X 3.0mm **Test Condition** 77 °F (25 °C), 1,000W/m², Irradiance and AM=1.5

Product Dimension 43.3 x 20.2 x 1.4"  $(W \times H \times D)$ (1100 x 514 x 35mm)



165W Max. Power (Pmax) Rated Voltage (Vmpp) 18.72V Rated Current (Impp) 8.82A Open Circuit Voltage (Voc) 23.12V Short Circuit Current (Isc) 9.49A Max. System Voltage 600V

Solar Port Output Type Furrion Connectors

Output Lead Length

Pre Drilled Frame For Secure Mounting

Compatible with Furrion Z-mount brackets (C-FSFP16MW-A02)

Solar Cell Type

**Product Dimension** 26.6 x 59.1 x 1.4" (675 x 1500 x 35mm)

Monocrystalline

 $(W \times H \times D)$ 

## Rigid Solar Panel Accessories

C-FSFP16MW-A02 Furrion Z-Mount Brackets

C-FSPP20MW-A05 12' Furrion Solar Panel Extension Cables



UV Resistant Plastic Material of Housing

Current 30-50 Amp

Connectivity Furrion Connector Pair, IP65

Cable Guage of Termination 12 AWG PV Cable on Contactor Side

Cable Guage of Termination 10 to 14 AWG Electrical Cable on Box Side

40°F to 176°F (-40°C to 80°C) Operating Temperature

IP Rating

Product Dimension 6.9 x 4.9 x 1.5" (174 x 124 x 37mm)  $(W \times H \times D)$ 

94 | Furrion 1 95 Solar Panels | Energy | Solar Panels

#### FSFP50MAT-BL

## 50W Solar Panel Battery Maintainer



# Solar panel:

Max. Power (Pmax)50WRated Voltage (Vmpp)18.5VRated Current (Impp)2.7AOpen Circuit Voltage (Voc)22.6VShort Circuit Current (Isc)6AMax. System Voltage600V

Solar Cell Type Monocrystalline

Cell Efficiency 18%

 Product Dimension
 5.1 x 1.75 x 3.75"

 (W x H x D)
 (810 x 57 x 570 mm)

## **PWN Controller:**


Charging Current 10A
Overvoltage Protection 17V
Floating Charging Voltage 13.8V
Boost Charging Recovery Voltage 13.2V
Undervoltage 12.0V
Over-Discharge Voltage 11.0V

Cable 16AWG, 235/8" (600mm)

#### FSFP10MAT-BL

#### 100W Solar Panel Battery Maintain

# Solar panel:



 Max. Power (Pmax)
 100W

 Rated Voltage (Vmpp)
 18V

 Rated Current (Impp)
 5.5A

 Open Circuit Voltage (Voc)
 21.4V

 Short Circuit Current (Isc)
 5.8A

 Max. System Voltage
 600V

Solar Cell Type Monocrystalline

Cell Efficiency 19%

 Product Dimension
 5.1 x 1.75 x 3.75"

 (W x H x D)
 (810 x 57 x 570 mm)

## **PWN Controller:**

Charging Current 10A

Overvoltage Protection 17V

Floating Charging Voltage 13.8V

Boost Charging Recovery Voltage 12.0V

Undervoltage 11.0V

Cable 16AWG, 235/8" (600mm)

AC/DC Power Converters | Power Distribution | Inverters and Converters

#### FCVSWC42A

## 35A All-in-One Power Center



Stand By Voltage 13.2V Auto Battery Type Selection 105-132V AC Operation Voltage Range Output Over Voltage Protection 60Hz 615W Full Load Input Power AC Low Voltage Protection Efficiency (LiFePO4) (120Vac) >80% Intelligent Fan Speed Control Reverse Polarity Protection By Fuse **Electronic Current Limiting** 35A 7A Charge Current Full Load Input Current (12V/60Hz) Product Dimension 11.9 x 8.4 x 6.6"

(WxHxD) (300.9 x 211.3 x 167.9mm)

## FCVSWC54A

#### All-in-One Power Center



Stand By Voltage 3.2V Auto Battery Type Selection 105-132V AC Operation Voltage Range Output Over Voltage Protection 60Hz 790W Full Load Input Power AC Low Voltage Protection Efficiency (LiFePO4) (120Vac) >80% Intelligent Fan Speed Control Reverse Polarity Protection By Fuse Electronic Current Limiting 45A Full Load Input Current (12V/60Hz) 8.8A Charge Current **Product Dimension** 11.87 x 3.37 x 6.62"  $(W \times H \times D)$ (300.9 x 211.3 x 167.9mm)

## FSCC30PWB-BL

## 5A Wall Mount MPPT Solar Charge Controller with Mounting Bracket



Nominal System Voltage 12/24V DC Max. PV Power (Pmax) 300W Max. PV Open Circuit Voltage (Voc) 16 to 70V DC MPPT Tracking Efficiency ≥99% Min. Battery Voltage For Charging 8V/20V Max. MPPT Charging Current 25A Max. Charging Efficiency > 90% **Product Dimension** 7.8 x 8.37 x 2.68"  $(W \times H \times D)$ (200 x 212 x 68mm)

LED Indicator
Auto Battery Type Detection
Over Charging Protection
Over Temperature Protection
Auto Temperature Compensation

# FSCC60PW-BL

## 50A Wall Mount MPPT Solar Charge Controller 50A Wall Mount MPPT Solar Charge Controller with Mounting Brack



Nominal System Voltage 12/24V DC Max. PV Power (Pmax) 600W 16 to 135V DC Max. PV Open Circuit Voltage (Voc) MPPT Tracking Efficiency >99% Min. Battery Voltage For Charging 3V DC Max. MPPT Charging Current 50A Max. Charging Efficiency > 90% **Product Dimension** 7.8 x 10.37 x 2.68"  $(W \times H \times D)$ (200 x 262 x 68mm) LED Indicator

Auto Battery Type Detection

Over Charging Protection

✓

Over Temperature Protection

Auto Temperature Compensation

✓

## FDP12WA-BL

#### AC/DC Wall Mount Distribution Pan



Input 120Vac 30Amp/ Built-in negative battery System Voltage DC Terminal bar 240 Vac 50 Amp. terminal Max. 12 branches (7 for No light: Working fuse AC Distribution 30A main; 12 For 50A Fuse Status Indicator LED Red light: Broken fuse main) 30Amp or 50Amp x2 UL67 and FCC Part 15B AC Main Breakers Certification 5-20R 120V 20A AC Receptacle Larger Door Assembly 13.88 x 11.75" receptacle 15DC outputs 352.5 x 298.45mm DC Circuits (Total) (30Amp x2CH, Dimensions (W x H x D) 20Amp x13CH) Rough Opening Dimensions 12.44 x 8.44 x 3" (315.9 x 214.4 x 76.2mm)  $(W \times H \times D)$ 

## FCVSDC60A

#### 30A Power Converter



Stand By Voltage 13.2V Intelligent Fan Speed Control 65A **Output Over Current Protection Cut-off Protection** No Load Input Current 300mA DC Lower & Higher Voltage Protection Reverse Polarity Protection By Fuse Electronic Current Limiting Charge Current 60A Intelligent Thermal De-rating Full Load Input Power 1,015W Efficiency (LiFePO4)(120Vac) >80% Operation Voltage Range 100-132V AC 60Hz

> 11.7 x 9.3 x 4.4" (296.3 x 235.6 x 110mm)

## FCVSDC80A

## 80A Power Converte

**Product Dimension** 

 $(W \times H \times D)$ 



Stand By Voltage 13.2V Intelligent Fan Speed Control **Output Over Current Protection** 85A **Cut-off Protection** No Load Input Current 200mA DC Lower & Higher Voltage Protection Reverse Polarity Protection By Fuse Electronic Current Limiting 80A Charge Current Intelligent Thermal De-rating Full Load Input Power 1,500W Efficiency (LiFePO4)(120Vac) >80% Operation Voltage Range 100-132V AC 60Hz 11.7 x 9.3 x 4.4 **Product Dimension** (296.3 x 235.6 x 110mm)  $(W \times H \times D)$ 

## FIVBD10


## 1000W 12V Pure Sine Wave Invert



Battery Voltage 10.5 - 15V DC Low Battery Protection 115 ± 5V AC Output Voltage Over Voltage Protection Output Waveform Pure Sine Wave Over Load Protection Max. Peak Efficiency 88% Over Temperature Protection Bypass Transfer Time Continuous Rated Power 1,000W <20ms AC Bypass Input 100-120V AC Circuit Breaker 15A Output Frequency 60±1 Hz Grounding Terminal Lug Surge Rated Power 2500W **Product Dimension** 16.8 x 9.3 x 4.4"  $(W \times H \times D)$ (425 x 236 x 112mm)


1 99

98 | **Furrion** (425 X 236 X 112fnfn)

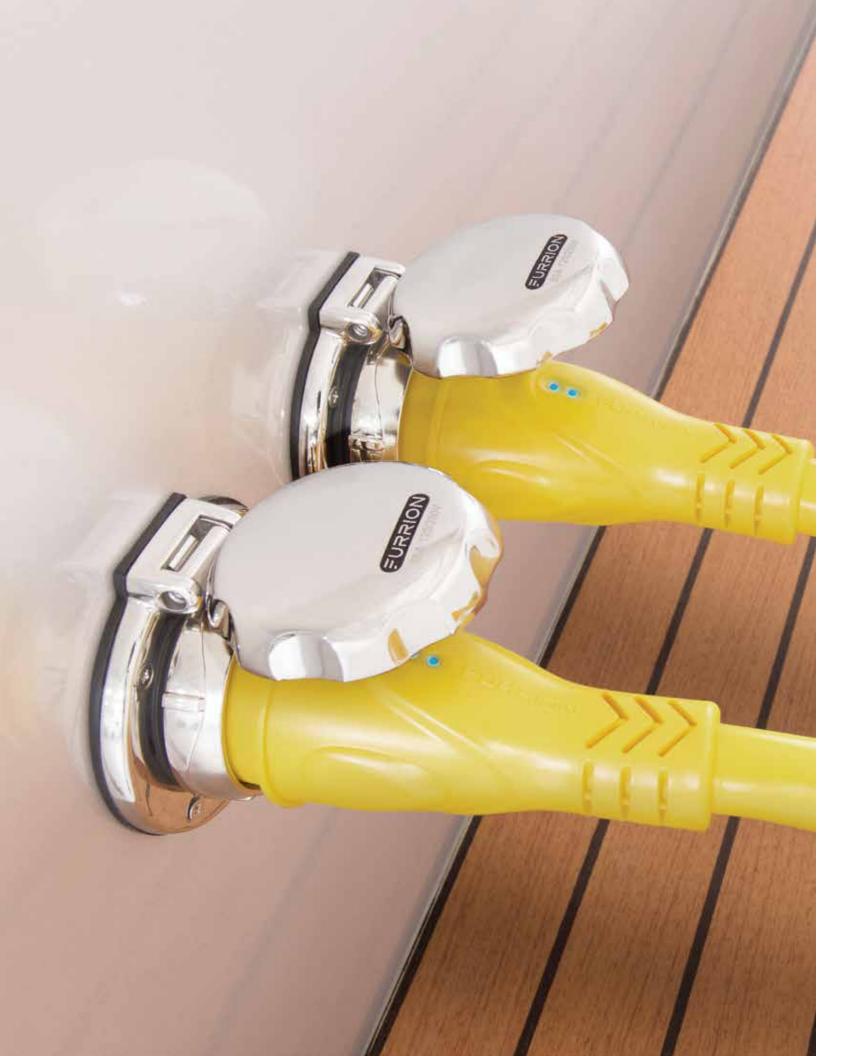



Furrion's Faultsmart™ neutral loss and reverse polarity indicator includes a bright blue LED power indicator and a bright red LED reverse polarity indicator. This reverse polarity LED indicates incorrect flow of electricity due to incorrect wiring. When this occurs, the current will continue to flow until the circuit burns open. Furrion's Faultsmart™ LED provides the user with an instant warning and reduces the risk of damage to electrical equipment or the likely consequence of an onboard fire.





# **Smart safety solutions**Revolutionary Pullsmart design helps prevent neutral loss.

Furrion's RV Pullsmart™ safe disconnect feature is a revolutionary design which helps prevent neutral loss due to user error. The plug handle has been designed to provide the user with a quick, easy and safe disconnect from the power source. Neutral loss commonly occurs when the user disconnects the plug on an angle resulting in pulling out the neutral pin before the live pins. This action creates a surge of electricity through the connection that can damage appliances and other electronics. The Pullsmart™ design helps create an optimal pull out angle that can prevent damage to your on board appliances and electronics.



Powersmart™ POWER VOLTAGE INDICATOR



Furrion's Powersmart™ bright blue LED voltage indicator confirms that power is present. In blackout situations, this super bright LED helps determine whether the fault has occurred at the power source or at the equipment.



Cordsets and Adapters | Power Distribution | Cordsets and Adapters





## 50 Amp 125/250V Powersmart™ Cordset

Product Coding and Pin Config. Conn. (F) Plug (M)





30ft F50R30-SB (Black) 36ft F50R36-SB (Black)







## 0 Amp Powersmart<sup>™</sup> 125V cordse

Product Coding and Pin Config. Conn. (F) Plug (M)





25ft F30P25-SY (Yellow) 50ft F30P50-SY (Yellow)





## 30 Amp 125V Cordse

Product Coding and Pin Config. Conn. (F) Plug (M)





25ft F30C25-SY (Yellow) 50ft F30C50-SY (Yellow)



## 50 Amp Powersmart™ 125/250V Cordse

Product Coding and Pin Config. Conn. (F) Plug (M)





50ft F50250-SY (Yellow)





Pigtail Adapters | Connectivity **Connectivity** | Y-Adapters

# **Pigtail Adapters**

Faultsmart™ Reverse Polarity and







# With Faultsmart<sup>™</sup> and **Powersmart™ LED Technology**

Pigtail adapters allow for connection from a shore power receptacle to an RV or Marine inlet or equipment with dissimilar power configurations. Furrion pigtail adapters are made to high quality standards, constructed with high-grade, corrosion resistant materials for longevity in the harsh environments. Designed for safety, Powersmart™ and Faultsmart™ indicators provide valuable, real-time information. Plug-ends feature ergonomic side grips for easy, user-friendly connection. Furrion adapters meet global industry standards and conform to NEMA universal fit with other brands. Cables are rated up to 600V, 221°F (105°C). Furrion stands behind its shore-power products with a 5-year warranty. 50A adapters include heavy-duty storage bag.

















Conn. (F)





FP5530-SY (Yellow)

50 Amp 125/250V Marine Conn. (F) -30 Amp Marine plug (M)



# **Y-Adapters**

# With Powersmart™ LED Technology









Furrion Y-Adapters are engineered for durability in harsh environments and constructed with heavy-duty, corrosion-resistant materials. Designed for safety, the Faultsmart and Powersmart LED fault and voltage indicators provide real time, useful, connection information. With a modern design and sleek appearance, Furrion Y-adapters feature ergonomic, molded side grips to provide the boater with an easy, user-friendly connection, All Furrion Y-Adapters conform to NEMA universal fit with other brands and are rated up to 600V, 221°F (105°C). Furrion stands behind its shore-power products with a 5-year warranty.

Product Coding and Pin Config. Plug (M)











Product Coding and Pin Config. Conn. (F) Plug (M Plug (M)





(2) 15 Amp conn (F) - 30 Amp plug (M)





Product Coding and Pin Config. Conn. (F) Plug (M)





(2) 50 Amp 125V conn (F) - 50 Amp 125V plug (M)





104 | Furrion I 105 Inlets | Connectivity | Inlets

# **Inlets**


Furrion's shore power inlets are constructed with high quality materials to withstand harsh environments. These stylish, modern inlets feature a Powersmart™ voltage indicator LED to show live connection status.

# Features:

- Furrion's Powersmart™ LED indicator
- Furrion's sleek, modern design
- Available in polished stainless steel and fiber filled UV polyester materials
- Universal fit for industry standard

# Specifications:

- Plastic inlet: 316 marine grade stainless steel logo plate
- Outer casing: Fiber filled UV stabilized polyester
- Stainless steel inlet: Hand polished stainless steel outer casing
- Rear and internal parts: Plug Inserts: PC (CTI greater than 600v)
- Rear enclosure: PA UL flammability rating 94v-0
- Terminals and pins: Nickel plated brass pins for corrosion resistance

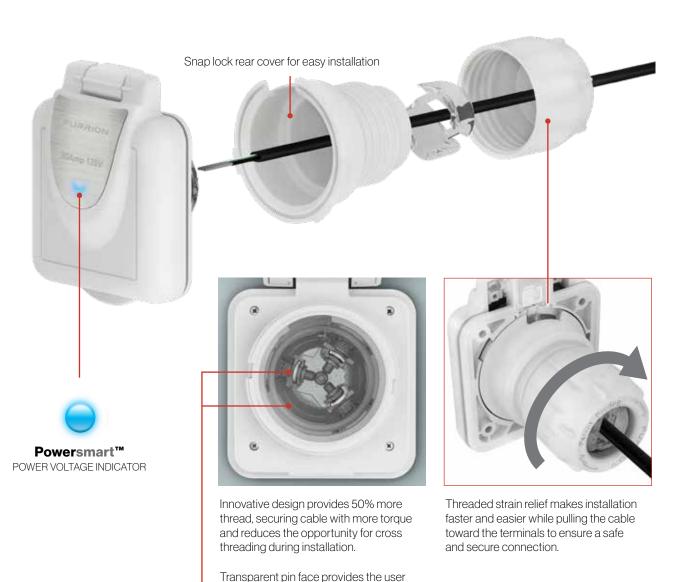

with quick indication that the cable is secured to the terminal and provides visible warning for overheating connection

or internal damage.





# FSPINS-PS / FSPINS-BS

Solar Port Inlet for RV

Modern and sleek design. Made from heavy duty marine-grade materials with a fiber filled UV stabilized polyester outer casing designed to withstand harsh outdoor environment.

## OA Shore Power Inlet

Prong Configuration

F30ITS-SS Stainless Steel





## 50A Shore Power Inlet

Prong Configuration

F50INS-PS White





## 50A 125/250V Shore Power Inlet

Prong Configuration

F52INS-PS White





Connectivity | Generator Adapters

# **12V DC Connections**



VRSB 12V Dual USB Cha

12V Dual USB Charger And Receptacle In-one

USB Charger:

- Voltage rating: 12V DC
- Max Amp: USB1: 1A/5V, USB2: 2.1A/5V
- Cigarette lighter receptacle:
- Voltage rating: 12V/24V DC
- Max Amp: 15A



# **Cordset Conversion Kits**



Convert your hard-wired RV power cordset into an easy-to-use electrical set up. No more struggling with heavy power cords in and out of small access doors!

- Simple and easy installation
- Use your existing cordset
- Easier storage for your cable





## ECKIT30-P9

30A RV Power Conversion K

- 30A Powersmart™ LED square non-metallic inlet
- 30A female plug
- Titanium color weatherproof plug cover
- Electrical box
- Inlet mounting ring and gaskets





# **Generator Adapters**

30A to 30A Adapter Plug

Product Coding and Pin Config. Conn. (F) Plug (M)





F3030AD-RY



# **Plug Covers**

50A Female Connection Cove

F50CVL-SY (Yellow)



AV Entertainment | Product List | Navigation & Network

# **Furrion Product List**

SKU	Product Name	Furrion ID	Page
FDHK32V1A	32" Furrion Sense® HD LED All-In-One Entertainment System	110115	16
FDHS32M4A	32" HD LED TV	110045	16
FDFS40M4A	40"FHDLEDTV	110317	17
FDUS50F1A	50" 4K LED TV	111367	17
FDUS50M7A	50" 4K LED TV	110085	17
DV1230-BL	260W 3-Zone Entertainment System with Independent Zone Control and DVD	110009	20
DV3100S	120W 2-Zone Entertainment System with DVD	110215	20
DV3300S-BL	120W 2-Zone Entertainment System with DVD	110156	21
DV7200	40W 2-Zone Mono Entertainment System	110020	22
FSB24SA2C-BL	40W Passive Soundbar	110188	23
FSBN4W-BL	20W Soundbar Speaker	110218	23
FSBT43S-BL	30W Soundbar Speaker	110186	23
FSB2N25MC-BL	2-zone Soundbar	110217	24
FSBN25M-BL	110W 4-zone Soundbar	110140	24
FSW8P12-CF	8* Active Subwoofer	110299	24
FMS5B	5" Outdoor Marine Speaker	110326	25
FMS5L2A-BL	5" Two-way Outdoor Marine Speaker with LED + LED Ring	110038	25

SKU	Product Name	Furrion ID	Page
FBS012N-BL	Furrion LIT™ Bluetooth Speaker - Black	110160	28
FBS012N-PS	Furrion LIT™ Bluetooth Speaker - White	110250	28
FBS012NBS	Furrion LIT™ Rail/Bike Mount	110205	28
FBS012NCU	Furrion LIT™ Wireless Charging Dock	110161	28
FBS012NHS	Furrion LIT™ Hand Strap	110081	28
FBS012NSM	Furrion LIT™ Strap Mount	110110	28
FBS012NAP	Furrion LIT™ Accessories Pack	110159	29
FBS012NVP-BL	Furrion LIT™ Adventure Pack Black	110070	29
FBS012NVP-PS	Furrion LIT™ Adventure Pack White	110255	29
FCE48TASH	Furrion Vision S™ Side Camera with LED Marker Light (Left and Right)	110469	32
FCN48TASF	Furrion Vision S™ Doorway Security / Rear Camera	110414	32
FCN48TASK	Furrion Vision S™ Rear Camera with Marker Light	110476	32
FOS05TAEM	Furrion Vision S™ 5" 3-Camera System with Marker Lights	110448	33
FOS05TASF	Furrion Vision S™ 5" Monitor with Rear Camera	110449	33
FOS05TASM	Furrion Vision S™ 5" Monitor with Rear Marker Light Camera	110377	33
FOS07TAEM	Furrion Vision S™ 7" 3-Camera System with Marker Lights	110482	33
FOS07TAPM	Furrion Vision S™ 7* 4-Camera System with Marker Lights	110452	33
FOS07TASF	Furrion Vision S™ 7" Monitor with Rear Camera	110379	33
FOS43TASF	Furrion Vision S™ 4.3" Single Camera System	110423	33
FOS43TASM	Furrion Vision S™ 4.3" Single Camera System with Marker Light	110493	33
C-FOS07TAPK-005	2.4GHz Antenna for Camera	21070	34
F2BC001XXBK	7-way Vision S Camera System Adapter	111144	35
F2BC002XXBK	Camera System 7-Way Adapter with Power Switch	111312	35
FAN73B7C	Furrion Access™ Omni-directional Rooftop Antenna	110431	38
FAN17B87	Furrion Access™ LTE Wi-Fi Router Unlocked	111143	39
FAN17B83	Furrion Access™ LTE Wi-Fi Router	110440	39

Appliances & Comfort | Product List | Appliances & Comfort

SKU	Product Name	Furrion ID	Page
F1S17L02A-BL	17" 3-Burner Direct Flame Gas Oven Range - Black	111387	48
F1S17L02A-SS	17" 3-Burner Direct Flame Gas Oven Range - Stainless Steel	111388	48
F1S17L03A-BL	17" 3-Burner Direct Flame Gas Oven Range - Black	111463	48
F1S21L02A-BL	21" 3-Burner Direct Flame Gas Oven Range - Black	111389	48
F1S21L02A-SS	21" 3-Burner Direct Flame Gas Oven Range - Stainless Steel	111465	48
F1S21L03A-BL	21" 3-Burner Direct Flame Gas Oven Range - Black	111464	48
C-FSRE21SA-002	Cooktop Grate	210528	49
C-F1S17L02A-002	17" Top tray module	210984	49
C-FSRE21SA-003	21" Top tray module	210634	49
CF1SL02ABLA1	Drawer Front - Black	111468	49
CF1SL02ASSA1	Drawer Front - Stainless Steel	111469	49
FGH4ZSA-SS	Chef Collection Gas Cooktop	111047	52
FGHWCLDA-BL	Rangetop Cooktop - Black	110873	52
FGHWCLDA-SS	Rangetop Cooktop - Stainless Steel	110913	52
FIH2ZEA-BG	Built-in Double Induction Cooktop	110847	53
FS22N20A-SS	Chef Collection Gas Oven - Stainless Steel	110957	56
FS22N20A-SB	Chef Collection Gas Oven	110857	56
FTRD22LA-BL	Chef Collection Electric Oven - Black	111114	56
FTRD22LA-SS	Chef Collection Electric Oven - Stainless Steel	111137	56
FG21MA1EA-BG	Chef Collection Gas Oven - Black Glass	111462	56
FMCM15-BL	1.5 cu. ft. Over-the-Range Convection Microwave Oven	110848	58
FMSMA16-SS	1.6 cu. ft. Over-the-Range Microwave Oven	111076	58
FMCM15-SS	1.5 cu. ft. OTR Convection Microwave Oven - Stainless Steel	111377	58
FMSM13-BL	1.3 cu. ft. OTR Microwave	111474	59
FMSM09-SS-TK	Silver plastic trim kit	110935	59
FMSM09-BL-TK	Black plastic trim kit	110932	59
FMSM09-SB-TK	Black VCM plastic trim kit	110933	59
FGL202A-SS	21" Single Burner Drop-in Grill with Splash Guard	111129	62
FCR08DCGTA-BL	8 cu. ft. Furrion Arctic® 12V Built-in Refrigerator(Right Hinge)	111401	66
FCR08DCGTA-BR	8 cu. ft. Furrion Arctic® 12V Built-in Refrigerator(Left Hinge)	111402	66
FCR10DCGTA-BL	10 cu. ft. Furrion Arctic® 12V Built-in Refrigerator(Right Hinge)	111403	67
FCR10DCGTA-BR	10 cu. ft. Furrion Arctic® 12V Built-in Refrigerator(Left Hinge)	111404	67
C-FCR08DCDTA-A02	8 cu. ft. Furrion Arctic® Matte Black Door Panel Wood Set (Thickness 4.5mm)	110894	67
C-FCR10DCDTA-A02	10 cu. ft. Furrion Arctic® Matte Black Door Panel Wood Set (Thickness 4.5mm)	111320	67
C-FCR08DCGTA-A03a	8 cu. ft. Furrion Arctic® High Gloss Black Door Panel Set (2mil film) (USA)	111601	67
C-FCR10DCGTA-A03a	10 cu. ft. Furrion Arctic® High Gloss Black Door Panel Set (2mil film) (USA)	111602	67
C-FCR08DCGTA-A01	8 cu. ft. Furrion Arctic® Stainless Steel Door Panel Set (USA)	111391	67
C-FCR10DCGTA-A01	10 cu. ft. Furrion Arctic® Stainless Steel Door Panel Set (USA)	111396	67
FCR14ACBQA-BL	14 cu. ft. 4-Door Built-in Refrigerator - Black	111027	72
FCR14ACBQA-SS	14 cu. ft. 4-Door Built-in Refrigerator - Stainless Steel	111068	72
FCR15ACATA-VS	14.5 cu. ft. Top Freezer Refrigerator	111329	72

SKU	Product Name	Furrion ID	Page
FCR16ACASA-BG	15.6 cu. ft. Side by Side Refrigerator - Black	111594	73
FCR16ACASA-SS	15.6 cu. ft. Side by Side Refrigerator - Stainless Steel	111595	73
FCR21ACASA-BG	20.6 cu. ft. Side by Side Refrigerator - Black	111346	73
FCR21ACASA-SV	20.6 cu. ft. Side by Side Refrigerator - Stainless Steel	111347	73
FACR14SA-BL	14.5K Furrion Chill™ Rooftop Air Conditioner - Black	111117	76
FACR14SA-PS	14.5K Furrion Chill™ Rooftop Air Conditioner - White	110876	76
FACR15SA-BL	15.5K Furrion Chill™ Rooftop Air Conditioner - Black	110898	76
FACR15SA-PS	15.5K Furrion Chill™ Rooftop Air Conditioner - White	110855	76
FACT11MA-PS	Furrion Chill™ Air Distribution Box With Manual Control	110967	76
FACT11CA-PS	Furrion Chill™ Standard Air Distribution Box with Manual Control	111406	76
FACT12CA-PS	Furrion Chill™ Standard Air Distribution Box for Electric Thermostat	111405	77
FACT12LA-PS	Furrion Chill™ Air Distribution Box With LED Light	111043	77
FACT12SA-PS	Furrion Chill™ Air Distribution Box	111051	77
C-FACR15SA-A01	Universal Conversion kit with wiring harness	110822	77
FACW10SA-BL	Furrion Chill™ Single Zone Basic Wall Thermostat	111476	78
FACW12SA-BL	Furrion Chill™ Single Zone Basic Wall Thermostat	110900	78
FACW12PA-BL	Furrion Chill™ Single Zone Premium Wall Thermostat	110899	78
FACW12ZA-BL	Furrion Chill™ Multi Zone Wall Thermostat	110829	78
FACC10SA-BL	Furrion Chill™ Single Zone Controller	111475	79
FACC12BA-BL	Furrion Chill™ Single Zone Controller Compatible with BMPRO Controllers	111480	79
FACC12SA-BL	Furrion Chill™ Single Zone Controller	111039	79
FACC12ZA-BL	Furrion Chill™ Multi Zone Controller	111116	79
C-FACR15SA-A02	Furrion Chill™ Heat Strip - Mechanical	111471	79
C-FACR15SA-A04	Furrion Chill™ Heat Strip - Electronic	111479	79
FF30SW15A-BL	30" Built-In Electric Wood Fireplace with Wall Mount - Black	110872	82
FF30SW15A-SS	30" Built-In Electric Wood Fireplace with Wall Mount - Stainless Steel	111124	82
FF34SW15A-BL	34" Built-In Electric Wood Fireplace with Wall Mount	110910	82
FF40SW15A-BL	40" Built-In Electric Wood Fireplace with Wall Mount	111044	82
FF48SW15A-BL	48" Built-In Electric Wood Fireplace with Wall Mount	110842	82
FF26C15A-BL	26" Fireplace Curved Glass with Wood Flame	111079	82
FF30SC15A-BL	30" Built-In Electric Crystal Fireplace with Wall Mount - Black	110970	83
FF30SC15A-SS	30" Built-In Electric Crystal Fireplace with Wall Mount - Stainless Steel	110838	83
FF34SC15A-BL	34" Built-In Electric Crystal Fireplace with Wall Mount	111091	83
FF40SC15A-BL	40" Built-In Electric Crystal Fireplace	111012	83
FF48SC15A-BL	48" Built-In Electric Crystal Fireplace with Wall Mount	111099	83
FWH09A-PS-AM	Water Heater	110882	86
FWH09EA-PS	Water Heater Small Door	111081	86
FWH41EA-PS	Water Heater Medium Door	110997	86
FWH46EA-PS	Water Heater Large Door	111111	86

Product List | Power Distribution | Product List

SKU	Product Name	Furrion ID	Page
FSPK10MWT-BL	100W Kickstand Solar Panel with 10A PWM Controller	110650	94
FSFP16MW-BL	165W Rigid Solar Panel	110743	94
C-FSFP16MW-A02	Furrion Z-Mount Brackets	110530	94
C-FSPP20MW-A05	12' Furrion Solar Panel Extension Cables	110531	94
FSEB30JWL-BL	Rooftop Solar Panel Connection Kit	110714	95
FSFP50MAT-BL	50W Solar Panel Battery Maintainer	110686	96
FSFP10MAT-BL	100W Solar Panel Battery Maintainer	111219	97
FCVSWC42A	35A All-in-One Power Center	110532	98
FCVSWC54A	All-in-One Power Center	110725	98
FSCC30PWB-BL	25A Wall Mount MPPT Solar Charge Controller with Mounting Bracket	110784	98
FSCC60PW-BL	50A Wall Mount MPPT Solar Charge Controller	110645	98
FSCC60PWB-BL	50A Wall Mount MPPT Solar Charge Controller with Mounting Bracket	110706	98
FCVSDC60A	60A Power Converter	110719	99
FCVSDC80A	80A Power Converter	110581	99
FDP12WA-BL	AC/DC Wall Mount Distribution Panel	110699	99
FIVBDP10A	1000W 12V Pure Sine Wave Inverter	110643	99
F50R30-SB-OEM	50 Amp 125/250V Powersmart™ Cordset	110676	102
F50R36-SB-OEM	36 ft. 50 Amp 125/250V Powersmart™ Cordset	110758	102
F30C25-SY-AM	25 ft. 30 Amp 125V Cordset	110554	103
F30C50-SY-AM	30 Amp 125V Cordset	110669	103
F30P25-SY-AM	25 ft. 30 Amp Powersmart™ 125V cordset	110538	103
F30P50-SY-AM	30 Amp Powersmart™ 125V cordset	110663	103

SKU	Product Name	Furrion ID	Page
FP3015-SS	30 Amp to 15 Amp Pigtail Adapter with Powersmart™	110639	104
FP3015-SY	30 Amp to 15 Amp Pigtail Adapter with Powersmart™	110763	104
FP5530-SY	50 Amp 125/250V to 30 Amp Pigtail Adapter Powersmart™	110761	104
F1530Y-SY	(2) 15 Amp conn (F) - 30 Amp plug (M)	110599	105
F3030RY-SB	(2) 30 Amp straight blade RV Conn. (F) - 30 Amp RV straight blade plug (M)	110609	105
F5050Y-SY	(2) 50 Amp 125V conn (F) - 50 Amp 125V plug (M)	110618	105
F30ITS-SS	30A Shore Power Inlet	110578	107
F50INS-PS-AM	50A Shore Power Inlet	110704	107
F52INS-PS-AM	50A 125/250V Shore Power Inlet	110553	107
FSPINS-BS-AM	Solar Port Inlet for RV	110597	107
FSPINS-PS-AM	Solar Port Inlet for RV	110689	107
F12VRSB-B	12V Dual USB Charger And Receptacle In-one	110520	108
FCKIT30-PS	30A RV Power Conversion Kit	110635	108
F3030AD-RY	30A to 30A Adapter Plug	110574	109
F50CVL-SY	50A Female Connection Cover	110583	109

114 | Furrion All products are current as of April 2, 2021.