



# GRABBER HTS<sup>60</sup>

## PERFECT SYNERGY OF COMFORT, DURABILITY AND PERFORMANCE




### ANYWHERE IS POSSIBLE

### GRABBER HTS<sup>60</sup>



20% 80%



M+S

The tough highway terrain tyre with extremely well balanced product performance and significantly improved tread life over its predecessor.



**GENERAL TIRE**



# GRABBER HTS<sup>60</sup>

## PERFECT SYNERGY OF COMFORT, DURABILITY AND PERFORMANCE

Rim diameter	Size <sup>1)</sup>	Load / Speed index / Extra Load / Load Range	Sidewall	Permitted rim widths (in inch)	Tyre dimensions		Rolling circumference + 1,5% - 2,5%	E	C	72/2
					Max. standard value in operation width (mm)	outer diameter (mm)				
15"	265/75 R 15	112S	OWL	7.0 - 9.0	278	795	2376	E	C	72/2
	255/70 R 15	108S	OWL	6.5 - 8.5	270	753	2254	E	C	72/2
	31X10.50 R 15LT	109R C	OWL	7.0 - 9.0	289	797	2386	t.b.d. <sup>2)</sup>		
16"	LT235/85 R 16	120/116R E	OWL	6.0 - 7.5	249	822	2458	E	C	72/2
	225/75 R 16	104S	OWL	6.0 - 7.0	236	758	2254	E	E	71/2
	235/75 R 16	108S	OWL	6.0 - 8.0	244	772	2312	E	E	71/2
	245/75 R 16	111S	OWL	6.5 - 8.0	258	788	2361	E	E	71/2
	265/75 R 16	116T	OWL	7.0 - 9.0	278	820	2452	E	C	72/2
	LT265/75 R 16	123/120R E	OWL	7.0 - 8.0	283	820	2436			
	255/70 R 16	111S	OWL	6.5 - 8.5	270	778	2330	E	C	72/2
	265/70 R 16	112T	OWL	7.0 - 9.0	283	792	2373	E	C	72/2
17"	255/65 R 16	109H	BSW	7.0 - 9.0	270	752	2251	E	C	72/2
	235/70 R 17	111T XL	OWL	6.0 - 8.0	250	776	2325	E	E	72/2
	245/70 R 17	110T	OWL	6.5 - 8.0	258	790	2367	E	E	71/2
	265/70 R 17	115S	BSW	7.0 - 9.0	283	818	2452	E	C	72/2
	245/65 R 17	111T XL	OWL	7.0 - 8.5	258	762	2288	E	E	72/2
	245/65 R 17	107H	BSW	7.0 - 8.5	258	762	2288	E	E	71/2
	245/65 R 17	107V	BSW	7.0 - 8.5	258	762	2288	E	E	71/2
	265/65 R 17	112T	OWL	7.5 - 9.5	283	790	2367	E	C	72/2
18"	285/65 R 17	116H	BSW	8.0 - 10.0	319	816	2446	t.b.d. <sup>2)</sup>		
	265/70 R 18	116T	OWL	7.0 - 9.0	283	843	2528	E	C	72/2
	LT275/70 R 18	125/122S E	OWL	7.0 - 8.5	296	859	2632			
	235/60 R 18	103H	BSW	6.5 - 8.5	250	751	2254	E	E	71/2
	245/60 R 18	105H	BSW	7.0 - 8.5	258	763	2291	E	E	71/2
20"	265/60 R 18	110T	OWL	7.5 - 9.5	283	787	2364	E	C	72/2
	275/60 R 20	119T XL	BSW	7.5 - 9.5	290	852	2556	E	C	73/2

<sup>1)</sup> = all sizes with rim protection (FR)

<sup>2)</sup> = to be defined

### ► Excellent ride quality and exceptional grip in wet conditions.

The advanced pattern design with multiple block edges and sipes equips the tread with a high number of grip edges to ensure excellent ride quality with remarkable control even on wet surfaces.

### ► Improved tread life in rugged terrain conditions.

With a robust compound that achieves excellent cut and chip resistance, the tread remains its great performance even in harsh terrains.

### ► Comfortable and pleasant ride.


A cushioned tread isolates the vehicle from road disturbances with an absorption layer. Ribs located on both sides of the pattern work as a sound barrier to reduce sound generated in the centre of the pattern.

### ► High mileage thanks to even wear and extended tread life.

The StabiliTread Technology combines a flat footprint for even pressure distribution with optimized pattern stiffness to minimize wear-causing distortion. With additional long wearing tread compound the tyre's wear resistance improved significantly.

### Tyre performance:

— Grabber HTS  
— Grabber HTS<sup>60</sup>

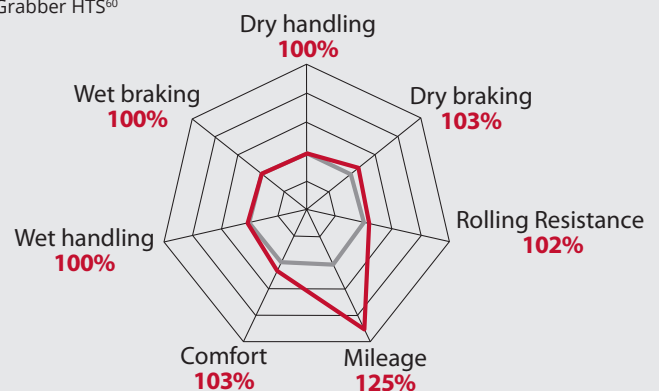

### M+S

"Snow tyre" means a tyre whose tread pattern, tread compound or structure are primarily designed to achieve in snow conditions a performance better than that of a normal tyre with regard to its ability to initiate or maintain vehicle motion.