




Installation Instructions

Dual Split Rear Exhaust
Nissan Murano 3.5L FWD

Part #12219

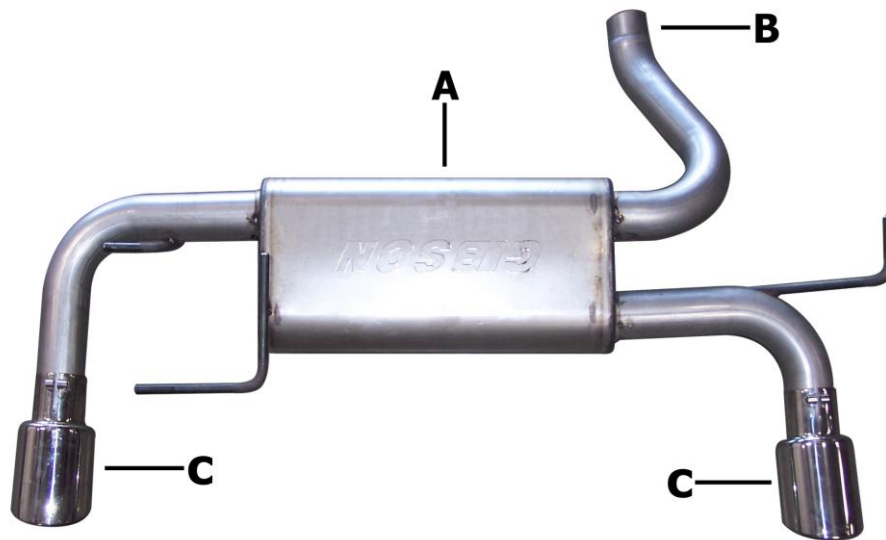


ITEM	PART	QUANTITY	DESCRIPTION
A	11232-3	1	Superflow CFT Muffler Assembly
B	5756	1	2.25" Clamp
C	500417	2	4" Stainless intercooled tips

Installation Instructions #12219

When installing this exhaust system make sure to use proper safety precautions. Use jack stands when working under the vehicle, set parking brake, block tires and use safety glasses and gloves. Allow exhaust to cool before attempting installation. Severe injury or burns could occur if safety measures are not taken.

SUGGESTED TOOLS: 1/2", 9/16", 15mm wrenches & sockets, WD-40, hacksaw, jack stands

1. Disconnect the negative battery cable before removal of OEM exhaust. This will allow the computer to reset and recognize the new exhaust. Lay out the exhaust on the floor so it looks like the drawing and compare parts with manual.



2. To remove stock exhaust, measure 2.5" from exhaust hanger located before the 2-bolt flange. See picture. Remove stock exhaust from the 3 rubber hangers. Use WD-40 to aid in removal.



3. Install stainless steel tips. Clamp down. When you have everything in place, firmly tighten all bolts and clamps down securely. Use stainless steel cleaner and a Scotch Brite pad weekly to prevent tip from discoloration. Inspect all fasteners after 25-50 miles of operation and re-tighten as necessary.



3. Install muffer assembly onto factory pipe. Insert hangers into rubber grommets. Use clamp #B to secure pipes together. Do not tighten.

