

2017 DATA BOOK/OE FITMENT GUIDE

GOOD YEAR

DUNLOP TIRES

KELLY TIRES



DATA BOOK  
& OE FITMENT GUIDE

2017

THE TIRES  
EXPERTS  
TRUST



Retailer Use Only NASCAR® is a registered trademark of the National Association for Stock Car Auto Racing, Inc.

**GOOD YEAR**

Official Tire of 

 **DUNLOP**  
TIRES

**KELLY**  **TIRES**

# 2017 GOODYEAR® TIRE LINES



# THE GOODYEAR® ADVANTAGE

## When Superior Performance Matters, Goodyear Is There

For drivers who are passionate about driving, Goodyear fuels their love of the road by making superior tires that harness more than 100 years of innovation.

## DEFINING GOODYEAR



### Innovative

Goodyear is the #1 consumer tire manufacturer in North America. An indisputable innovator, Goodyear has been creating relevant, new technologies that benefit your customers for more than 100 years.



### Bold

Goodyear tires climb tough mountain terrain and blaze through hot deserts. Goodyear is the official tire of NASCAR® and the tire that broke the land speed record multiple times. Accomplishments like these help the Goodyear brand stand out among all other tire brands and make powerful selling points you can share with your customers.



### Passionate

At Goodyear, we think tires are awesome. That's why professionals who demand the most from their tires choose the brand that shares their passion for superior performance and their love of the road. That enthusiasm is evident and contagious when promoting the Goodyear brand to the consumers in your area.



### Relentless

Goodyear never stops learning from the tires we make, whether it's for extreme conditions or everyday driving. We're not satisfied until we've made the right tire for every driving experience. And even then, we push our products further so you can recommend Goodyear tires over any other brand.

NASCAR® is a registered trademark of the National Association for Stock Car Auto Racing, Inc.




## WATER ZONE



Water Zone has a sweeping tread pattern that helps evacuate water away from the tread for enhanced wet traction.

## EVOLVING TRACTION® GROOVES



Evolving Traction Grooves help maintain confident traction in rain and snow as the tire wears.

## ICE ZONE



Ice Zone has numerous biting edges offering enhanced gripping traction on icy and slick roads.

## COMFORT LAYER



A special Comfort Layer in the tread helps provide, on average, 20% more cushion than standard passenger tires.\*

\* Source: Comparison of industry data for T-, H- and V-speed rated tires vs. Goodyear Assurance® ComforTred® Touring.

## DRY ZONE



Dry Zone has large tread blocks along the outer edges to help provide confident handling on dry roads.

## COMFORTEDGE® SIDEWALLS



ComfortEdge Sidewalls help provide a versatile balance of comfort and handling.

### FUEL-SAVING TREAD COMPOUND



Fuel-saving tread compound helps save up to 2,600 miles/ 4,000 km worth of gas over the life of a set of four tires.\*

\* 2,600 miles/4,000 kilometres based on a 4% fuel economy improvement, on 65,000 Mile/105,000 Kilometre Tread Life Limited Warranty, as compared to the standard Goodyear Assurance® tire tested on P195/65R15 size – 2008 Honda Civic. Actual results may vary based on when tires are replaced, driving and road conditions, and proper tire maintenance.

### 2D (TWO-DIMENSIONAL) BLADES IN THE CENTER ZONE



Two-dimensional blades in the center zone offer enhanced stopping and starting power on snow and ice.

### WET TREAD ZONE WITH DUAL AQUACHANNEL® GROOVES




Wet Tread Zone helps evacuate water away from the treadface for great traction on wet roads.

### 3D (THREE-DIMENSIONAL) TREDLOCK® TECHNOLOGY



Three-dimensional TredLock Technology blades in the shoulder zone offer enhanced wet and winter traction, locking together for confident grip in turns.

### 3D (THREE-DIMENSIONAL) BUBBLE BLADE™ INTERLOCKING SYSTEM



3-Dimensional Bubble Blade Interlocking System helps enhance dry weather handling.

### SPECIALIZED ICE TREAD COMPOUND



Specialized Ice Tread Compound offers enhanced traction on ice and snow-covered roads.

# GOODYEAR® TECHNOLOGIES

## DUPONT™ KEVLAR® LAYER



An extra layer made with DuPont™ Kevlar® enhances toughness and soaks up road noise.

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

## WETTRAC® TECHNOLOGY



WetTrac Technology is an exclusive wet traction compound that helps provide traction on wet roads.

## DUPONT™ KEVLAR® REINFORCED SIDEWALLS



DuPont™ Kevlar® reinforced sidewalls help increase sidewall puncture resistance by 35%.\*

\*Source: Goodyear Sidewall Penetration Energy – LT285/70R17 LR-D-65 psi.

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

## DURAWALL® TECHNOLOGY



Durawall Technology helps resist cuts and punctures to sidewalls.

## TRACTIVEGROOVE TECHNOLOGY®



TractiveGroove Technology offers enhanced traction in deep mud and snow.

## WRAPAROUND TREAD



Hardworking wraparound tread helps to deliver sidewall traction in deep mud, sand and rocks.



## RACE-INSPIRED ULTRA HIGH-PERFORMANCE TREAD COMPOUND



Race-inspired ultra high-performance tread compound helps provide excellent dry traction.

## ACTIVEBRAKING TECHNOLOGY



ActiveBraking Technology offers enhanced stopping power on wet and dry roads.

## SWEEPING AQUACHANNEL® GROOVES



Sweeping Aquachannel Grooves on the inboard side of the tread help enhance wet cornering grip.

## LIGHTWEIGHT, RACING-DERIVED CONSTRUCTION



Lightweight, racing-derived construction helps reduce unsprung mass for enhanced steering precision and handling.

## INNOVATIVE MULTI-RADIUS MOLD SHAPE



Innovative multi-radius mold shape helps offer precise handling and smooth, even wear.

## ADAPTIVE SIPEGrip TECHNOLOGY



Adaptive SipeGrip Technology helps enhance gripping power under slippery conditions while maintaining dry and wet handling.

## TREDLOCK® TECHNOLOGY



TredLock Technology microgrooves help provide biting edges for enhanced wet traction and lock together for confident grip in turns.

## SOUNDCOMFORT TECHNOLOGY®



Polyurethane foam bonded to the tire's inner surface helps to reduce the level of interior vehicle noise, offering passengers a quieter, more comfortable ride.



# PERFORMANCE



Eagle® F1 SuperCar® G- 2	Eagle® F1 Asymmetric 3	Eagle® F1 Asymmetric All-Season	Eagle® Sport All-Season	Eagle RS-A®	Eagle® Touring	Eagle® LS-2
Race-Inspired Dry Traction	Commanding Traction and Precise Handling in Wet and Dry Conditions	Superior Responsiveness and Expert Handling in All Seasons	Enhanced Responsive Handling and Strong Grip in All Seasons	Quality Performance for All Seasons	Confident Handling and a Smooth, Quiet Ride for Luxury Performance	Quality Performance for a Smooth, Quiet Ride and Confident Cornering

		Wet Traction	Dry Traction	Snow Traction	Responsiveness	Ride Comfort
SUMMER	Eagle F1 SuperCar G: 2	8	10	N/A	10	6
	Eagle F1 Asymmetric 3	10	9	N/A	9	7
ALL-SEASON	Eagle F1 Asymmetric All-Season	9	8	7	8	7
	Eagle Sport All-Season	8	7	8	8	8
	Eagle RS-A	8	7	6	8	8
	Eagle Touring	7	7	7	7	9
	Eagle LS-2	7	7	7	7	9

### NUMERICAL RATING SCALE

**1 = Lower Performance | 10 = Higher Performance**

The rating scale can help you compare tires within each category. However, using the scale to distinguish between tires across different types of categories would be misleading.











# EAGLE® F1 SUPERCAR® G: 2/SUPERCAR®

(Select sizes with EMT/ROF)


## Race-Inspired, Ultra High-Performance Dry Traction for Select Supercars



### FEATURES BENEFITS


1. Race-inspired ultra high-performance tread compound	Helps provide excellent dry traction
2. Asymmetric, directional tread design with massive tread blocks on the outboard side of the tread*	Helps enhance dry cornering grip
3. Sweeping Aquachannel grooves on the inboard side of the tread*	Help enhance wet cornering grip
4. Innovative multi-radius mold shape	Helps offer precise handling and smooth, even wear
5. Serrated band sidewall styling with distinctive lettering	Offers an ultra high-performance appearance
6. Specialized ultra high-performance construction	Meets high-end OE fitments for select supercars

### PERFORMANCE RATINGS

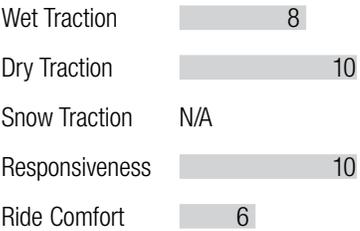

### POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

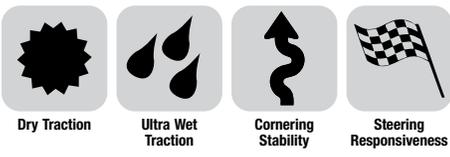

Original Equipment on Chevrolet, Chrysler, Dodge, Fisker and Ford

\* Innovation specific to SuperCar G: 2.

## EAGLE F1 SUPERCAR G: 2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P265/40ZR19	98Y	SL	VSB	408030316	217442	9.0 - 10.5	9.5	10.7	27.4	1,653	8	766	220 AA A	Ford Mustang GT 500: 11-13 (LF), Ford Shelby GT 350: 11-13 (L)
P265/40ZR19	98Y	SL	VSB	408031328	217444	9.0 - 10.5	9.5	10.7	27.4	1,653	8	766	220 AA A	Ford Mustang GT 500: 11-13 (RF), Ford Shelby GT 350: 11-13 (R)
P285/35ZR20	92Y	LL	VSB	408027316	215660	9.5 - 11.0	10.0	11.4	27.9	1,389	8	749	220 AA A	Ford Mustang GT 500: 11-13 (LR)
P285/35ZR20	92Y	LL	VSB	408028328	215672	9.5 - 11.0	10.0	11.4	27.9	1,389	8	749	220 AA A	Ford Mustang GT 500: 11-13 (RR)
285/35ZR20	100Y	SL	VSB	408038316	218857	9.5 - 11.0	10.0	11.4	27.9	1,764	8	750	220 AA A	Chevrolet Camaro ZL1: 12-15 (LF)
285/35ZR20	100Y	SL	VSB	408038328	218901	9.5 - 11.0	10.0	11.4	27.9	1,764	8	750	220 AA A	Chevrolet Camaro ZL1: 12-15 (RF)
305/35ZR20	104Y	SL	VSB	408039316	218859	10.0 - 12.0	11.0	12.3	28.4	1,984	8	735	220 AA A	Chevrolet Camaro ZL1: 12-15 (LR)
305/35ZR20	104Y	SL	VSB	408039328	218903	10.0 - 12.0	11.0	12.3	28.4	1,984	8	735	220 AA A	Chevrolet Camaro ZL1: 12-15 (RR)
<b>EAGLE F1 SUPERCAR G: 2 ROF</b>														
P275/35ZR18	87Y	LL	VSB	408561330	215986	9.0 - 11.0	9.5	10.8	25.6	1,201	8	818	220 AA A	Chevrolet Corvette: 11-13 (LF)
P275/35ZR18	87Y	LL	VSB	408561331	215987	9.0 - 11.0	9.5	10.8	25.6	1,201	8	818	220 AA A	Chevrolet Corvette: 11-13 (RF)
P325/30ZR19	94Y	LL	VSB	408029331	215963	12.0 - 13.0	12.0	13.2	26.7	1,477	8	782	220 AA A	Chevrolet Corvette: 11-13 (RR)
P325/30ZR19	94Y	LL	VSB	408029330	215988	12.0 - 13.0	12.0	13.2	26.7	1,477	8	782	220 AA A	Chevrolet Corvette: 11-13 (LR)

## EAGLE F1 SUPERCAR SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P265/40ZR17	91Y	LL	VSB	389119128	158662	9.0 - 10.0	9.5	10.7	25.4	1,356	7	824	220 AA A	Chevrolet Corvette Z06: 04 (F)
P235/45ZR18	88Y	LL	VSB	389024128	191659	7.5 - 9.0	8.0	9.3	26.3	1,235	9	793	220 AA A	Ford GT: 05-06 (F)
P255/45ZR18	99W	SL	VSB	389046128	198491	8.0 - 9.5	8.5	10.0	27.0	1,709	11	773	220 AA A	Ford Mustang GT 500: 07-10 (F), Ford Mustang GT: 05-06
P285/40ZR18	96W	LL	VSB	389027128	198492	9.5 - 11.0	10.0	11.4	27.0	1,565	11	775	220 AA A	Ford Mustang GT 500: 07-10 (R)
P295/35ZR18	91Y	SL	VSB	389118128	158658	10.0 - 12.0	10.0	11.7	26.1	1,356	8	801	220 AA A	Chevrolet Corvette Z06: 04 (R)
P255/40R19	96W	SL	VSB	389385128	207336	8.5 - 10.0	9.0	10.2	27.0	1,565	10	774	220 AA A	Ford Mustang GT: 12-13, Mustang GT 500: 10-12 (F)
P285/35R19	90W	LL	VSB	389386128	207337	9.5 - 11.0	10.0	11.4	26.9	1,323	10	777	220 AA A	Ford Mustang GT 500: 10-12 (R)
P315/40ZR19	103Y	LL	VSB	389025128	191661	11.0 - 12.0	11.0	12.6	28.9	1,929	7	722	220 AA A	Ford GT: 05-06 (R)
*245/45ZR20	99Y	SL	VSB	389122128	195686	7.5 - 9.0	8.0	9.6	28.7	1,709	10	729	220 AA A	Chrysler 300: 15-17, Chrysler 300 SRT8: 12-14, 300C SRT8: 06-08 (F), 300C SRT8: 09-10, Dodge Challenger: 10-17, SRT8: 08-14 (F), Charger 10-17, Charger SRT8: 08-14 (F), Magnum SRT8: 06-08 (F), Ford Taurus SHO: 10-16
245/45ZR20	99Y	SL	VSB	389926128	226379	7.5 - 9.0	8.0	9.6	28.7	1,709	10	729	220 AA A	Chrysler 300: 15, Chrysler 300 SRT8: 12-14, 300C SRT8: 06-08 (F), 300C SRT8: 09-10, Dodge Challenger: 10-15, SRT8 08-14 (F), Charger: 10-15, Charger SRT8: 08-14 (F), Magnum SRT8: 06-08 (F), Ford Taurus SHO: 10-15
255/45ZR20	101Y	SL	VSB	389123128	195688	8.0 - 9.5	8.5	10.0	29.1	1,819	11	719	220 AA A	Chrysler 300C SRT8: 06-08 (R), Dodge Challenger SRT8: 08-14 (R), Charger SRT8: 06-10 (R), Magnum SRT8: 06-08 (R)
255/35R22	99W	XL	VSB	389357128	218581	8.5 - 10.0	9.0	10.2	29.0	1,709	9	720	220 AA A	Fisker Karma: 12-17 (F)
285/35R22	102W	SL	VSB	389398128	230809	9.5 - 11.0	10.0	11.4	29.9	1,874	10	699	220 AA A	Fisker Karma: 12-16 (R)
285/35R22	102W	SL	VSB	389358128	218583	9.5 - 11.0	10.0	11.4	29.9	1,874	10	699	220 AA A	Fisker Karma: 12-17 (R)
<b>EAGLE F1 SUPERCAR EMT</b>														
P245/40ZR18	88Y	LL	VSB	412609506	201868	8.0 - 9.5	8.5	9.8	25.7	1,235	11	813	220 AA A	Chevrolet Corvette: 07-09
P275/35ZR18	87Y	LL	VSB	412561506	197280	9.0 - 11.0	9.5	10.8	25.6	1,201	8	818	220 AA A	Chevrolet Corvette: 06-13 (F)
P285/35ZR19	90Y	LL	VSB	412610506	201869	9.5 - 11.0	10.0	11.4	26.9	1,323	9	777	220 AA A	Chevrolet Corvette: 07-09
P325/30ZR19	94Y	LL	VSB	412562506	197362	12.0 - 13.0	12.0	13.2	26.7	1,477	8	782	220 AA A	Chevrolet Corvette: 06-13 (R)

\*Discontinued 2016.

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.



# EAGLE® F1 ASYMMETRIC 3

(Select sizes with ROF/SoundComfort Technology®)

## A Premium Ultra High-Performance Summer Tire for Commanding Traction and Precise Handling in Wet and Dry Conditions




### FEATURES

1. Asymmetric tread pattern
2. Grip-boosting tread compound
3. Solid center rib
4. Advanced construction

### BENEFITS

- Offers powerful traction in turns and enhanced wet traction
- Enhances road adhesion for superior traction
- Helps to provide quick response and accurate on-center feel
- Tuned for ultra high-performance suspension systems

### PERFORMANCE RATINGS

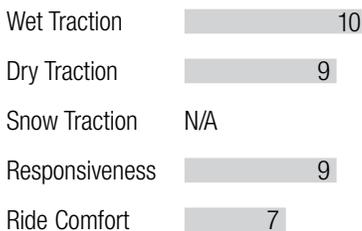

### ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on BMW, Chevrolet, Jaguar, Mercedes-Benz and Tesla

## EAGLE F1 ASYMMETRIC 3 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
205/40R17	84W	XL	BLK	783446388	231545	7.0 - 8.0	7.5	8.3	23.5	1,102	10	889	300 AA A	
225/40R18	92Y	XL	BLK	783163388	231544	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	300 AA A	
245/35R18	92Y	XL	BLK	783457388	231547	8.0 - 9.5	8.5	9.8	24.8	1,389	10	843	300 AA A	
245/40R18	97Y	XL	BLK	783458388	231548	8.0 - 9.5	8.5	9.8	25.7	1,609	10	813	300 AA A	
255/35R18	94Y	XL	BLK	783143388	231561	8.5 - 10.0	9.0	10.2	25.0	1,477	10	836	300 AA A	
275/35R18	99Y	XL	BLK	783461388	231550	9.0 - 11.0	9.5	10.9	25.6	1,709	10	816	300 AA A	
225/35R19	88Y	XL	BLK	783448388	231546	7.5 - 9.0	8.0	9.1	25.2	1,235	10	829	300 AA A	
245/40R19	98Y	XL	BLK	783787388	231373	8.0 - 9.5	8.5	9.8	26.7	1,653	9	782	300 AA A	Jaguar XF: 16
255/30R19	91Y	XL	BLK	783459388	231549	8.5 - 9.5	9.0	10.2	25.1	1,356	10	833	300 AA A	
255/35R19	96Y	XL	BLK	783494388	231562	8.5 - 10.0	9.0	10.2	26.0	1,565	10	804	300 AA A	
255/40R19	100Y	XL	BLK	783499388	231563	8.5 - 10.0	9.0	10.2	27.0	1,764	10	774	300 AA A	
265/45R19	105Y	XL	BLT	783859388	232873	8.5 - 10.0	9.0	10.5	28.4	2,039	9	736	300 AA A	
285/30R19	98Y	XL	BLK	783490388	231551	9.5 - 10.5	10.0	11.4	25.8	1,653	10	810	300 AA A	
295/40R19	108Y	XL	BLT	783917388	232874	10.0 - 11.5	10.5	11.9	28.3	2,205	9	738	300 AA A	
255/35R20	97Y	XL	BLK	783363388	231374	8.5 - 10.0	9.0	10.2	27.0	1,609	9	774	300 AA A	Jaguar XF: 16
265/35R22	102W	XL	BLT	783407388	228220	9.0 - 10.5	9.5	10.7	29.3	1,874	9	713	300 AA A	Tesla Model X: 16-17
285/35R22	106W	XL	BLT	783411388	228292	9.5 - 11.0	10.0	11.4	29.9	2,094	9	699	300 AA A	Tesla Model X: 16-17
<b>EAGLE F1 ASYMMETRIC 3 ROF</b>														
* P245/40R18	93Y	SL	BLT	783428385	227365	8.0 - 9.5	8.5	9.8	25.7	1,433	9	813	240 AA A	Chevrolet Corvette: 16 (F)
** P245/35R19	89Y	SL	BLT	783349385	228975	8.0 - 9.5	8.5	9.8	25.8	1,279	9	810	240 AA A	Chevrolet Corvette Z51: 16 (F)
245/40R19	98Y	XL	BLT	783836385	232802	8.0 - 9.5	8.5	9.8	26.7	1,653	10	782	300 AA A	BMW 5 Series (G30): 17, Mercedes-Benz E-Class: 17
275/35R19	100Y	XL	BLT	783857385	232803	9.0 - 11.0	9.5	10.9	26.6	1,565	10	786	300 AA A	BMW 5 Series (G30): 17, Mercedes-Benz E-Class: 17
* P285/35R19	99Y	SL	BLT	783432385	227366	9.5 - 11.0	10.0	11.4	26.9	1,709	8	777	240 AA A	Chevrolet Corvette: 16 (R)
245/35R20	95Y	XL	BLT	783718385	232428	8.0 - 9.5	8.5	9.8	26.8	1,521	10	781	300 AA A	BMW 5 Series (G30): 17, Mercedes-Benz E-Class: 17
245/40R20	95Y	SL	BLT	783390385	225684	8.0 - 9.5	8.5	9.8	27.7	1,521	8	754	300 AA A	Chevrolet Camaro SS: 16-17 (F)
275/30R20	97Y	XL	BLT	783723385	232429	9.0 - 10.0	9.5	14.9	26.5	1,609	10	789	300 AA A	BMW 5 Series (G30): 17, Mercedes-Benz E-Class: 17
275/35R20	98Y	SL	BLT	783400385	225686	9.0 - 11.0	9.5	10.9	27.6	1,653	8	758	300 AA A	Chevrolet Camaro SS: 16-17 (R)
** P285/30R20	95Y	SL	BLT	783355385	228976	9.5 - 11.0	10.0	11.4	28.9	1,521	9	750	240 AA A	Chevrolet Corvette Z51: 16 (R)
<b>EAGLE F1 ASYMMETRIC 3 SCT (SOUND/COMFORT TECHNOLOGY)</b>														
265/35R22	102W	XL	BLT	783407394	230457	9.0 - 10.5	9.5	10.7	29.3	1,874	9	713	300 AA A	Tesla Model X: 16-17
285/35R22	106W	XL	BLT	783411394	230459	9.5 - 11.0	10.0	11.4	29.9	2,094	9	699	300 AA A	Tesla Model X: 16-17

\*Special size tuned for the 2016 Chevrolet Corvette C7.

\*\*Special size tuned for the 2016 Chevrolet Corvette C7 Z51.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.



# EAGLE® F1 ASYMMETRIC 2

(Select sizes with ROF/SoundComfort Technology®)

A Premium Tire for Ultra High-Performance Driving in Summer Months, Built for Responsive Handling and Control in Both Dry and Wet Conditions. Stops Up to 6% Shorter on Wet Asphalt Than a Leading Competitor.†



## FEATURES BENEFITS

1. Tread compound with motorsport resins	Helps provide superior dry handling
2. Lightweight, racing-derived construction	Helps reduce unsprung mass for enhanced steering precision and handling
3. ActiveBraking Technology	Offers enhanced stopping power on wet and dry roads
4. Advanced tread block pattern	Helps reduce excessive road noise

### PERFORMANCE RATINGS

Wet Traction	9
Dry Traction	9
Snow Traction	N/A
Responsiveness	9
Ride Comfort	7



### ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on BMW, Ford, Maserati, Mercedes-Benz and Porsche

† Based upon Goodyear internal Vehicle Stopping Distance, Wet Skid Test on 225/45R17 tire versus the Bridgestone Potenza S-04 Pole Position.

## EAGLE F1 ASYMMETRIC 2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* 215/45R17	91Y	XL	BLT	784809348	217204	7.0 - 8.0	7.0	8.4	24.7	1,356	10	848	300 AA A	
* 225/45R17	94Y	XL	BLT	784155348	225578	7.0 - 8.5	7.5	8.9	25.0	1,477	10	837	300 AA A	
* 225/45R17	91Y	SL	BLT	784166348	225736	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	300 AA A	
* 235/45R17	94Y	SL	BLT	784133348	225575	7.5 - 9.0	8.0	9.3	25.4	1,477	9	825	300 AA A	
* 235/45R17	97Y	XL	BLT	784159348	225579	7.5 - 9.0	8.0	9.3	25.4	1,609	10	825	300 AA A	
245/40R17	91Y	SL	BLT	784131348	225574	8.0 - 9.5	8.5	9.8	24.7	1,356	10	846	300 AA A	
* 225/40R18	92Y	XL	BLT	784163348	225580	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	300 AA A	
235/40R18	95Y	XL	BLT	784764348	219320	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823	240 AA A	Ford Focus ST: 13-17
* 235/45R18	98Y	XL	BLT	784342348	217712	7.5 - 9.0	8.0	9.3	26.3	1,653	10	793	300 AA A	
235/45ZR18	94Y	SL	BLT	784055348	221491	7.5 - 9.0	8.0	9.3	26.3	1,477	9	794	240 AA A	Porsche Boxster/Cayman: 12-17 (F)
235/45R18	98Y	XL	BLT	784426348	229972	7.5 - 9.0	8.0	9.3	26.3	1,653	10	794	240 AA A	Ford Fusion Titanium: 16-17
235/50R18	101W	XL	BLT	784168348	226229	6.5 - 8.5	7.5	9.7	27.3	1,819	10	766	300 AA A	
* 245/35R18	92Y	XL	BLT	784320348	217274	8.0 - 9.5	8.5	9.8	24.8	1,389	10	844	300 AA A	
* 245/40R18	93Y	SL	BLT	784327348	217279	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	300 AA A	
* 245/40R18	97Y	XL	BLT	784120348	225616	8.0 - 9.5	8.5	9.8	25.7	1,609	10	813	300 AA A	
245/50R18	100Y	SL	BLT	784441348	231121	7.0 - 8.5	7.5	10.0	27.7	1,764	10	756	240 AA A	
* 255/35R18	94Y	XL	BLT	784143348	225577	8.5 - 10.0	9.0	10.2	25.0	1,477	10	836	300 AA A	
* 255/45R18	103Y	XL	BLT	784329348	217286	8.0 - 9.5	8.5	10.0	27.1	1,929	10	773	300 AA A	
* 265/35R18	97Y	XL	BLT	784121348	225614	9.0 - 10.5	9.5	10.7	25.3	1,609	10	826	300 AA A	
265/45ZR18	101Y	SL	BLT	784066348	221492	8.5 - 10.0	9.0	10.5	27.4	1,819	9	764	240 AA A	Porsche Boxster/Cayman: 12-17 (R)
275/45ZR18	103Y	SL	BLT	784443348	231122	8.5 - 10.5	9.0	10.7	27.8	1,929	9	753	240 AA A	
* 225/35R19	88Y	XL	BLT	784340348	217312	7.5 - 9.0	8.0	9.1	25.2	1,235	10	828	300 AA A	
* 235/35R19	91Y	XL	BLT	784334348	217289	8.0 - 9.5	8.5	9.5	25.5	1,356	10	821	300 AA A	
235/40ZR19	92Y	SL	BLT	784045348	221459	8.0 - 9.5	8.5	9.5	26.4	1,389	9	791	240 AA A	Porsche 911: 12-17 (F), Porsche Boxster/Cayman: 12-15 (F)
235/55R19	101Y	SL	BLT	784437348	230361	6.5 - 8.5	7.5	9.7	29.2	1,819	9	717	240 AA A	Porsche Macan: 16
* 245/35R19	93Y	XL	BLT	784140348	225576	8.0 - 9.5	8.5	9.8	25.8	1,433	10	810	300 AA A	
* 255/30R19	91Y	XL	BLT	784344348	217713	8.5 - 9.5	9.0	10.2	25.1	1,356	10	833	300 AA A	
* 255/35R19	96Y	XL	BLT	784122348	225615	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803	300 AA A	
* 255/40R19	100Y	XL	BLT	784337348	217294	8.5 - 10.0	9.0	10.2	27.0	1,764	10	773	300 AA A	
255/50R19	103Y	SL	BLT	784439348	230362	7.0 - 9.0	8.0	10.4	29.1	1,929	9	719	240 AA A	Porsche Macan: 16-17
265/30R19	93Y	XL	BLT	784318348	217273	9.0 - 10.5	9.5	10.7	25.3	1,433	10	826	300 AA A	
265/40ZR19	98Y	SL	BLT	784067348	221493	9.0 - 10.5	9.5	10.7	27.4	1,653	9	764	240 AA A	Porsche Boxster/Cayman: 12-15 (R)
265/50R19	110Y	XL	BLT	784247348	228747	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	240 AA A	
275/30R19	96Y	XL	BLT	784360348	217714	9.0 - 10.0	9.5	10.9	25.6	1,565	10	818	300 AA A	
285/35ZR19	103Y	XL	BLT	784048348	221460	9.5 - 11.0	10.0	11.4	26.9	1,929	9	777	240 AA A	Porsche 911: 12-14 (R)
285/35R19	99Y	SL	BLT	784075348	223832	9.5 - 11.0	10.0	11.4	26.9	1,709	10	777	300 AA A	
295/35ZR19	100Y	SL	BLT	784093348	224591	10.0 - 11.5	10.5	11.9	27.1	1,764	9	771	240 AA A	Porsche 911: 12-17 (R)
235/35ZR20	88Y	SL	BLT	784194348	226927	8.0 - 9.50	8.5	9.5	26.5	1,235	9	790	240 AA A	Porsche Boxster/Cayman: 15-17 (F)
265/35ZR20	95Y	SL	BLT	784204348	226928	9.0 - 10.5	9.5	10.7	27.3	1,521	9	765	240 AA A	Porsche Boxster/Cayman: 15-17 (R)
285/40R21	109Y	XL	BLT	784445348	231304	9.5 - 11	10.0	11.4	30.0	2,271	10	#N/A	240 AA A	
<b>EAGLE F1 ASYMMETRIC 2 SUV MGT</b>														
265/45R20	108Y	XL	BLT	784741348	232626	8.5 - 10.0	9.0	10.5	29.4	2,205	9	711	240 AA A	Maserati M161-Levante: 17
<b>EAGLE F1 ASYMMETRIC 2 ROF</b>														
* 225/40R18	92W	XL	BLT	784087359	223874	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	240 AA A	Mercedes-Benz A & B Platform: 11-17, Mercedes-Benz CLA: 13-17
225/40R18	92W	XL	BLT	784806359	232799	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	240 AA A	
225/40R18	88Y	SL	BLT	784208359	227096	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	240 AA A	
245/35ZR18	88Y	SL	BLT	784238359	227097	8.0 - 9.5	8.5	9.5	24.5	1,235	10	855	240 AA A	BMW 2 Series: 14
225/40R19	89Y	SL	BLT	784044359	223276	7.5 - 9.0	8.0	9.1	26.1	1,279	10	801	240 AA A	BMW 3 Series: 12-17 (F)
225/40R19	93Y	XL	BLT	784182359	226533	7.5 - 9.0	8.0	0.0	26.1	1,433	10	801	240 AA A	Mercedes-Benz C-Class: 17 (F)
245/35R19	93Y	XL	BLT	784140359	226534	8.0 - 9.5	8.5	9.8	25.8	1,433	10	810	240 AA A	Mercedes-Benz C-Class: 17 (R)
255/35R19	92Y	SL	BLT	784054359	223277	8.5 - 10.0	9.0	10.2	26.0	1,389	10	803	240 AA A	BMW 3 Series: 12-17 (R)
245/40R20	99Y	XL	BLT	784117359	225601	8.0 - 9.5	8.5	9.8	27.7	1,709	9	754	240 AA A	Mercedes-Benz S-Class: 14-17 (F)
275/35R20	102Y	XL	BLT	784118359	225602	9.0 - 11.0	9.5	10.9	27.6	1,874	10	758	240 AA A	Mercedes-Benz S-Class: 14-17 (R)
<b>EAGLE F1 ASYMMETRIC 2 ROF SCT (SOUND COMFORT TECHNOLOGY)</b>														
245/40R20	99Y	XL	BLT	784117392	230249	8.0 - 9.5	8.5	9.8	27.7	1,709	9	754	240 AA A	Mercedes-Benz S-Class: 16-17 (R)
275/35R20	102Y	XL	BLT	784118392	230250	9.0 - 11.0	9.5	10.9	27.6	1,874	10	758	240 AA A	Mercedes-Benz S-Class: 16-17 (F)

\*Discontinued 2016.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.



# EAGLE® F1 SUPERCAR® 3R

A Track-Ready Tire Providing Superior Grip and Control in Dry Conditions



FEATURES	BENEFITS
1. Racing-derived tread compound	Helps to deliver superior performance in dry and damp conditions and provides consistent lap times
2. Asymmetric tread design with large and aggressive pattern ribs	Helps to provide phenomenal grip and precise steering response
3. Uniquely designed large outside shoulder and centerline blocks	Help to deliver maximum grip while cornering and exceptional dry handling stability
4. Combination Grip Technology	Helps to provide superior grip while cornering, allowing the vehicle to maneuver with more confidence under corner braking and acceleration
5. Lightweight, racing-derived construction	Helps to reduce unsprung mass for enhanced steering and handling precision, and temperature stability

## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Dry Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Chevrolet

## EAGLE F1 SUPERCAR 3R SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
305/30ZR19	98Y	SL	VSB	797001538	225690	10.5 - 11.5	11.0	12.3	26.3	1,653	5	796	80 AA A	Chevrolet Camaro Z28 Track Pack: 17
325/30ZR19	101Y	SL	VSB	797002538	225752	11.0 - 12.0	11.5	13.0	26.7	1,819	5	782	80 AA A	Chevrolet Camaro Z28 Track Pack: 17



# EAGLE® F1 SUPERCAR® 3

## A Race-Inspired Tire for Commanding Grip and Exceptional Handling in Dry Conditions



FEATURES	BENEFITS
1. Race-inspired tread compound	Helps to deliver superior performance in dry and damp conditions
2. Asymmetric tread design with full depth sipes on inside shoulder	Helps to provide commanding grip, precise steering response and enhanced wet traction
3. Uniquely designed large outside shoulder blocks and solid centerline	Help to deliver powerful grip while cornering and exceptional dry handling stability
4. Combination Grip Technology	Helps to provide superior grip while cornering, allowing the vehicle to maneuver with more confidence under corner braking and acceleration
5. Lightweight, racing-derived construction	Helps to reduce unsprung mass for enhanced steering and handling precision, and temperature stability

### POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Chevrolet


## EAGLE F1 SUPERCAR 3 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
285/30ZR20	95Y	SL	BSW	797788523	225754	9.5 - 11.0	10.0	11.4	28.9	1,521	7	782	220 AA A	Chevrolet Camaro ZL1: 17
305/30ZR20	99Y	SL	BSW	797789523	225756	10.5 - 11.5	11.0	12.3	27.2	1,709	7	768	220 AA A	Chevrolet Camaro ZL1: 17



# EAGLE® F1 ASYMMETRIC EAGLE® F1 ASYMMETRIC SUV

Active CornerGrip® Technology for Commanding Dry Grip  
and Ultra High-Performance Handling



Original Equipment on Audi,  
BMW, Land Rover, Mercedes-Benz,  
Porsche and Volkswagen

## EAGLE F1 ASYMMETRIC SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
205/55ZR17	91Y	SL	BLT	784160287	215274	5.5 - 7.5	6.5	8.4	25.9	1,356	10	807	240 AA A	Porsche Boxster/Cayman: 09-11 (F)
235/50ZR17	96Y	SL	BLT	784162287	215275	6.5 - 8.5	7.5	9.7	26.3	1,565	10	795	240 AA A	Porsche Boxster/Cayman: 09-11 (R)
235/35ZR19	87Y	SL	BLT	784164287	215276	8.0 - 9.5	8.5	9.5	25.5	1,201	10	820	240 AA A	Porsche Boxster/Cayman: 09-11 (F)
255/40R19	100Y	XL	BLT	784257336	217730	8.5 - 10.0	9.0	10.2	27.0	1,764	11	773	240 AA A	Audi A6: 11-17, A7: 11-17
255/45R19	104Y	XL	BLT	784008336	219430	8.0 - 9.5	8.5	10.0	28.1	1,984	10	745	240 AA A	Audi A8: 11-17
255/45ZR19	100Y	SL	BLT	784001287	222499	8.0 - 9.5	8.5	10.0	28.1	1,764	10	745	240 AA A	Porsche Panamera: 10-13 (F), Porsche Macan: 16-17
265/35ZR19	94Y	SL	BLT	784165287	215277	9.0 - 10.5	9.5	10.7	26.3	1,477	9	795	240 AA A	Porsche Boxster/Cayman: 09-11 (R)
285/40ZR19	103Y	SL	BLT	784006287	222500	9.5 - 11.0	10.0	11.4	28.0	1,929	9	747	240 AA A	Porsche Panamera: 10-13 (R)
255/55ZR20	110Y	XL	BLT	784389333	228992	7.0 - 9.0	8.0	10.4	31.0	2,337	10	674	240 AA A	
265/40R20	104Y	XL	BLT	784226336	217564	9.0 - 10.5	9.5	10.7	28.4	1,984	10	737	240 AA A	Audi A8: 11-17
<b>EAGLE F1 ASYMMETRIC ROF</b>														
255/50R19	107W	XL	BLT	784305333	225986	7.0 - 9.0	8.0	10.4	29.1	2,149	10	719	240 AA A	BMW X5: 14-17, X5: 14-17 (F)
285/45R19	111W	XL	BLT	784306333	225990	9.0 - 10.5	9.5	11.2	29.1	2,403	9	719	240 AA A	BMW X5: 14-17 (R)

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

## EAGLE F1 ASYMMETRIC SUV SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
*255/60R17	106V	SL	BLT	784253333	216343	7.0 - 9.0	7.5	10.2	29.1	2,094	10	719	240 AA A	Volkswagen Tiguan: 10-12
255/55R18	109Y	XL	BLT	784246333	216323	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720	240 AA A	Audi Q7: 10-15
255/55R18	109W	XL	BLT	784256333	216346	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720	240 AA A	Volkswagen Tiguan: 10-12
255/60R18	112W	XL	BLT	784500398	231367	7.0 - 9.0	7.5	10.2	30.0	2,469	10	696	240 AA A	
255/50R19	103W	SL	VSB	784287347	218483	7.0 - 9.0	8.0	10.3	29.1	1,929	10	719	240 AA A	Mercedes-Benz ML-Class: 13, 15-17
265/50R19	110Y	XL	BLT	784247333	216341	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	240 AA A	Audi Q7: 10-15
265/50R19	110Y	XL	BLT	784255333	216345	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	240 AA A	Porsche Cayenne: 10-17
255/55R20	110W	XL	BLT	784074333	223779	7.0 - 9.0	8.0	10.4	31.0	2,337	10	674	240 AA A	Land Rover L405: 13
255/55R20	109W	XL	BLT	784502398	231366	7.0 - 9.0	8.0	10.4	31.0	2,271	10	673	240 AA A	
275/45R20	110Y	XL	BLT	784248333	216342	8.5 - 10.5	9.0	10.7	29.8	2,337	10	702	240 AA A	Audi Q7: 10-15, Porsche Cayenne: 15-17
275/45R20	110W	XL	BLT	784254333	216344	8.5 - 10.5	9.0	10.7	29.8	2,337	10	702	240 AA A	Volkswagen Tiguan: 10-12
275/45R21	110W	XL	BLT	784072333	223778	8.5 - 10.5	9.5	10.8	30.8	2,337	10	680	240 AA A	Land Rover L405: 13

\*Discontinued 2016.



# EAGLE® F1 GS-D3

V-TRED™ Technology for Commanding Wet Traction for Ultra High-Performance Driving



Original Equipment on Volkswagen

### EAGLE F1 GS-D3 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
*255/45ZR17	98Y	SL	VSB	709256154	184092	8.0 - 9.5	8.5	10.0	26.1	1,653	10	802	280 AA A	
275/40ZR17	98Y	SL	VSB	709254154	184090	9.0 - 11.0	9.5	10.9	25.7	1,653	10	814	280 AA A	
*285/40ZR17	100Y	SL	VSB	709257154	184093	9.5 - 11.0	10.0	11.4	26.0	1,764	10	804	280 AA A	
315/35ZR17	102Y	SL	VSB	709260154	184094	10.5 - 12.5	11.0	12.6	25.7	1,874	10	814	280 AA A	
235/50R18	97V	SL	BLT	709001281	207568	6.5 - 8.5	7.5	9.7	27.3	1,609	11	766	280 AA A	Volkswagen Tiguan: 08-13

\*Discontinued 2016.



# EAGLE® F1 GS-2 EMT

Ultra High-Performance Tires for Specialty and OE Applications



Original Equipment on Chevrolet

### EAGLE F1 GS-2 EMT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P245/40ZR18	88Y	LL	VSB	406609164	201866	8.0 - 9.5	8.5	9.8	25.7	1,235	10	813	300 AA A	Chevrolet Corvette: 05-13 (F)
P285/35ZR19	90Y	LL	VSB	406610164	201867	9.5 - 11.0	10.0	11.4	26.9	1,323	11	777	300 AA A	Chevrolet Corvette: 05-13 (R)

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.



# EAGLE® F1 GS EMT

## Ultra High-Performance Tire for Specialty and OE Applications



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Chevrolet

### EAGLE F1 GS EMT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P245/45ZR17	89Y	SL	B02	406375063	90721	7.5 - 9.0	8.0	9.6	25.7	1,279	10	814	300 AA A	Chevrolet Corvette C5: 04 (F)
P275/40ZR18	94Y	SL	B02	406390063	90723	9.0 - 11.0	9.5	10.9	26.7	1,477	10	784	300 AA A	Chevrolet Corvette C5: 04 (R)

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

B02 – Broken serrated band – EMT



# EAGLE NCT<sup>®</sup> 5

Impressive OE Fitments on European and Asian High-Performance Vehicles



Dry Traction



Ultra Wet Traction



Steering Responsiveness



Original Equipment on BMW and Rolls-Royce

## EAGLE NCT 5 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
<b>EAGLE NCT 5 EMT</b>														
205/55R16	91V	SL	VSB	797937131	202199	5.5 - 7.5	6.5	8.4	24.9	1,356	12	840	240 A A	BMW Z4
255/50R21	106W	SL	VSB	797650149	203582	7.0 - 9.0	8.0	10.4	31.1	2,094	11	673	240 A A	Rolls-Royce Phantom: 05-17 (F)
285/45R21	109W	SL	VSB	797652149	203583	9.0 - 10.5	9.5	11.2	31.1	2,271	11	673	240 A A	Rolls-Royce Phantom: 05-17 (R)
<b>EAGLE NCT 5 ROF</b>														
205/50R17	89V	SL	BLT	797078556	216635	5.5 - 7.5	6.5	8.4	25.1	1,279	10	832	240 A A	BMW 1 Series: 10-14 (F)
205/50R17	89W	SL	BLT	797191556	217322	5.5 - 7.5	6.5	8.4	25.1	1,279	10	832	240 A A	BMW 1 Series: 10-14
225/45R17	91V	SL	BLT	797173556	216548	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	240 A A	BMW 1 Series: 10-14 (R)
225/45R17	91W	SL	BLT	797192556	217323	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	240 A A	BMW 1 Series: 10-13 (R)
245/45R17	95Y	SL	VSB	797638271	203049	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	240 A A	BMW 5 Series/6 Series: 07-10
245/40R18	93Y	SL	VSB	797590271	203047	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	240 A A	BMW 5 Series/6 Series: 07-10

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

ROF, RunOnFlat<sup>®</sup> radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# EXCELLENCE®

(Select sizes with ROF)

Original Equipment Tire on Select European Import Vehicles



Dry Traction



Ultra Wet Traction



Steering Responsiveness



Original Equipment on Audi, BMW, Mercedes-Benz, Mini and Volkswagen

## EXCELLENCE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
*195/65R15	91H	SL	BLT	684067293	217244	5.5 - 7.0	6.0	7.9	25.0	1,356	10	836	240 A A	Volkswagen Golf Vi: 10-13
235/60R18	103W	SL	BLT	684129293	215481	6.5 - 8.5	7.0	9.5	29.1	1,929	10	718	240 A A	Audi Q5: 09-10
255/45R20	101W	SL	BLT	684011293	224173	8.0 - 9.5	8.5	10.0	29.1	1,819	10	719	240 A A	Audi Q5: 13-17
<b>EXCELLENCE ROF</b>														
195/55R16	87V	SL	VSB	111971513	203120	5.5 - 7.0	6.0	7.9	24.4	1,202	10	856	240 A A	Mini Cooper S: 07-13
225/45R17	91W	SL	VSB	111870513	203392	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	240 A A	Mercedes-Benz C-Class: 07-14, CLK-Class: 07-14, SLK-Class: 07-17 (F)
225/55R17	97Y	SL	BLT	111272513	217118	6.0 - 8.0	7.0	9.2	26.8	1,609	9	781	240 A A	BMW 5 Series/6 Series: 11-14
245/40R17	91Y	SL	MBW	111986356	222281	8.0 - 9.5	8.5	9.8	24.7	1,356	10	846	240 A A	Mercedes-Benz CLK: 12
245/55R17	102W	SL	BLT	111018513	209230	7.0 - 8.5	7.5	10.0	27.7	1,874	10	756	240 A A	BMW 7 Series: 13-14, BMW 5 GT: 16-17
245/45R18	96Y	SL	BLT	111443513	217119	7.5 - 9.0	8.0	9.6	26.7	1,565	9	784	240 A A	BMW 5 Series/6 Series: 11-12
245/40R19	98Y	XL	BLT	111003513	219429	8.0 - 9.5	8.5	9.8	26.7	1,653	9	782	240 A A	BMW 6 Series: 12-17
245/45R19	98Y	SL	BLT	111016513	209228	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	240 A A	BMW 7 Series/5 GT: 09-13 (F)
275/35R19	96Y	SL	BLT	111446513	217121	9.0 - 11.0	9.5	10.9	26.6	1,565	9	787	240 A A	BMW 5 Series/6 Series: 11-16, BMW 5 Series/6 Series (F1X): 17
275/40R19	101Y	SL	BLT	111017513	209229	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	240 A A	BMW 7 Series/5 GT: 09-13 (R)
245/40R20	99Y	XL	BLT	111045513	209251	8.0 - 9.5	8.5	9.8	27.7	1,709	10	754	240 A A	BMW X3: 13, BMW 7 Series: 13-14, BMW 5 GT: 16-17 (F)
275/35R20	102Y	XL	BLT	111048513	209252	9.0 - 11.0	9.5	10.9	27.6	1,874	10	757	240 A A	BMW X3: 13, BMW 7 Series: 13-14, BMW 5 GT: 16-17 (R)

\*Discontinued 2016.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# EFFICIENTGRIP™

(Select sizes with ROF/ROF SoundComfort Technology®)  
Original Equipment Tire on Select European Vehicles

FEATURES	BENEFITS
----------	----------

Optimized silica tread compound	Helps provide enhanced traction in wet conditions
Wide Circumferential Grooves	Help evacuate water from beneath the tread
OE-tuned asymmetric tread design	Provides responsive handling and a smooth touring ride



Dry Traction



Ultra Wet Traction



Steering Responsiveness



Original Equipment on Audi, BMW, Mercedes-Benz, Mini and Rolls-Royce

## EFFICIENTGRIP SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
205/55R16	91W	SL	BLT	112187381	225613	5.5 - 7.5	6.5	8.4	24.9	1,356	10	840	340 A A	Audi A3: 10, BMW 1 Series: 12-13
225/55R17	101V	XL	BLT	112032534	232872	6.0 - 8.0	7.0	9.2	26.8	1,819	10	781	340 A A	
* 235/45R18	94Y	SL	BLT	112028381	231870	7.5 - 9.0	8.0	9.3	26.3	1,477	10	794	320 A A	
* 235/50R18	99V	SL	BLT	112030381	232385	6.5 - 8.5	7.5	9.7	27.3	1,709	10	767	440 A A	
255/45R18	99Y	SL	BLT	112350381	218995	8.0 - 9.5	8.5	10.0	27.1	1,709	11	773	340 A A	Audi A7: 11-17
235/55R19	105V	XL	BLT	112019381	228640	6.5 - 8.5	7.5	9.7	29.2	2,039	11	717	440 A A	
<b>EFFICIENTGRIP ROF</b>														
205/55R16	91W	SL	BLT	112187344	222291	5.5 - 7.5	6.5	8.4	24.9	1,356	9	840	340 A A	BMW 1 Series: 14
* 225/45R18	91V	SL	BLT	112206344	217524	7.0 - 8.5	7.5	8.9	25.9	1,356	10	806	340 A A	BMW X1: 11-16 (F), Mini Countryman: 11-17
225/45R18	91W	SL	BLT	112303344	218705	7.0 - 8.5	7.5	8.9	25.9	1,356	10	806	340 A A	BMW X1: 12-16 (F)
225/45R18	91Y	SL	BLT	112005344	222729	7.0 - 8.5	7.5	8.9	25.9	1,356	10	806	340 A A	BMW 3 Series: 12-17 (F)
225/45R18	91V	SL	BLT	112031344	232663	7.0 - 8.5	7.5	8.9	25.9	1,356	10	805	340 A A	
255/40R18	95V	SL	BLT	112199344	217523	8.5 - 10.0	9.0	10.2	26.0	1,521	11	803	340 A A	BMW X1: 11-13 (R), BMW X1: 14-16
255/40R18	95Y	SL	BLT	112006344	222730	8.5 - 10.0	9.0	10.2	26.0	1,521	11	803	340 A A	BMW 3 Series: 12-17 (R)
235/45R19	95V	SL	BLT	112014344	227807	7.5 - 9.0	8.0	9.3	27.4	1,521	10	764	340 A A	Mercedes-Benz GLA: 15
255/40R19	100Y	XL	BLT	112228344	217692	8.5 - 10.0	9.0	10.2	27.0	1,764	10	773	340 A A	Audi A6: 11-14, A7: 11-17
255/50R19	103Y	SL	BLT	112068344	217245	7.0 - 9.0	8.0	10.4	29.1	1,929	11	718	340 A A	Rolls-Royce Ghost: 10-17 (R)
255/45R20	101Y	SL	BLT	112126344	217246	8.0 - 9.5	8.5	10.0	29.1	1,819	9	719	340 A A	Rolls-Royce Ghost: 10-17 (F)
285/40R20	104Y	SL	BLT	112185344	217239	9.5 - 11.0	10.0	11.4	29.0	1,984	11	721	340 A A	Rolls-Royce Ghost: 10-17 (R)
<b>EFFICIENTGRIP ROF SCT (SOUNDComfort TECHNOLOGY)</b>														
245/45R19	102Y	XL	BLT	112020391	230247	7.5 - 9.0	8.0	9.6	27.7	1,874	9	755	340 A A	
275/40R19	101Y	SL	BLT	112026391	230248	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	340 A A	

\*Discontinued 2016.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# EFFICIENTGRIP™ PERFORMANCE ROF

## EFFICIENTGRIP PERFORMANCE ROF SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
195/55R16	87W	SL	BLT	112015379	228037	5.5 - 7.0	6.0	7.9	24.4	1,201	10	856	340 A A	Mini Cooper F56: 14-15

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# EAGLE® F1 ASYMMETRIC ALL-SEASON

(Select sizes with ROF/SoundComfort Technology®)

Our Best Tire for Ultra High-Performance Driving With Superior Responsiveness and Expert Handling in All Seasons – Dry, Wet and Snow




FEATURES	BENEFITS
1. Proven asymmetric tread	For precise, race-inspired handling on wet or dry roads
2. Dry Handling Zone	With powerful tread blocks puts more rubber on the road for superb dry traction and handling
3. All-Season Zone	Helps push water and slush away from the tread for enhanced all-season traction
4. Specialized tread compound	Offers enhanced wet and dry traction in any season
5. TredLock Technology	Microgrooves help provide biting edges for enhanced wet traction and lock together for confident grip in turns

- 1. Proven asymmetric tread
- 2. Dry Handling Zone
- 3. All-Season Zone
- 4. Specialized tread compound
- 5. TredLock Technology

- For precise, race-inspired handling on wet or dry roads
- With powerful tread blocks puts more rubber on the road for superb dry traction and handling
- Helps push water and slush away from the tread for enhanced all-season traction
- Offers enhanced wet and dry traction in any season
- Microgrooves help provide biting edges for enhanced wet traction and lock together for confident grip in turns

## PERFORMANCE RATINGS



## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Chevrolet, Ford, Lincoln, Nissan and Tesla

## EAGLE F1 ASYMMETRIC ALL-SEASON SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
205/55ZR16	91W	SL	FSB	104294357	218793	5.5 - 7.5	6.5	8.4	24.9	1,356	10	840	500 AA A	
205/45ZR17	88W	XL	FSB	104115357	218783	6.5 - 7.5	7.0	8.1	24.3	1,235	10	862	500 AA A	
205/50ZR17	93W	XL	FSB	104711357	218784	5.5 - 7.5	6.5	8.4	25.1	1,433	10	832	500 AA A	
215/45ZR17	91W	XL	FSB	104945357	218656	7.0 - 8.0	7.0	8.4	24.7	1,356	10	848	500 AA A	
225/45ZR17	91W	SL	FSB	104097357	218653	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	500 AA A	
225/50ZR17	94W	SL	FSB	104090357	218658	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	500 AA A	
*225/55ZR17	97W	SL	FSB	104129357	218792	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781	500 AA A	
235/45ZR17	94W	SL	FSB	104946357	218655	7.5 - 9.0	8.0	9.3	25.4	1,477	10	824	500 AA A	
235/50ZR17	96W	SL	FSB	104091357	218796	6.5 - 8.5	7.5	9.7	26.3	1,565	10	795	500 AA A	
235/55ZR17	99W	SL	FSB	104434357	218789	6.5 - 8.5	7.5	9.7	27.2	1,709	10	769	500 AA A	
245/40ZR17	91W	SL	FSB	104037357	223233	8.0 - 9.5	8.5	9.8	24.7	1,356	10	845	500 AA A	
245/45ZR17	95Y	SL	FSB	104109357	218781	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	500 AA A	
*255/40ZR17	94W	SL	FSB	104040357	223234	8.5 - 10.0	9.0	10.2	25.0	1,477	10	835	500 AA A	
275/40ZR17	98W	SL	FSB	104138357	218795	9.0 - 11.0	9.5	10.9	25.7	1,653	10	814	500 AA A	
225/40ZR18	92Y	XL	FSB	104225357	218657	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	500 AA A	
225/45ZR18	95Y	XL	FSB	104627357	218659	7.0 - 8.5	7.5	8.9	25.9	1,521	10	806	500 AA A	
225/50ZR18	95W	SL	FSB	104331357	226650	6.0 - 8.0	7.0	9.2	26.9	1,521	10	777	500 AA A	
235/40ZR18	95Y	XL	FSB	104619357	218788	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823	500 AA A	
235/50R18	97W	SL	FSB	104207357	223141	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	500 AA A	Ford Mustang: 15-17, Lincoln Continental: 17
245/35ZR18	92Y	XL	FSB	104324357	226783	8.0 - 9.5	8.5	9.5	24.5	1,389	10	855	500 AA A	
245/40ZR18	93Y	SL	FSB	104107357	218660	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	500 AA A	
245/45ZR18	96Y	SL	FSB	104100357	218654	7.5 - 9.0	8.0	9.6	26.7	1,565	10	784	500 AA A	
255/35ZR18	94Y	XL	FSB	104135357	218794	8.5 - 10.0	9.0	10.2	25.0	1,477	10	836	500 AA A	
255/40ZR18	95Y	SL	FSB	104732357	223883	8.5 - 10.0	9.0	10.2	26.0	1,521	10	803	500 AA A	
255/45ZR18	99W	SL	FSB	104126357	218787	8.0 - 9.5	8.5	10.0	27.0	1,709	10	773	500 AA A	
265/35ZR18	97Y	XL	FSB	104626357	218804	9.0 - 10.5	9.5	10.7	25.3	1,609	10	826	500 AA A	
265/40ZR18	101Y	XL	FSB	104631357	226785	9.0 - 10.5	9.5	10.7	26.3	1,819	10	795	500 AA A	
275/35ZR18	95Y	SL	FSB	104376357	218801	9.0 - 11.0	9.5	10.9	25.6	1,521	10	818	500 AA A	
275/40ZR18	99Y	SL	FSB	104148357	218800	9.0 - 11.0	9.5	10.9	26.7	1,709	10	784	500 AA A	
285/35ZR18	97Y	SL	FSB	104295357	226649	9.5 - 11.0	10.0	11.4	25.9	1,609	10	807	500 AA A	
225/40ZR19	93Y	XL	FSB	104291357	226648	7.5 - 9.0	8.0	9.1	26.1	1,433	10	801	500 AA A	
225/45ZR19	92Y	SL	FSB	104322357	226782	7.0 - 8.5	7.5	8.9	27.0	1,389	10	775	500 AA A	
235/35ZR19	91Y	XL	FSB	104727357	218806	8.0 - 9.5	8.5	9.5	25.5	1,356	10	821	500 AA A	
235/40R19	96W	XL	FSB	104504357	227763	8.0 - 9.5	8.5	9.5	26.4	1,565	10	791	500 AA A	Ford Fusion Sport: 17
245/40ZR19	94Y	SL	FSB	104041357	223235	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	500 AA A	
245/40ZR19	94W	SL	FSB	104388357	226602	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	500 AA A	Nissan Maxima: 16-17
255/35ZR19	96Y	XL	FSB	104633357	218790	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803	500 AA A	
255/40ZR19	96Y	SL	FSB	104086357	223884	8.5 - 10.0	9.0	10.2	27.1	1,565	10	773	500 AA A	
255/50ZR19	107W	XL	FSB	104383357	221871	7.0 - 9.0	8.0	10.4	29.1	2,149	10	718	500 AA A	
265/35ZR19	94Y	SL	FSB	104341357	226786	9.0 - 10.5	9.5	10.7	26.3	1,477	10	795	500 AA A	
*265/50ZR19	110V	XL	FSB	104215357	228216	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	500 AA A	
275/35ZR19	96Y	SL	FSB	104734357	218803	9.0 - 11.0	9.5	10.9	26.6	1,565	10	787	500 AA A	
*275/40ZR19	101Y	SL	FSB	104738357	218798	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	500 AA A	
285/30ZR19	98Y	XL	FSB	104382357	218808	9.5 - 11.0	10.0	11.4	25.8	1,653	10	810	500 AA A	
285/35ZR19	99Y	SL	FSB	104545357	221872	9.5 - 11.0	10.0	11.4	26.9	1,709	10	777	500 AA A	
245/40ZR20	99W	XL	FSB	104433357	225276	8.0 - 9.5	8.5	9.8	27.7	1,709	9	754	500 AA A	
245/45ZR20	103Y	XL	FSB	104258357	226647	7.5 - 9.0	8.0	9.6	28.7	1,929	10	729	500 AA A	
*255/45ZR20	101Y	SL	FSB	104296357	226781	8.0 - 9.5	8.5	10.0	29.1	1,819	10	719	500 AA A	
255/45ZR20	101W	SL	FSB	104784357	232546	8.0 - 9.5	8.5	10.0	29.1	1,819	10	720	500 AA A	
265/35ZR20	99W	XL	FSB	104436357	226572	9.0 - 10.5	9.5	10.7	27.3	1,709	9	765	500 AA A	Ford Mustang: 17
*275/35ZR20	102Y	XL	FSB	104379357	218802	9.0 - 11.0	9.5	10.9	27.6	1,874	10	758	500 AA A	
275/40ZR20	106Y	XL	FSB	104241357	226646	9.0 - 11.0	9.5	10.9	28.7	2,094	10	729	500 AA A	
<b>EAGLE F1 ASYMMETRIC ALL-SEASON ROF</b>														
245/40R20	95V	SL	FSB	104423390	225682	8.0 - 9.5	8.5	9.8	27.7	1,521	9	754	500 AA A	Chevrolet Camaro 2LT: 16-17 (R)
<b>EAGLE F1 ASYMMETRIC ALL-SEASON SCT (SOUND/COMFORT TECHNOLOGY)</b>														
245/40ZR18	93Y	SL	FSB	104564393	232311	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	500 AA A	
245/40ZR19	94Y	SL	FSB	104540393	232322	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	500 AA A	
255/50ZR19	107W	XL	FSB	104507393	232285	7.0 - 9.0	8.0	10.4	29.1	2,149	10	720	500 AA A	
*265/50R19	110V	XL	FSB	104215393	230455	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	500 AA A	Tesla Model X: 16
245/40R20	99W	XL	FSB	104433393	230945	8.0 - 9.5	8.5	9.8	27.7	1,521	9	754	500 AA A	Lincoln Continental: 17

\*Discontinued 2016.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# EAGLE® SPORT ALL-SEASON

(Select sizes with ROF)

A Powerful Sport Performance Tire With Enhanced Responsive Handling and Strong Grip in All Season Conditions



FEATURES	BENEFITS
1. Proven tread pattern	Offers both responsive handling and exceptional all-season grip
2. Innovative tread compound	Offers outstanding wet and dry performance, with enhanced grip in ice and snow
3. Full-depth sipes	Offer biting edges for confident grip as the tire wears
4. Rim protector	Helps protect wheels against accidental curb damage

## PERFORMANCE RATINGS

Wet Traction	8
Dry Traction	7
Snow Traction	8
Responsiveness	8
Ride Comfort	8

## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Audi, BMW, Cadillac, Chevrolet, Fiat, Maserati and Mercedes-Benz

# ALL-SEASON SPORT/TOURING

PERFORMANCE

## EAGLE SPORT ALL-SEASON SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
195/55R15	85V	SL	VS	109911366	222192	5.5 - 7.0	6.0	7.9	23.4	1,135	10	892	560 A A	
195/60R15	88V	SL	VS	109848366	222124	5.5 - 7.0	6.0	7.9	24.2	1,235	10	864	560 A A	
195/65R15	91V	SL	VS	109174366	222128	5.5 - 7.0	6.0	7.9	25.0	1,356	10	836	560 A A	
195/55R16	87V	SL	VS	109032366	222193	5.5 - 7.0	6.0	7.9	24.4	1,201	10	856	560 A A	
205/50R16	87V	SL	VS	109134366	222186	5.5 - 7.5	6.5	8.4	24.1	1,201	10	867	560 A A	
205/55R16	91V	SL	VS	109907366	222123	5.5 - 7.5	6.5	8.4	24.9	1,356	10	840	560 A A	
205/60R16	92V	SL	VS	109910366	222127	5.5 - 7.5	6.0	8.2	25.7	1,389	10	816	560 A A	
215/55R16	93V	SL	VS	109887366	222179	6.0 - 7.5	7.0	8.9	25.3	1,433	10	827	560 A A	
215/60R16	95V	SL	VS	109902366	222125	6.0 - 7.5	6.5	8.7	26.1	1,521	10	800	560 A A	
225/50R16	92V	SL	VS	109035366	222194	6.0 - 8.0	7.0	9.2	24.9	1,389	10	839	560 A A	
225/55R16	95V	SL	VS	109485366	222188	6.0 - 8.0	7.0	9.2	25.8	1,521	10	812	560 A A	
225/60R16	98V	SL	VS	109361366	222172	6.0 - 8.0	6.5	9.0	26.6	1,653	10	786	560 A A	
205/45R17	88V	XL	VS	109136366	222201	6.5 - 7.5	7.0	8.1	24.3	1,235	10	862	560 A A	
205/50R17	93V	XL	VS	109576366	222180	5.5 - 7.5	6.5	8.4	25.1	1,433	10	832	560 A A	
215/45R17	91W	XL	VS	109053366	222175	7.0 - 8.0	7.0	8.4	24.7	1,356	10	846	560 A A	
215/50R17	91V	SL	VS	109912366	222177	6.0 - 7.5	7.0	8.9	25.5	1,356	10	819	560 A A	
215/55R17	94V	SL	VS	109085366	225131	6.0 - 7.5	7.0	8.9	26.3	1,477	10	795	560 A A	
225/45R17	94W	XL	VS	109044366	222129	7.0 - 8.5	7.5	8.9	25.0	1,477	10	837	560 A A	
225/50R17	94W	SL	VS	109083366	222173	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	560 A A	
225/55R17	97V	SL	VS	109923366	222176	6.0 - 8.0	7.0	9.2	26.8	1,609	10	780	560 A A	
235/45R17	94W	SL	VS	109270366	222171	7.5 - 9.0	8.0	9.3	25.4	1,477	10	824	560 A A	
235/50R17	96W	SL	VS	109064366	222199	6.5 - 8.5	7.5	9.7	26.3	1,565	10	795	560 A A	
235/55R17	99W	SL	VS	109046366	222130	6.5 - 8.5	7.5	9.7	27.2	1,709	10	768	560 A A	
245/40R17	91W	SL	VS	109060366	222195	8.0 - 9.5	8.5	9.8	24.7	1,356	10	846	560 A A	
245/45R17	95W	SL	VS	109059366	222190	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	560 A A	
255/40R17	94W	SL	VS	109075366	222207	8.5 - 10.0	9.0	10.3	25.0	1,477	10	836	560 A A	
215/45R18	93W	XL	VS	109065366	222202	7.0 - 8.0	7.0	8.4	25.6	1,433	10	815	560 A A	
225/40R18	92W	XL	VS	109055366	222183	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	560 A A	
225/45R18	95W	XL	VS	109058366	222191	7.0 - 8.5	7.5	8.9	25.9	1,521	10	806	560 A A	
225/55R18	98V	SL	VS	109086382	228531	6.0 - 8.0	7.0	9.2	27.8	1,653	10	753	560 A A	Fiat 500X: 17
225/60R18	100V	SL	VS	109132366	222182	6.0 - 8.0	6.5	9.0	28.6	1,764	10	731	560 A A	
235/40R18	95W	XL	VS	109063366	222198	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823	560 A A	
235/40R18	91W	SL	VS	109104366	226644	8.0 - 9.5	8.5	9.5	25.4	1,356	10	823	560 A A	
235/45R18	94V	SL	VS	109084366	224905	7.5 - 9.0	8.0	9.3	26.3	1,477	10	794	560 A A	
235/50R18	97W	SL	VS	109054366	222181	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	560 A A	
235/50R18	97V	SL	VS	109087366	225218	6.5 - 8.5	7.5	9.7	27.3	1,609	9	766	560 A A	Cadillac CT6: 17
235/60R18	107V	XL	VS	109133366	222187	6.5 - 8.5	7.0	9.5	29.1	2,149	11	718	560 A A	
245/40R18	93W	SL	VS	109057366	222185	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	560 A A	
245/45R18	96W	SL	VS	109056366	222184	7.5 - 9.0	8.0	9.6	26.7	1,565	10	784	560 A A	
245/45R18	100H	XL	VS	109093382	230774	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784	560 A A	
* 245/50R18	100V	SL	VS	109079366	223672	7.0 - 8.5	7.5	10.0	27.7	1,764	10	755	560 A A	
245/50R18	100V	SL	VS	109089366	225688	7.0 - 8.5	7.5	10.0	27.7	1,764	10	755	560 A A	Chevrolet Camaro: 16-17
255/35R18	94W	XL	VS	109080366	223674	8.5 - 10.0	9.0	10.2	25.0	1,477	10	836	560 A A	
255/40R18	99W	XL	VS	109072366	222205	8.5 - 10.0	9.0	10.2	26.0	1,709	10	803	560 A A	
255/55R18	109V	XL	VS	109112366	232974	7.0 - 9.0	8.0	10.4	29.0	2,271	11	721	560 A A	
255/60R18	108W	SL	BLT	109106399	231878	7.0 - 9.0	7.5	10.2	30.0	2,205	10	696	560 A A	Maserati M161-Levante: 17
255/60R18	108H	SL	BLT	109099382	231110	7.0 - 9.0	7.5	10.2	30.0	2,205	10	696	560 A A	Audi Q7: 16-17
265/45R18	101V	SL	VS	109098366	225214	8.5 - 10.0	9.0	10.5	27.4	1,819	10	764	560 A A	Cadillac CT6: 17
245/40R19	94W	SL	VS	109077366	223671	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	560 A A	
245/55R19	103V	SL	VS	109113366	232975	7.0 - 8.5	7.5	10.0	29.7	1,929	11	704	560 A A	
255/35R19	96W	XL	VS	109074366	222206	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803	560 A A	
255/50R19	107V	XL	VS	109020366	232976	7.0 - 9.0	8.0	10.4	29.1	2,149	11	718	560 A A	
255/60R19	109H	SL	VS	109110366	232972	7.0 - 9.0	7.5	10.2	31.1	2,271	11	672	560 A A	
265/50R19	110W	XL	BLT	109105399	231877	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	560 A A	Maserati M161-Levante: 17
235/55R20	102V	SL	VS	109100366	231498	6.5 - 8.5	7.5	9.7	30.2	1,874	10	693	560 A A	
245/35R20	95W	XL	VS	109066366	222203	8.0 - 9.5	8.5	9.8	26.8	1,521	10	781	560 A A	
245/45R20	103W	XL	VS	109069366	222204	7.5 - 9.0	8.0	9.6	28.7	1,929	10	729	560 A A	
245/50R20	102V	SL	VS	109111366	232973	7.0 - 8.5	7.5	10.0	29.7	1,874	11	704	560 A A	
255/35R20	97W	XL	VS	109081366	223675	8.5 - 10.0	9.0	10.2	27.0	1,609	10	774	560 A A	
255/45R20	101W	SL	VS	109082366	223676	8.0 - 9.5	8.5	10.0	29.1	1,819	11	719	560 A A	
255/50R20	109V	XL	VS	109108366	232971	7.0 - 9.0	8.0	10.9	30.1	2,271	11	694	560 A A	
255/55R20	107H	SL	VS	109114366	232977	7.0 - 9.0	8.0	10.4	31.0	2,149	11	674	560 A A	
275/40R20	106W	XL	VS	109062366	222196	9.0 - 11.0	9.5	10.9	28.7	2,094	11	728	560 A A	
* 275/55R20	117V	XL	VS	109138366	222189	7.5 - 9.5	8.5	11.2	31.9	2,833	11	655	560 A A	
285/45R22	110H	SL	VS	109115366	232979	9.0 - 10.5	9.5	11.2	32.1	2,337	11	651	560 A A	
<b>EAGLE SPORT ALL-SEASON ROF</b>														
* 225/55R17	97V	SL	BLT	109094395	230800	6.0 - 8.0	7.0	9.2	26.8	1,609	10	780	400 A A	BMW 5 Series (G30): 17, Mercedes-Benz E-Class: 17
225/50R18	95V	SL	BLT	109092395	230505	6.0 - 8.0	7.0	9.2	26.9	1,521	11	777	400 A A	BMW X1: 17
245/45R18	100V	XL	BLT	109095395	230921	7.5 - 9.0	8.0	9.6	26.7	1,764	10	783	400 A A	BMW 5 Series (G30): 17, Mercedes-Benz E-Class: 17
* 245/40R19	98V	XL	BLT	109107395	232804	8.0 - 9.5	8.5	9.8	26.7	1,653	10	783	400 A A	Mercedes-Benz E-Class: 17
255/55R19	111H	XL	BLT	109097395	230923	7.0 - 9.0	8.0	10.4	30.0	2,403	10	697	560 A A	Audi Q7: 16-17
255/45R20	105V	XL	BLT	109101395	231456	8.0 - 9.5	8.5	10.0	29.1	2,039	10	719	560 A A	
285/40R20	108H	XL	BLT	109102395	231457	9.5 - 11.0	10.0	11.4	29.0	2,205	10	721	560 A A	
285/45R20	112H	XL	BLT	109096395	230922	9.0 - 10.5	9.5	9.5	30.1	2,469	11	694	560 A A	Audi Q7: 16-17

\*Discontinued 2016.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# EAGLE RS-A®

(Select sizes with EMT)

A Quality Performance Tire for All-Season Traction in Dry, Wet and Snowy Conditions

1. Unique asymmetric tread design

2. Aggressive shoulder tread blocks and wide lateral grooves




## FEATURES

1. Unique asymmetric tread design
2. Aggressive shoulder tread blocks and wide lateral grooves

## BENEFITS

- Helps provide enhanced traction, superb cornering and a quiet ride
- Offer confident handling in wet, dry or snowy conditions

## PERFORMANCE RATINGS



## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Acura, BMW, Buick, Cadillac, Chevrolet, Chrysler, Dodge, Ford, GMC, Honda, Infiniti, Jeep, Lexus, Lincoln, Mazda, Mercury, Mitsubishi, Nissan, Pontiac, Saab, Saturn, Scion, Tesla and Toyota

# ALL-SEASON SPORT/TOURING

PERFORMANCE

## EAGLE RS-A SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
195/60R15	88H	SL	VS	732401500	214321	5.5 - 7.0	6.0	7.9	24.2	1,234	10	864	260 A A	
P205/55R16	89H	SL	VS	732170500	195751	5.5 - 7.5	6.5	8.4	24.9	1,279	11	840	260 A A	Honda Civic: 06-10, Acura CSX: 06-11
P205/55R16	89H	SL	VS	732674500	204489	5.5 - 7.5	6.5	8.4	24.9	1,279	11	840	260 A A	Toyota Corolla: 09-17, Matrix: 09-13, Scion XB: 12-16
205/55R16	91H	SL	VS	732051500	214399	5.5 - 7.5	6.5	8.4	24.9	1,356	11	840	260 A A	
P225/55R16	94H	SL	VS	732127500	158666	6.0 - 8.0	7.0	9.2	25.8	1,477	10	812	260 A A	Cadillac CTS: 04-07
*P235/70R16	104H	SL	VS	732804500	201538	6.0 - 8.0	7.0	9.5	29.0	1,984	11	721	260 A A	
P205/50R17	88V	SL	VS	732491500	191104	5.5 - 7.5	6.5	8.4	25.1	1,235	10	832	260 A A	Mazda MAZDA3: 04-11, Mazda MAZDA5: 05-11
P215/45R17	87W	SL	VS	732682500	204491	7.0 - 8.0	7.0	8.4	24.7	1,201	11	848	260 A A	Pontiac Vibe: 09-10, Toyota Matrix: 09-13, Corolla: 09-13
P215/55R17	93V	SL	VS	732262500	217743	6.0 - 7.5	7.0	8.9	26.3	1,433	10	795	260 A A	Nissan Juke: 10-16
225/50R17	94W	SL	BL	732514500	192396	6.0 - 8.0	7.0	9.2	25.9	1,477	11	807	260 A A	BMW 5 Series/6 Series: 07-10
*P225/50R17	93V	SL	VS	732515500	193363	6.0 - 8.0	7.0	9.2	25.9	1,433	10	807	260 A A	Mitsubishi Eclipse: 06-11
P225/55R17	95V	SL	VS	732941500	202674	6.0 - 8.0	7.0	9.2	26.8	1,521	10	781	260 A A	Infiniti G25: 12-17, Infiniti G37: 07-13
P235/50R17	95V	SL	VS	732277500	185477	6.5 - 8.5	7.5	9.7	26.3	1,521	10	795	260 A A	Infiniti G35 Coupe: 04-08 (R)
P235/65R17	103H	SL	VS	732957757	201843	6.5 - 8.5	7.0	9.5	29.1	1,929	11	719	260 A A	Dodge Nitro: 07-13
P255/60R17	105H	SL	VS	732371500	185460	7.0 - 9.0	7.5	10.2	29.1	2,039	11	719	260 A A	Cadillac SRX: 04-09 (R)
P275/60R17	110H	SL	VS	732372500	187327	7.5 - 9.5	8.0	11.0	30.0	2,337	12	697	260 A A	Chrysler Aspen: 06-09, Dodge Durango: 04-09, Dakota: 04-08
P225/45R18	91V	SL	VS	732646500	203939	7.0 - 8.5	7.5	8.9	25.9	1,356	11	806	260 A A	Ford Fusion: 08-12, Lincoln MKZ: 10-12, Mercury Milan: 10-11
P235/45R18	94V	SL	VS	732516500	193710	7.5 - 9.0	8.0	9.3	26.3	1,477	11	794	260 A A	Mitsubishi Eclipse: 06-11, Mitsubishi Galant: 12-13
P235/50R18	97W	SL	VS	732483500	187856	6.5 - 8.5	7.5	9.7	27.3	1,609	11	766	260 A A	Chevrolet Colorado: 08-13, Equinox: 08-09, Impala: 06-17, Monte Carlo: 06-07, GMC Canyon: 08-13, Pontiac Bonneville: 04-06, Torrent: 08-09
P235/55R18	99V	SL	VS	732373500	187663	6.5 - 8.5	7.5	9.7	28.2	1,709	10	742	260 A A	Lexus RX: 04-09, Toyota Sienna: 11-16
235/55R18	100V	SL	VS	732222500	230749	6.5 - 8.5	7.5	9.7	28.2	1,764	10	742	260 A A	Toyota Sienna: 17
P235/60R18	102H	SL	VS	732601500	201051	6.5 - 8.5	7.0	9.5	29.1	1,874	10	718	260 A A	Mazda CX-7: 06-12
P245/45R18	96V	SL	VS	732279438	200293	7.5 - 9.0	8.0	9.6	26.7	1,565	10	784	260 A A	Nissan Maxima: 07-15
P235/55R19	101H	SL	VS	732770500	214358	8.5 - 6.5	7.5	9.7	29.2	1,819	10	716	260 A A	Mazda CX-7: 09-12
P245/40R19	94V	SL	VS	732647500	204485	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	260 A A	Nissan Maxima: 09-15
P245/40R19	94W	SL	VS	732375500	219360	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	260 A A	Buick Regal: 11-13, Regal GS: 14-17
255/45R19	100V	SL	VS	732016500	218968	8.0 - 9.5	8.5	10.0	28.1	1,764	10	745	260 A A	Ford Taurus: 13-17
P255/60R19	108H	SL	VS	732587500	199486	7.0 - 9.0	7.5	10.2	31.1	2,205	11	673	260 A A	Buick Enclave: 11-17, GMC Acadia: 07-17, Saturn Outlook: 07-10
245/45ZR20	99Y	SL	VS	732548500	195684	7.5 - 9.0	8.0	9.6	28.7	1,709	11	729	260 A A	Chrysler 300C SRT8: 06-10, Dodge Magnum SRT8: 06-08, Charger SRT8: 06-10, Challenger SRT8: 08-11
245/45R20	99V	SL	VS	732603500	201292	7.5 - 9.0	8.0	9.6	28.7	1,709	11	729	260 A A	Chrysler 300: 09-10, Dodge Challenger: 09-10, Charger: 07-10
P245/50R20	102V	SL	VS	732612500	201929	7.0 - 8.5	7.5	10.0	29.7	1,874	11	704	260 A A	Dodge Nitro: 07-12
P245/50R20	102H	SL	VS	732899500	206589	7.0 - 8.5	7.5	10.0	29.7	1,874	10	704	260 A A	Toyota Venza: 09-17
255/45R20	101V	SL	BS	732007741	218966	8.0 - 9.5	8.5	10.0	29.1	1,819	11	719	260 A A	Lincoln MKT: 13-17
P255/50R20	104V	SL	VS	732550500	196404	7.0 - 9.0	8.0	10.9	30.1	1,984	10	695	260 A A	Cadillac SRX: 06-09, Chevrolet TrailBlazer: 06-09, Saab 9-7X: 08-09
P265/50R20	106V	SL	VS	732278500	186540	7.5 - 9.5	8.5	10.9	30.5	2,094	10	686	260 A A	Infiniti FX35: 05-14, Infiniti FX45: 04-14
P295/40R20	106H	SL	VS	732410500	183944	10.0 - 12.0	10.0	11.7	29.3	2,094	12	714	260 A A	Chevrolet SSR: 04-07 (R)
<b>EAGLE RS-A EMT</b>														
255/45R20	101W	SL	VS	474565372	198221	8.0 - 9.5	8.5	10.0	29.1	1,819	11	719	260 A A	Jeep Grand Cherokee SRT8: 06-10 (F)
285/40R20	104W	SL	VS	474566372	198223	9.5 - 11.0	10.0	11.4	29.0	1,984	12	721	260 A A	Jeep Grand Cherokee SRT8: 06-10 (R)
<b>EAGLE RS-A POLICE</b>														
P225/60R16	97V	SL	VS	732354500	103103	6.0 - 8.0	6.5	9.0	26.6	1,609	12	785	260 A A	
P225/60R16	97V	SL	VS	732354148	175293	6.0 - 8.0	6.5	9.0	26.6	1,609	11	785	340 A A	Ford Crown Victoria Interceptor: 04-05
P235/55R17	98W	SL	VS	732002500	136360	6.5 - 8.5	7.5	9.7	27.2	1,653	11	769	260 A A	Cadillac Seville STS: 04, Chevrolet Impala/Monte Carlo: 05, Ford Crown Victoria Police: 06-11
P235/55R17	98W	SL	VS	732297500	218651	6.5 - 8.5	7.5	9.7	27.2	1,653	11	769	260 A A	Chevrolet Impala Police: 12-17
*P265/60R17	108V	SL	VS	732301500	218830	7.0 - 9.5	8.0	10.7	29.5	2,205	11	708	260 A A	Chevrolet Tahoe Police: 12-17
P265/60R17	108V	SL	VS	732523500	231944	7.0 - 9.5	8.0	10.7	29.5	2,205	11	708	260 A A	Chevrolet Tahoe Police: 17
P225/60R18	99W	SL	VS	732312500	218769	6.0 - 8.0	6.5	9.0	28.6	1,709	11	730	260 A A	Dodge Charger Police: 11-14, Dodge Charger: 15, Chrysler 300: 15, Dodge Charger Pursuit: 16-17
P235/50R18	99W	XL	VS	732276500	218197	6.5 - 8.5	7.5	9.7	27.3	1,709	11	766	260 A A	Chevrolet Caprice Police: 11-17
245/55R18	103V	SL	VS	732026500	222703	7.0 - 8.5	7.0	10.0	28.6	1,929	11	730	260 A A	Ford Police Interceptor Sedan/Utility: 13-17, Dodge Charger Pursuit: 15-17
<b>EAGLE RS-A2</b>														
P245/45R19	98V	SL	VS	107172343	216808	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	440 A A	Tesla Model S: 13-17, Cadillac CTS: 11-14, XTS 13-17, Chevrolet Impala: 14-17, Buick LaCrosse: 14-17
245/45ZR20	99Y	SL	VS	107548343	218853	7.5 - 9.0	8.0	9.6	28.7	1,709	10	729	440 A A	Chrysler 300: 15-17, Chrysler 300 SRT8: 12-14, Dodge Challenger: 15-17, Challenger SRT8: 12-14, Charger: 15-17

\*Discontinued 2016.

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# EAGLE® LS/LS-2


(Select sizes with ROF/SoundComfort Technology®)

A Quality Performance Tire for a Smooth, Quiet Ride and Confident Cornering in Any Season



FEATURES	BENEFITS
1. Wide circumferential grooves	Help efficiently evacuate water from beneath the tread
2. Special tread block sequence	Helps enhance handling and traction and reduces tread noise
3. Premium sidewall styling	Contemporary appearance

## PERFORMANCE RATINGS



## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Acura, Audi, BMW, Buick, Cadillac, Chevrolet, Chrysler, Dodge, Fiat, Ford, GMC, Honda, Jeep, Kia, Lincoln, Mercedes-Benz, Mitsubishi, Nissan, Oldsmobile, Pontiac, Porsche, Saturn, Scion, Subaru, Toyota and Volkswagen

# ALL-SEASON SPORT/TOURING

PERFORMANCE

## EAGLE LS/LS-2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
<b>EAGLE LS</b>														
P185/60R15	84T	SL	VS	706460492	115230	5.0 - 6.5	5.5	7.5	23.8	1,102	9	880	360 A B	Dodge Neon SXT : 04-05
P185/60R15	84T	SL	BSW	706413034	185543	5.0 - 6.5	5.5	7.5	23.8	1,102	10	880	360 A B	Scion XB, XB: 04-07, Toyota Echo: 04-05, Toyota Yaris: 06-11
* P205/55R16	89T	SL	BSW	706180034	177430	5.5 - 7.5	6.5	8.4	24.9	1,279	10	840	360 A B	Chrysler PT Cruiser: 04-10, Convertible: 06-08, Touring: 04-05, Touring Convertible: 04-05
P205/60R16	91T	SL	VS	706536492	195241	5.5 - 7.5	6.0	8.2	25.7	1,356	10	814	360 A B	Chrysler Sebring LX, LXI, Limited Convertible: 04-05, Dodge Stratus SE/ES /SXT: 04-05, Stratus SXT: 04
* P225/60R16	97S	SL	BSW	706346034	72279	6.0 - 8.0	6.5	9.0	26.6	1,609	10	785	360 A B	Buick Century, Park Avenue: 04-05, Buick Regal: 04, Oldsmobile Silhouette: 04, Pontiac Grand Prix: 04-08
P255/65R16	106S	SL	OWL	706011140	156284	7.0 - 9.0	7.5	10.2	29.1	2,094	12	719	360 A B	Dodge Dakota: 04-07, Mitsubishi Raider: 06-07
P235/55R17	98H	SL	BSW	706421034	129984	6.5 - 8.5	7.5	9.7	27.2	1,653	12	769	360 A A	Buick Park Avenue Ultra: 04-05, Ford Crown Victoria: 04-08
P235/60R17	103S	XL	XNW	706052025	130736	6.5 - 8.5	7.0	9.5	28.1	1,929	11	744	360 A B	Cadillac DeVille/DTS Limo: 09-11, Cadillac DeVille: 04-06
P235/65R18	104T	SL	VS	706901492	184729	6.5 - 8.5	7.0	9.5	30.0	1,984	11	696	360 A A	Nissan Murano: 04-14
<b>EAGLE LS-2</b>														
P195/65R15	89S	SL	VS	706648163	204487	5.5 - 7.0	6.0	7.9	25.2	1,279	9	836	400 A B	Toyota Corolla: 09-13
205/55R16	91H	SL	BLT	706393308	225141	5.5 - 7.5	6.5	8.4	24.9	1,356	11	840	400 A A	Fiat 500L: 13-15, 17
P205/70R16	96T	SL	VS	706611163	201952	5.0 - 7.0	6.0	8.2	27.3	1,565	11	765	400 A B	Jeep Patriot: 07-17
215/55R16	97H	XL	VS	706581163	198622	6.0 - 7.5	7.0	8.9	25.3	1,609	11	827	400 A A	Volkswagen Passat: 06-14
P225/65R16	99H	SL	VS	706482163	187852	6.0 - 8.0	6.5	9.0	27.5	1,709	10	761	400 A A	Nissan Quest: 04-09
P215/45R17	87H	SL	VS	706203163	214398	7.0 - 8.0	7.0	8.4	24.7	1,201	10	848	400 A A	Kia Forte: 10-12
P215/50R17	90V	SL	VS	706687163	214151	6.0 - 7.5	7.0	8.9	25.5	1,323	10	819	400 A A	Kia Optima: 09-10
225/45R17	91H	SL	BLT	706113308	225142	7.0 - 8.5	7.5	8.9	25.0	1,356	11	837	400 A A	Fiat 500L: 13-15
225/50R17	94H	SL	BLT	706567163	205096	6.0 - 8.0	7.0	9.2	25.9	1,477	12	807	400 A A	Audi A5: 08-14
P225/55R17	95T	SL	BSW	706486153	189161	6.0 - 8.0	7.0	9.2	26.8	1,521	10	781	400 A B	Buick LaCrosse: 05-09, Chevrolet Impala: 06-17, Chevrolet Monte Carlo: 07
225/55R17	97H	SL	BLT	706447308	217728	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781	400 A A	Audi A6: 12-17
225/55R17	97H	SL	VS	706447163	222799	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781	400 A A	Acura TLX: 15-17
235/45R17	97H	XL	VS	706604163	201299	7.5 - 9.0	8.0	9.3	25.4	1,609	10	824	400 A A	Volkswagen Eos: 06-13, Volkswagen Passat: 13-14
245/45R17	95H	SL	BLT	706578163	205097	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	400 A A	Audi A5: 08-15
P225/50R18	94T	SL	BSW	706543153	196001	6.0 - 8.0	7.0	9.2	26.9	1,477	11	777	400 A B	Chevrolet Malibu: 08-12, Pontiac G6: 06-10, Saturn Aura: 07-10, Dodge Avenger: 11-14, Chrysler 200: 11-14
225/50R18	95H	SL	VS	706171163	222839	6.0 - 8.0	7.0	9.2	26.9	1,521	10	777	400 A A	Acura TLX: 15-17, Subaru Legacy: 15-17
225/50R18	95H	SL	VS	706171532	232661	6.0 - 8.0	7.0	9.2	26.9	1,521	10	778	400 A A	
P225/55R18	97H	SL	VS	706569163	198303	6.0 - 8.0	7.0	9.2	27.8	1,609	10	753	400 A A	Honda Element: 07-10
P225/55R18	97H	SL	BSW	706569153	203046	6.0 - 8.0	7.0	9.2	27.8	1,609	10	753	400 A A	Mitsubishi Outlander: 07-12, 14-16
235/45R18	94V	SL	VS	706038163	218855	7.5 - 9.0	8.0	9.3	26.3	1,477	10	792	400 A A	Ford Fusion: 13-17, Honda Accord: 15-17
235/45R18	94V	SL	VS	706588163	232316	7.5 - 9.0	8.0	9.3	26.3	1,477	10	794	400 A A	
P235/50R18	97H	SL	VS	706018163	218905	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	400 A A	Chevrolet Malibu: 13-17, Buick LaCrosse: 15-17
245/40R18	93H	SL	BLT	706014308	208169	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	400 A A	Audi A5: 08-15, Audi S5: 08-14
245/45R18	100H	XL	BLT	706239308	217729	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784	400 A A	Audi A6: 12
255/45R18	99H	SL	BLT	706196308	217522	8.0 - 9.5	8.5	10.0	27.0	1,709	11	773	400 A A	Audi A7: 11-17
255/55R18	109H	XL	BLT	706999308	217667	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720	400 A A	Lincoln MKT Limo: 13-17, Volkswagen Touareg: 11-14
255/55R18	109V	XL	BLT	706939308	217981	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720	400 A A	Porsche Cayenne: 11-17
255/55R18	105H	SL	VS	706068163	221842	7.0 - 9.0	8.0	10.4	29.0	2,039	11	720	400 A A	Subaru Tribeca: 06-11
235/55R19	101V	SL	BLT	706414308	229608	6.5 - 8.5	7.5	9.7	29.2	1,819	10	717	400 A A	Porsche Macan: 16-17
235/55R19	101H	SL	BLT	706356324	214734	6.5 - 8.5	7.5	9.7	29.2	1,819	10	716	400 A A	Audi Q5: 09-10
255/40R19	100H	XL	BLT	706195308	217521	8.5 - 10.0	9.0	10.2	27.0	1,764	11	773	400 A A	Audi A7: 11-14
255/45R19	104H	XL	BLT	706073308	215272	8.0 - 9.5	8.5	10.0	28.1	1,984	10	745	400 A A	Audi A8: 10-17
255/45R19	100V	SL	BLT	706016165	220386	8.0 - 9.5	8.5	10.0	28.1	1,764	10	745	400 A A	Porsche Panamera: 10-13 (F)
255/50R19	103V	SL	BLT	706422308	229609	7.0 - 9.0	8.0	10.4	29.1	1,929	10	719	400 A A	Porsche Macan: 16-17
265/50R19	110V	XL	BLT	706215308	217563	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	400 A A	Porsche Cayenne: 10-17
265/50R19	110H	XL	BLT	706598308	217668	7.5 - 9.5	8.5	10.9	29.5	1,060	10	709	400 A A	Volkswagen Tiguan: 11-12, Volkswagen Touareg: 13-14
265/50R19	110V	XL	BLT	706385308	228010	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	400 A A	Porsche Cayenne: 15
275/45R19	108V	XL	BLT	706928165	220194	8.5 - 10.5	9.0	10.7	28.8	2,205	10	726	400 A A	Porsche Cayenne: 07-09, Volkswagen Touareg: 08
285/40R19	103V	SL	BLT	706017165	220387	9.5 - 11.0	10.0	11.4	28.0	1,929	10	747	400 A A	Porsche Panamera: 10-13 (R)
275/45R20	110H	XL	BSW	706940165	202673	8.5 - 10.5	9.0	10.7	29.8	2,337	10	702	400 A A	Audi Q7: 07-15
275/45R20	110H	XL	BLT	706940308	217669	8.5 - 10.5	9.0	10.7	29.8	2,337	10	702	400 A A	Volkswagen Touareg: 11-13
275/45R20	110V	XL	BLT	706274308	217982	8.5 - 10.5	9.0	10.7	29.8	2,337	10	702	400 A A	Porsche Cayenne: 11-14
275/45R20	110V	XL	BLT	706386308	228041	8.5 - 10.5	9.0	10.8	29.8	2,337	10	702	400 A A	Porsche Cayenne: 15-16
P275/55R20	111S	SL	BLT	706069165	193043	7.5 - 9.5	8.5	11.2	31.9	2,403	11	655	360 A B	Cadillac Escalade: 06, Chevrolet Silverado: 06-17, Suburban: 06-10, Tahoe: 06-13, GMC Sierra: 06-17, Denali Yukon: 06-10, Dodge Ram 1500 SRT10: 06
P275/55R20	111S	SL	BLT	706069384	229059	7.5 - 9.5	8.5	11.2	31.9	2,403	11	655	360 A B	GM Special
<b>EAGLE LS-2 ROF</b>														
205/50R17	89H	SL	BSW	706795168	206176	5.5 - 7.5	6.5	8.4	25.1	1,279	12	833	400 A A	BMW 1 Series: 08-14
225/50R17	94H	SL	BLT	706567308	218704	6.0 - 8.0	7.0	9.2	25.9	1,477	10	806	400 A A	BMW X1: 11-16
225/55R17	97V	SL	BLT	706923322	217115	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781	400 A A	BMW 5 Series/6 Series: 11-16, BMW 5 Series/6 Series (F1X): 17
245/45R17	95H	SL	BLT	706578322	212679	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	400 A A	Mercedes-Benz E-Class: 10-16
* 245/45R18	100V	XL	BLT	706260322	217731	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784	400 A A	BMW 5 Series/6 Series: 11-16, BMW 5 Series/6 Series (F1X): 17
245/50R18	100V	SL	BLT	706070322	209455	7.0 - 8.5	7.5	10.0	27.7	1,764	10	755	400 A A	BMW 7 Series: 09-14, BMW X3: 11-17, BMW 5 GT: 16-17
245/50R18	100W	SL	BLT	706088322	216489	7.0 - 8.5	7.5	10.0	27.7	1,764	10	755	400 A A	BMW F01
255/55R18	109H	XL	VS	706999163	220018	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720	400 A A	BMW X5: 14-17
235/45R19	95H	SL	BLT	706377308	227808	7.5 - 9.0	8.0	9.3	27.4	1,521	10	764	400 A A	Mercedes GLA: 15
245/40R19	98V	XL	BLT	706387322	228749	8.0 - 9.5	8.5	9.8	26.7	1,653	10	782	400 A A	
245/40R19	100V	XL	BLT	706440322	230327	8.0 - 9.5	8.5	9.8	26.7	1,764	10	782	400 A A	BMW 5 Series/6 Series: 16
245/45R19	102V	XL	BLT	706280322	218195	7.5 - 9.0	8.0	9.6	27.7	1,874	10	755	400 A A	BMW 7 Series/5 GT: 16-17, BMW X3: 11-17
255/50R19	107H	XL	VS	706110163	220016	7.0 - 9.0	8.0	10.4	29.1	2,149	10	718	400 A A	BMW X5: 14-17
275/50R20	109H	SL	VS	706794163	206174	7.5 - 9.5	8.5							




# EAGLE® TOURING

Confident Handling and a Smooth, Quiet Ride for Luxury Performance

FEATURES	BENEFITS
Optimized tire contact area with the road	For enhanced handling and responsiveness
Biting edges	Help to provide confident all-season traction in wet, dry and snowy conditions
Optimized tread pattern	Helps to quiet noise from on-road driving

## PERFORMANCE RATINGS





All-Season



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Cadillac and Tesla

### EAGLE TOURING SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
245/45R19	98V	SL	VS8	102839387	225220	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	500 A A	Cadillac CT6: 17
245/45R19	98W	SL	VS8	102851387	231041	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	500 A A	
245/40R20	95W	SL	VS8	102850387	230732	8.0 - 9.5	8.5	9.8	27.7	1,521	9	754	500 A A	Cadillac CT6: 17
285/45R22	114H	XL	VS8	102863387	228472	9.0 - 10.5	9.5	11.2	32.1	2,601	10	651	500 A A	
<b>EAGLE TOURING SCT (SOUNDCOMFORT TECHNOLOGY)</b>														
245/45R19	98W	SL	VS8	102851396	231361	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	500 A A	Tesla Model S: 17

# ALL-SEASON SPORT/TOURING

## EAGLE GT® II

Classic Styling and All-Season Traction



All-Season



Original Equipment on Chevrolet,  
Ford and GMC

PERFORMANCE

### EAGLE GT II SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P275/45R20	106V	SL	VSB	106137625	175627	8.5 - 10.0	9.0	10.8	29.8	2,094	11	702	420 A A	Ford F-150/Harley Davidson Edition: 03
P285/50R20	111H	SL	VSB	106087625	165523	8.0 - 10.0	9.0	11.7	31.3	2,403	11	669	420 A A	Chevrolet Avalanche: 13, Chevrolet Silverado: 11-17, Suburban: 11-17, Tahoe: 11-17, GMC Sierra: 11-17, Yukon: 11-17, Yukon Denali: 11-17, Yukon (XL): 11-17, Denali (XL): 11-17
305/50R20	120H	XL	VSB	106182625	180550	8.5 - 11.0	9.5	12.4	32.0	3,086	11	653	420 A A	



# FIERCE INSTINCT® ZR

Ultra-High Performance With a Street-Smart Appearance

## FEATURES

Continuous, solid center rib

All-Season Zone with biting tread block edges

Twin circumferential grooves

Rim protector

Stylized black sidewall

## BENEFITS

Transfers lateral forces to help provide excellent stability at highway speeds

Enhances wet and winter weather performance

Help evacuate water from the tread for enhanced wet weather performance

Helps protect wheels from accidental curb damage

Complements any vehicle's appearance



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



All-Season

## FIERCE INSTINCT ZR SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
*215/45ZR17	91W	XL	BSW	353941178	213630	7.0 - 8.0	7.0	8.4	24.7	1,356	10	848	400 AA A
*225/45ZR17	94W	XL	BSW	353942178	213701	7.0 - 8.5	7.5	8.9	25.0	1,477	10	837	400 AA A
*225/50ZR17	94W	SL	BSW	353943178	213704	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	400 AA A
*235/45ZR17	94W	SL	BSW	353544178	213702	7.5 - 9.0	8.0	9.3	25.4	1,477	10	824	400 AA A
*235/55ZR17	99W	SL	BSW	353945178	213706	6.5 - 8.5	7.5	9.7	27.2	1,709	10	769	400 AA A
*245/40ZR17	91W	SL	BSW	353545178	213628	8.0 - 9.5	8.5	9.8	24.7	1,356	10	845	400 AA A
*245/45ZR17	95W	SL	BSW	353547178	213703	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	400 AA A
*255/40ZR17	94W	SL	BSW	353549178	213629	8.5 - 10.0	9.0	10.3	25.0	1,477	10	835	400 AA A
*215/45ZR18	93W	XL	BSW	353954178	213711	7.0 - 8.0	7.0	8.4	25.6	1,433	10	815	400 AA A
*225/40ZR18	92W	XL	BSW	353946178	213707	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	400 AA A
*225/45ZR18	95W	XL	BSW	353955178	213712	7.0 - 8.5	7.5	8.9	25.9	1,521	10	806	400 AA A
*235/40ZR18	95W	XL	BSW	353947178	213708	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823	400 AA A
*235/50ZR18	97W	SL	BSW	353958178	213714	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	400 AA A
*245/40ZR18	93W	SL	BSW	353949178	213709	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	400 AA A
*245/45ZR18	96W	SL	BSW	353956178	213713	7.5 - 9.0	8.0	9.6	26.7	1,565	10	784	400 AA A
*255/40ZR18	99W	XL	BSW	353953178	213710	8.5 - 10.0	9.0	10.2	26.0	1,709	10	803	400 AA A
*245/40ZR19	98W	XL	BSW	353987178	213718	8.0 - 9.5	8.5	9.8	26.7	1,653	10	782	400 AA A
*245/35ZR20	95W	XL	BSW	353279178	213720	8.0 - 9.5	8.5	9.8	26.8	1,521	10	781	400 AA A
*265/35ZR22	102W	XL	BSW	353989178	213722	9.0 - 10.5	9.5	10.7	29.3	1,874	10	713	400 AA A

\*Discontinued 2016.

# ALL-SEASON SPORT/TOURING

## FIERCE INSTINCT® VR

Sport Performance Traction Geared for All Seasons



PERFORMANCE

### FEATURES

- M+S-rated
- Rim protector
- Stylized black sidewall

### BENEFITS

- Helps deliver all-season traction and wet handling
- Helps protect wheels from accidental curb damage
- Complements any vehicle's appearance



All-Season



Dry Traction



Ultra Wet  
Traction



Steering  
Responsiveness



Cornering  
Stability

### FIERCE INSTINCT VR SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
* 195/55R15	85V	SL	BSW	353532177	212694	5.5 - 7.0	6.0	7.9	23.4	1,135	10	892	440 A A
* 205/50R16	87V	SL	BSW	353911177	212695	5.5 - 7.5	6.5	8.4	24.1	1,201	10	867	440 A A
* 205/55R16	91V	SL	BSW	353912177	212696	5.5 - 7.5	6.5	8.4	24.9	1,356	10	840	440 A A
* 215/55R16	93V	SL	BSW	353913177	212697	6.0 - 7.5	7.0	8.9	25.3	1,433	10	827	440 A A
* 225/50R16	92V	SL	BSW	353679177	214993	6.0 - 8.0	7.0	9.2	24.9	1,389	10	840	440 A A
* 225/55R16	95V	SL	BSW	353914177	212698	6.0 - 8.0	7.0	9.2	25.8	1,521	10	812	440 A A
* 205/50R17	93V	XL	BSW	353915177	212699	5.5 - 7.5	6.5	8.4	25.1	1,433	10	832	440 A A
* 215/50R17	91V	SL	BSW	353916177	212700	6.0 - 7.5	7.0	8.9	25.5	1,356	9	819	440 A A
* 215/55R17	94V	SL	BSW	353917177	212711	6.0 - 7.5	7.0	8.9	26.3	1,477	10	795	440 A A
* 225/55R17	97V	SL	BSW	353228177	212712	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781	440 A A

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# COMMUTER TOURING



Assurance® WeatherReady™	Assurance® ComforTred® Touring	Assurance® TripleTred® All-Season Assurance®CS TripleTred® All-Season	Assurance® Fuel Max® Assurance®CS Fuel Max®	Assurance® All-Season
Weather Reactive Traction for Predictable Control in Every Season	Confident All-Season Traction With Smooth Ride and Refined Handling	Confident All-Season Traction in Changing Weather Conditions	Confident All-Season Traction With Enhanced Fuel Savings	Confident All-Season Traction

	Wet Traction	Ride Comfort	Quiet Ride	Fuel Efficiency	Snow Traction
Assurance WeatherReady	10	8	9	8	10
Assurance ComforTred Touring	8	10	10	8	8
Assurance TripleTred All-Season Assurance®CS TripleTred All-Season	9	8	8	7	9
Assurance Fuel Max Assurance®CS Fuel Max	8	7	8	9	7
Assurance All-Season	7	7	7	8	7

### NUMERICAL RATING SCALE

1 = Lower Performance | 10 = Higher Performance

The rating scale can help you compare tires within each category. However, using the scale to distinguish between tires across different types of categories would be misleading.

# COMMUTER TOURING TIRE SELECTOR CHART

	PASSENGER/CIJ	PASSENGER	PASSENGER	PASSENGER	CIJ	PASSENGER	CIJ	PASSENGER/CIJ	PASSENGER
	Assurance® WeatherReady™ (Pg. 50)	Assurance® ComfortTred® Touring (Pg. 52)	Assurance® ComfortTred® (Pg. 52)	Assurance® TripleTred® All-Season (Pg. 54)	Assurance®cs TripleTred® All-Season (Pg. 56)	Assurance® Fuel Max® (Pg. 58)	Assurance®cs Fuel Max® (Pg. 60)	Assurance® All-Season (Pg. 62)	Integrity® (Pg. 64)
175/65R14									81S*
175/70R14									84T*
185/65R14						85H		86T	
185/70R14								88T	
195/70R14			90T*					91T	
175/65R15						84H			
185/55R15									82T
185/60R15						84T		84T	
185/65R15		86T				88H		88T	86S*
195/60R15		88H		88H		87H		88T	
195/65R15	91H	91H		91H		89H, 89S		91T	89S*
205/60R15		90H				90H		91T	
205/65R15		94H		94H		94H		94T	92T*
205/70R15			95T*			95T		96T	
205/75R15								97T	
215/65R15			95T*					96T	
215/70R15		98T				98T		98T	98S
215/75R15								100T	
175/60R16						82H			
195/55R16	87H					87V		87T	
205/50R16						86H		87H	
205/55R16	91H	91H		94H		89H, 91H		91H	
205/60R16	92V	91V		91V		91H, 92V		92T	
205/65R16	95H	95H				94T		95H	
215/55R16		93H		97H		91H		93H	
215/60R16	95H	94V		94T, 94V		95V, 94H		95T	
215/65R16	98H	98T		98T		98T		98T	
215/70R16	100T				99T		99T	100T	
225/55R16		95H				95H		95H	
225/60R16	98H	98H	97T*	98H		98H		98T	97S*
225/65R16						100H		100T	
225/70R16	103T	103T			101T		103T	103T	
235/60R16		100H				100H		100T	
235/65R16		103T		103T		103T		103T	
235/70R16					104T		106T	106T, 100H	104S
245/70R16					106T		107T		
245/75R16							111T		
255/70R16							111T		
265/70R16					111T		112T		
265/75R16							116T		
205/50R17		89V		93V					
215/45R17	87V					87V			
215/50R17		93V		93V		93V		91H	
215/55R17	94V	94V		94V		94V*		94H	
215/60R17	96H	96H		96H		95T		96T	
215/65R17	99H	98T		98H		98T		99T	
225/45R17		91V				91V			
225/50R17	94V	94V		94V		94V		94T	
225/55R17	97H	97V		97H		95H, 97V		97T	
225/60R17	99H	98H		98H		98T		99T	

\*Discontinued 2016.

# COMMUTER TOURING TIRE SELECTOR CHART

	PASSENGER/CUV	PASSENGER	PASSENGER	PASSENGER	CUV	PASSENGER	CUV	PASSENGER/CUV	PASSENGER
	Assurance® WeatherReady™ (Pg. 50)	Assurance® ComforTred® Touring (Pg. 52)	Assurance® ComforTred® (Pg. 52)	Assurance® TripleTred® All-Season (Pg. 54)	Assurance®CS TripleTred® All-Season (Pg. 56)	Assurance® Fuel Max® (Pg. 58)	Assurance®CS Fuel Max® (Pg. 60)	Assurance® All-Season (Pg. 62)	Integrity® (Pg. 64)
225/65R17	102H	102H			102H	102T	102H	102T	101S
235/45R17	97V	94H		97V					
235/55R17	99H	99H		99H		98H		99T	
235/60R17	102H	102H			102H	102H	102T	102T	
235/65R17	104H	104H			104H	103H		104T	
245/65R17					105T		107T		
245/70R17							108T		
255/60R17					106H				
265/65R17					110T		112T		
265/70R17					113T		113T		
215/55R18				95H					
225/45R18	95V								
225/50R18		94H							
225/55R18	98V	97H						98H	
225/60R18	100H		99H*			100H		100H	
235/45R18	94V								
235/50R18	97V								
235/55R18	100V	100V			100V		100V		
235/60R18	103H	102V	102T		103H		102H		
235/65R18	106H				104H		106T		
245/45R18		96V							
245/60R18	105H				105H		105T		
255/55R18	109V				109H		109H		
255/65R18	111T						111S		
255/65R18					109T				
255/70R18					112T		112T		
265/60R18							110H		
265/65R18					112H		112T		
265/70R18							116T		
225/55R19							99H		
235/55R19	101V				101V				
245/55R19	103H				103T		103T		
255/50R19	107H								
255/60R19	109H								
235/55R20	102H								
245/50R20	102H								
255/55R20	110H								

\*Discontinued 2016.



# ASSURANCE® WEATHERREADY™

Weather Reactive Traction for Predictable Control in Every Season



## FEATURES

1. Weather Reactive Technology

---

2. Asymmetric Tread

---

3. Sweeping Tread Grooves

---

4. Zigzag Biting Edges

---

5. Soy-based rubber compound with silica

## BENEFITS

- The combination of Evolving Traction® Grooves, which help you feel safe with like-new traction as the tire wears, and 3D Tredlock® Technology Blades, which provide predictable traction in turns when the weather changes
- 
- Gives you traction in any weather and helps reduce road noise
- 
- Force water away for steadfast control in the rain
- 
- Give you dependable, worry-free grip in snow and ice
- 
- Enhances traction in any weather

## PERFORMANCE RATINGS

Wet Traction	<div style="width: 100%; height: 10px; background-color: #ccc;"></div>	10
Ride Comfort	<div style="width: 80%; height: 10px; background-color: #ccc;"></div>	8
Quiet Ride	<div style="width: 90%; height: 10px; background-color: #ccc;"></div>	9
Fuel Efficiency	<div style="width: 80%; height: 10px; background-color: #ccc;"></div>	8
Snow Traction	<div style="width: 100%; height: 10px; background-color: #ccc;"></div>	10



## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Ultra Wet Traction



Severe Snow

## ASSURANCE WEATHERREADY SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
195/65R15	91H	SL	VS	767489537	230529	5.5 - 7.0	6.0	7.9	25.0	1,356	10	836	700 A A
195/55R16	87H	SL	VS	767820537	230528	5.5 - 7.0	6.0	7.9	24.4	1,201	10	857	700 A A
205/55R16	91H	SL	VS	767524537	230530	5.5 - 7.5	6.5	8.4	24.9	1,356	10	839	700 A A
205/60R16	92V	SL	VS	767570537	230551	5.5 - 7.5	6.0	8.2	25.7	1,389	10	813	700 A A
205/65R16	95H	SL	VS	767780537	230552	5.5 - 7.5	6.0	8.2	26.5	1,521	10	789	700 A A
215/60R16	95H	SL	VS	767829537	230554	6.0 - 7.5	6.5	8.7	26.1	1,521	10	801	700 A A
215/65R16	98H	SL	VS	767874537	230556	6.0 - 7.5	6.5	8.7	27.0	1,653	10	774	700 A A
215/70R16	100T	SL	VS	767782537	230558	5.5 - 7.0	6.5	8.7	27.9	1,764	11	749	700 A A
225/60R16	98H	SL	VS	767407537	230562	6.0 - 8.0	6.5	9.0	26.6	1,653	10	786	700 A A
225/70R16	103T	SL	VS	767378537	230566	6.0 - 7.5	6.5	9.0	28.4	1,929	11	736	700 A A
215/45R17	87V	SL	VS	767568537	230588	7.0 - 8.0	7.0	8.4	24.7	1,201	10	846	700 A A
215/55R17	94V	SL	VS	767340537	230553	6.0 - 7.5	7.0	8.9	26.3	1,477	10	795	700 A A
215/60R17	96H	SL	VS	767322537	230555	6.0 - 7.5	6.5	8.7	27.2	1,565	10	768	700 A A
215/65R17	99H	SL	VS	767875537	230557	6.0 - 7.5	6.5	8.7	28.0	1,709	10	746	700 A A
225/50R17	94V	SL	VS	767372537	230559	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	700 A A
225/55R17	97H	SL	VS	767753537	230560	6.0 - 8.0	7.0	9.2	26.8	1,609	10	780	700 A A
225/60R17	99H	SL	VS	767366537	230563	6.0 - 8.0	6.5	9.0	27.6	1,709	11	757	700 A A
225/65R17	102H	SL	VS	767517537	230565	6.0 - 8.0	6.5	9.0	28.5	1,874	11	733	700 A A
235/45R17	97V	XL	VS	767881537	230567	7.5 - 9.0	8.0	9.3	25.4	1,609	10	823	700 A A
235/55R17	99H	SL	VS	767181537	230571	6.5 - 8.5	7.5	9.7	27.2	1,709	11	768	700 A A
235/60R17	102H	SL	VS	767488537	230576	6.5 - 8.5	7.0	9.5	28.1	1,874	11	744	700 A A
235/65R17	104H	SL	VS	767188537	230578	6.5 - 8.5	7.0	9.5	29.1	1,984	11	718	700 A A
225/45R18	95V	XL	VS	767906537	232361	7.0 - 8.5	7.5	8.9	25.9	1,521	10	807	700 A A
225/55R18	98V	SL	VS	767880537	230561	6.0 - 8.0	7.0	9.2	27.8	1,653	10	752	700 A A
225/60R18	100H	SL	VS	767363537	230564	6.0 - 8.0	6.5	9.0	28.6	1,764	11	730	700 A A
235/45R18	94V	SL	VS	767871537	230568	7.5 - 9.0	8.0	9.3	26.3	1,477	10	795	700 A A
235/50R18	97V	SL	VS	767876537	230570	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	700 A A
235/55R18	100V	SL	VS	767877537	230572	6.5 - 8.5	7.5	9.7	28.2	1,764	11	741	700 A A
235/60R18	103H	SL	VS	767815537	230577	6.5 - 8.5	7.0	9.5	29.1	1,929	11	718	700 A A
235/65R18	106H	SL	VS	767885537	230579	6.5 - 8.5	7.0	9.5	30.0	2,094	11	697	700 A A
245/60R18	105H	SL	VS	767819537	230583	7.0 - 8.5	7.0	9.8	29.6	2,039	11	706	700 A A
255/55R18	109V	XL	VS	767903537	231534	7.0 - 9.0	8.0	10.4	29.0	2,271	11	721	700 A A
255/65R18	111T	SL	VS	767894537	230586	7.0 - 9.0	7.5	10.2	31.1	2,403	11	672	700 A A
235/55R19	101V	SL	VS	767883537	230573	6.5 - 8.5	7.5	9.7	29.2	1,819	11	716	700 A A
245/55R19	103H	SL	VS	767890537	230582	7.0 - 8.5	7.5	10.0	29.7	1,929	11	704	700 A A
255/50R19	107H	XL	VS	767905537	231535	7.0 - 9.0	8.0	10.4	29.1	2,149	11	718	700 A A
255/60R19	109H	SL	VS	767892537	230585	7.0 - 9.0	7.5	10.2	31.1	2,271	11	672	700 A A
235/55R20	102H	SL	VS	767884537	230574	6.5 - 8.5	7.5	9.7	30.2	1,874	11	693	700 A A
245/50R20	102H	SL	VS	767870537	230581	7.0 - 8.5	7.5	10.0	29.7	1,874	11	704	700 A A
255/55R20	110H	XL	VS	767891537	230584	7.0 - 9.0	8.0	10.4	31.0	2,337	11	674	700 A A

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# ASSURANCE® COMFORTRED® TOURING

Our Best Tire for a Smooth Ride With Refined Handling Plus Confident Traction in Changing Weather Conditions. Offers 20% More Cushion<sup>†</sup> and Outperforms the Leading Competitor in Ride Comfort.<sup>‡</sup>

1. Dual Comfort Zones in the tread and sidewall

2. A special Comfort Layer in the tread

5. Wide circumferential grooves



3. ComfortEdge® sidewalls

4. An asymmetric tread



## FEATURES

1. Dual Comfort Zones in the tread and sidewall
2. A special Comfort Layer in the tread
3. ComfortEdge sidewalls
4. An asymmetric tread
5. Wide circumferential grooves

## BENEFITS

Help optimize comfort and handling

Helps provide, on average, 20% more cushion than standard passenger tires for a smooth, comfortable ride<sup>†</sup>

Help provide a versatile balance of comfort and handling

Helps provide refined handling and confident wet traction

Help evacuate water away from the tread for traction on wet roads

## PERFORMANCE RATINGS

Wet Traction	8
Ride Comfort	10
Quiet Ride	10
Fuel Efficiency	8
Snow Traction	8



## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Comfortable, Refined Handling



Original Equipment on Chrysler, Dodge and Ford

<sup>†</sup> Source: Comparison of industry data for T-, H- and V-speed rated tires vs. Goodyear Assurance ComfortRed Touring.

<sup>‡</sup> Standard Goodyear Internal Ride Test-P215/60R16, 2008 Toyota Camry LE V6 railroad track at 35 mph vs. Michelin Primacy MXV4.

## ASSURANCE COMFORTRED TOURING SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P185/65R15	86T	SL	VS	413393329	215872	5.0 - 6.5	5.5	7.4	24.5	1,168	11	856	740 A B	
195/60R15	88H	SL	VS	413490329	215880	5.5 - 7.0	6.0	7.9	24.2	1,235	11	864	740 A B	
195/65R15	91H	SL	VS	413489329	215879	5.5 - 7.0	6.0	7.9	25.0	1,356	11	836	740 A B	
P205/60R15	90H	SL	VS	413148329	215874	5.5 - 7.5	6.5	8.2	24.7	1,301	11	846	740 A B	
205/65R15	94H	SL	VS	413403329	215873	5.5 - 7.5	6.0	8.3	25.5	1,477	11	820	740 A B	
215/70R15	98T	SL	VS	413390329	215871	5.5 - 7.0	6.5	8.7	26.9	1,653	11	777	740 A B	
205/55R16	91H	SL	VS	413524329	216497	5.5 - 7.5	6.5	8.4	24.9	1,356	11	840	740 A B	
P205/60R16	91V	SL	VS	413500329	215885	5.5 - 7.5	6.0	8.2	25.7	1,356	11	814	640 A B	
205/65R16	95H	SL	VS	413780329	225884	5.5 - 7.5	6.0	8.2	26.5	1,521	11	789	740 A B	
215/55R16	93H	SL	VS	413525329	216498	6.0 - 7.5	7.0	8.9	25.3	1,433	11	827	740 A B	
P215/60R16	94V	SL	VS	413499329	215884	6.0 - 7.5	6.5	8.7	26.1	1,477	11	800	640 A B	
215/65R16	98T	SL	VS	413382329	215867	6.0 - 7.5	6.5	8.7	27.0	1,653	11	774	740 A B	
225/55R16	95H	SL	VS	413379329	215866	6.0 - 8.0	7.0	9.2	25.8	1,521	11	812	740 A B	
225/60R16	98H	SL	VS	413407329	215875	6.0 - 8.0	6.5	9.0	26.6	1,653	12	785	740 A B	
225/70R16	103T	SL	VS	413378329	215864	6.0 - 7.5	6.5	9.0	28.4	1,929	12	736	740 A B	
235/60R16	100H	SL	VS	413486329	215876	6.5 - 8.5	7.0	9.5	27.1	1,764	11	772	740 A B	
235/65R16	103T	SL	VS	413207329	215865	6.5 - 8.5	7.0	9.5	28.0	1,929	11	746	740 A B	
205/50R17	89V	SL	VS	413582329	216599	5.5 - 7.5	6.5	8.4	25.1	1,279	11	832	640 A B	
P215/50R17	93V	XL	VS	413511329	215890	6.0 - 7.5	7.0	8.9	25.5	1,433	11	819	640 A B	
215/55R17	94V	SL	VS	413497329	215883	6.0 - 7.5	7.0	8.9	26.3	1,477	11	795	640 A B	
215/60R17	96H	SL	VS	413322329	215863	6.0 - 7.5	6.5	8.7	27.2	1,565	11	768	740 A B	
P215/65R17	98T	SL	VS	413385329	215870	6.0 - 7.5	6.5	8.7	28.0	1,653	11	746	740 A B	
225/45R17	91V	SL	VS	413567329	225883	7.0 - 8.5	7.5	8.9	25.0	1,356	11	836	640 A B	
225/50R17	94V	SL	VS	413509329	215889	6.0 - 8.0	7.0	9.2	25.9	1,477	11	807	640 A B	
225/55R17	97V	SL	VS	413502329	215886	6.0 - 8.0	7.0	9.2	26.8	1,609	11	781	640 A B	
P225/60R17	98H	SL	VS	413487329	215877	6.0 - 8.0	6.5	9.0	27.6	1,653	12	756	740 A B	
225/65R17	102H	SL	VS	413517329	215893	6.0 - 8.0	6.5	9.0	28.5	1,874	12	733	740 A B	
235/45R17	94H	SL	VS	413572329	216598	7.5 - 9.0	8.0	9.3	25.4	1,477	11	824	740 A B	
235/55R17	99H	SL	VS	413319329	215862	6.5 - 8.5	7.5	9.7	27.2	1,709	11	769	740 A B	
235/60R17	102H	SL	VS	413488329	215878	6.5 - 8.5	7.0	9.5	28.1	1,874	11	744	740 A B	
235/65R17	104H	SL	VS	413188329	215868	6.5 - 8.5	7.0	9.5	29.1	1,984	11	719	740 A B	
P225/50R18	94H	SL	VS	413513329	215891	6.0 - 8.0	7.0	9.2	26.9	1,477	11	777	740 A B	
P225/55R18	97H	SL	VS	413383329	215869	6.0 - 8.0	7.0	9.2	27.8	1,609	11	753	740 A B	
235/55R18	100V	SL	VS	413496329	215882	6.5 - 8.5	7.5	9.7	28.2	1,764	11	739	640 A B	
P235/60R18	102V	SL	VS	413495329	215881	6.5 - 8.5	7.0	9.5	29.1	1,874	11	718	640 A B	
245/45R18	96V	SL	VS	413516329	215892	7.5 - 9.0	8.0	9.6	26.7	1,565	11	784	640 A B	

## ASSURANCE COMFORTRED SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
*P195/70R14	90T	SL	VS	413047507	191120	5.0 - 6.5	6.0	7.9	24.8	1,312	11	843	700 A B	
*P205/70R15	95T	SL	VS	413899507	191118	5.0 - 7.0	6.0	8.2	26.3	1,499	11	793	700 A B	
*P215/65R15	95T	SL	VS	413008507	191126	6.0 - 7.5	6.5	8.7	26.0	1,510	10	803	700 A B	
*P225/60R16	97T	SL	WB	413314511	195554	6.0 - 8.0	6.5	9.0	26.6	1,609	10	785	700 A B	
*P225/60R18	99H	SL	VS	413189507	196585	6.0 - 8.0	6.5	9.0	28.6	1,709	10	730	700 A B	Chrysler 300, Dodge Charger, Dodge Magnum: 06-08
P235/60R18	102T	SL	VS	413215507	204658	6.5 - 8.5	7.0	9.5	29.1	1,874	10	718	700 A B	Ford Flex: 09-17

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# ASSURANCE® TRIPLETRED® ALL-SEASON

All-Season Tire for Confident Traction in Changing Weather Conditions (Wet, Dry and Snow) That Offers Ultra Wet Traction. Gets, on Average, 21% Better Wet Traction Than the Leading Competitor.†



## FEATURES

1. Water Zone with a sweeping tread pattern
2. Ice Zone with numerous biting edges
3. Dry Zone with large tread blocks along the outer edges
4. Evolving Traction Grooves

## BENEFITS

- Helps evacuate water away from the tread for enhanced wet traction
- Offers enhanced gripping traction on icy and slick roads
- Helps provide confident handling on dry roads
- Help maintain confident traction in rain and snow as the tire wears

## PERFORMANCE RATINGS

Wet Traction	9
Ride Comfort	8
Quiet Ride	8
Fuel Efficiency	7
Snow Traction	9



## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Ultra Wet Traction

† Based on internal wet traction test results of the Assurance TripleTred All-Season and Michelin Defender using size 215/60R16.

## ASSURANCE TRIPLETRED ALL-SEASON SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
195/60R15	88H	SL	VS	399333349	216992	5.5 - 7.0	6.0	7.9	24.2	1,235	11	864	740 A B
195/65R15	91H	SL	VS	399535349	216996	5.5 - 7.0	6.0	7.9	25.0	1,356	11	836	740 A B
205/65R15	94H	SL	VS	399331349	216997	5.5 - 7.5	6.0	8.3	25.5	1,477	11	820	740 A B
205/55R16	94H	XL	VS	399508349	216981	5.5 - 7.5	6.5	8.4	24.9	1,477	11	840	740 A B
P205/60R16	91V	SL	VS	399543349	216977	5.5 - 7.5	6.0	8.2	25.7	1,356	11	814	640 A A
215/55R16	97H	XL	VS	399590349	216982	6.0 - 7.5	7.0	8.9	25.3	1,609	11	827	740 A B
P215/60R16	94V	SL	VS	399080349	216978	6.0 - 7.5	6.5	8.7	26.1	1,477	11	800	640 A A
P215/60R16	94T	SL	VS	399086349	216979	6.0 - 7.5	6.5	8.7	26.1	1,477	11	800	740 A B
215/65R16	98T	SL	VS	399159349	216975	6.0 - 7.5	6.5	8.7	27.0	1,653	11	774	740 A B
225/60R16	98H	SL	VS	399544349	216980	6.0 - 8.0	6.5	9.0	26.6	1,653	11	786	740 A B
235/65R16	103T	SL	VS	399207349	216976	6.5 - 8.5	7.0	9.5	28.0	1,929	11	746	740 A B
205/50R17	93V	XL	VS	399365349	216993	5.5 - 7.5	6.5	8.4	25.1	1,433	11	833	640 A A
P215/50R17	93V	XL	VS	399511349	216989	6.0 - 7.5	7.0	8.9	25.5	1,433	11	819	640 A A
215/55R17	94V	SL	VS	399548349	216986	6.0 - 7.5	7.0	8.9	26.3	1,477	11	795	640 A A
215/60R17	96H	SL	VS	399546349	216984	6.0 - 7.5	6.5	8.7	27.2	1,565	11	768	740 A B
P215/65R17	98H	SL	VS	399186349	216983	6.0 - 7.5	6.5	8.7	28.0	1,653	11	746	740 A B
225/50R17	94V	SL	VS	399364349	216990	6.0 - 8.0	7.0	9.2	25.9	1,477	11	807	640 A A
225/55R17	97H	SL	VS	399347349	216987	6.0 - 8.0	7.0	9.2	26.8	1,609	11	780	740 A B
P225/60R17	98H	SL	VS	399547349	216985	6.0 - 8.0	6.5	9.0	27.6	1,653	11	756	740 A B
235/45R17	97V	XL	VS	399624349	216999	7.5 - 9.0	8.0	9.3	25.4	1,609	11	823	640 A A
235/55R17	99H	SL	VS	399181349	216988	6.5 - 8.5	7.5	9.7	27.2	1,709	11	768	740 A B
215/55R18	95H	SL	VS	399367349	216994	6.0 - 7.5	7.0	8.9	27.3	1,521	11	766	740 A B

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# ASSURANCE<sup>CS</sup> TRIPLETRED<sup>®</sup> ALL-SEASON

All-Season Tire for Confident Traction in Changing Weather Conditions (Wet, Dry and Snow) That Offers Ultra Wet Traction




## FEATURES

1. Water Zone with a sweeping tread pattern
2. Ice Zone with numerous biting edges
3. Dry Zone with large tread blocks along the outer edges
4. Evolving Traction Grooves

## BENEFITS

- Helps evacuate water away from the tread for enhanced wet traction
- Offers enhanced gripping traction on icy and slick roads
- Helps provide confident handling on dry roads
- Help maintain confident traction in rain and snow as the tire wears

## PERFORMANCE RATINGS



## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



On-Road



Ultra Wet Traction

**ASSURANCE<sup>CS</sup> TRIPLETRED ALL-SEASON SPECIFICATIONS**

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
P215/70R16	99T	SL	VSB	745205516	220164	5.5 - 7.0	6.5	8.7	27.9	1,709	11	750	740 A B
P225/70R16	101T	SL	VSB	745551516	217000	6.0 - 7.5	6.5	9.0	28.4	1,819	11	735	740 A B
P235/70R16	104T	SL	VSB	745492516	217001	6.0 - 8.0	7.0	9.5	29.0	1,984	11	721	740 A B
P245/70R16	106T	SL	VSB	745495516	217002	6.5 - 8.0	7.0	9.8	29.5	2,094	11	708	740 A B
P265/70R16	111T	SL	VSB	745500516	217003	7.0 - 9.0	8.0	10.7	30.6	2,403	11	682	740 A B
225/65R17	102H	SL	VSB	745561516	217004	6.0 - 8.0	6.5	9.0	28.5	1,874	11	733	740 A B
235/60R17	102H	SL	VSB	745554516	217005	6.5 - 8.5	7.0	9.5	28.1	1,874	11	744	740 A B
235/65R17	104H	SL	VSB	745173516	217006	6.5 - 8.5	7.0	9.5	29.0	1,984	11	719	740 A B
P245/65R17	105T	SL	VSB	745166516	217007	7.0 - 8.5	7.0	9.8	29.5	2,039	11	708	740 A B
255/60R17	106H	SL	VSB	745560516	217008	7.0 - 9.0	7.5	10.2	29.1	2,094	11	719	740 A B
P265/65R17	110T	SL	VSB	745611516	217009	7.5 - 9.5	8.0	10.7	30.6	2,337	11	684	740 A B
P265/70R17	113T	SL	VSB	745501516	217010	7.0 - 9.0	8.0	10.7	31.7	2,535	11	660	740 A B
235/55R18	100V	SL	VSB	745339516	222776	6.5 - 8.5	7.5	9.7	28.2	1,764	11	742	740 A B
235/60R18	103H	SL	VSB	745558516	217011	6.5 - 8.5	7.0	9.5	29.1	1,929	11	718	740 A B
P235/65R18	104H	SL	VSB	745565516	217012	6.5 - 8.5	7.0	9.5	30.0	1,984	11	696	740 A B
245/60R18	105H	SL	VSB	745587516	220166	7.0 - 8.5	7.0	9.8	29.6	2,039	11	707	740 A B
255/55R18	109H	XL	VSB	745647516	217013	7.0 - 9.0	8.0	10.4	29.0	2,271	11	720	740 A B
P255/65R18	109T	SL	VSB	745622516	220170	7.0 - 9.0	7.5	10.2	31.1	2,271	11	672	740 A B
P255/70R18	112T	SL	VSB	745612516	217014	6.5 - 8.5	7.5	10.2	32.1	2,469	11	651	740 A B
P265/65R18	112H	SL	VSB	745040516	217015	7.5 - 9.5	8.0	10.7	31.5	2,469	11	663	740 A B
235/55R19	101V	SL	VSB	745592516	220167	6.5 - 8.5	7.5	9.7	29.2	1,819	11	716	740 A B
P245/55R19	103T	SL	VSB	745595516	220168	7.0 - 8.5	7.5	10.0	29.7	1,929	11	705	740 A B

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# ASSURANCE® FUEL MAX®

Our Best Tire for Enhanced Fuel Savings Plus Confident Traction in Changing Weather Conditions. Save up to 2,600 mi/4,000 km Worth of Gas Over the Life of 4 Tires.†




## FEATURES

1. Fuel-Saving Tread Compound
2. Wet Tread Zone with Dual Aquachannel Grooves
3. Dry Tread Zone with Solid Shoulder Blocks
4. Zigzag microgrooves and center tread notches
5. Circumferential shoulder grooves

## BENEFITS

- Helps reduce energy loss as the tire rolls to save up to 2,600 miles/4,000 kilometres worth of gas over the life of a set of four tires
- Helps evacuate water away from the treadface for great traction on wet roads
- Helps enhance handling and grip for confident maneuvering on dry pavement
- Help grip the road in rain and light snow for all-season performance
- Help promote even wear and provide biting edges for traction in wet weather

## PERFORMANCE RATINGS



## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Fuel Efficiency



Original Equipment on Chevrolet, Chrysler, Ford, Honda, Scion, Subaru and Toyota

## ASSURANCE FUEL MAX SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P185/65R14	85H	SL	VS	738337571	214991	5.0 - 6.5	5.5	7.4	23.5	1,124	10	891	580 A A	
P175/65R15	84H	SL	VS	738609571	220571	5.0 - 6.0	5.0	7.0	24.0	1,102	10	872	580 A A	Toyota Prius: 12-14, 17, Yaris: 12-17
P185/60R15	84T	SL	VS	738273571	209591	5.0 - 6.5	5.5	7.5	23.8	1,102	10	880	620 A B	
185/65R15	88H	SL	VS	738523571	216377	5.0 - 6.5	5.5	7.4	24.5	1,235	10	855	580 A A	
P195/60R15	87H	SL	VS	738093571	209588	5.5 - 7.0	6.0	7.9	24.2	1,190	10	863	580 A A	
P195/65R15	89H	SL	VS	738274571	209584	5.5 - 7.0	6.0	7.9	25.2	1,279	10	836	580 A A	
†P195/65R15	89S	SL	VS	738289571	216024	5.5 - 7.0	6.0	7.9	25.2	1,279	10	836	540 A B	Toyota Prius: 10-17
P205/60R15	90H	SL	VS	738148571	209598	5.5 - 7.5	6.5	8.2	24.7	1,301	10	846	580 A A	
205/65R15	94H	SL	VS	738403571	216378	5.5 - 7.5	6.0	8.3	25.5	1,477	10	821	580 A A	
P205/70R15	95T	SL	VS	738236571	209585	5.0 - 7.0	6.0	8.2	26.3	1,499	10	793	620 A B	
215/70R15	98T	SL	VS	738280571	209583	5.5 - 7.0	6.5	8.7	26.9	1,653	10	777	620 A B	
175/60R16	82H	SL	VS	738529571	217645	5.0 - 6.0	5.0	7.0	24.3	1,047	10	860	580 A A	Scion iQ: 11-17
195/55R16	87V	SL	VS	738604571	217866	5.5 - 7.0	6.0	7.9	24.4	1,201	10	856	580 A A	
P205/50R16	86H	SL	VS	738318571	209605	5.5 - 7.5	6.5	8.4	24.1	1,168	10	868	580 A A	
P205/55R16	89H	SL	VS	738053571	209587	5.5 - 7.5	6.5	8.4	24.9	1,279	10	840	580 A A	
205/55R16	91H	SL	VS	738524571	224853	5.5 - 7.5	6.5	8.4	24.9	1,356	9	839	580 A A	
P205/60R16	91H	SL	VS	738057571	209586	5.5 - 7.5	6.0	8.2	25.7	1,356	10	814	580 A A	Ford Fusion: 10-12, Chevrolet Cruze: 15, 17
205/60R16	92V	SL	VS	738570571	216653	5.5 - 7.5	6.0	8.2	25.7	1,389	10	814	580 A A	
P205/65R16	94T	SL	VS	738066571	209601	5.5 - 7.5	6.0	8.2	26.5	1,477	10	790	620 A B	
P215/55R16	91H	SL	VS	738026571	209596	6.0 - 7.5	7.0	8.9	25.3	1,356	10	827	580 A A	
215/60R16	95V	SL	VS	738571571	216654	6.0 - 7.5	6.5	8.7	26.1	1,521	10	800	580 A A	
94H	SL	VS	738638571	218907	6.0 - 7.5	6.5	8.7	26.1	1,477	10	800	580 A A	Chevrolet Malibu: 13-17	
215/60R16	95H	SL	VS	738704571	218911	6.0 - 7.5	6.5	8.7	26.1	1,521	10	800	580 A A	Ford Fusion: 13-17
215/65R16	98T	SL	VS	738016571	209582	6.0 - 7.5	6.5	8.7	27.0	1,653	10	774	620 A B	
225/55R16	95H	SL	VS	738336571	214840	6.0 - 8.0	7.0	9.2	25.8	1,521	10	812	580 A A	
225/60R16	98H	SL	VS	738407571	216376	6.0 - 8.0	6.5	9.0	26.6	1,653	10	785	580 A A	
225/65R16	100H	SL	VS	738338571	214992	6.0 - 8.0	6.5	9.0	27.5	1,764	10	760	580 A A	
235/60R16	100H	SL	VS	738334571	209602	6.5 - 8.5	7.0	9.5	27.1	1,764	10	772	580 A A	
235/65R16	103T	SL	VS	738287571	209590	6.5 - 8.5	7.0	9.5	28.0	1,929	10	746	620 A B	
215/45R17	87V	SL	VS	738568571	216651	7.0 - 8.0	7.0	8.4	24.7	1,201	10	848	580 A A	
P215/50R17	93V	XL	VS	738569571	216652	6.0 - 7.5	7.0	8.9	25.5	1,433	10	819	580 A A	
P215/55R17	94V	SL	VS	738735571	219827	6.0 - 7.5	7.0	8.9	26.3	1,477	9	795	580 A A	Honda Accord: 13-17
* 215/55R17	94V	SL	VS	738340571	220177	6.0 - 7.5	7.0	8.9	26.3	1,477	9	795	580 A A	Chevrolet Cruze: 12-17, Chevrolet Volt: 12-17
215/55R17	94V	SL	VS	738548571	222650	6.0 - 7.5	7.0	8.9	26.3	1,477	9	795	580 A A	Chrysler 200: 14-17
P215/60R17	95T	SL	VS	738198571	209603	6.0 - 7.5	6.5	8.7	27.2	1,521	10	769	620 A B	
P215/65R17	98T	SL	VS	738432571	209593	6.0 - 7.5	6.5	8.7	28.0	1,653	10	746	620 A B	
225/45R17	91V	SL	VS	738567571	216600	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	580 A A	
225/50R17	94V	SL	VS	738372571	215019	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	580 A A	
P225/55R17	95H	SL	VS	738201571	217108	6.0 - 8.0	7.0	9.2	26.8	1,521	9	781	580 A A	Chevrolet Malibu: 12-15
225/55R17	97V	SL	VS	738754571	223003	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781	580 A A	Subaru Legacy: 15-17
P225/55R17	95H	SL	VS	738828571	225531	6.0 - 8.0	7.0	9.2	26.8	1,521	9	781	580 A A	Chevrolet Malibu: 16-17
P225/60R17	98T	SL	VS	738168571	209592	6.0 - 8.0	6.5	9.0	27.6	1,653	10	756	620 A B	
225/65R17	102T	SL	VS	738285571	209599	6.0 - 8.0	6.5	9.0	28.5	1,874	10	733	620 A B	
P235/55R17	98H	SL	VS	738205571	209604	6.5 - 8.5	7.5	9.7	27.2	1,653	10	769	580 A A	
235/60R17	102H	SL	VS	738335571	214839	6.5 - 8.5	7.0	9.5	28.1	1,874	10	744	580 A A	
P235/65R17	103H	SL	VS	738317571	209594	6.5 - 8.5	7.0	9.5	29.1	1,929	10	719	580 A A	
225/60R18	100H	SL	VS	738363571	231281	6.0 - 8.0	6.5	9.0	28.6	1,764	13	730	600 A B	

†P195/65R15 89S, Material 216024 has a 4-rib tread pattern.

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# ASSURANCE<sup>CS</sup> FUEL MAX<sup>®</sup>

Our Best Tire for Enhanced Fuel Savings Plus Confident Traction in Changing Weather Conditions. Save up to 2,600 mi/4,000 km Worth of Gas Over the Life of 4 Tires.†



## FEATURES

1. Fuel-Saving Tread Compound

2. Wet Tread Zone with Dual Aquachannel Grooves

3. Optimized Construction

## BENEFITS

Helps reduce energy loss as the tire rolls to save up to 2,600 miles/4,000 kilometres worth of gas over the life of a set of four tires

Enhances water evacuation off the tread for gripping power on wet roads

Helps provide consistent traction and wear in a wide range of loading conditions

## PERFORMANCE RATINGS

Wet Traction	8
Ride Comfort	7
Quiet Ride	8
Fuel Efficiency	9
Snow Traction	7

## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



On-Road



Fuel Efficiency



Original Equipment on Chevrolet, GMC, Infiniti and Nissan

ASSURANCE<sup>CS</sup> FUEL MAX SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P215/70R16	99T	SL	VS	755205383	216974	5.5 - 7.0	6.5	8.7	27.9	1,709	11	750	600 A B	
225/70R16	103T	SL	VS	755281383	216958	6.0 - 7.5	6.5	9.0	28.4	1,929	11	735	600 A B	
235/70R16	106T	SL	VS	755206383	216953	6.0 - 8.0	7.0	9.5	29.0	2,094	11	721	600 A B	
245/70R16	107T	SL	VS	755762383	216957	6.5 - 8.0	7.0	9.8	29.5	2,149	11	708	600 A B	
* 245/75R16	111T	SL	VS	755298383	216960	6.5 - 8.0	7.0	9.8	30.5	2,403	11	686	600 A B	
255/70R16	111T	SL	VS	755276383	216956	6.5 - 8.5	7.5	10.2	30.1	2,403	11	695	600 A B	
265/70R16	112T	SL	VS	755317383	216954	7.0 - 9.0	8.0	10.7	30.6	2,469	11	682	600 A B	
265/75R16	116T	SL	VS	755292383	216959	7.0 - 9.0	7.5	10.5	31.7	2,755	11	660	600 A B	
225/65R17	102H	SL	VS	755667383	222526	6.0 - 8.0	6.5	9.0	28.5	1,874	10	733	600 A B	Infiniti Q50: 14-15, Nissan Rogue: 14-17
235/60R17	102T	SL	VS	755032383	216968	6.5 - 8.5	7.0	9.5	28.1	1,874	11	744	600 A B	
245/65R17	107T	SL	VS	755228383	216955	7.0 - 8.5	7.0	9.8	29.5	2,149	11	708	600 A B	
P245/70R17	108T	SL	VS	755056383	220304	6.5 - 8.0	7.0	9.8	30.6	2,205	11	684	600 A B	
265/65R17	112T	SL	VS	755338383	216961	7.5 - 9.5	8.0	10.7	30.6	2,469	11	684	600 A B	
P265/70R17	113T	SL	VS	755501383	220305	7.0 - 9.0	8.0	10.7	31.7	2,535	11	660	600 A B	
235/55R18	100V	SL	VS	755339383	216963	6.5 - 8.5	7.5	9.7	28.2	1,764	11	741	600 A B	
P235/60R18	102H	SL	VS	755625383	220306	6.5 - 8.5	7.0	9.5	29.1	1,874	11	718	600 A B	
235/65R18	106T	SL	VS	755342383	216965	6.5 - 8.5	7.0	9.5	30.0	2,094	11	696	600 A B	
245/60R18	105T	SL	VS	755385383	216970	7.0 - 8.5	7.0	9.8	29.6	2,039	11	707	600 A B	
255/55R18	109H	XL	VS	755647383	216964	7.0 - 9.0	8.0	10.4	29.0	2,271	11	720	600 A B	
255/65R18	111S	SL	VS	755903383	228218	7.0 - 9.0	8.0	10.4	29.0	2,403	10	720	600 A B	
P255/70R18	112T	SL	VS	755612383	216971	6.5 - 8.5	7.5	10.2	32.1	2,469	11	651	600 A B	
265/60R18	110H	SL	VS	755582383	216967	7.5 - 9.5	8.0	10.7	30.5	2,337	11	685	600 A B	
P265/65R18	112T	SL	VS	755664383	218909	7.5 - 9.5	8.0	10.7	31.5	2,469	11	663	600 A B	Chevrolet Silverado: 14-17, Chevrolet Suburban: 15-17, Tahoe: 15-17, GMC Sierra: 14-17, GMC Yukon: 15-17
265/70R18	116T	SL	VS	755352383	216966	7.0 - 9.0	8.0	10.7	32.6	2,756	11	640	600 A B	
225/55R19	99H	SL	VS	755635383	220307	6.0 - 8.0	7.0	9.1	28.7	1,709	10	702	600 A B	
245/55R19	103T	SL	VS	755386383	216973	7.0 - 7.5	8.0	10.0	29.7	1,929	11	705	600 A B	

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# ASSURANCE® ALL-SEASON

A Practical Tire for Confident All-Season Traction in Wet, Dry and Snowy Conditions, With Long-Lasting Treadwear



FEATURES	BENEFITS
1. Multiple biting edges	Offer great all-season traction in wet, dry and snowy conditions
2. Wide tread grooves	Help evacuate water and slush for enhanced wet traction
3. Optimized tread pattern	Reduces road noise for a quieter ride
4. Large stable shoulder blocks	For confident dry and wet handling

## PERFORMANCE RATINGS

Wet Traction	7
Ride Comfort	7
Quiet Ride	7
Fuel Efficiency	8
Snow Traction	7

## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season

## ASSURANCE ALL-SEASON SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
185/65R14	86T	SL	VS	407106374	224948	5.0 - 6.5	5.5	7.4	23.5	1,168	9	889	600 A B
185/70R14	88T	SL	VS	407476374	226972	4.5 - 6.0	5.5	7.4	24.3	1,235	9	860	600 A B
195/70R14	91T	SL	VS	407736374	224957	5.0 - 6.5	6.0	7.9	24.8	1,356	9	843	600 A B
185/60R15	84T	SL	VS	407739374	224956	5.0 - 6.5	5.5	7.5	23.8	1,102	9	878	600 A B
185/65R15	88T	SL	VS	407259374	224943	5.0 - 6.5	5.5	7.4	24.5	1,235	9	853	600 A B
195/60R15	88T	SL	VS	407740374	224937	5.5 - 7.0	6.0	7.9	24.2	1,235	9	864	600 A B
195/65R15	91T	SL	VS	407477374	224932	5.5 - 7.0	6.0	7.9	25.0	1,356	9	836	600 A B
205/60R15	91T	SL	VS	407741374	224949	5.5 - 7.5	6.5	8.2	24.7	1,356	9	846	600 A B
205/65R15	94T	SL	VS	407478374	224946	5.5 - 7.5	6.0	8.3	25.5	1,477	9	820	600 A B
205/70R15	96T	SL	VS	407785374	224952	5.0 - 7.0	6.0	8.2	26.3	1,565	9	795	600 A B
205/75R15	97T	SL	VS	407789374	226975	5.0 - 7.0	5.5	8.0	27.1	1,609	9	771	600 A B
215/65R15	96T	SL	VS	407791374	226978	6.0 - 7.5	6.5	8.7	26.0	1,565	9	804	600 A B
215/70R15	98T	SL	VS	407783374	224945	5.5 - 7.0	6.5	8.7	26.9	1,653	9	777	600 A B
215/75R15	100T	SL	VS	407792374	226980	5.5 - 7.0	6.0	8.5	27.7	1,764	9	756	600 A B
195/55R16	87T	SL	VS	407787374	224955	5.5 - 7.0	6.0	7.9	24.4	1,201	9	857	600 A B
205/50R16	87H	SL	VS	407788374	226973	5.5 - 7.5	6.5	8.4	24.1	1,201	9	867	600 A B
205/55R16	91H	SL	VS	407781374	224930	5.5 - 7.5	6.5	8.4	24.9	1,356	9	839	600 A B
205/60R16	92T	SL	VS	407212374	224939	5.5 - 7.5	6.0	8.2	25.7	1,389	9	813	600 A B
205/65R16	95H	SL	VS	407780374	226974	5.5 - 7.5	6.0	8.2	26.5	1,521	9	789	600 A B
215/55R16	93H	SL	VS	407525374	226977	6.0 - 7.5	7.0	8.9	25.3	1,433	9	827	600 A B
215/60R16	95T	SL	VS	407562374	224931	6.0 - 7.5	6.5	8.7	26.1	1,521	9	801	600 A B
215/65R16	98T	SL	VS	407016374	224947	6.0 - 7.5	6.5	8.7	27.0	1,653	9	774	600 A B
215/70R16	100T	SL	VS	407782374	224938	5.5 - 7.0	6.5	8.7	27.9	1,764	9	749	600 A B
225/55R16	95H	SL	VS	407165374	226991	6.0 - 8.0	7.0	9.2	25.8	1,521	9	810	600 A B
225/60R16	98T	SL	VS	407715374	224936	6.0 - 8.0	6.5	9.0	26.6	1,653	9	786	600 A B
225/65R16	100T	SL	VS	407786374	224953	6.0 - 8.0	6.5	9.0	27.5	1,764	9	760	600 A B
225/70R16	103T	SL	VS	407378374	226993	6.0 - 7.5	6.5	9.0	28.4	1,929	9	736	600 A B
235/60R16	100T	SL	VS	407784374	224951	6.5 - 8.5	7.0	9.5	27.1	1,764	9	771	600 A B
235/65R16	103T	SL	VS	407207374	224944	6.5 - 8.5	7.0	9.5	28.0	1,929	9	746	600 A B
235/70R16	106T	SL	VS	407866374	232861	6.0 - 8.0	7.0	9.5	29.0	2,094	9	721	600 A B
235/70R16	100H	SL	VS	407826374	232862	6.0 - 8.0	7.0	9.5	29.0	1,764	9	721	600 A B
215/50R17	91H	SL	VS	407790374	226976	6.0 - 7.5	7.0	8.9	25.5	1,356	9	820	600 A B
215/55R17	94H	SL	VS	407213374	224933	6.0 - 7.5	7.0	8.9	26.3	1,477	9	795	600 A B
215/60R17	96T	SL	VS	407348374	224954	6.0 - 7.5	6.5	8.7	27.2	1,565	9	768	600 A B
215/65R17	99T	SL	VS	407719374	226979	6.0 - 7.5	6.5	8.7	28.0	1,709	9	746	600 A B
225/50R17	94V	SL	VS	407372374	229734	6.0 - 7.5	7.0	8.9	25.5	1,356	9	820	600 A B
225/55R17	97T	SL	VS	407726374	224941	6.0 - 8.0	7.0	9.2	26.8	1,609	9	780	600 A B
225/60R17	99T	SL	VS	407723374	224940	6.0 - 8.0	6.5	9.0	27.6	1,709	9	757	600 A B
225/65R17	102T	SL	VS	407285374	224934	6.0 - 8.0	6.5	9.0	28.5	1,874	9	733	600 A B
235/55R17	99T	SL	VS	407599374	226994	6.5 - 8.5	7.5	9.7	27.2	1,709	9	768	600 A B
235/60R17	102T	SL	VS	407323374	224950	6.5 - 8.5	7.0	9.5	28.1	1,874	9	744	600 A B
235/65R17	104T	SL	VS	407722374	224942	6.5 - 8.5	7.0	9.5	29.1	1,984	9	718	600 A B
225/55R18	98H	SL	VS	407867374	232863	6.0 - 8.0	7.0	9.2	27.8	1,653	9	752	600 A B
225/60R18	100H	SL	VS	407795374	226992	6.0 - 8.0	6.5	9.0	28.6	1,764	9	731	600 A B

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# INTEGRITY®

A Quality Tire for Everyday Driving That Helps Provide Sturdy All-Season Traction



## FEATURES

1. Solid centerline rib
2. High-tensile steel belts
3. All-season tread compound

## BENEFITS

- Helps provide a quiet ride and enhanced tread life
- Offer enhanced toughness and reliability
- Helps provide good traction

### ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Original Equipment on Chevrolet, Chrysler, Dodge, Honda,  
Lexus and Toyota

## INTEGRITY SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
*P175/65R14	81S	SL	B03	402531073	135286	5.0 - 6.0	5.0	7.0	23.0	1,019	9	909	460 A B	Toyota Echo: 04
*P175/70R14	84T	SL	VS	402268047	87567	4.5 - 6.0	5.0	7.0	23.7	1,102	9	882	460 A B	Dodge Neon SE: 04-05
185/55R15	82T	SL	VS	402602047	217110	5.0 - 6.5	5.0	7.6	23.0	1,047	9	908	460 A B	Chevrolet Spark: 12-17
*P185/65R15	86S	SL	B03	402032477	173612	5.0 - 6.5	5.5	7.4	24.5	1,168	9	856	460 A B	Toyota Corolla: 04-08, Toyota Prius: 04-10
*P195/65R15	89S	SL	B03	402289477	207541	5.5 - 7.0	6.0	7.9	25.2	1,279	10	836	460 A B	Chevrolet Cobalt: 09-10
*P205/65R15	92T	SL	B03	402406477	172824	5.5 - 7.5	6.0	8.3	25.5	1,400	9	821	460 A B	Toyota Camry LE: 04-06
215/70R15	98S	SL	VS	402282047	205060	5.5 - 7.0	6.5	8.7	26.9	1,653	10	777	460 A B	Chrysler Town & Country, Dodge Caravan: 06-07
P225/60R16	97S	SL	B03	402314073	196149	6.0 - 8.0	6.5	9.0	26.6	1,609	10	785	460 A B	Chevrolet Monte Carlo: 06-07, Impala: 06-17
*P225/60R16	97S	SL	B03	402542073	218563	6.0 - 8.0	6.5	9.0	26.6	1,609	10	785	460 A B	
P235/70R16	104S	SL	B03	402027477	180522	6.0 - 8.0	7.0	9.5	29.0	1,984	11	721	460 A B	Honda Pilot: 04-08
225/65R17	101S	SL	VS	402479047	187258	6.0 - 8.0	6.5	9.0	28.5	1,819	10	733	460 A B	Lexus RX: 04-09, Toyota Highlander: 04-07

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# CONVENIENCE SPARES

## CONVENIENCE SPARES SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
*T115/70D15	90M	SL	BL	818258256	190661	4.0 - 4.0	4.0	4.8	21.4	1,323	4	957
*T125/70D16	96M	SL	BL	818286253	19586	4.0 - 4.0	4.0	5.2	22.9	1,565	5	886
*T135/80D16	101M	SL	BL	818405450	139399	4.0 - 4.0	4.0	5.4	24.5	1,819	4	849
*T145/90D16	106M	SL	BL	818208253	19550	4.0 - 4.0	4.0	5.7	26.3	2,094	5	796
*T155/90D16	110M	SL	BL	818372253	19594	4.0 - 4.0	4.0	6.0	27.0	2,337	5	774
T155/90D16	110M	SL	BLT	818004535	232847	4.0 - 4.0	4.0	6.0	27.0	2,337	4	774
*T155/90D16	100M	LL	BSL	818400450	198641	4.0 - 4.0	4.0	6.0	27.0	1,764	5	774
T135/70D17	92M	LL	BSL	818401450	203037	4.0 - 4.0	4.0	5.4	24.5	1,874	5	853
T135/80D17	103M	SL	BSL	818150253	191855	4.0 - 4.0	4.0	5.4	25.5	1,929	4	808
*T135/90D17	104M	SL	BL	818052253	191208	4.0 - 4.0	4.0	5.4	26.6	1,929	4	782
*T145/80D17	97M	LL	SBL	818070253	184759	4.0 - 4.0	4.0	5.7	26.1	1,609	4	790
T145/80D17	97M	LL	SBL	818001262	221509	4.0 - 4.0	4.0	5.7	26.1	1,609	4	790
*T155/70D17	110M	SL	BL	818024253	205334	4.0 - 4.0	4.0	6.0	25.6	2,337	5	837
T165/80D17	104M	LL	SBL	818002262	222644	4.0 - 4.0	4.0	6.3	27.4	1,984	5	754
T165/80D17	104M	LL	BL	818370253	199157	4.0 - 4.0	4.0	6.3	27.4	1,984	5	754
*T175/90D17	109M	LL	BL	818054253	193296	4.5 - 4.5	4.5	6.8	29.5	2,271	4	710
*T145/80D18	99M	LL	BL	818022253	191206	4.0 - 4.0	4.0	5.7	27.2	1,709	4	765
*T175/90D18	111M	LL	BL	818003253	224851	4.5 - 4.5	4.5	6.8	30.4	2,403	4	684
T175/90D18	111M	LL	BSL	818025267	215198	4.5 - 4.5	4.5	6.8	30.4	2,403	4	684
T165/90D19	119M	SL	BSL	818023267	229715	4.5 - 4.5	4.5	6.5	30.8	2,998	4	676

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# ALL-TERRAIN



Wrangler SR-A®	Wrangler Fortitude HT®	Wrangler TrailRunner AT®	Wrangler® All-Terrain Adventure With Kevlar®	Wrangler DuraTrac®	Wrangler MT/R® With Kevlar®
A Trusted Tire Offering a Smooth, Quiet Ride	A Strong, Quiet Tire With Confident Traction for Changing Conditions and a Long Tread Life	A Tough, Dependable Tire With a Hardworking Combination of On- and Off-Road Performance	A Versatile Tire With Rugged Strength for Quiet On-Road Driving and Going Off-Road at a Moment's Notice	A Workhorse Tire for Tough Off-Road Terrain and Snow That Offers Long Tread Life	An Extreme Off-Road Expedition Tire for Powering Over Rocks, Mud and Sand

	Dry Traction	Wet Traction	Snow Traction	Off-Road Traction	Ride Comfort	Quiet Ride
Wrangler SR-A	8	8	7	7	8	8
Wrangler Fortitude HT	10	9	7	7	9	9
Wrangler TrailRunner AT	9	9	8	8	8	8
Wrangler All-Terrain Adventure with Kevlar®	10	10	8	8	8	9
Wrangler DuraTrac	8	8	9	9	6	6
Wrangler MT/R with Kevlar®	8	7	7	10	5	5

ALL-TERRAIN

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

### NUMERICAL RATING SCALE

**1 = Lower Performance | 10 = Higher Performance**

The rating scale can help you compare tires within each category. However, using the scale to distinguish between tires across different types of categories would be misleading.



	ON-ROAD										ON/OFF-ROAD							OFF-ROAD			TRAILER				
	Wrangler SR-A® (Pg. 72)	Wrangler Fortitude HT® (Pg. 74)	Wrangler® HT (Pg. 76)	Wrangler® HP (Pg. 77)	Wrangler® ST (Pg. 78)	Fordera® HL (Pg. 79)	Fordera SL® (Pg. 80)	Radial LS (Not Shown)	Cargo (Not Shown)	Cargo Vector 2 (Not Shown)	Wrangler TrailRunner AT® (Pg. 82)	Wrangler® All-Terrain Adventure with Kevlar® Wrangler® All-Terrain Adventure with Kevlar® Pre-Grade (Pg. 84)	Wrangler® SilentArmor® Wrangler® SilentArmor® Pre-Grade (Pg. 86)	Wrangler ArmorTrac® (Pg. 87)	Wrangler® AT/S (Pg. 88)	Wrangler® Radial (Pg. 89)	Wrangler® AT (Pg. 89)	Wrangler DuraTrac® (Pg. 90)	Wrangler MT/R® with Kevlar® (Pg. 92)	Military Wrangler MT/R® (Not Shown)	Fierce Attitude MT® (Pg. 94)	Wrangler® MT (Pg. 95)	Endurance® (Pg. 96)	Marathon® (Pg. 98)	
ST175/80R13																								C	
ST185/80R13																									C
LT195/75R14																	C								
ST205/75R14																							D	C	
ST215/75R14																							D	C	
215/75R15	100S																								
225/70R15	100S												100T*												
225/75R15	102S	102T									102T		102T												
235/70R15	102S																								
235/75R15	105S	105T									105S	108T*	108T*		105S										
265/70R15	110S																								
265/75R15	112S																								
LT215/75R15			D												D										
LT235/75R15			C															C							
ST205/75R15																							D	C	
ST225/75R15																							E	C, D	
30X9.50R15LT										C		C*													
32X11.50R15LT																			C						
35X12.50R15LT																			C						
31X10.50R15LT	C									C	C							C	C						
33X12.50R15LT																		C	C						
215/65R16									109T																
215/70R16	100S			99S, 99H																					
215/75R16					101S*																				
225/70R16	103T																								
225/75R16	104S	104T			104S					104S															
235/70R16	104S	106T								106T	106T		104T*												
235/75R16	109S	112T			106S																				
245/70R16	106S	107T								107T	107T		106T*												
245/75R16	109S	111T								111S	111T		109T*												
255/65R16	106S																								
255/70R16	109S									111S	111T							111S							
265/70R16	111S	112T								112T	112T		111T*					112S							
265/75R16	114S	116T								116T	116T		114T*												
LT215/85R16	E	E	E							E	E							E							
LT225/75R16	E	E	E							E	E							E		E	E				
ST235/80R16																							E	D, E	
LT235/85R16	E	E	E							E	E							E	E		E	E			
ST235/85R16																							E		
LT245/75R16	E	E	E							E	E		E					C, E	E		E	E			
LT255/85R16																	D								
ST255/85R16																							E		
LT265/75R16	E	E								C, E	E		E					C, E	E		E	E			
LT285/75R16	E									E	E*							E	E		E*	E*			
LT305/70R16																			E						
LT315/75R16																		E	D		E	E			

\*Discontinued 2016.

# ALL-TERRAIN TIRE SELECTOR CHART

	ON-ROAD										ON/OFF-ROAD							OFF-ROAD			TRAILER			
	Wrangler SR-A® (Pg. 72)	Wrangler Fortitude HT® (Pg. 74)	Wrangler® HT (Pg. 76)	Wrangler® HP (Pg. 77)	Wrangler® ST (Pg. 78)	Fontera® HL (Pg. 79)	Fontera SL® (Pg. 80)	Radial LS (Not Shown)	Cargo (Not Shown)	Cargo Vector 2 (Not Shown)	Wrangler TrailRunner AT® (Pg. 82)	Wrangler® All Terrain Adventure with Kevlar® Wrangler® All Terrain Adventure with Kevlar® Wrangler® All Terrain Adventure with Kevlar® Pre-Grade (Pg. 84)	Wrangler® SilentArmor® Wrangler® SilentArmor® Pre-Grade (Pg. 86)	Wrangler ArmorTrac® (Pg. 87)	Wrangler® AT/S (Pg. 88)	Wrangler® Radial (Pg. 89)	Wrangler® AT (Pg. 89)	Wrangler DuraTrac® (Pg. 90)	Wrangler MT/R® with Kevlar® (Pg. 92)	Military Wrangler MT/R® (Not Shown)	Fierce Attitude M/T® (Pg. 94)	Wrangler® MT (Pg. 95)	Endurance® (Pg. 96)	Marathon® (Pg. 98)
37X12.50R16.5LT										109T									D, E					
215/60R17																								
215/65R17	98S																							
225/55R17										104H														
235/65R17	103S	104T		103S																				
235/70R17	108S	109T								109T	109T													
235/75R17	108S	109T								109T	109T													
245/65R17	105S	107T				105S*, 105T*				107T	107T		105T*											
245/70R17	108S	110T				108T				110T	110T		108T*				110S							
245/75R17											112T	110T												
255/65R17	108S*	110T									110T													
255/70R17	110S	112T								112T	112T													
255/75R17	113S											113T*					115S							
265/65R17	110S	112T								112T	112T						112S							
265/70R17	113R	115T		113S*	113S*					115T	115T		113T*	113S			115S							
LT235/60R17							E																	
LT235/80R17	E									E	E						E							
LT245/70R17	E	E								E	E						E	E						
LT245/75R17	E									E	E		E				E	E						
LT255/75R17																		C						
LT265/70R17	E	E								E	E	C, E	E				C, E	E		E	E			
LT275/70R17																		E						
LT285/70R17										E	E						D	D		D	D			
LT305/70R17																		D						
LT315/70R17																	D	D						
35X12.50R17LT																		C		D	D			
37X12.50R17LT																		D						
38X14.50R17LT																		D						
40X13.50R17LT																		C						
42X14.50R17LT																		C						
235/60R18						102T*																		
245/60R18	105T	105T																						
255/65R18		111T				109S					111T													
255/70R18	112T	113T								113T	113T		112T*				113S							
265/60R18	109T	110T								110T	110T		109T*				110S							
265/65R18	112T	112T								114T	114T						114S							
265/70R18	114S	116T								116T	116T													
275/65R18	114T	116T								116T	116T		114T*				116S							
LT265/70R18	E									E	E													
LT275/65R18	E									E	C, E			C			E	C		E	E			
LT275/70R18	E									E	E*						E	E		E	E			
LT285/65R18											E													
LT285/75R18																		E						
LT295/65R18																		E						
LT325/65R18																		E		E	E			
35X12.50R18LT																		F						

\*Discontinued 2016.

# ALL-TERRAIN TIRE SELECTOR CHART

	ON-ROAD										ON/OFF-ROAD							OFF-ROAD			TRAILER			
	Wrangler SR-A® (Pg. 72)	Wrangler Fortitude HT® (Pg. 74)	Wrangler® HT (Pg. 76)	Wrangler® HP (Pg. 77)	Wrangler® ST (Pg. 78)	Fordera® HL (Pg. 79)	Fordera SL® (Pg. 80)	Radial LS (Not Shown)	Cargo (Not Shown)	Cargo Vector 2 (Not Shown)	Wrangler TrailRunner AT® (Pg. 82)	Wrangler® All-Terrain Adventure with Kevlar® Wrangler® All-Terrain Adventure with Kevlar® Pre-Grade (Pg. 84)	Wrangler® SilentArmor® Wrangler® SilentArmor® Pre-Grade (Pg. 86)	Wrangler ArmorTrac® (Pg. 87)	Wrangler® AT/S (Pg. 88)	Wrangler® Radial (Pg. 89)	Wrangler® AT (Pg. 89)	Wrangler DuraTrac® (Pg. 90)	Wrangler MT/R® with Kevlar® (Pg. 92)	Military Wrangler MT/R® (Not Shown)	Fierce Attitude MT® (Pg. 94)	Wrangler® MT (Pg. 95)	Endurance® (Pg. 96)	Marathon® (Pg. 98)
255/55R19																		1110, 111S						
255/60R19											109T													
265/50R20	106S					107T					107T													
275/55R20	111S										113T	113T						113S						
275/60R20	114S			114S							115T	115T	114T	114T				115S						
LT265/60R20	E										E													
LT275/65R20											E	E		E				E	E					
LT285/55R20											E													
LT285/60R20											E							E						
LT285/65R20																			E					
LT305/55R20											E							E						
LT325/60R20																		E						
33X12.50R20LT																			E					
35X12.50R20LT																			E					
285/45R22		114H					114H																	
305/40R22							114H																	
305/45R22							118H																	
205/65R15C								102T, 102R																
225/70R15C								112R*																

\*Discontinued 2016.



# WRANGLER SR-A®

A Trusted Tire Offering a Smooth, Quiet Ride



## FEATURES

1. Zigzag microgrooves
2. Wide circumferential grooves
3. Exclusive wet traction compound

## BENEFITS

- Offer enhanced traction in rain, snow and ice
- Help move water away from the tread for enhanced traction in rain
- Helps provide traction on wet roads

## PERFORMANCE RATINGS

Dry Traction	<div style="width: 80%;"></div>	8
Wet Traction	<div style="width: 80%;"></div>	8
Snow Traction	<div style="width: 70%;"></div>	7
Off-Road Traction	<div style="width: 70%;"></div>	7
Ride Comfort	<div style="width: 80%;"></div>	8
Quiet Ride	<div style="width: 80%;"></div>	8

## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



On-Road



All-Season



Original Equipment on Chevrolet, Chrysler, Dodge, Ford, GMC, Jeep, Mercury, Mitsubishi and Nissan

## WRANGLER SR-A SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P215/75R15	100S	SL	OWL	183025418	201206	5.5 - 7.0	6.0	8.5	27.7	1,742	11	755	500 A B	
P225/70R15	100S	SL	OWL	183482418	201530	6.0 - 7.5	6.5	9.0	27.4	1,753	11	762	500 A B	
P225/75R15	102S	SL	OWL	183064418	201207	6.0 - 7.5	6.0	8.8	28.3	1,874	11	738	500 A B	
P235/70R15	102S	SL	OWL	183408418	201205	6.0 - 8.0	7.0	9.5	28.0	1,896	11	747	500 A B	
†P235/75R15	105S	SL	OWL	183406418	198599	6.0 - 8.0	6.5	9.3	28.9	2,028	13	724	500 A B	Ford Ranger: 07-12
P265/70R15	110S	SL	OWL	183050418	201193	7.0 - 9.0	8.0	10.7	29.7	2,337	12	705	500 A B	
P265/75R15	112S	SL	OWL	183753418	201209	7.0 - 9.0	7.5	10.5	30.7	2,469	12	681	500 A B	
215/70R16	100S	SL	VS	183021436	216831	5.5 - 7.0	6.5	8.7	27.9	1,764	11	749	500 A B	
225/70R16	103T	SL	OWL	183054418	212665	6.0 - 7.5	6.5	9.0	28.4	1,819	11	736	500 A B	
P225/75R16	104S	SL	OWL	183017418	203073	6.0 - 7.5	6.0	8.8	29.3	1,984	11	714	500 A B	
†P235/70R16	104S	SL	OWL	183407418	135299	6.0 - 8.0	7.0	9.5	29.0	1,984	13	721	500 A B	Ford Escape: 04-07, Mercury Mariner: 05-07, Jeep Liberty Limited Sport: 04, Jeep Liberty: 05-12
P235/75R16	109S	XL	OWL	183680418	201722	6.0 - 8.0	6.5	9.3	29.8	2,271	11	700	500 A B	
P245/70R16	106S	SL	VS	183293436	193621	6.5 - 8.0	7.0	9.8	29.5	2,094	12	708	500 A B	Dodge Dakota: 05-11, Mitsubishi Raider: 06-09
P245/70R16	106S	SL	OWL	183597418	117875	6.5 - 8.0	7.0	9.8	29.5	2,094	13	708	500 A B	Dodge Dakota: 04-07, Jeep Grand Cherokee Laredo, Grand Cherokee Special Edition: 04
P245/75R16	109S	SL	OWL	183217418	201232	6.5 - 8.0	7.0	9.8	30.5	2,271	11	686	500 A B	
P255/65R16	106S	SL	OWL	183987418	201194	7.0 - 9.0	7.5	10.2	29.1	2,094	11	719	500 A B	
P255/70R16	109S	SL	OWL	183601418	201210	6.5 - 8.5	7.5	10.2	30.1	2,271	12	695	500 A B	
P265/70R16	111S	SL	OWL	183212418	201231	7.0 - 9.0	8.0	10.7	30.6	2,403	12	682	500 A B	
P265/75R16	114S	SL	OWL	183857418	201233	7.0 - 9.0	7.5	10.5	31.7	2,601	12	660	500 A B	
P215/65R17	98S	SL	OWL	183678418	201170	6.0 - 7.5	6.5	8.7	28.0	1,653	10	746	500 A B	Jeep Compass: 13-14, Patriot: 07-17, Renegade Trailhawk: 15
†P235/65R17	103S	SL	OWL	183105418	150861	6.5 - 8.5	7.0	9.5	29.1	1,929	13	719	500 A B	Jeep Grand Cherokee Overland: 04
P235/70R17	108S	XL	OWL	183783418	203075	6.0 - 8.0	7.0	9.5	30.0	2,205	11	693	500 A B	
P235/75R17	108S	SL	OWL	183539418	212666	6.0 - 8.0	6.5	9.3	30.9	2,205	11	677	500 A B	
P245/65R17	105S	SL	OWL	183284418	193001	7.0 - 8.5	7.0	9.8	29.5	2,039	12	708	500 A B	Jeep Grand Cherokee: 05-06
P245/70R17	108S	SL	VS	183114470	189903	6.5 - 8.0	7.0	9.8	30.6	2,205	11	684	500 A B	Dodge Durango: 04-09, Dodge Ram 1500: 06-09
*P255/65R17	108S	SL	OWL	183579418	203074	7.0 - 9.0	7.5	10.2	30.1	2,205	11	691	500 A B	
P255/70R17	110S	SL	OWL	183540418	212667	6.5 - 8.5	7.5	10.2	31.1	2,337	12	672	500 A B	
†P255/75R17	113S	SL	OWL	183107418	199747	6.5 - 8.5	7.0	10.0	32.1	2,535	12	649	500 A B	Jeep Wrangler: 07-17
P265/65R17	110S	SL	VS	183602436	188100	7.5 - 9.5	8.0	10.7	30.6	2,337	11	684	500 A B	Dodge Dakota: 05-11, Dodge Durango: 04-05, Mitsubishi Raider: 06-09
P265/70R17	113R	SL	VS	183106436	175021	7.0 - 9.0	8.0	10.7	31.7	2,535	12	660	500 A B	Dodge Ram 1500: 04-11, Ram 1500: 12-17
P265/70R17	113R	SL	OWL	183106418	175026	7.0 - 9.0	8.0	10.7	31.7	2,535	12	660	500 A B	Dodge Ram 1500: 04-11, Ram 1500: 12-17
245/60R18	105T	SL	VS	183001436	216832	7.0 - 8.5	7.0	9.8	29.6	2,039	11	707	500 A B	
P255/70R18	112T	SL	OWL	183612418	212668	6.5 - 8.5	7.5	10.2	32.1	2,469	12	651	500 A B	
P265/60R18	109T	SL	VS	183558436	201944	7.5 - 9.5	8.0	10.7	30.5	2,271	11	682	500 A B	Chrysler Aspen: 06-09, Dodge Durango: 06-09, Dodge Dakota: 07-11
P265/65R18	112T	SL	BSL	183051217	218920	7.5 - 9.5	8.0	10.7	31.5	2,469	12	663	500 A B	Chevrolet Avalanche: 13, Silverado: 13-17, Suburban: 13-17, Tahoe: 13-17, GMC Sierra: 13-17
P265/65R18	112T	SL	OWL	183051492	218962	7.5 - 9.5	8.0	10.7	31.5	2,469	12	663	500 A B	Chevrolet Silverado: 14-17, Suburban: 14-17, Tahoe: 14-17, GMC Sierra: 14-17
P265/65R18	112T	SL	BSL	183051676	231452	7.5 - 9.5	8.0	10.7	31.5	2,469	12	663	500 A B	GM Special
P265/70R18	114S	SL	OWL	183487418	188898	7.0 - 9.0	8.0	10.7	32.6	2,601	11	640	500 A B	Nissan Titan CE/LE: 13-15
P275/65R18	114T	SL	OWL	183538418	204966	7.5 - 9.5	8.0	11.0	32.1	2,601	13	651	500 A B	Ford Expedition: 11-14, Ford F-150: 09-14
P265/50R20	106S	SL	VS	183675436	202997	7.5 - 9.5	8.5	10.9	30.5	2,094	11	686	500 A B	Chrysler Aspen: 08-09, Dodge Durango: 08-09
P275/55R20	111S	SL	BSL	183102217	218964	7.5 - 9.5	8.5	11.2	31.9	2,403	12	655	500 A B	Chevrolet Silverado: 14-17, GMC Sierra: 14-17
P275/60R20	114S	SL	VS	183934436	202747	7.5 - 9.5	8.0	11	33.0	2,601	11	634	500 A B	Nissan Titan CE/LE: 04-17
P275/60R20	114S	SL	OWL	183934492	216827	7.5 - 9.5	8.0	11.0	33.0	2,601	11	634	500 A B	Dodge Ram 1500: 11, Ram 1500: 12-17
P275/60R20	114S	SL	VS	183934470	221505	7.5 - 9.5	8.0	11.0	33.0	2,601	11	634	500 A B	Dodge Ram 1500: 13-17
P275/55R20	111S	SL	BSL	183102676	230771	7.5 - 9.5	8.5	11.2	31.9	2,403	12	655	500 A B	
<b>WRANGLER SR-A LT</b>														
31X10.50R15LT	109R	C	OWL	179510492	203213	7.0 - 9.0	8.5	10.6	30.5	2,270	14	685		
LT215/85R16	115P	E	BSL	179751217	212692	5.5 - 7.0	6.0	8.6	30.5	2,680	14	688		
LT225/75R16	115R	E	BSL	179748217	202632	6.0 - 7.0	6.0	8.8	29.3	2,680	14	714		Chevrolet Silverado 2500 4X2: 04
LT235/85R16	120R	E	BSL	179745217	202633	6.0 - 7.5	6.5	9.3	31.7	3,042	14	659		
LT245/75R16	120R	E	BSL	179747217	212693	6.5 - 8.0	7.0	9.8	30.5	3,042	13	686		
LT265/75R16	123R	E	OWL	179746492	202635	7.0 - 8.0	7.5	10.5	31.7	3,415	14	660		
LT285/75R16	126R	E	OWL	179585492	202636	7.5 - 9.0	8.0	11.3	32.8	3,750	14	637		
LT235/80R17	120R	E	VS	179136436	166228	6.0 - 7.5	6.5	9.3	31.8	3,085	14	654		Dodge 3500 DWR: 04-05
LT245/70R17	119R	E	OWL	179469492	203028	6.5 - 8.0	7.0	9.8	30.6	3,000	14	684		
LT245/75R17	121R	E	OWL	179636492	203029	6.5 - 7.5	7.0	9.8	31.5	3,195	14	663		
LT265/70R17	121S	E	BSL	179696217	202212	7.0 - 8.5	8.0	10.7	31.7	3,195	15	660		Chevrolet Avalanche, Silverado: 07-10, Suburban: 07-17, Silverado HD: 13-17, GMC Yukon: 08-10, Yukon XL (EXP): 11-17, Sierra: 07-10, Sierra HD: 11-17
LT265/70R17	121R	E	OWL	179535492	203076	7.0 - 8.5	8.0	10.7	31.7	3,195	14	660		
LT265/70R18	124S	E	VS	179040436	223022	7.0 - 9.0	8.0	10.7	32.6	3,525	13	638		Chevrolet Silverado HD: 13-17, GMC Sierra HD: 13-17
LT275/65R18	123Q	E	OWL	179029492	216833	7.5 - 9.0	8.0	11.0	32.1	3,415	14	651		
LT275/70R18	125R	E	OWL	179646492	212691	7.0 - 8.5	8.0	11.0	33.2	3,640	14	630		
LT265/60R20	121S	E	VS	179020436	216121	7.5 - 9.5	8.0	10.7	32.5	3,195	16	640		Chevrolet Silverado HD: 13-17, GMC Sierra HD: 11-17

\*Discontinued 2016.

†4-Rib Design.


Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# WRANGLER FORTITUDE HT®

A Strong, Quiet Tire Offering the Reliability Busy Lives Demand With Confident Traction for Changing Conditions and a Long Tread Life

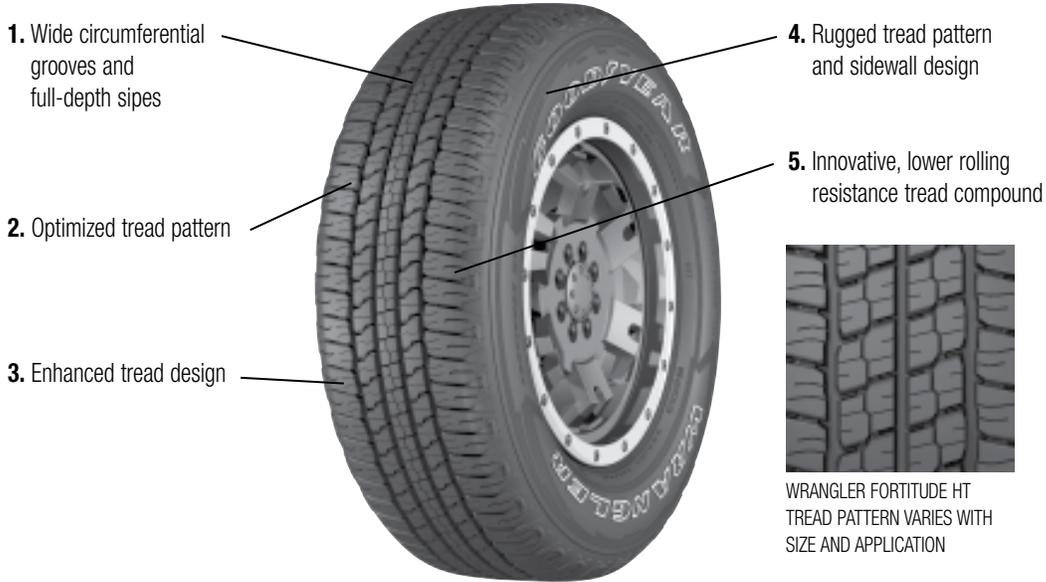


## FEATURES BENEFITS

1. Wide circumferential grooves and full-depth sipes
2. Optimized tread pattern
3. Enhanced tread design
4. Rugged tread pattern and sidewall design
5. Innovative, lower rolling resistance tread compound

- Help provide confident wet, dry and snow traction for year-round versatility
- Aids in a quiet ride on the highway
- Offers long-lasting treadwear
- Help enhance the vehicle's appearance
- Offers enhanced fuel efficiency

## PERFORMANCE RATINGS

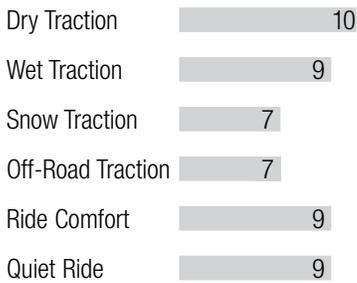

## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Original Equipment on Chevrolet, Ford and GMC

## WRANGLER FORTITUDE HT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/75R15	102T	SL	OWL	157131620	228823	6.0 - 7.5	6.0	8.8	28.3	1,874	12	739	680 A B	
235/75R15	105T	SL	OWL	157142620	228824	6.0 - 7.0	6.5	9.3	28.9	2,039	12	723	680 A B	
225/75R16	104T	SL	OWL	157144620	228826	6.0 - 7.5	6.0	8.8	29.3	1,984	12	713	680 A B	
235/70R16	106T	SL	BSL	157043622	228827	6.0 - 8.0	7.0	9.5	29.0	2,094	12	721	680 A B	
235/75R16	112T	XL	BSL	157145622	228828	6.0 - 8.0	6.5	9.3	29.8	2,469	12	701	680 A B	
245/70R16	107T	SL	OWL	157762620	228829	6.5 - 8.0	7.0	9.8	29.5	2,149	12	708	680 A B	
245/75R16	111T	SL	OWL	157059620	228830	6.5 - 8.0	7.0	9.8	30.5	2,403	12	685	680 A B	
265/70R16	112T	SL	BSL	157045622	222656	7.0 - 9.0	8.0	10.7	30.6	2,469	11	682	680 A B	Chevrolet Colorado: 15-17, GMC Canyon: 15-17
265/75R16	116T	SL	OWL	157057620	228832	7.0 - 9.0	7.5	10.5	31.7	2,756	12	659	680 A B	
235/65R17	104T	SL	BSL	157996622	228833	6.5 - 8.5	7.0	9.5	29.0	1,984	12	721	680 A B	
235/70R17	109T	XL	BSL	157078622	228834	6.0 - 8.0	7.0	9.5	30.0	2,271	12	697	680 A B	
235/75R17	109T	SL	BSL	157089622	228835	6.0 - 8.0	6.5	9.3	30.9	2,271	12	676	680 A B	
245/65R17	107T	SL	BSL	157592622	228836	7.0 - 8.5	7.0	9.8	29.5	2,149	12	708	680 A B	
245/70R17	110T	SL	OWL	157172620	228837	6.5 - 8.0	7.0	9.8	30.6	2,337	12	683	680 A B	
245/70R17	110T	SL	OWL	157060620	226575	6.5 - 8.0	7.0	9.8	30.6	2,337	12	683	680 A B	
255/65R17	110T	SL	BSL	157069622	222654	7.0 - 9.0	7.5	10.2	30.1	2,335	11	691	680 A B	Chevrolet Colorado: 15-17, GMC Canyon: 15-17
255/70R17	112T	SL	OWL	157067620	228838	6.5 - 8.5	7.5	10.3	31.1	2,469	12	672	680 A B	
265/65R17	112T	SL	OWL	157061620	228839	7.5 - 9.5	8.0	10.7	30.6	2,469	12	683	680 A B	
265/70R17	115T	SL	BSL	157042622	231043	7.0 - 9.0	8.0	10.7	31.7	2,679	12	659	680 A B	
265/70R17	115T	SL	OWL	157042620	222031	7.0 - 9.0	8.0	10.7	31.7	2,679	12	659	680 A B	Ford F-150: 14-17
245/60R18	105T	SL	BSL	157001622	228840	7.0 - 8.5	7.0	9.8	29.6	2,039	12	706	680 A B	
255/65R18	111T	SL	BSL	157088622	228841	7.0 - 9.0	7.5	10.2	31.1	2,403	12	672	680 A B	
255/70R18	113T	SL	OWL	157174620	228842	6.5 - 8.5	7.5	10.2	32.1	2,535	12	651	680 A B	
265/60R18	110T	SL	BSL	157076622	222652	7.5 - 9.5	8.0	10.7	30.5	2,337	11	685	680 A B	Chevrolet Colorado: 15-17, GMC Canyon: 15-17
265/65R18	112T	SL	BSL	157051622	230901	7.5 - 9.5	8.0	10.7	31.5	2,469	11	663	680 A B	Chevrolet Silverado: 17, Chevrolet Tahoe: 17, GMC Sierra: 17
265/65R18	112T	SL	OWL	157051620	230903	7.5 - 9.5	8.0	10.7	31.5	2,469	11	663	680 A B	Chevrolet Silverado: 17, Chevrolet Tahoe: 17, GMC Sierra: 17
265/70R18	116T	SL	OWL	157070620	228844	7.0 - 9.0	8.0	10.7	32.6	2,756	12	641	680 A B	
275/65R18	116T	SL	OWL	157066620	222027	7.5 - 9.5	8.0	11.0	32.1	2,756	12	651	680 A B	Ford F-150: 14-17, Expedition: 16-17
275/65R18	116T	SL	VSB	157066708	228707	7.5 - 9.5	8.0	11.0	32.1	2,756	11	651	680 A B	
285/45R22	114H	XL	BSL	157176622	228847	9.0 - 10.5	9.5	11.2	32.1	2,601	12	651	680 A B	
<b>WRANGLER FORTITUDE HT LT</b>														
LT225/75R16	115R	E	BSL	179748622	228723	6.0 - 7.0	6.0	8.8	29.3	2,680	15	710		
LT245/75R16	120R	E	BSL	179747622	228725	6.5 - 8.0	7.0	9.8	30.5	3,042	15	682		
LT265/75R16	123R	E	OWL	179746620	228726	7.0 - 8.0	7.5	10.5	31.7	3,415	15	656		
LT245/70R17	119R	E	BSL	179469622	228728	6.5 - 8.0	7.0	9.8	30.6	3,000	15	680		
LT265/70R17	121R	E	OWL	179535620	228730	7.0 - 8.5	8.0	10.7	31.7	3,195	15	656		

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# WRANGLER® HT

An All-Season Tire for Heavy-Duty Trucks and Full-Size Vans

## FEATURES

- Patented, all-season tread design
- Circumferential channels
- Solid center rib

## BENEFITS

- Offers year-round traction
- Offer dependable wet traction
- Offers a smooth ride and long, even wear



All-Season



On-Road



Original Equipment on Ford

## WRANGLER HT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	ORIGINAL EQUIPMENT FITMENT
LT215/75R15	106Q	D	BSL	744154900	182302	5.5 - 7.0	6.0	8.5	27.7	2,095	14	755	
LT235/75R15	104Q	C	BSL	744826802	82003	6.0 - 7.0	6.5	9.3	28.9	1,985	14	724	
LT215/85R16		E	BSL	744821900	122771	5.5 - 7.0	6.0	8.6	30.5	2,680	13	688	
LT225/75R16	115Q	E	BSL	744830900	139346	6.0 - 7.0	6.0	8.8	29.3	2,680	14	714	Ford Econoline E-350: 05-08
LT235/85R16		E	BSL	744725502	88221	6.0 - 7.5	6.5	9.3	31.7	3,042	14	659	
LT245/75R16	120R	E	BSL	744395900	163717	6.5 - 8.0	7.0	9.8	30.5	3,042	13	686	Ford Econoline E-250: 05-08

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**

# WRANGLER® HP

An All-Season Tire Found on Select Truck and SUV Original Equipment Fitments



FEATURES	BENEFITS
Wide circumferential channels	Help efficiently evacuate water from beneath the tread for enhanced wet traction
High sipe density	Offers enhanced all-season traction and a comfortable ride
Large, stiff shoulder blocks	Help provide responsive handling and agility
Lower profile sidewalls	Enhance responsiveness and handling



All-Season



On-Road



Original Equipment on Cadillac, Chevrolet, Dodge, Ford, GMC, Honda, Jeep, Mazda and Mercury

## WRANGLER HP SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P215/70R16	99S	SL	VSB	403113174	144368	5.5 - 7.0	6.5	8.7	27.9	1,709	9	750	340 A B	Honda Element: 04-10
P215/70R16	99H	SL	VSB	403207174	181126	5.5 - 7.0	6.5	8.7	27.9	1,709	9	750	340 A B	Ford Escape: 04-12, Mercury Mariner: 08-11, Mazda Tribute: 08-11
P235/65R17	103S	SL	VSB	403105174	176138	6.5 - 8.5	7.0	9.5	29.1	1,929	11	719	340 A B	Jeep Liberty: 04-07
P265/70R17	113S	SL	BSL	403422658	163878	7.0 - 9.0	8.0	10.7	31.7	2,535	12	660	340 A B	Cadillac Escalade: 04-06, Chevrolet Avalanche: 04-13, Silverado: 14-17, Suburban: 13-17, Tahoe: 06-17, GMC Sierra: 04-17, Denali: 05-10, Yukon: 06-17, Yukon XL: 11-17
P265/70R17	113S	SL	VSB	403422171	175652	7.0 - 9.0	8.0	10.7	31.7	2,535	12	660	340 A B	Cadillac Escalade: 06, Chevrolet Silverado, Tahoe: 06-07, GMC Sierra: 06-07, Dodge Ram 1500: 04-05, Ram 1500: 12-17
* P265/70R17	113S	SL	BSL	403767658	203630	7.0 - 9.0	8.0	10.7	31.7	2,535	12	660	340 A B	Chevrolet Tahoe: 07-17, Suburban: 11-17, Avalanche: 13, GMC Yukon: 13-17, Yukon XL: 11-17
P275/60R20	114S	SL	VSB	403934174	169954	7.5 - 9.5	8.0	11.0	33.0	2,601	12	634	340 A B	Dodge Ram 1500: 04-11, Ram 1500: 12-14
P275/60R20	114S	SL	OWL	403934169	197080	7.5 - 9.5	8.0	11.0	33.0	2,601	12	634	340 A B	Dodge Ram 1500: 06-11, Ram 1500: 12-14

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# WRANGLER® ST

An All-Season Tire Found on Select Truck and SUV Original Equipment Fitments

## FEATURES

- All-season tread design
- Wide circumferential channels

## BENEFITS

- Offers all-season traction
- Help to efficiently evacuate water from beneath the tread for enhanced wet traction



All-Season



On-Road



Original Equipment on Chevrolet, Dodge, GMC and Jeep

## WRANGLER ST SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* P215/75R16	101S	SL	VSB	773007415	135233	5.5 - 7.0	6.0	8.5	28.7	1,819	11	726	340 A B	Jeep Liberty Sport: 03- 04
P225/75R16	104S	SL	VSB	773017415	117069	6.0 - 7.5	6.0	8.8	29.3	1,984	10	714	340 B B	Dodge Nitro: 07-11, Jeep Liberty: 08-12, Wrangler: 07-17
P235/75R16	106S	SL	BSL	773430430	110787	6.0 - 8.0	6.5	9.3	29.8	2,094	11	700	340 B B	Chevrolet Colorado: 07-13, Express: 06-07, Silverado: 04-05, TrailBlazer: 05-09, GMC Sierra: 04-05, GMC Canyon: 08-13, Envoy: 06-09, Savana: 06-08
P235/75R16	106S	SL	OWL	773430431	110790	6.0 - 8.0	6.5	9.3	29.8	2,094	11	700	340 B B	Chevrolet TrailBlazer: 05-09, GMC Sierra 1500: 04-05
* P265/70R17	113S	SL	BSL	773422430	183300	7.0 - 9.0	8.0	10.7	31.7	2,535	10	660	340 B B	Chevrolet Silverado: 05-13, Suburban: 06-09, Tahoe: 07-09, GMC Sierra: 05-13, Yukon: 05-10
* P265/70R17	113S	SL	OWL	773422431	183341	7.0 - 9.0	8.0	10.7	31.7	2,535	10	660	340 B B	Chevrolet Silverado: 05-10, Suburban: 06-09, Tahoe: 07-09, GMC Sierra 1500: 05-10, GMC Yukon: 05-10

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**

# FORTERA® HL

An All-Season Tire Designed With Luxury in Mind for Select Truck and SUV Original Equipment Fitments



FEATURES	BENEFITS
Deep blades and grooves	Help extend tread life without sacrificing performance
Staggered circumferential grooves, curvilinear blades and see-through grooves	Enhance forward and lateral traction, and performance in the rain and snow
Highly buttressed tread block elements	Help provide stable handling and even treadwear
Intricate blading in the riding ribs and centerline	Enhances handling, noise reduction and all-season traction
Optimized tread pattern	Helps provide a quiet ride



All-Season



On-Road



Comfortable, Refined Handling



Original Equipment on Buick, Chevrolet, Dodge, Ford, GMC, Honda, Jeep, Mercury and Saturn

## FORTERA HL SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P245/65R17	105T	SL	VSB	151284203	197884	7.0 - 8.5	7.0	9.8	29.5	2,039	10	708	540 A B	Jeep Commander: 06-10, Jeep Cherokee: 07-10
* P245/65R17	105S	SL	OWL	151986164	201967	7.0 - 8.5	7.0	9.8	29.5	2,039	10	708	540 A B	Ford Explorer: 06-10
* P245/65R17	105T	SL	VSB	151494203	204656	7.0 - 8.5	7.0	9.8	29.5	2,039	10	708	540 A B	Honda Pilot: 09-15
* P245/65R17	105T	SL	VSB	151166203	217440	7.0 - 8.5	7.0	9.8	29.5	2,039	10	708	540 A B	Ford Explorer: 11-14, Mercury Mountaineer: 11-14
P245/70R17	108T	SL	OWL	151056164	215304	6.5 - 8.0	7.0	9.8	30.6	2,205	11	684	540 A B	Jeep Grand Cherokee: 11-14, 16
P245/70R17	108T	SL	VSB	151056203	215305	6.5 - 8.0	7.0	9.8	30.6	2,205	11	684	540 A B	Jeep Grand Cherokee: 11-17
* P235/60R18	102T	SL	VSB	151976203	204003	6.5 - 8.5	7.0	9.5	29.1	1,874	11	718	540 A B	Jeep Liberty: 08-12
P255/65R18	109S	SL	BSL	151559248	196833	7.0 - 9.0	7.5	10.2	31.1	2,271	11	672	540 A B	Buick Enclave: 08-17, Chevrolet Traverse: 11-17, GMC Acadia: 07-17, Saturn Outlook: 07-10
265/50R20	107T	SL	VSB	151093203	215818	7.5 - 9.5	8.5	10.9	30.5	2,149	10	677	540 A B	Jeep Grand Cherokee: 11-17, Dodge Durango: 15-17

\*Discontinued 2016.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**

ALL-TERRAIN



# FORTERA SL®

An All-Season Tire Designed With Luxury in Mind for Select Truck and SUV Original Equipment Fitments



## FEATURES

- Directional wraparound tread pattern
- Rim protector
- Reinforced shoulder blocks
- Innovative sidewall design
- Deep non-skid tread elements with high sipe density

## BENEFITS

- Offers a sporty appearance
- Helps protect wheels against accidental curb damage
- Help provide even treadwear
- Enhances the look and style of your vehicle
- Help provide enhanced all-season traction



All-Season



On-Road



Original Equipment on Chevrolet, GMC and Ram

## FORTERA SL SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
285/45R22	114H	XL	VSB	151621163	199570	9.0 - 10.5	9.5	11.2	32.1	2,601	10	647	500 B A	Chevrolet Suburban: 13, Silverado: 13-17, Tahoe: 13-17, GMC Sierra: 13-17, Yukon: 13-17, Ram 1500: 12-17
305/40R22	114H	RE	VSB	151774163	194221	10.0 - 12.0	11.0	12.3	31.6	2,337	12	657	500 A A	
305/45R22	118H	RE	VSB	151775163	194223	9.5 - 11.5	10.0	11.9	32.8	2,910	12	633	500 A A	

**NOTE:** When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



# WRANGLER TRAILRUNNER AT®

A Tough, Dependable Tire With a Hardworking Combination of On- and Off-Road Performance



## FEATURES

1. Large interlocking tread blocks
2. Saw-tooth block edges
3. Multi-angle sipes
4. Optimized tread pattern
5. Rugged stepped shoulder

## BENEFITS

- Help to deliver strong on- and off-road durability
- Offer all-season traction on and off the road
- Offer all-season traction on and off the road
- Enhances tread life and helps to quiet noise from on-road driving
- Helps to provide added traction in deep mud and snow



All-Terrain



Severe Snow

\*\*

## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

## WRANGLER TRAILRUNNER AT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
225/75R15	102T	SL	OWL	741131680	229120	6.0 - 7.5	6.0	8.8	28.3	1,874	12	739	580 A B
235/75R15	105S	SL	OWL	741126680	229103	6.0 - 8.0	6.5	9.3	28.9	2,039	12	723	580 A B
225/75R16	104S	SL	OWL	741129680	229109	6.0 - 7.5	6.0	8.8	29.3	1,984	12	713	580 A B
235/70R16	106T	SL	OWL	741043680	229108	6.0 - 8.0	7.0	9.4	29.0	2,094	12	721	580 A B
245/70R16	107T	SL	OWL	741762680	229107	6.5 - 8.0	7.0	9.8	29.5	2,149	12	708	580 A B
245/75R16	111S	SL	OWL	741128680	229106	6.5 - 8.0	7.0	9.8	30.5	2,403	12	685	580 A B
255/70R16	111S	SL	OWL	741127680	229104	6.5 - 8.5	7.5	10.2	30.1	2,403	12	694	580 A B
265/70R16	112T	SL	OWL	741045680	229102	7.0 - 9.0	8.0	10.7	30.6	2,469	12	683	580 A B
265/75R16	116T	SL	OWL	741057680	229105	7.0 - 9.0	7.5	10.5	31.7	2,756	12	659	580 A B
235/70R17	109T	XL	BLK	741134681	229124	6.0 - 8.0	7.0	9.4	30.0	2,271	12	697	580 A B
245/65R17	107T	SL	BLK	741592681	229110	7.0 - 8.5	7.0	9.8	29.5	2,149	12	708	580 A B
245/70R17	110T	SL	BLK	741060681	229112	6.5 - 8.0	7.0	9.8	30.6	2,337	12	683	580 A B
255/70R17	112T	SL	OWL	741067680	229121	6.5 - 8.5	7.5	10.2	31.1	2,469	12	672	580 A B
265/65R17	112T	SL	OWL	741061680	229113	7.5 - 9.5	8.0	10.7	30.6	2,469	12	683	580 A B
265/70R17	115T	SL	OWL	741042680	228954	7.0 - 9.0	8.0	10.7	31.7	2,679	12	659	580 A B
255/70R18	113T	SL	OWL	741074680	229118	6.5 - 8.5	7.5	10.2	32.1	2,535	12	651	580 A B
265/60R18	110T	SL	OWL	741130680	229116	7.5 - 9.5	8.0	10.7	30.5	2,337	12	685	580 A B
265/65R18	114T	SL	OWL	741068680	229117	7.5 - 9.5	8.0	10.7	31.5	2,601	12	663	580 A B
265/70R18	116T	SL	OWL	741070680	229119	7.0 - 9.0	8.0	10.7	32.6	2,756	12	641	580 A B
275/55R20	116T	SL	OWL	741066680	229115	7.5 - 9.5	8.0	11.0	32.1	2,756	12	651	580 A B
275/55R20	113T	SL	BLK	741065681	229111	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	580 A B
275/60R20	115T	SL	BLK	741073681	229114	7.5 - 9.5	8.0	11.0	33.0	2,679	12	633	580 A B
<b>WRANGLER TRAILRUNNER AT LT</b>													
30X9.50R15LT	104R	C	OWL	742509680	229099	6.5 - 8.5	7.5	9.5	29.5	1,985	15	705	
31X10.50R15LT	109R	C	OWL	742510680	229100	7.0 - 9.0	8.5	10.6	30.8	2,270	15	675	
LT215/85R16	115R	E	BLK	742517681	229093	5.5 - 7.0	6.0	8.6	30.5	2,680	15	682	
LT225/75R16	115R	E	BLK	742748681	228960	6.0 - 7.0	6.0	8.8	29.3	2,680	15	710	
LT235/85R16	120R	E	BLK	742745681	228957	6.0 - 7.5	6.5	9.3	31.7	3,042	15	656	
LT245/75R16	120S	E	BLK	742103681	228955	6.5 - 8.0	7.0	9.8	30.5	3,042	15	682	
LT265/75R16	123R	E	OWL	742746680	228958	7.0 - 8.0	7.5	10.5	31.7	3,415	15	656	
LT265/75R16	112R	C	OWL	742515680	228959	7.0 - 8.0	7.5	10.5	31.7	2,470	15	656	
LT285/75R16	126R	E	OWL	742585680	229095	7.5 - 9.0	8.0	11.3	33.1	3,750	15	628	
LT285/75R16	126R	E	BLK	742138680	232619	7.5 - 9.0	8.0	11.3	33.1	3,750	15	628	
LT235/80R17	120R	E	BLK	742635681	229094	6.0 - 7.5	6.5	9.3	31.8	3,085	15	654	
LT245/70R17	119S	E	BLK	742120681	229091	6.5 - 8.0	7.0	9.8	30.6	3,000	15	680	
LT245/75R17	121S	E	BLK	742104681	229092	6.5 - 7.5	7.0	9.8	31.5	3,195	15	660	
LT265/70R17	121S	E	BLK	742661681	228956	7.0 - 8.5	8.0	10.7	31.7	3,195	15	656	
LT285/70R17	121R	E	OWL	742096680	229123	7.5 - 9.0	8.5	11.5	33.0	3,195	15	630	
LT265/70R18	124S	E	OWL	742014680	229122	7.0 - 9.0	8.0	10.7	32.6	3,525	15	638	
LT275/65R18	123S	E	OWL	742965680	229097	7.5 - 9.0	8.0	11.0	32.1	3,415	15	648	
LT275/70R18	125R	E	OWL	742646680	229096	7.0 - 8.5	8.0	11.0	33.2	3,640	15	627	
LT275/65R20	126S	E	OWL	742303680	229098	7.5 - 9.5	8.0	11.0	34.1	3,750	15	610	

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# WRANGLER® ALL-TERRAIN ADVENTURE WITH KEVLAR®

A Versatile Tire With Rugged Strength for Quiet On-Road Driving and Going Off-Road at a Moment's Notice – Featuring DuPont™ Kevlar® fiber and Durawall® Technology



## FEATURES BENEFITS

1. A layer of DuPont Kevlar®	Offers rugged strength for confident off-road driving
2. Durawall Technology	Helps resist sidewall cuts and punctures
3. Traction ridges and open shoulder blocks	Help clear mud and snow for versatile off-road traction
4. Biting edges and a rubber compound	Offer superior traction on wet and icy roads

## PERFORMANCE RATINGS

Dry Traction	10
Wet Traction	10
Snow Traction	8
Off-Road Traction	8
Ride Comfort	8
Quiet Ride	9



## ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Terrain



Severe Snow



Rugged Toughness from DuPont™ Kevlar®



Original Equipment on Chevrolet, Ford, GMC, Jeep and Toyota

† Compared to standard load tires.

\*\* LT sizes marked with the Severe Snow Conditions Symbol.

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

## WRANGLER ALL-TERRAIN ADVENTURE WITH KEVLAR® SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
31X10.50R15LT	109R	C	OWL	748510571	219161	7.0 - 9.0	8.5	10.6	30.8	2,270	15	681		
235/70R16	106T	SL	OWL	758043571	219132	6.0 - 8.0	7.0	9.5	29.0	2,095	12	721	640 A B	
235/70R16	106T	SL	BSL	758079572	220309	6.0 - 8.0	7.0	9.5	29.0	2,095	12	721	640 A B	
245/70R16	107T	SL	OWL	758762571	219140	6.5 - 8.0	7.0	9.8	29.5	2,150	12	708	640 A B	
245/75R16	111T	SL	OWL	758059571	219136	6.5 - 8.0	7.0	9.8	30.5	2,405	12	686	640 A B	
255/70R16	111T	SL	OWL	758062571	219138	6.5 - 8.5	7.5	10.2	30.1	2,403	12	695	640 A B	
265/70R16	112T	SL	OWL	758045571	219134	7.0 - 9.0	8.0	10.7	30.6	2,469	12	682	640 A B	
265/70R16	112T	SL	VS	758045630	225035	7.0 - 9.0	8.0	10.7	30.6	2,469	11	682	640 A B	
265/75R16	116T	SL	OWL	758057571	219135	7.0 - 9.0	7.5	10.5	31.7	2,755	12	660	640 A B	
235/70R17	109T	XL	OWL	758078571	219152	6.0 - 8.0	7.0	9.5	30.0	2,405	12	697	640 A B	
235/75R17	109T	SL	BSL	758089572	220536	6.0 - 8.0	6.5	9.3	30.9	2,270	12	677	640 A B	
245/65R17	107T	SL	BSL	758592572	219133	7.0 - 8.5	7.0	9.8	29.5	2,150	12	708	640 A B	
245/65R17	107T	SL	OWL	758592571	220310	7.0 - 8.5	7.0	9.8	29.5	2,150	12	708	640 A B	
245/70R17	110T	SL	BSL	758060572	219137	6.5 - 8.0	7.0	9.8	30.6	2,337	12	684	640 A B	
245/70R17	110T	SL	OWL	758080571	220321	6.5 - 8.0	7.0	9.8	30.6	2,337	12	684	640 A B	
245/75R17	112T	SL	BSW	758177707	228709	6.5 - 8.0	7.0	9.8	31.5	2,469	11	663	640 A B	
255/65R17	110T	SL	OWL	758069571	219146	7.0 - 9.0	7.5	10.2	30.1	2,335	12	691	640 A B	
255/65R17	110T	SL	BSL	758069572	222658	7.0 - 9.0	7.5	10.2	30.1	2,335	11	691	680 A B	
255/70R17	112T	SL	OWL	758067571	219144	6.5 - 8.5	7.5	10.3	31.1	2,470	12	672	640 A B	
265/65R17	112T	SL	OWL	758061571	219139	7.5 - 9.5	8.0	10.7	30.6	2,469	12	684	640 A B	
265/70R17	115T	SL	OWL	758042571	219131	7.0 - 9.0	8.0	10.7	31.7	2,679	12	660	640 A B	
265/70R17	115T	SL	BSL	758042572	220308	7.0 - 9.0	8.0	10.7	31.7	2,679	12	660	640 A B	
255/65R18	111T	SL	BSL	758088572	220341	7.0 - 9.0	7.5	10.2	31.1	2,405	12	672	640 A B	
255/70R18	113T	SL	BSL	758074572	219149	6.5 - 8.5	7.5	10.2	32.1	2,535	12	651	640 A B	
255/70R18	113T	SL	BSW	758074707	228718	6.5 - 8.5	7.5	10.2	32.1	2,535	11	651	640 A B	
265/60R18	110T	SL	OWL	758076571	219150	7.5 - 9.5	8.0	10.7	30.5	2,337	12	685	640 A B	
265/60R18	110T	SL	VS	758076630	226999	7.5 - 9.5	8.0	10.7	30.5	2,337	12	685	640 A B	
265/65R18	114T	SL	OWL	758068571	219145	7.5 - 9.5	8.0	10.7	31.5	2,601	12	663	640 A B	
265/70R18	116T	SL	OWL	758070571	219147	7.0 - 9.0	8.0	10.7	32.6	2,755	12	640	640 A B	
275/65R18	116T	SL	OWL	758066571	219143	7.5 - 9.5	8.0	11.0	32.1	2,756	12	651	640 A B	
275/65R18	116T	SL	BSL	758081572	220322	7.5 - 9.5	8.0	11.0	32.1	2,756	12	651	640 A B	
255/60R19	109T	SL	BSL	758083572	220340	7.0 - 9.0	7.5	10.2	31.1	2,270	12	672	640 A B	
265/50R20	107T	SL	VS	758124630	227271	7.5 - 9.5	8.5	10.9	30.5	2,149	12	686	640 A B	
275/55R20	113T	SL	BSL	758065572	219141	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	640 A B	
275/55R20	113T	SL	OWL	758065571	222025	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	640 A B	
275/60R20	115T	SL	OWL	758073571	219148	7.5 - 9.5	8.0	11.0	33.0	2,679	12	634	640 A B	
275/60R20	115T	SL	BSL	758082572	220323	7.5 - 9.5	8.0	11.0	33.0	2,679	12	634	640 A B	
<b>WRANGLER ALL-TERRAIN ADVENTURE WITH KEVLAR® PRO-GRADE</b>														
LT215/85R16	115R	E	BSL	748517572	219162	5.5 - 7.0	6.0	8.6	30.5	2,680	15	688		
LT225/75R16	115R	E	BSL	748748572	219159	6.0 - 7.0	6.0	8.8	29.3	2,680	15	714		
LT235/85R16	120R	E	BSL	748745572	219158	6.0 - 7.5	6.5	9.3	31.7	3,042	15	659		
LT245/75R16	120S	E	BSL	748103572	225437	6.5 - 8.0	7.0	9.8	30.7	3,042	15	686		
LT245/75R16	120S	E	OWL	748103571	225438	6.5 - 8.0	7.0	9.8	30.7	3,042	15	686		
LT265/75R16	123R	E	BSL	748746572	219157	7.0 - 8.0	7.5	10.5	31.7	3,415	15	660		
LT265/75R16	123R	E	OWL	748746571	220325	7.0 - 8.0	7.5	10.5	31.7	3,415	15	660		
* LT285/75R16	126R	E	OWL	748585571	219166	7.5 - 9.0	8.0	11.3	32.8	3,750	15	637		
* LT285/75R16	126R	E	BSL	748585572	220328	7.5 - 9.0	8.0	11.3	32.8	3,750	15	637		
LT285/75R16	126R	E	OWL	748138571	231397	7.5 - 9.0	8.0	11.3	33.1	3,750	15	628		
LT285/75R16	126R	E	BSL	748138572	231398	7.5 - 9.0	8.0	11.3	33.1	3,750	15	628		
LT235/80R17	120R	E	BSL	748635572	219165	6.0 - 7.5	6.5	9.3	31.8	3,085	15	654		
LT245/70R17	119R	E	OWL	748469571	219169	6.5 - 8.0	7.0	9.8	30.6	3,000	15	684		
LT245/70R17	119R	E	BSL	748469572	220329	6.5 - 8.0	7.0	9.8	30.6	3,000	15	684		
‡LT245/70R17	119S	E	BSL	748120572	227189	6.5 - 8.0	7.0	9.8	30.6	3,000	14	684		
LT245/75R17	121S	E	OWL	748104571	225439	6.5 - 7.5	7.0	9.8	31.7	3,195	15	663	Ford F-150: 16-17	
LT245/75R17	121S	E	BSL	748104572	225440	6.5 - 7.5	7.0	9.8	31.7	3,195	15	663		
LT265/70R17	121S	E	OWL	748661571	225841	7.0 - 8.5	8.0	10.7	31.7	3,195	15	660		
LT265/70R17	121S	E	BSL	748661572	225843	7.0 - 8.5	8.0	10.7	31.7	3,195	15	660		
LT285/70R17	121R	E	OWL	748096571	219170	7.5 - 9.0	8.5	11.5	32.8	3,195	15	638		
LT285/70R17	121R	E	BSL	748096572	220330	7.5 - 9.0	8.5	11.5	32.8	3,195	15	638		
LT265/70R18	124S	E	BSL	748014572	225842	7.0 - 8.5	8.0	10.7	31.7	3,525	15	638		
LT275/65R18	123S	E	OWL	748965571	225844	7.5 - 9.0	8.0	11.0	32.1	3,415	15	651		
§LT275/65R18	113S	C	OWL	748958571	222029	7.5 - 9.0	8.0	11.0	32.1	2,535	15	651	Ford F150: 14-17	
LT275/70R18	125S	E	BSL	748108572	225461	7.0 - 8.5	8.0	11.0	33.4	3,640	15	630		
* LT275/70R18	125S	E	OWL	748108571	225462	7.0 - 8.5	8.0	11.0	33.4	3,640	15	630		
^LT275/70R18	125R	E	BSL	748139686	225567	7.0 - 8.5	8.0	11.0	33.4	3,640	14	630	Ford Superduty (F250/F350): 17	
^LT275/70R18	125R	E	OWL	748139571	227769	7.0 - 8.5	8.0	11.0	33.4	3,640	14	630	Ford Superduty (F250/F350): 17	
LT285/65R18	125R	E	BSL	748093572	220338	8.0 - 10.0	8.5	11.5	32.6	3,640	15	639		
LT265/60R20	121R	E	BSL	748097572	220332	7.5 - 9.5	8.0	10.7	32.5	3,197	15	640		
LT275/65R20	126S	E	OWL	748303571	226061	7.5 - 9.5	8.0	11.0	34.1	3,750	15	610		
LT275/65R20	126S	E	BSL	748303572	226062	7.5 - 9.5	8.0	11.0	34.1	3,750	15	610		
LT285/55R20	122R	E	BSL	748101572	220336	8.0 - 10.0	9.0	11.7	32.4	3,305	15	646		
LT285/60R20	125R	E	BSL	748015572	220337	8.0 - 10.0	8.5	11.5	33.5	3,638	15	622		
LT305/55R20	121R	E	BSL	748094572	219173	8.5 - 11.0	9.5	12.4	33.2	3,195	15	622		

\*Discontinued 2016.

‡Not marked with the Severe Snow Conditions Symbol.

§Only one layer of Kevlar®.

^4-rib option for OE that will not be marked with the Severe Snow Conditions Symbol.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# WRANGLER® SILENTARMOR®

An Original Equipment Tire  
Featuring DuPont™ Kevlar® Fiber for Added Strength

## FEATURES

- Added layer made with DuPont™ Kevlar®
- Durawall® Technology
- Traction ridges
- Open tread pattern
- Rim protector

## BENEFITS

- Helps provide rugged toughness and helps soak up road noise for a smooth and quiet ride
- Offers toughness and helps resist cuts and punctures in the sidewall area
- Help provide off-road traction in wet, muddy conditions
- For enhanced off-road traction
- Helps protect wheels against accidental curb damage



### Available in PRO-GRADE.†

Features long-lasting tread compound for heavy-duty truck applications.



Rugged Toughness from DuPont™ Kevlar®



All-Terrain



Severe Snow



Original Equipment on Dodge and Jeep

## WRANGLER SILENTARMOR SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* P235/75R15	108T	XL	OWL	758507189	195403	6.0 - 8.0	6.5	9.3	28.9	2,183	13	724	520 A B	
P245/75R17	110T	SL	OWL	758912189	209635	6.5 - 8.0	7.0	9.8	31.5	2,337	13	663	520 A B	Jeep Wrangler: 14-17
* P255/75R17	113T	SL	BSL	758498188	201525	6.5 - 8.5	7.0	10.0	32.1	2,535	13	649	520 A B	
P275/60R20	114T	SL	OWL	758649189	200355	7.5 - 9.5	8.0	11.0	33.0	2,601	13	634	520 A B	Dodge Ram 1500: 13-16, Dodge 2500 Power Wagon: 14
<b>WRANGLER SILENTARMOR LT</b>														
* 30X9.50R15LT	104R	C	OWL	748509189	195441	6.5 - 8.5	7.5	9.5	29.5	1,985	15	708		
* LT265/70R17	112R	C	OWL	748518189	195450	7.0 - 8.5	8.0	10.7	31.7	2,470	16	660		

## †WRANGLER SILENTARMOR PRO-GRADE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
LT265/70R17	121R	E	OWL	748535189	196387	7.0 - 8.5	8.0	10.7	31.7	3,195	16	660		Dodge Ram 1500: 12-17

\*Discontinued 2016.

**NOTE:** When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

# WRANGLER ARMORTRAC®

A Tough Tire Featuring All-Terrain Traction  
That Helps Get the Job Done



## FEATURES

- Enhanced tread
- Jagged tread blocks
- Open tread pattern
- Rim protector

## BENEFITS

- Offers toughness in on- and off-road conditions
- Help provide traction in wet conditions and enhance lateral stability
- Helps provide off-road traction
- Helps protect wheels against accidental curb damage



All-Terrain

## WRANGLER ARMORTRAC SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTOG
* P225/70R15	100T	SL	OWL	741734334	212741	6.0 - 7.5	6.5	9.0	27.4	1,753	13	762	520 A B
P225/75R15	102T	SL	OWL	741490334	212742	6.0 - 7.5	6.0	8.8	28.3	1,874	13	738	520 A B
* P235/75R15	108T	XL	OWL	741507334	212743	6.0 - 8.0	6.5	9.3	28.9	2,183	13	724	520 A B
* P235/70R16	104T	SL	OWL	741492334	212744	6.0 - 8.0	7.0	9.5	29.0	1,984	13	721	520 A B
* P245/70R16	106T	SL	OWL	741495334	212745	6.5 - 8.0	7.0	9.8	29.5	2,094	13	708	520 A B
* P245/75R16	109T	SL	OWL	741496334	212748	6.5 - 8.0	7.0	9.8	30.5	2,271	13	686	520 A B
* P265/70R16	111T	SL	OWL	741500334	212746	7.0 - 9.0	8.0	10.7	30.6	2,403	13	682	520 A B
* P265/75R16	114T	SL	OWL	741503334	212749	7.0 - 9.0	7.5	10.5	31.7	2,601	13	660	520 A B
* P245/65R17	105T	SL	BSL	741494333	212750	7.0 - 8.5	7.0	9.8	29.5	2,039	13	708	520 A B
* P245/70R17	108T	SL	BSL	741508333	217020	6.5 - 8.0	7.0	9.8	30.6	2,205	13	684	520 A B
* P265/70R17	113T	SL	OWL	741501334	212751	7.0 - 9.0	8.0	10.7	31.7	2,535	13	660	520 A B
* P255/70R18	112T	SL	OWL	741612334	218226	6.5 - 8.5	7.5	10.2	32.1	2,469	13	651	520 A B
* P265/60R18	109T	SL	OWL	741558334	212752	7.5 - 9.5	8.0	10.7	30.5	2,271	13	682	520 A B
* P275/65R18	114T	SL	OWL	741538334	217019	7.5 - 9.5	8.0	11.0	32.1	2,601	13	651	520 A B
P275/60R20	114T	SL	OWL	741649334	212753	7.5 - 9.5	8.0	11.0	33.0	2,601	13	634	520 A B
<b>WRANGLER ARMORTRAC LT</b>													
LT245/75R16	120R	E	BSL	742747333	212708	6.5 - 8.0	7.0	9.8	30.5	3,042	15	686	
LT265/75R16	123R	E	OWL	742746334	212709	7.0 - 8.0	7.5	10.5	31.7	3,415	16	660	
LT245/75R17	121R	E	OWL	742636334	218227	6.5 - 7.5	7.0	9.8	31.5	3,195	15	663	
LT265/70R17	121R	E	OWL	742535334	212710	7.0 - 8.5	8.0	10.7	31.7	3,195	16	660	

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# WRANGLER® AT/S

A Tough On-/Off-Road Tire

## FEATURES

- Self-cleaning, dual Traction Lug Channels
- Aggressive wraparound shoulder design
- Wide, deep lateral grooves
- Tough tread compound

## BENEFITS

- Superb mud, water and snow evacuation for all-surface traction
- Enhances looks and off-road traction
- Enhance snow and on- and off-road traction
- Offers tough off-road performance



All-Terrain



Original Equipment on Chevrolet, Ford and GMC

## WRANGLER AT/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P265/70R17	113S	SL	BSL	410422177	163884	7.0 - 9.0	8.0	10.7	31.7	2,535	13	660	360 A B	Chevrolet Avalanche: 04-06, Colorado: 13, Silverado: 13-14, Tahoe: 06-14, Suburban: 04, 07-14, GMC Canyon: 13, Sierra: 06-17, Yukon XL: 04, 11-17, Yukon: 06-15
P265/70R17	113S	SL	OWL	410422176	163887	7.0 - 9.0	8.0	10.7	31.7	2,535	13	660	360 A B	Chevrolet Avalanche (ALL): 04-05, Colorado: 11-12, Silverado: 06-14, Suburban, Tahoe: 04-10, GMC Canyon: 11-12, Sierra: 06-17, Yukon (ALL): 04, Yukon: 06-10
<b>WRANGLER AT/S LT</b>														
LT215/75R15	106S	D	BSL	411154177	177076	5.5 - 7.0	6.0	8.5	27.7	2,095	15	755		
LT275/65R18	113S	C	OWL	411958176	187223	7.5 - 9.0	8.0	11.0	32.1	2,535	16	651		Ford F-150: 04-14
LT275/65R20	126S	E	OWL	411303176	193959	7.5 - 9.5	8.0	11.0	34.1	3,750	16	610		Ford F-250: 05-10, Ford F-350: 05-09

**NOTE:** When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

# WRANGLER® RADIAL

The Proven All-Season, All-Terrain Wrangler



## FEATURES

All-season tread design  
Large tread blocks

## BENEFITS

Helps provide traction in a variety of conditions  
Help provide a stable footprint and confident handling



All-Terrain

### WRANGLER RADIAL SPECIFICATIONS

SIZE	LI/SS	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER
P235/75R15	105S	SL	OWL	795698918	19032



# WRANGLER® AT

A Trusted Tire Offering Year-Round Traction

## FEATURES

Easy-rolling radial construction  
Large footprint  
Tread lugs with multiple biting edges

## BENEFITS

Offers responsive steering and handling  
Provides a broad traction base and long tread life  
Offer excellent on- and off-road traction



All-Terrain

### WRANGLER AT SPECIFICATIONS

SIZE	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER
LT195/75R14	C	HBW	740036515	219176
LT255/85R16	D	OWL	740262471	189329

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



# WRANGLER DURATRAC®

A Workhorse Tire for Tough Off-Road Terrain and Snow With Long Tread Life and Aggressive Looks While Still Offering a Comfortable On-Road Experience



## FEATURES

1. TractiveGroove Technology
2. Self-cleaning shoulder blocks
3. Highly angled center tread blocks
4. Rim protector
5. LT sizes pinned for #16 metal studs†

## BENEFITS

- Offers enhanced traction in deep mud and snow
- Help provide enhanced dirt, gravel and mud traction
- Help provide enhanced traction and lateral stability while reducing road noise
- Helps protect wheels from accidental curb damage
- Enhanced traction in winter driving conditions

## PERFORMANCE RATINGS

Dry Traction	8
Wet Traction	8
Snow Traction	9
Off-Road Traction	9
Ride Comfort	6
Quiet Ride	6

## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Terrain



Severe Snow



Original Equipment on Chevrolet, Dodge and GMC

† Applies to LT sizes. Consult state and provincial laws regarding stud use. Use stud #16.

## WRANGLER DURATRAC SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/70R16	111S	SL	BSL	150567601	223249	6.5 - 8.5	7.5	10.2	30.1	2,403	16	694	500 B B	
265/70R16	112S	SL	BSL	150564601	223310	7.0 - 9.0	8.0	10.7	30.6	2,469	16	682	500 B B	
245/70R17	110S	SL	BSL	150675601	223247	6.5 - 8.0	7.0	9.8	30.6	2,337	16	683	500 B B	
255/75R17	115S	SL	BSL	150684601	225681	6.5 - 8.5	7.0	10.0	32.0	2,679	16	653	500 B B	
265/65R17	112S	SL	BSL	150153601	223248	7.5 - 9.5	8.0	10.7	30.6	2,469	16	683	500 B B	Chevrolet Colorado: 17
265/70R17	115S	SL	BSL	150154601	223243	7.0 - 9.0	8.0	10.7	31.7	2,679	16	659	500 B B	
255/70R18	113S	SL	BSL	150524601	223301	6.5 - 8.5	7.5	10.2	32.1	2,535	16	651	500 B B	
265/60R18	110S	SL	BSL	150525601	223309	7.5 - 9.5	8.0	10.7	30.5	2,337	16	685	500 B B	
265/65R18	114S	SL	BSL	150644601	223320	7.5 - 9.5	8.0	10.7	31.5	2,601	16	663	500 B B	Chevrolet Silverado: 15-17, Chevrolet Tahoe: 15-17, GMC Sierra: 15-17, GMC Yukon: 15-17
275/65R18	116S	SL	BSL	150638601	223304	7.5 - 9.5	8.0	11.0	32.1	2,756	16	651	500 B B	
*255/55R19	111S	XL	BLT	150663574	223967	7.0 - 9.0	8.0	10.4	30.0	2,403	16	696	320 A B	Land Rover Discovery: 11-17
255/55R19	111Q	XL	BLT	150884574	232662	7.0 - 9.0	8.0	10.4	30.0	2,403	16	696	320 A B	
275/55R20	113S	SL	BSL	150636601	223250	7.5 - 9.5	8.5	11.2	31.9	2,535	16	655	500 B B	
275/60R20	115S	SL	BSL	150678601	223307	7.5 - 9.5	8.0	11.0	33.0	2,679	16	633	500 B B	
<b>WRANGLER DURATRAC LT</b>														
31X10.50R15LT	109Q	C	OWL	312007027	208386	7.0 - 9.0	8.5	10.6	30.8	2,270	18	681		
33X12.50R15LT	108Q	C	OWL	312020027	208399	8.5 - 11.0	10.0	12.5	32.8	2,205	18	635		
LT235/75R15	104Q	C	OWL	312008027	208387	6.0 - 7.0	6.5	9.3	28.9	1,985	18	724		
LT215/85R16	115Q	E	BSL	312010142	208389	5.5 - 7.0	6.0	8.6	30.5	2,680	18	688		
LT225/75R16	115Q	E	BSL	312009142	208388	6.0 - 7.0	6.0	8.8	29.3	2,680	18	714		
LT235/85R16	120Q	E	BSL	312036142	220217	6.0 - 7.5	6.5	9.3	31.7	3,042	18	659		
* LT235/85R16	120Q	E	BSL	312036142	226375	6.0 - 7.5	6.5	9.3	31.7	3,042	18	659		
LT245/75R16	120Q	E	OWL	312249027	208316	6.5 - 8.0	7.0	9.8	30.7	3,042	18	681		
LT245/75R16	108Q	C	OWL	312017027	208396	6.5 - 8.0	7.0	9.8	30.7	2,205	18	686		
* LT245/75R16	120Q	E	OWL	312249027	226374	6.5 - 8.0	7.0	9.8	30.7	3,042	18	681		
LT265/75R16	112Q	C	OWL	312018027	208414	7.0 - 8.0	7.5	10.5	31.7	2,470	18	660		
LT265/75R16	123Q	E	BSL	312034142	223558	7.0 - 8.0	7.5	10.5	31.7	3,415	18	659		
* LT265/75R16	123Q	E	BSL	312034142	226373	7.0 - 8.0	7.5	10.5	31.7	3,415	18	659		
LT285/75R16	126P	E	BSL	312035142	223557	7.5 - 9.0	8.0	11.3	33.1	3,750	18	637		
LT315/75R16	127Q	E	BSL	312013142	208392	8.0 - 10.0	8.5	12.3	34.8	3,860	18	605		
LT235/80R17	120Q	E	BSL	312032142	216880	6.0 - 7.5	6.5	9.3	31.8	3,085	18	654		
LT245/70R17	119Q	E	BSL	312022142	208401	6.5 - 8.0	7.0	9.8	30.6	3,000	18	684		
LT245/75R17	121Q	E	OWL	312023027	208347	6.5 - 7.5	7.0	9.8	31.7	3,195	18	663		
LT265/70R17	121Q	E	BSL	312014142	208393	7.0 - 8.5	8.0	10.7	31.7	3,195	18	659		
LT265/70R17	112Q	C	OWL	312019027	208398	7.0 - 8.5	8.0	10.7	31.7	2,470	18	660		
* LT265/70R17	121Q	E	BSL	312014142	226372	7.0 - 8.5	8.0	10.7	31.7	3,195	18	659		
LT285/70R17	121Q	D	OWL	312015027	208394	7.5 - 9.0	8.5	11.5	33.0	3,195	18	638		Dodge Ram 2500 Power Wagon: 13-17
LT315/70R17	121Q	D	BSL	312031142	208413	8.5 - 10.0	9.5	12.7	34.4	3,195	18	607		
LT275/65R18	123Q	E	BSL	312011142	208390	7.5 - 9.0	8.0	11.0	32.1	3,415	18	651		Chevrolet Silverado HD: 15-17, GMC Sierra HD: 15-17
* LT275/65R18	123Q	E	BSL	312050142	230792	7.5 - 9.0	8.0	11.0	32.1	3,415	18	651		
LT275/70R18	125Q	E	BSL	312012142	208391	7.0 - 8.5	8.0	11.0	33.4	3,640	18	630		
LT295/65R18	127P	E	BSL	312024142	208348	8.0 - 10.0	8.5	11.8	33.1	3,860	18	624		
LT325/65R18	127Q	E	BSL	312016142	208395	9.0 - 12.0	9.5	13.0	34.8	3,860	18	597		
LT275/65R20	126Q	E	BSL	312025142	208349	7.5 - 9.5	8.0	11.0	34.1	3,750	18	610		
LT285/60R20	125Q	E	BSL	312028142	208350	8.0 - 10.0	8.5	11.5	33.5	3,640	18	622		
LT305/55R20	121Q	E	BSL	312030142	208412	8.5 - 11.0	9.5	12.4	33.2	3,195	18	622		
LT325/60R20	126Q	E	BSL	312029142	208411	9.0 - 12.0	9.5	13.0	35.6	3,750	18	584		

\*Discontinued 2016.

†Not marked with the Severe Snow Conditions Symbol.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**




# WRANGLER MT/R® WITH KEVLAR®

An Extreme Off-Road Expedition Tire Reinforced With DuPont™ Kevlar® Fiber Plus Durawall® Technology to Help Resist Punctures When Powering Over Rocks, Mud and Sand



FEATURES	BENEFITS
1. DuPont Kevlar® reinforced sidewalls	Help increase sidewall puncture resistance by 35% for confidence in tough terrain*
2. Hardworking wraparound tread	Offers enhanced sidewall traction in deep mud, sand and rocks
3. Innovative asymmetric tread design	Offers aggressive off-road traction while maintaining enhanced handling on the road
4. Advanced silica rubber	For superb off-road and wet traction
5. Durawall Technology	Helps resist sidewall cuts and punctures

## PERFORMANCE RATINGS

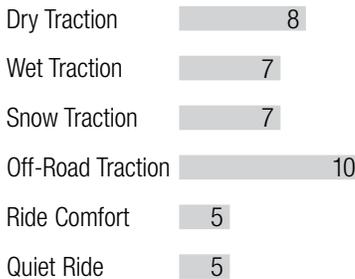

## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Rugged Toughness from DuPont™ Kevlar®



Off-Road

\* Source: Goodyear® Sidewall Penetration Energy – LT285/70R17 LR-D-65 psi. DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

## WRANGLER MT/R WITH KEVLAR® SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
31X10.50R15LT	109Q	C	BSL	750710326	219336	7.0 - 9.0	8.5	10.6	30.8	2,270	19	681
32X11.50R15LT	113Q	C	BSL	750732326	219346	8.0 - 10.0	9.0	11.4	31.8	2,535	21	655
33X12.50R15LT	108Q	C	BSL	750711326	219335	8.5 - 11.0	10.0	12.5	32.8	2,205	21	635
35X12.50R15LT	113Q	C	BSL	750712326	208009	8.5 - 11.0	10.0	12.5	34.8	2,535	21	598
LT235/85R16	120Q	E	BSL	750713326	208010	6.0 - 7.5	6.5	9.3	31.7	3,042	18	659
LT245/75R16	120Q	E	BSL	750151326	219334	6.5 - 8.0	7.0	9.8	30.7	3,042	18	686
LT265/75R16	123Q	E	BSL	750153326	219332	7.0 - 8.0	7.5	10.5	31.7	3,415	18	660
LT285/75R16	126Q	E	BSL	750451326	219333	7.5 - 9.0	8.0	11.3	33.1	3,750	18	637
LT305/70R16	124Q	E	BSL	750475326	219344	8.0 - 9.5	9.0	12.2	33.1	3,525	18	637
LT315/75R16	121Q	D	BSL	750554326	207999	8.0 - 10.0	8.5	12.3	34.8	3,195	21	598
35X12.50R17LT	111Q	C	BSL	750740326	208003	8.5 - 11.0	10.0	12.5	34.8	2,405	21	598
37X12.50R17LT	124Q	D	BSL	750578326	208000	8.5 - 11.0	10.0	12.5	36.8	3,525	21	566
38X14.50R17LT	121Q	D	BSL	750736326	208013	10.0 - 12.0	12.0	14.7	37.8	3,195	21	551
40X13.50R17LT	121Q	C	BSL	750623326	216483	8.5 - 11.0	11.0	13.6	39.8	3,195	22	523
40X13.50R17LT	121Q	C	BSL	750622326	208001	8.5 - 11.0	11.0	13.6	39.8	3,195	21	523
42X14.50R17LT	121Q	C	BSL	750624326	216485	10.0 - 12.0	12.0	14.7	41.8	3,195	22	497
42X14.50R17LT	121Q	C	BSL	750625326	208002	10.0 - 12.0	12.0	14.7	41.8	3,195	21	498
LT245/70R17	119Q	E	BSL	750140326	219342	6.5 - 8.0	7.0	9.8	30.6	3,000	18	684
LT245/75R17	121Q	E	BSL	750707326	219339	6.5 - 7.5	7.0	9.8	31.7	3,195	18	663
LT255/75R17	111Q	C	BSL	750687326	208560	6.5 - 8.5	7.0	10.0	32.3	2,405	19	644
LT265/70R17	121Q	E	BSL	750152326	219331	7.0 - 8.5	8.0	10.7	31.7	3,195	18	660
LT275/70R17	121Q	E	BSL	750393326	219349	7.0 - 8.5	8.0	11.0	32.4	3,195	18	649
LT285/70R17	121Q	D	BSL	750434326	219280	7.5 - 9.0	8.5	11.5	33.0	3,195	19	638
LT305/70R17	119Q	D	BSL	750542326	219337	8.0 - 9.5	9.0	12.2	34.1	3,000	19	617
LT315/70R17	121Q	D	BSL	750551326	219340	8.5 - 10.0	9.5	12.7	34.7	3,195	21	607
35X12.50R18LT	123Q	E	BSL	750032326	216875	8.5 - 11.0	10.0	12.5	34.8	3,415	18	598
LT275/65R18	113Q	C	BSL	750392326	219348	7.5 - 9.0	8.0	11.0	32.1	2,535	19	651
LT275/70R18	125Q	E	BSL	750432326	219338	7.0 - 8.5	8.0	11.0	33.4	3,640	18	630
LT285/75R18	129P	E	BSL	750116326	226371	7.5 - 9.5	8.0	11.3	35.1	4,080	18	593
33X12.50R20LT	114Q	E	BSL	750035326	216879	8.5 - 11.0	10.0	12.5	32.8	2,600	18	633
35X12.50R20LT	121Q	E	BSL	750002326	216874	8.5 - 11.0	10.0	12.5	34.8	3,195	18	598
LT275/65R20	126Q	E	BSL	750714326	208011	7.5 - 9.5	8.0	11.0	34.1	3,750	18	610
LT285/65R20	127Q	E	BSL	750435326	207993	8.0 - 10.0	8.5	11.5	34.8	3,860	18	598

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**

# FIERCE ATTITUDE M/T®

A Rugged Tire Offering Intense Mud Performance and Looks to Match



## FEATURES

1. Rugged mud terrain tread pattern
2. Staggered shoulder blocks
3. Rim flange protector

## BENEFITS

- Helps provide traction in deep mud conditions
- Help enhance grip for off-road driving
- Helps protect rims from accidental damage



Off-Road

## FIERCE ATTITUDE M/T SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
LT225/75R16	115P	E	BSL	357814294	208512	6.0 - 7.0	6.0	8.8	29.3	2,680	19	714
LT235/85R16	120P	E	BSL	357328294	220282	6.0 - 7.5	6.5	9.3	31.7	3,042	19	659
LT245/75R16	120P	E	BSL	357797294	208508	6.5 - 8.0	7.0	9.8	30.5	3,042	19	686
LT265/75R16	123P	E	BSL	357334294	223555	7.0 - 8.0	7.5	10.5	31.7	3,415	19	660
*LT285/75R16	126P	E	BSL	357584294	223553	7.5 - 9.0	8.0	11.3	33.1	3,750	19	637
LT315/75R16	127P	E	BSL	357194294	208505	8.0 - 10.0	8.5	12.3	34.8	3,860	19	605
35X12.50R17LT	119P	D	BSL	357351294	208510	8.5 - 11.0	10.0	12.5	34.8	3,000	19	597
LT265/70R17	121P	E	BSL	357368294	208507	7.0 - 8.5	8.0	10.7	31.7	3,195	19	660
LT285/70R17	121P	D	OWL	357435295	217711	7.5 - 9.0	8.5	11.5	33.0	3,195	19	638
LT275/65R18	123P	E	BSW	357442088	218196	7.5 - 9.0	8.0	11.0	32.1	3,415	19	651
LT275/70R18	125P	E	BSL	357379294	208511	7.0 - 8.5	8.0	11.0	33.4	3,640	19	630
LT325/65R18	127P	E	BSL	357523294	208513	9.0 - 12.0	9.5	13.0	34.8	3,860	19	597

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# WRANGLER® MT

A Rugged Off-Road Tire Designed for Military Applications



FEATURES	BENEFITS
----------	----------

Two steel belts	Help provide rugged penetration resistance and toughness
Wide, square footprint	Offers superb traction, on- or off-road
Open tread block design	Provides excellent self-cleaning tread action



Off-Road

### WRANGLER MT SPECIFICATIONS

SIZE	LI/SS	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER
37X12.50R16.5LT	123M	D	BSL	743123154	184251

**NOTE:** When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



# ENDURANCE®

Whether for Work or for Play, This Dependable Trailer Tire –  
Featuring Durawall® Technology – is Designed to Help You Tow With Confidence



FEATURES	BENEFITS
1. Optimized tread depth and decoupling groove	Help tire to remain cool while towing heavy loads
2. Rugged fabric-steel construction	Offers improved durability and carrying capacity while remaining compatible with tire pressure monitoring systems and typical tire inflation stations
3. Specialized inner liner	Minimizes air loss in trailer applications because of 100% halobutyl rubber
4. Scuff guard	Helps provide sidewall protection
5. Durawall Technology	Helps resist sidewall cuts and punctures

## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

## ENDURANCE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
ST205/75R14	105N	D	BSW	724864519	232865	5.0 - 6.5	5.5	8.0	26.1	2,040	8	797
ST215/75R14	108N	D	BSW	724865519	232866	5.5 - 7.0	6.0	8.5	26.7	2,200	8	779
ST205/75R15	107N	D	BSW	724861519	232551	5.0 - 6.5	5.5	8.0	27.1	2,150	8	768
ST225/75R15	117N	E	BSW	724857519	231946	6.0 - 7.0	6.0	8.7	28.3	2,830	8	735
ST235/80R16	123N	E	BSW	724858519	231947	6.0 - 7.5	6.5	9.3	30.8	3,420	8	675
ST235/85R16	125N	E	BSW	724860519	231948	6.0 - 7.5	6.5	9.3	31.7	3,640	8	659
ST255/85R16	129N	E	BSW	724862519	231949	6.0 - 8.0	7.0	10.0	33.1	4,080	8	631

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# MARATHON®

A Versatile, Long-Running Trailer Tire for Extended Trips



## FEATURES

1. Rib tread pattern design
2. Enhanced sidewall rubber
3. Scuff guard

## BENEFITS

- For precise tracking and long life
- Helps resist sidewall cracking
- Helps provide sidewall protection

## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

## MARATHON SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
ST175/80R13	91L	C	BSL	762174406	197549	4.5 - 5.5	5.0	6.9	24.0	1,360	9	870
ST185/80R13	94L	C	BSL	762045406	197581	4.5 - 6.0	5.0	7.2	24.7	1,480	9	848
ST205/75R14	100L	C	BSL	762176406	197585	5.0 - 6.5	5.5	8.0	26.1	1,760	9	800
ST215/75R14	102L	C	BSL	762177406	197589	5.5 - 7.0	6.0	8.5	26.7	1,870	9	783
ST205/75R15	101L	C	BSL	762171406	197605	5.0 - 6.5	5.5	8.0	27.1	1,820	9	770
ST225/75R15	113L	D	BSL	762173406	197609	6.0 - 7.0	6.0	8.7	28.3	2,540	9	738
ST225/75R15	107L	C	BSL	762172406	197607	6.0 - 7.0	6.0	8.7	28.3	2,150	9	738
ST235/80R16	119L	D	BSL	762400406	197621	6.0 - 7.5	6.5	9.3	30.8	3,000	9	679
ST235/80R16	123L	E	BSL	762394406	203129	6.0 - 7.5	6.5	9.3	30.8	3,420	10	679

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# WINTER

			
<b>Ultra Grip® 8 Performance</b>	<b>Eagle® Ultra Grip® GW-3</b>	<b>Ultra Grip® Ice <i>WRT</i></b>	
Powerful Winter Traction and Handling in Freezing Rain, Snow, Slush and Ice	Responsive Handling and Traction in Wet and Slippery Conditions	Enhanced Traction in Challenging Winter Conditions	
		Confident Traction and Strong Grip in Slippery Winter Conditions	

		Snow Traction	Ice Traction	Wet Traction	Handling	Ride Comfort
PERFORMANCE	Ultra Grip 8 Performance	10	10	9	10	8
	Eagle Ultra Grip GW-3	9	9	10	9	8
COMMUTER TOURING	Ultra Grip Ice <i>WRT</i>	9	10	7	8	9
	Ultra Grip Winter	9	8	8	7	10

### NUMERICAL RATING SCALE

**1 = Lower Performance | 10 = Higher Performance**

The rating scale can help you compare tires within each category. However, using the scale to distinguish between tires across different types of categories would be misleading.



	PERFORMANCE						COMMUTER		LT	COMMUTER		SUV		
	Ultra Grip® 8 Performance (Pg. 102)	Ultra Grip® 8 Performance ROF (Pg. 102)	Eagle® Ultra Grip® GW-3 (Pg. 106)	Eagle® Ultra Grip® GW-3 ROF (Pg. 106)	Eagle® Ultra Grip® GW-2 (Pg. 106)	Ultra Grip® Performance 2 (Pg. 108)	Ultra Grip® Ice WFT (Pg. 110)	Ultra Grip® Ice WFT (P) (Pg. 110)	Ultra Grip® Ice WFT LT (Pg. 110)	Ultra Grip® Winter (Pg. 112)	Ultra Grip® Ice (Pg. 114)	Ultra Grip® SUV ROF (Pg. 114)	Ultra Grip®+ SUV 4x4 (Pg. 115)	Cargo Ultra Grip® 2 (Pg. 115)
175/65R14										82T				
175/70R14										84T				
185/60R14										82T				
185/65R14										86T				
185/70R14										88T				
195/70R14										91T				
185/60R15										84T				
185/65R15										88T				
195/55R15										85T				
195/60R15										88T				
195/65R15							91S			91T				
205/60R15										91T				
205/65R15										94T				
205/70R15										96T				
215/60R15										94T				
215/70R15										98T				
235/75R15										105T				
195/55R16	87H			87H										
205/55R16						91H	94T			91T				
205/60R16							92T			92T				
205/65R16										95T				
215/55R16							97S							
215/60R16							95T			95T				
215/65R16							98S			98T				
225/60R16					97V		98S			98T				
225/65R16							100S			100T				
225/70R16								103S						
225/75R16C														118N*
235/60R16							100S			100T				
235/65R16							103S			103T				
235/70R16								106S						
245/70R16								107S						
245/75R16								111S						
255/70R16								111S						
265/70R16								112S						
LT245/75R16									E					
LT265/75R16									E					
205/50R17	93V					89H								
215/45R17							87T							
215/50R17							95T							
215/55R17							94T			94T				
215/65R17							99S			99T				
225/45R17							94T							
225/50R17				94H			94T			94T				
225/55R17							101T			97T				

# WINTER TIRE SELECTOR CHART

	PERFORMANCE						COMMUTER		LT	COMMUTER		SUV		
	Ultra Grip® 8 Performance (Pg. 102)	Ultra Grip® 8 Performance ROF (Pg. 102)	Eagle® Ultra Grip® GW-3 (Pg. 106)	Eagle® Ultra Grip® GW-3 ROF (Pg. 106)	Eagle® Ultra Grip® GW-2 (Pg. 106)	Ultra Grip® Performance 2 (Pg. 108)	Ultra Grip® Ice WFT (Pg. 110)	Ultra Grip® Ice WFT (P) (Pg. 110)	Ultra Grip® Ice WFT LT (Pg. 110)	Ultra Grip® Winter (Pg. 112)	Ultra Grip® Ice (Pg. 114)	Ultra Grip® SUV ROF (Pg. 114)	Ultra Grip®+ SUV 4x4 (Pg. 115)	Cargo Ultra Grip® 2 (Pg. 115)
225/60R17							99S			99T				
225/65R17							102S			102T				
235/55R17			98V				99T			99T				
235/60R17							102S							
235/65R17								104S		104T				
245/55R17						102H								
245/65R17								107S						
265/60R17			108H											
265/65R17								112S						
265/70R17								115S						
LT245/70R17									E					
LT245/75R17									E					
LT265/70R17									E					
225/40R18	92V													
225/45R18							91T							
225/50R18							95S							
225/55R18							98T							
225/60R18	108H		99V											
235/45R18							94T							
235/50R18			101V				97T							
235/55R18							100T			100T				
235/60R18							107T			107T				
235/65R18							106S							
245/45R18	100V	100V												
245/55R18			103V											
245/60R18							105S							
255/55R18							109S					109H		
255/65R18											109Q			
255/70R18								113S						
265/60R18								110S						
265/65R18								114S						
275/65R18								116S						
LT275/70R18									E					
235/55R19							101T							
245/45R19		102V												
245/55R19							103S			103T				
255/50R19												107H, 107V*		
255/55R19													111H	
255/60R19											108Q			
245/50R20							102S							
275/40R20													102H	
275/55R20								113S						
285/40R20	112V													
255/50R21						106H								

\*Discontinued 2016.



# ULTRA GRIP® 8 PERFORMANCE

(Select sizes with ROF)

## Our Best Ultra High-Performance Tire for Powerful Winter Traction and Handling in Freezing Rain, Snow, Slush and Ice




### FEATURES

1. Numerous sipes with biting edges
2. Saw-shaped center rib
3. Optimized polymer blend and silica tread compound
4. Directional tread pattern

### BENEFITS

- Help provide superior braking power on hard-packed snow and ice
- Helps grip snow-covered roads for enhanced snow traction
- Help maintain flexibility and provide consistent grip at low temperatures
- Helps channel water away from the tire surface for confident grip on wet and slushy roads

### PERFORMANCE RATINGS

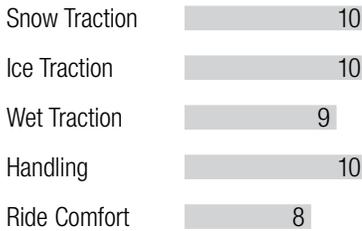

### POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Severe Snow



Ice Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness

## ULTRA GRIP 8 PERFORMANCE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
195/55R16	87H	SL	BLT	117820373	227929	5.5 - 7.0	6.0	7.9	24.4	1,201	10	856
205/50R17	93V	XL	BLT	117767373	226214	5.5 - 7.5	6.5	8.4	25.1	1,433	11	832
225/40R18	92V	XL	BLT	117775373	226219	7.5 - 9.0	8.0	9.1	25.1	1,389	11	833
225/60R18	108H	SL	BLT	117847373	230514	6.0 - 8.0	6.5	9.0	28.6	2,205	11	730
245/45R18	100V	XL	BLT	117778373	226514	7.5 - 9.0	8.0	9.6	26.7	1,764	11	784
285/45R20	112V	XL	BLT	117838373	229729	9.0 - 10.5	9.5	11.2	30.1	2,469	11	695
<b>ULTRA GRIP 8 PERFORMANCE ROF</b>												
245/45R18	100V	XL	BLT	117799373	227398	7.5 - 9.0	8.0	9.6	27.7	1,764	11	755
245/45R19	102V	XL	BLT	117798373	227397	7.5 - 9.0	8.0	9.6	27.7	1,874	11	755

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# EAGLE® ULTRA GRIP® GW-3 EAGLE® ULTRA GRIP® GW-2

(Select sizes with R0F)

**A Winter Performance Tire That Offers Responsive Handling and Traction in Wet and Slippery Conditions; Trusted for Use on Many Police Vehicles**

1. Unique high-performance winter tread compound

3. V-TRED™ Technology

2. High-blade density with multiple biting edges



EAGLE ULTRA GRIP GW-2 TREAD PATTERN


## FEATURES

1. Unique high-performance winter tread compound
2. High-blade density with multiple biting edges
3. V-TRED Technology

## BENEFITS

- Offers performance driving in all winter conditions
- Enhanced grip in snow and ice with wet and dry steering capability
- Helps evacuate water and slush away from the contact patch

## PERFORMANCE RATINGS

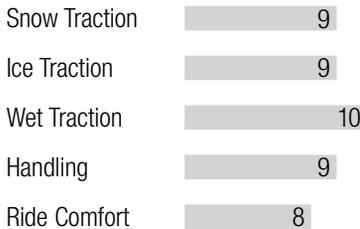

## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Severe Snow



Ice Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness

## EAGLE ULTRA GRIP GW-3 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
P235/55R17	98V	SL	VS	166579530	198865	6.5 - 8.5	7.5	9.7	27.2	1,653	11	769
265/60R17	108H	SL	VS	166043528	220014	7.5 - 9.5	8.0	10.7	29.5	2,205	11	708
P225/60R18	99V	SL	VS	166585530	204455	6.0 - 8.0	6.5	9.0	28.6	1,709	11	730
235/50R18	101V	XL	VS	166041528	220011	6.5 - 8.5	7.5	9.7	27.3	1,819	11	766
245/55R18	103V	SL	VS	166042528	220012	7.0 - 8.5	7.0	10.0	28.6	1,929	11	730
<b>EAGLE ULTRA GRIP GW-3 ROF</b>												
195/55R16	87H	SL	BLT	166040531	221673	5.5 - 7.0	6.0	7.9	24.4	1,201	9	856
225/50R17	94H	SL	BLT	166052531	208493	6.0 - 8.0	7.0	9.2	25.9	1,477	11	807

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

## EAGLE ULTRA GRIP GW-2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
P225/60R16	97V	SL	BCS	147354070	118468	6.0 - 8.0	6.5	9.0	26.6	1,609	11	785

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# ULTRA GRIP® PERFORMANCE 2

## An Ultra High-Performance Tire That Offers Strong Grip to Help Maneuver Through Winter Weather



FEATURES	BENEFITS
1. Adaptive SipeGrip Technology with 2D zigzag and 3D waffle sipes	Enhances gripping power under slippery conditions like snow, ice and wet while maintaining dry and wet handling
2. Hydrodynamic V groove and intermediate circumferential grooves	Help maximize water and slush evacuation for confident winter handling
3. Optimized polymer blend and advanced silica technology	Offer enhanced grip on snow, ice or wet surfaces at low temperatures
4. 4 different block sizes and rib shifting	Offer a quiet and comfortable ride with uniform wear

### POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



## ULTRA GRIP PERFORMANCE 2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
205/55R16	91H	SL	BLT	117524649	226230	5.5 - 7.5	6.5	8.4	24.9	1,356	11	840
205/50R17	89H	SL	BLT	117812649	227499	5.5 - 7.5	6.5	8.4	25.1	1,279	11	832
245/55R17	102H	SL	BLT	117608649	220319	7.0 - 8.5	7.5	10.0	27.7	1,874	11	756
255/50R21	106H	SL	BLT	117605649	220112	7.0 - 9.0	8.0	10.4	31.1	2,094	11	673

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.




# ULTRA GRIP® ICE WRT

## An Innovative Winter Tire for Enhanced Traction in Challenging Winter Conditions



FEATURES	BENEFITS
1. Specialized ice tread compound	Offers enhanced traction on ice and snow-covered roads from season to season
2. 2D blades in the center zone	Offer enhanced starting and stopping power on snow and ice
3. 3D TredLock Technology blades in the shoulder zone	Offer enhanced wet and winter traction and lock together for confident grip in turns
4. Directional tread pattern	Helps channel water and slush away from the tire for enhanced winter traction and handling
5. Rim protector*	Helps protect wheels against accidental curb damage
6. Outfitted for optional metal studs†	For enhanced traction in winter driving conditions

### PERFORMANCE RATINGS

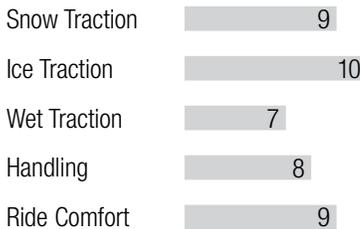

### POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



\* Applies to SUV and LT sizes.

† Applies to SUV and LT sizes. Consult state and provincial laws regarding stud use. Use stud #12 for SUV P-metric sizes and #15 for LT sizes. See Retailer for complete details.

## ULTRA GRIP ICE WRT – SUV/LT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
225/70R16	103S	SL	BSW	754150371	216726	6.0 - 7.5	6.5	9.0	28.4	1,929	13	735
235/70R16	106S	SL	BSW	754568371	216727	6.0 - 8.0	7.0	9.5	29.0	2,094	13	721
245/70R16	107S	SL	BSW	754213371	216728	6.5 - 8.0	7.0	9.8	29.5	2,149	13	708
245/75R16	111S	SL	BSW	754566371	216741	6.5 - 8.0	7.0	9.8	30.5	2,403	13	686
255/70R16	111S	SL	BSW	754567371	216729	6.5 - 8.5	7.5	10.2	30.1	2,403	13	695
265/70R16	112S	SL	BSW	754564371	216730	7.0 - 9.0	8.0	10.7	30.6	2,469	13	682
235/65R17	104S	SL	BSW	754640371	216742	6.5 - 8.5	7.0	9.5	29.1	1,984	13	719
245/65R17	107S	SL	BSW	754151371	216743	7.0 - 8.5	7.0	9.8	29.5	2,149	13	708
265/65R17	112S	SL	BSW	754153371	216744	7.5 - 9.5	8.0	10.7	30.6	2,469	13	684
265/70R17	115S	SL	BSW	754154371	216745	7.0 - 9.0	8.0	10.7	31.7	2,679	13	660
255/70R18	113S	SL	BSW	754524371	217056	6.5 - 8.5	7.5	10.2	32.1	2,535	13	651
265/60R18	110S	SL	BSW	754525371	217060	7.5 - 9.5	8.0	10.7	30.5	2,337	13	685
265/65R18	114S	SL	BSW	754644371	221102	7.5 - 9.5	8.0	10.7	31.5	2,601	13	663
275/65R18	116S	SL	BSW	754638371	221100	7.5 - 9.5	8.0	11.0	32.1	2,756	13	651
275/55R20	113S	SL	BSW	754636371	221099	7.5 - 9.5	8.5	11.2	31.9	2,535	13	655
<b>ULTRA GRIP ICE WRT LT</b>												
LT245/75R16	120Q	E	BWS	268607372	216746	6.5 - 8.0	7.0	9.8	30.5	3,042	16	686
LT265/75R16	123Q	E	BWS	268610372	216747	7.0 - 8.0	7.5	10.5	31.7	3,415	16	660
LT245/70R17	119Q	E	BWS	268598372	216748	6.5 - 8.0	7.0	9.8	30.6	3,000	16	684
LT245/75R17	121Q	E	BWS	268290372	216750	6.5 - 7.5	7.0	9.8	31.5	3,195	16	663
LT265/70R17	121Q	E	BWS	268289372	216749	7.0 - 8.5	8.0	10.7	31.7	3,195	16	660
LT275/70R18	125Q	E	BWS	268600372	216761	7.0 - 8.5	8.0	11.0	33.2	3,640	16	630

## ULTRA GRIP ICE WRT – CAR/MINIVAN SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
195/65R15	91S	SL	BSW	780584350	217093	5.5 - 7.0	6.0	7.9	25.0	1,356	12	836
205/55R16	94T	XL	BSW	780563350	217091	5.5 - 7.5	6.5	8.4	24.9	1,477	12	839
250/60R16	92T	SL	BSW	780212350	217101	5.5 - 7.5	6.0	8.2	25.7	1,389	12	813
215/55R16	97S	XL	BSW	780583350	217092	6.0 - 7.5	7.0	8.9	25.3	1,609	12	826
215/60R16	95T	SL	BSW	780562350	217088	6.0 - 7.5	6.5	8.7	26.1	1,521	12	801
215/65R16	98S	SL	BWS	780560350	217085	6.0 - 7.5	6.5	8.7	27.0	1,653	12	774
225/60R16	98S	SL	BSW	780034350	217089	6.0 - 8.0	6.5	9.0	26.6	1,653	12	786
225/65R16	100S	SL	BSW	780327350	224111	6.0 - 8.0	6.5	9.0	27.5	1,764	12	760
235/60R16	100S	SL	BSW	780328350	217090	6.5 - 8.5	7.0	9.5	27.1	1,764	12	771
235/65R16	103S	SL	BSW	780703350	217087	6.5 - 8.5	7.0	9.5	28.0	1,929	12	746
215/45R17	87T	SL	BSW	780642350	221093	7.0 - 8.0	7.0	8.4	24.7	1,201	12	846
215/50R17	95T	XL	BSW	780641350	221092	6.0 - 7.5	7.0	8.9	25.5	1,521	12	820
215/55R17	94T	SL	BSW	780597350	217097	6.0 - 7.5	7.0	8.9	26.3	1,477	12	795
215/65R17	99S	SL	BSW	780585350	217094	6.0 - 7.5	6.5	8.7	28.0	1,709	12	746
225/45R17	94T	XL	BSW	780640350	221091	7.0 - 8.5	7.5	8.9	25.0	1,477	12	836
225/50R17	94T	SL	BSW	780600350	217100	6.0 - 8.0	7.0	9.2	25.9	1,477	12	807
225/55R17	101T	XL	BSW	780598350	217098	6.0 - 8.0	7.0	9.2	26.8	1,819	12	780
225/60R17	99S	SL	BSW	780752350	224112	6.0 - 8.0	6.5	9.0	27.6	1,709	12	756
225/65R17	102S	SL	BSW	780712350	217095	6.0 - 8.0	6.5	9.0	28.5	1,874	12	733
235/55R17	99T	SL	BSW	780599350	217099	6.5 - 8.5	7.5	9.7	27.2	1,709	12	768
235/60R17	102S	SL	BSW	780559350	217084	6.5 - 8.5	7.0	9.5	28.1	1,874	12	744
225/45R18	91T	SL	BSW	780670350	221095	7.0 - 8.5	7.5	8.9	25.9	1,356	12	807
225/50R18	95S	SL	BSW	780558350	217083	6.0 - 8.0	7.0	9.2	26.9	1,521	12	777
225/55R18	98T	SL	BSW	780643350	221094	6.0 - 8.0	7.0	9.2	27.8	1,653	12	752
235/45R18	94T	SL	BSW	780687350	221096	7.5 - 9.0	8.0	9.3	26.3	1,477	12	792
235/50R18	97T	SL	BSW	780689350	221097	6.5 - 8.5	7.5	9.7	27.3	1,609	12	766
235/55R18	100T	SL	BSW	780556350	217081	6.5 - 8.5	7.5	9.7	28.2	1,764	12	741
235/60R18	107T	XL	BSW	780553350	217058	6.5 - 8.5	7.0	9.5	29.1	2,149	12	718
235/65R18	106S	SL	BSW	780552350	217057	6.5 - 8.5	7.0	9.5	30.0	2,094	12	697
245/60R18	105S	SL	BSW	780554350	217059	7.0 - 8.5	7.0	9.8	29.6	2,039	12	707
255/55R18	109S	XL	BSW	780557350	217082	7.0 - 9.0	8.0	10.4	29.0	2,271	12	720
235/55R19	101T	SL	BSW	780550350	217054	6.5 - 8.5	7.5	9.7	29.2	1,819	12	716
245/55R19	103S	SL	BSW	780551350	217055	7.0 - 7.5	8.0	10.0	29.7	1,929	12	705
245/50R20	102S	SL	BSW	780549350	217053	7.0 - 8.5	7.5	10.0	29.7	1,874	12	704

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.




# ULTRA GRIP® WINTER

A Quality Winter Tire That Stops, on Average, 6 Feet (1.8 m) Shorter on Snow Than a Leading Competitor.\* Provides Confident Traction and Strong Grip in Slippery Winter Conditions.



FEATURES	BENEFITS
1. Directional tread pattern	For enhanced winter traction in the snow
2. Multiple biting edges	Help provide confident grip on ice and snow-covered roads
3. Wide tread grooves	Help push snow and slush away for enhanced winter traction
4. Strong shoulder blocks	To promote even treadwear
5. Outfitted for optional metal studs†	For confidence in tough winter driving conditions

## PERFORMANCE RATINGS

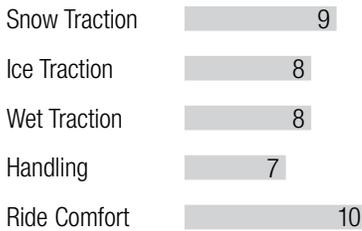

## POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Stops on average 6 ft. (1.8 meters) shorter on snow than the *General AltiMAX Arctic*.\*



\* In Goodyear's "Snow Stopping Distance Test," the Ultra Grip Winter tire stops, on average, 6 feet (1.8 meters) shorter on snow than the *General AltiMAX Arctic* 215/65R16.

† Consult state and provincial laws regarding stud use. Use stud #12. See Retailer for complete details.

## ULTRA GRIP WINTER SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
175/65R14	82T	SL	BSW	766360355	219632	5.0 - 6.0	5.0	7.0	23.0	1,047	13	910
175/70R14	84T	SL	BSW	766105355	219629	4.5 - 6.0	5.0	7.0	23.7	1,102	13	882
185/60R14	82T	SL	BSW	766474355	219634	5.0 - 6.5	5.5	7.5	22.8	1,047	13	917
185/65R14	86T	SL	BSW	766106355	219633	5.0 - 6.5	5.5	7.4	23.5	1,168	13	889
185/70R14	88T	SL	BSW	766476355	219630	4.5 - 6.0	5.5	7.4	24.3	1,235	13	860
195/70R14	91T	SL	BSW	766736355	219631	5.0 - 6.5	6.0	7.9	24.8	1,356	13	843
185/60R15	84T	SL	BSW	766739355	219641	5.0 - 6.5	5.5	7.5	23.8	1,102	13	880
185/65R15	88T	SL	BSW	766259355	219638	5.0 - 6.5	5.5	7.4	24.5	1,235	13	855
195/55R15	85T	SL	VS	766709358	219645	5.5 - 7.0	6.0	7.9	23.4	1,135	13	892
195/60R15	88T	SL	BSW	766740355	219642	5.5 - 7.0	6.0	7.9	24.2	1,235	13	864
195/65R15	91T	SL	BSW	766477355	219639	5.5 - 7.0	6.0	7.9	25.0	1,356	13	836
205/60R15	91T	SL	BSW	766741355	219643	5.5 - 7.5	6.5	8.2	24.7	1,356	13	846
205/65R15	94T	SL	BSW	766478355	219640	5.5 - 7.5	6.0	8.3	25.5	1,477	13	820
205/70R15	96T	SL	BSW	766738355	219636	5.0 - 7.0	6.0	8.2	26.3	1,565	13	795
215/60R15	94T	SL	VS	766706358	219644	6.0 - 7.5	6.5	8.7	25.2	1,477	13	830
215/70R15	98T	SL	BSW	766280355	219637	5.5 - 7.0	6.5	8.7	26.9	1,653	13	777
235/75R15	105T	SL	BSW	766737355	219635	6.0 - 8.0	6.5	9.3	28.9	2,039	13	723
205/55R16	91T	SL	VS	766718358	219653	5.5 - 7.5	6.5	8.4	24.9	1,356	13	840
205/60R16	92T	SL	VS	766212358	219649	5.5 - 7.5	6.0	8.2	25.7	1,389	13	816
205/65R16	95T	SL	BSW	766758355	226604	5.5 - 7.5	6.0	8.2	26.5	1,521	13	789
215/60R16	95T	SL	VS	766562358	219650	6.0 - 7.5	6.5	8.7	26.1	1,521	13	800
215/65R16	98T	SL	BSW	766016355	219646	6.0 - 7.5	6.5	8.7	27.0	1,653	13	774
225/60R16	98T	SL	VS	766715358	219651	6.0 - 8.0	6.5	9.0	26.6	1,653	13	786
225/65R16	100T	SL	VS	766714358	219647	6.0 - 8.0	6.5	9.0	27.5	1,764	13	760
235/60R16	100T	SL	VS	766716358	219652	6.5 - 8.5	7.0	9.5	27.1	1,764	13	772
235/65R16	103T	SL	VS	766207358	223554	6.5 - 8.5	7.0	9.5	28.0	1,929	13	746
215/55R17	94T	SL	VS	766597358	219658	6.0 - 7.5	7.0	8.9	26.3	1,477	13	795
215/65R17	99T	SL	VS	766719358	219654	6.0 - 7.5	6.5	8.7	28.0	1,709	13	746
225/50R17	94T	SL	VS	766600358	219661	6.0 - 8.0	7.0	9.2	25.9	1,477	13	807
225/55R17	97T	SL	VS	766726358	219659	6.0 - 8.0	7.0	9.2	26.8	1,609	13	780
225/60R17	99T	SL	VS	766723358	219657	6.0 - 8.0	6.5	9.0	27.6	1,709	13	756
225/65R17	102T	SL	VS	766720358	219655	6.0 - 8.0	6.5	9.0	28.5	1,874	13	733
235/55R17	99T	SL	VS	766599358	219660	6.5 - 8.5	7.5	9.7	27.2	1,709	13	768
235/65R17	104T	SL	VS	766722358	219656	6.5 - 8.5	7.0	9.5	29.1	1,984	13	719
235/55R18	100T	SL	VS	766733358	219663	6.5 - 8.5	7.5	9.7	28.2	1,764	13	742
235/60R18	107T	XL	VS	766553358	219662	6.5 - 8.5	7.0	9.5	29.1	2,149	13	718
245/55R19	103T	SL	VS	766734358	219664	7.0 - 7.5	8.0	10.0	29.7	1,929	13	705

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



## ULTRA GRIP® ICE

A Tire for Superb Winter Traction, Especially on Ice



### ULTRA GRIP ICE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
P255/65R18	109Q	SL	B03	780504404	209306	7.0 - 9.0	7.5	10.2	31.1	2,271	13	672
P255/60R19	108Q	SL	B03	780505404	209307	7.0 - 9.0	7.5	10.2	31.1	2,205	13	673



## ULTRA GRIP® SUV ROF

An SUV Tire for Enhanced Traction in Severe Winter Driving Conditions



### ULTRA GRIP SUV ROF SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
255/55R18	109H	XL	BSW	754647960	206228	7.0 - 9.0	8.0	10.4	29.0	2,271	11	720
255/50R19	107H	XL	BLT	754283318	209368	7.0 - 9.0	8.0	10.4	29.1	2,150	11	718
*255/50R19	107V	XL	BLT	754451318	218199	7.0 - 9.0	8.0	10.4	29.1	2,150	11	718

\*Discontinued 2016.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

# ULTRA GRIP®+ SUV 4X4

The Performance SUV Tyre That Delivers All-Around Winter Traction



## ULTRA GRIP+ SUV 4X4 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
255/55R19	111H	XL	BLT	754117575	224012	7.0 - 9.0	8.0	10.4	30.0	2,403	11	696
275/40R20	102H	SL	BLT	754095575	224011	9.0 - 11.0	9.5	10.9	28.7	1,874	12	728

# CARGO ULTRA GRIP® 2

The Hard-Working Tyre That Keeps Your Van Moving All Winter Long

## CARGO ULTRA GRIP 2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
*225/75R16C	118N	E	BLT	771760369	225828	6.0 - 7.0	6.0	8.8	29.3	2,910	14	710

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# 2017 GOODYEAR® OE FITMENTS

# #1

OE Brand Share

---

## Fitments on a Rich Mix of Vehicles

Ford • Honda • BMW • Mercedes-Benz • Cadillac • Toyota • Lincoln • Tesla • Jeep

---

Significantly Outperform the Market for  
OE Replacement Loyalty





VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>ACURA</b>										
	TL	P245/40R19 94V	732293500	EAGLE RS-A	VSX	X	X			
	TLX	225/55R17 97H	706447163	EAGLE LS-2	BSW			X	X	X
		225/50R18 95H	706171163	EAGLE LS-2	BSW			X	X	X
<b>AUDI</b>										
	A5	225/50R17 94H	706567163	EAGLE LS-2	BLT	X	X			
		245/40R18 93H	706014308	EAGLE LS-2	BLT		X	X		
		245/45R17 95H	706578163	EAGLE LS-2	BLT	X	X	X		
	A6	225/55R17 97Y	112002381	EFFICIENTGRIP	BLT	X	X	X	X	X
		255/40R19 100Y XL	112228344	EFFICIENTGRIP ROF	BLT	X	X			
		255/40R19 100Y XL	784257336	EAGLE F1 ASYMMETRIC	BLT	X	X	X	X	X
		225/55R17 97H	706447308	EAGLE LS-2	BLT	X	X	X	X	X
	A7	255/40R19 100Y XL	112228344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X
		255/40R19 100Y XL	784257336	EAGLE F1 ASYMMETRIC	BLT	X	X	X	X	X
		255/40R19 100H XL	706195308	EAGLE LS-2	VSX	X	X			
		255/45R18 99H	706196308	EAGLE LS-2	BLT	X	X	X	X	X
		255/45R18 99Y	112350381	EFFICIENTGRIP	BLT	X	X	X	X	X
	A8	235/55R18 104H XL	706076308	EAGLE LS-2	BLT	X	X	X	X	X
		255/45R19 104H XL	706073308	EAGLE LS-2	BLT	X	X	X	X	X
		255/45R19 104Y XL	784008336	EAGLE F1 ASYMMETRIC	BLT	X	X	X	X	X
		265/40R20 104Y XL	784226336	EAGLE F1 ASYMMETRIC	BLT	X	X	X	X	X
	Q5	255/45R20 101W	684011293	EXCELLENCE	BLT	X	X	X	X	X
	Q7	235/60R18 107H	706593163	EAGLE LS-2	VSX	X	X			
		255/55R18 109H XL	706999324	EAGLE LS-2	BLT	X	X			
		255/55R18 109Y XL	784246333	EAGLE F1 ASYMMETRIC SUV	BLT	X	X	X		
		255/55R19 111H XL	109097395	EAGLE SPORT ALL-SEASON ROF	BLT				X	X
		255/60R18 108H	109099382	EAGLE SPORT ALL-SEASON	BLT				X	X
		265/50R19 110H XL	706598163	EAGLE LS-2	VSX	X	X			
		265/50R19 110Y XL	784247333	EAGLE F1 ASYMMETRIC SUV	BLT	X	X	X		
		265/50ZR19 110Y XL	706696154	EAGLE F1 GS-D3	VSX	X	X			
		275/45R20 110H XL	706940165	EAGLE LS-2	VSX	X	X	X		
		275/45R20 110Y XL	784248333	EAGLE F1 ASYMMETRIC SUV	BLT	X	X	X		
		275/45ZR20 110Y	709608154	EAGLE F1 GS-D3	VSX	X	X			
		285/45R20 112H XL	109096395	EAGLE SPORT ALL-SEASON ROF	BLT				X	X
	S5	245/40R18 93H	706014308	EAGLE LS-2	BLT		X			
<b>BMW</b>										
	1 SERIES	205/55R16 91W	112169381	EFFICIENTGRIP ROF	BLT	X				
		205/55R16 91W	112187344	EFFICIENTGRIP ROF	BLT		X			
		205/50R17 89H	706795168	EAGLE LS-2 ROF	BSW	X	X			
		205/50R17 89V (F)	797078556	EAGLE NCT 5 ROF	BLT	X	X			
		205/50R17 89W (F)	797191556	EAGLE NCT 5 ROF	BLT	X	X			
		225/45R17 91V (R)	797173556	EAGLE NCT 5 ROF	BLT	X	X			
		225/45R17 91W (R)	797192556	EAGLE NCT 5 ROF	BLT	X				
	3 SERIES	225/45R18 91Y (F)	112005344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X
		255/40R18 95Y (R)	112006344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X
		225/40R19 89Y (F)	784044359	EAGLE F1 ASYMMETRIC 2 ROF	BLT	X	X	X	X	X
		255/35R19 92Y (R)	784054359	EAGLE F1 ASYMMETRIC 2 ROF	BLT	X	X	X	X	X
	5 GT	245/55R17 102W	111018513	EXCELLENCE ROF	BLT				X	X
		245/50R18 100V	706070322	EAGLE LS-2 ROF	BLT				X	X
		245/45R19 102V XL	706280322	EAGLE LS-2 ROF	BLT				X	X
		245/40R20 99Y XL (F)	111045513	EXCELLENCE ROF	BLT				X	X
		275/35R20 102Y XL (R)	111048513	EXCELLENCE ROF	BLT				X	X
	5 SERIES (G30)	225/55R17 97V	109094395	EAGLE SPORT ALL-SEASON * MOE ROF	BLT					X
		245/45R18 100V XL	109095395	EAGLE SPORT ALL-SEASON * MOE ROF	BLT					X
		245/40R19 98Y XL (F)	783836385	EAGLE F1 ASYMMETRIC 3 * MOE ROF	BLT					X
		275/35R19 100Y XL (R)	783857385	EAGLE F1 ASYMMETRIC 3 * MOE ROF	BLT					X
		245/35R20 95Y XL (F)	783718385	EAGLE F1 ASYMMETRIC 3 * MOE ROF	BLT					X
		275/30R20 97Y XL (R)	783723385	EAGLE F1 ASYMMETRIC 3 * MOE ROF	BLT					X
	5 SERIES / 6 SERIES	225/55R17 97V	706923322	EAGLE LS-2 ROF	BLT	X	X	X	X	
		225/55R17 97Y	111272513	EXCELLENCE ROF	BLT	X	X			
		245/45R18 100V XL	706260322	EAGLE LS-2 ROF	BLT	X	X	X	X	
		245/40R19 98V XL	706283322	EAGLE LS-2 ROF	BLT	X	X	X	X	
		245/40R19 94Y (F)	111444513	EXCELLENCE ROF	BLT	X	X	X	X	
		275/35R19 96Y (R)	111446513	EXCELLENCE ROF	BLT	X	X	X	X	



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>BMW (Cont.)</b>										
	5 SERIES / 6 SERIES (F1x)	225/55R17 97V	706923322	EAGLE LS-2 ROF	BLT					X
		245/45R18 100V XL	706260322	EAGLE LS-2 ROF	BLT					X
		245/40R19 98V XL	706283322	EAGLE LS-2 ROF	BLT					X
		245/40R19 94Y (F)	111444513	EXCELLENCE ROF	BLT					X
		275/35R19 96Y (R)	111446513	EXCELLENCE ROF	BLT					X
	6 SERIES	245/40R19 98Y XL	111003513	EXCELLENCE ROF	BLT	X	X	X	X	X
	7 SERIES / 5 GT	245/55R17 102W	111018513	EXCELLENCE ROF	BLT	X	X			
		245/50R18 100V	706070322	EAGLE LS-2 ROF	BLT	X	X			
		245/45R19 102V XL	706280322	EAGLE LS-2 ROF	BLT	X	X			
		245/45R19 98Y (F)	111016513	EXCELLENCE ROF	BLT	X				
		275/40R19 101Y (R)	111017513	EXCELLENCE ROF	BLT	X				
		245/40R20 99Y XL (F)	111045513	EXCELLENCE ROF	BLT	X	X			
		275/35R20 102Y XL (R)	111048513	EXCELLENCE ROF	BLT	X	X			
	X1	225/50R17 94H	706567308	EAGLE LS-2 ROF	BLT	X	X	X	X	
		225/45R18 91V (F)	112206344	EFFICIENTGRIP ROF	BLT	X	X	X	X	
		225/45R18 91V (R)	112199344	EFFICIENTGRIP ROF	BLT	X				
		255/40R18 95V	112199344	EFFICIENTGRIP ROF	BLT		X	X	X	
		225/50R18 95V	109092395	EAGLE SPORT ALL-SEASON * ROF	BLT					X
	225/45R18 91W (F)	112303344	EFFICIENTGRIP ROF	BLT	X	X	X	X		
	X3	245/55R17 102V	111313513	EXCELLENCE ROF	BLT	X	X	X	X	X
		245/50R18 100V	706070322	EAGLE LS-2 ROF	BLT	X	X	X	X	X
		245/45R19 102V XL	706280322	EAGLE LS-2 ROF	BLT	X	X	X	X	X
		245/40R20 99Y XL (F)	111045513	EXCELLENCE ROF	BLT	X				
		275/35R20 102Y XL (R)	111048513	EXCELLENCE ROF	BLT	X				
	X5	255/55R18 109H XL	706999163	EAGLE LS-2 ROF	BLT		X	X	X	X
		255/50R19 107H XL	706110163	EAGLE LS-2 ROF	BLT		X	X	X	X
		255/50R19 107W (F)	784305333	EAGLE F1 ASYMMETRIC SUV ROF	BLT		X	X	X	X
		285/45R19 111W (R)	784306333	EAGLE F1 ASYMMETRIC SUV ROF	BLT		X	X	X	X
<b>BUICK</b>										
ENCLAVE	P255/65R18 109S	151559248	FORTERA HL	BSL	X	X	X	X	X	
	P255/60R19 108H	732587500	EAGLE RS-A	VSB	X	X	X	X	X	
	P235/50R18 97H	706018163	EAGLE LS-2	VSB			X	X	X	
	P245/40R19 94W	732103500	EAGLE RS-A	VSB	X					
	P245/45R19 98V	107172343	EAGLE RS-A2	VSB		X	X	X	X	
REGAL	P245/40R19 94W	732375500	EAGLE RS-A	VSB	X					
REGAL GS	P245/40R19 94W	732375500	EAGLE RS-A	VSB		X	X	X	X	
<b>CADILLAC</b>										
CT6	235/50R16 97V	109087366	EAGLE SPORT ALL-SEASON	VSB					X	
	265/45R18 101V	109098366	EAGLE SPORT ALL-SEASON	VSB					X	
	245/45R19 98V	102839387	EAGLE TOURING	VSB					X	
	245/40R20 95W	102850387	EAGLE TOURING	VSB					X	
CTS	P245/45R19 98V	107172343	EAGLE RS-A2	VSB	X	X				
XTS	P245/45R19 98V	107172343	EAGLE RS-A2	VSB	X	X	X	X	X	
<b>CHEVROLET</b>										
AVALANCHE	P265/70R17 113S	403422658	WRANGLER HP	BSL	X					
	P265/70R17 113S	403767658	WRANGLER HP	BSL	X					
	P265/65R18 112T	183051217	WRANGLER SR-A	VSB	X					
	P285/50R20 111H	106087625	EAGLE GT II	VSB	X					
CAMARO	245/50R18 100V	109089366	EAGLE SPORT ALL-SEASON	VSB				X	X	
CAMARO 2LT	245/40R20 95V	104423390	EAGLE F1 ASYMMETRIC ALL-SEASON ROF	VSB				X	X	
CAMARO SS	245/40ZR20 95Y (F)	783390385	EAGLE F1 ASYMMETRIC 3 ROF	VSB				X	X	
	275/35ZR20 98Y (R)	783400385	EAGLE F1 ASYMMETRIC 3 ROF	VSB				X	X	
CAMARO ZL1	285/35ZR20 100Y (LF)	408038316	EAGLE F1 SUPERCAR G: 2	VSB	X	X	X			
	285/35ZR20 100Y (RF)	408038328	EAGLE F1 SUPERCAR G: 2	VSB	X	X	X			
	305/35ZR20 104Y (LR)	408039316	EAGLE F1 SUPERCAR G: 2	VSB	X	X	X			
	305/35ZR20 104Y (RR)	408039328	EAGLE F1 SUPERCAR G: 2	VSB	X	X	X			
	285/30ZR20 95Y (F)	797788523	EAGLE F1 SUPERCAR 3	VSB					X	
305/30ZR20 99Y (R)	797788523	EAGLE F1 SUPERCAR 3	VSB					X		
CAPRICE POLICE	P235/50R18 99W XL	732276500	EAGLE RS-A	VSB	X	X	X	X	X	

VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>CHEVROLET (Cont.)</b>										
COLORADO	P235/75R16 106S	773430430	WRANGLER ST	BSL	X					
	265/70R16 112T	157045622	WRANGLER FORTITUDE HT	BSL			X		X	
	P265/70R17 113S	410422177	WRANGLER AT/S	BSL	X					
	255/65R17 110T	157069622	WRANGLER FORTITUDE HT	BSL				X	X	X
	255/65R17 110T	758069572	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSL				X	X	X
	265/65R17 112S	150153601	WRANGLER DURATRAC	BSL						X
	P235/50R18 97W	732483500	EAGLE RS-A	VSF	X					
	265/60R18 110T	157076622	WRANGLER FORTITUDE HT	BSL				X	X	X
CORVETTE	P245/40ZR18 88Y (F)	406609164	EAGLE F1 GS-2 EMT	VSF	X					
	P285/35ZR19 90Y (R)	406610164	EAGLE F1 GS-2 EMT	VSF	X					
	P275/35ZR18 87Y (F)	412561506	EAGLE F1 SUPERCAR EMT	VSF	X					
	P325/30ZR19 94Y (R)	412562506	EAGLE F1 SUPERCAR EMT	VSF	X					
	P275/35ZR18 87Y (LF)	408561330	EAGLE F1 SUPERCAR G: 2 EMT	VSF	X					
	P275/35ZR18 87Y (RF)	408561331	EAGLE F1 SUPERCAR G: 2 EMT	VSF	X					
	P325/30ZR19 94Y (LR)	408029330	EAGLE F1 SUPERCAR G: 2 EMT	VSF	X					
	P325/30ZR19 94Y (RR)	408029331	EAGLE F1 SUPERCAR G: 2 EMT	VSF	X					
CRUZE	205/55R16 89H	738524571	ASSURANCE FUEL MAX	VSF				X		X
	215/55R17 94V	738340571	ASSURANCE FUEL MAX	VSF	X	X	X	X	X	X
IMPALA	P225/60R16 97S	402314073	INTEGRITY	BLK	X	X	X	X	X	X
	P225/55R17 95T	706486153	EAGLE LS-2	VSF	X	X	X	X	X	X
	P235/50R18 97W	732483500	EAGLE RS-A	VSF	X	X	X	X	X	X
	P245/45R19 98V	107172343	EAGLE RS-A2	VSF		X	X	X	X	X
IMPALA POLICE	P235/55R17 98W	732297500	EAGLE RS-A	VSF	X	X	X	X	X	X
MALIBU	P215/60R16 94H	738638571	ASSURANCE FUEL MAX	VSF	X	X	X	X	X	X
	P225/55R17 95H	738201571	ASSURANCE FUEL MAX	VSF	X	X	X			
	P225/55R17 95H	738828571	ASSURANCE FUEL MAX	VSF					X	X
	P235/50R18 97H	706018163	EAGLE LS-2	VSF	X	X	X	X	X	X
SILVERADO	P245/40R19 94W	732103500	EAGLE RS-A	VSF	X	X	X	X	X	X
	P265/70R17 113S	403422658	WRANGLER HP	BSL			X	X	X	X
	P265/70R17 113S	410422176	WRANGLER AT/S	OWL	X	X				
	P265/70R17 113S	410422177	WRANGLER AT/S	BSL	X	X				
	P265/70R17 113S	773422430	WRANGLER ST	BSL	X					
	265/65R18 114S	150644601	WRANGLER DURATRAC	OWL				X	X	X
	P265/65R18 112T	183051217	WRANGLER SR-A	VSF	X	X	X	X	X	X
	P265/65R18 112T	183051492	WRANGLER SR-A	OWL		X	X	X	X	X
	P265/65R18 112T	755664383	ASSURANCE <sup>CS</sup> FUEL MAX	VSF		X	X	X	X	X
	P265/65R18 112T	157051622	WRANGLER FORTITUDE HT	VSF						X
	P265/65R18 112T	157051620	WRANGLER FORTITUDE HT	OWL						X
	P275/55R20 111S	706069165	EAGLE LS-2	VSF	X	X	X	X	X	X
	P275/55R20 111S	183102217	WRANGLER SR-A	VSF		X	X	X	X	X
	P285/50R20 111H	106087625	EAGLE GT II	VSF	X	X	X	X	X	X
285/45R22 114H	151621163	FORTERA SL	VSF	X	X	X	X	X	X	
SILVERADO HD	LT265/70R17 121S	179696217	WRANGLER SR-A	BSL	X	X	X	X	X	X
	LT265/70R18 124Q	179040436	WRANGLER SR-A	VSF	X					
	LT265/70R18 124S	179040436	WRANGLER SR-A	VSF		X		X	X	X
	LT275/65R18 123Q	312011142	WRANGLER DURATRAC	OWL				X	X	X
	LT265/60R20 117R	179020436	WRANGLER SR-A	VSF	X					
	LT265/60R20 121S	179020436	WRANGLER SR-A	VSF		X		X	X	X
SPARK	185/55R15 82T	402602047	INTEGRITY	VSF	X	X	X	X	X	X
SUBURBAN	LT265/70R17 121S	179696217	WRANGLER SR-A	BSL	X	X	X	X	X	X
	P265/70R17 113S	403422658	WRANGLER HP	BSL	X	X	X	X	X	X
	P265/70R17 113S	403767658	WRANGLER HP	BSL	X	X	X	X	X	X
	P265/70R17 113S	410422177	WRANGLER AT/S	BSL	X	X				
	P265/65R18 112T	183051217	WRANGLER SR-A	VSF	X	X	X	X	X	X
	P265/65R18 112T	183051492	WRANGLER SR-A	OWL		X	X	X	X	X
	P265/65R18 112T	755664383	ASSURANCE <sup>CS</sup> FUEL MAX	VSF				X	X	X
	P285/50R20 111H	106087625	EAGLE GT II	VSF	X	X	X	X	X	X
	285/45R22 114H	151621163	FORTERA SL	VSF	X					
	P265/70R17 113S	403422658	WRANGLER HP	BSL	X	X	X	X	X	X
TAHOE	P265/70R17 113S	403767658	WRANGLER HP	BSL	X	X	X	X	X	X
	P265/70R17 113S	410422177	WRANGLER AT/S	BSL	X	X				
	265/65R18 114S	150644601	WRANGLER DURATRAC	OWL				X	X	X
	P265/65R18 112T	183051217	WRANGLER SR-A	VSF	X	X	X	X	X	X



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR					
						2013	2014	2015	2016	2017	
<b>CHEVROLET (Cont.)</b>											
TAHOE (cont.)	TAHOE (cont.)	P265/65R18 112T	183051492	WRANGLER SR-A	OWL		X	X	X	X	
		P265/65R18 112T	75664383	ASSURANCE <sup>CS</sup> FUEL MAX	VSF			X	X	X	
		P265/65R18 112T	157051622	WRANGLER FORTITUDE HT	OWL					X	
		P265/65R18 112T	157051620	WRANGLER FORTITUDE HT	OWL					X	
		P275/55R20 111S	706069165	EAGLE LS-2	VSF	X					
	TAHOE POLICE	TAHOE POLICE	P285/50R20 111H	106087625	EAGLE GT II	VSF	X	X	X	X	X
			285/45R22 114H	151621163	FORTERA SL	VSF	X	X	X	X	X
			P265/60R17 108V	732301500	EAGLE RS-A	VSF	X	X	X	X	X
			P265/60R17 108V	732523500	EAGLE RS-A	VSF					X
			P255/65R18 109S	151559248	FORTERA HL	BSL	X	X	X	X	X
TRaverse	VOLT	215/55R17 94V	738340571	ASSURANCE FUEL MAX	VSF	X	X	X	X	X	
<b>CHRYSLER</b>											
200	200	215/55R17 94H	738548571	ASSURANCE FUEL MAX	VSF			X	X	X	
		215/55R17 94V	738548571	ASSURANCE FUEL MAX	VSF		X				
		P225/50R18 94T	706543153	EAGLE LS-2	VSF	X	X				
	300	300	P225/60R18 99W	732312500	EAGLE RS-A	VSF			X		
			245/45ZR20 99Y	389122128	EAGLE F1 SUPERCAR	VSF			X	X	X
			245/45ZR20 99Y	107548343	EAGLE RS-A	VSF			X	X	X
	300 SRT8	300 SRT8	245/45ZR20 99Y	389122128	EAGLE F1 SUPERCAR	VSF	X	X			
			245/45ZR20 99Y	107548343	EAGLE RS-A2	VSF	X	X			
<b>DODGE</b>											
AVENGER	AVENGER	P225/50R18 94T	706543153	EAGLE LS-2	VSF	X	X				
		245/45ZR20 99Y	389122128	EAGLE F1 SUPERCAR	VSF	X	X	X	X	X	
		245/45ZR20 99Y	107548343	EAGLE RS-A	VSF			X	X	X	
	CHALLENGER SRT8	CHALLENGER SRT8	245/45ZR20 99Y (F)	389122128	EAGLE F1 SUPERCAR	VSF	X	X			
			255/45ZR20 101Y (R)	389123128	EAGLE F1 SUPERCAR	VSF	X	X			
			255/45ZR20 101Y	107548343	EAGLE RS-A2	VSF	X	X			
	CHARGER	CHARGER	P225/60R18 99W	732312500	EAGLE RS-A	VSF			X		
			245/45ZR20 99Y	389122128	EAGLE F1 SUPERCAR	VSF	X	X	X	X	X
			245/45ZR20 99Y	107548343	EAGLE RS-A	VSF			X	X	X
	CHARGER POLICE	CHARGER POLICE	P225/60R18 99W	732312500	EAGLE RS-A	VSF	X	X			
			P225/60R18 99W	732312500	EAGLE RS-A	VSF				X	X
	CHARGER PURSUIT	CHARGER PURSUIT	245/55R18 103V	732026500	EAGLE RS-A	VSF			X	X	X
			DURANGO	265/50R20 107T	151093203	FORTERA HL	VSF			X	X
	<b>FIAT</b>										
	500 X	500L	225/55R18	109086382	EAGLE SPORT ALL-SEASON	BLT					X
205/55R16 91H			706393308	EAGLE LS-2	BLT					X	
205/55R16 91H					VSF	X	X	X			
225/45R17 91H			706113308	EAGLE LS-2	VSF	X	X	X			
<b>FISKER</b>											
KARMA	KARMA	255/35R22 99W XL (F)	389357128	EAGLE F1 SUPERCAR	VSF	X		X	X	X	
		285/35R22 102W (R)	389358128	EAGLE F1 SUPERCAR	VSF	X		X	X	X	
<b>FORD</b>											
EXPEDITION	EXPEDITION	P275/65R18 114T	183538418	WRANGLER SR-A	OWL	X	X				
		275/65R18 116T	157066620	WRANGLER FORTITUDE HT	OWL				X	X	
	EXPLORER	EXPLORER	P245/65R17 105T	151166203	FORTERA HL	VSF	X	X			
			P265/70R17 115T	157042620	WRANGLER FORTITUDE HT	OWL		X	X	X	X
			LT245/70R17 119S	753707623	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSL		X	X		
			LT245/70R17 119S	748120572	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR					X	X
			275/65R18 116T	157066620	WRANGLER FORTITUDE HT	OWL		X	X	X	X
			LT275/65R18 113S	411958176	WRANGLER AT/S	OWL	X	X			
			LT275/65R18 113S	748958571	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	OWL		X	X	X	X
			P275/65R18 114T	183538418	WRANGLER SR-A	OWL	X	X			
			275/55R20 113T	758065571	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	OWL		X	X	X	X
			FLEX	FLEX	P235/60R18 102T	413215507	ASSURANCE COMFORTRED	VSF	X	X	X
	FOCUS ST	FOCUS ST	235/40R18 95Y	784764348	EAGLE F1 ASYMMETRIC 2	VSF	X	X	X		
			235/40R18 95Y XL	784764348	EAGLE F1 ASYMMETRIC 2	VSF				X	X
	FUSION	FUSION	215/60R16 95H	738704571	ASSURANCE FUEL MAX	VSF	X	X	X	X	X
235/45R18 94V			706038163	EAGLE LS-2	VSF	X	X	X	X	X	

VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>FORD (Cont.)</b>										
	FUSION SPORT	235/40R19 96W XL	104504357	EAGLE F1 ASYMMETRIC ALL-SEASON	VS8					X
	FUSION TITANIUM	235/45R18 98Y XL	784426348	EAGLE F1 ASYMMETRIC 2	VS8				X	X
	MUSTANG	235/50R18 97W	104207357	EAGLE F1 ASYMMETRIC ALL-SEASON	VS8			X	X	X
		265/35R20 99W	104436357	EAGLE F1 ASYMMETRIC ALL-SEASON	VS8					X
	MUSTANG GT	P255/40R19 96W	389385128	EAGLE F1 SUPERCAR	VS8	X				
	MUSTANG GT 500	P265/40ZR19 98Y (LF)	408030316	EAGLE F1 SUPERCAR G: 2	VS8	X				
		P265/40ZR19 98Y (RF)	408031328	EAGLE F1 SUPERCAR G: 2	VS8	X				
		P285/35ZR20 92Y (LR)	408027316	EAGLE F1 SUPERCAR G: 2	VS8	X				
		P285/35ZR20 92Y (RR)	408028328	EAGLE F1 SUPERCAR G: 2	VS8	X				
	POLICE INTERCEPTOR SEDAN	245/55R18 103V	732026500	EAGLE RS-A	VS8	X	X	X	X	X
	POLICE INTERCEPTOR UTILITY	245/55R18 103V	732026500	EAGLE RS-A	VS8	X	X	X	X	X
	SHELBY GT350	P265/40ZR19 98Y (R)	408031328	EAGLE F1 SUPERCAR G: 2	VS8	X				
		P265/40ZR19 98Y (L)	408030316	EAGLE F1 SUPERCAR G: 2	VS8	X				
	SUPERDUTY (F-250 / F-350)	LT275/70R18 125/122R	748139686	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSW					X
		LT275/70R18 125/122R	748139571	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	OWL					X
	TAURUS	255/45R19 100V	732016500	EAGLE RS-A	VS8	X	X	X	X	X
	TAURUS SHO	245/45ZR20 99Y	389122128	EAGLE F1 SUPERCAR	VS8	X	X	X	X	
<b>GMC</b>										
	ACADIA	P255/65R18 109S	151559248	FORTERA HL	BSL	X	X	X	X	X
		P255/60R19 108H	732587500	EAGLE RS-A	VS8	X	X	X	X	X
	CANYON	265/70R16 112T	157045622	WRANGLER FORTITUDE HT	BSL			X	X	X
		P235/75R16 106S	773430430	WRANGLER ST	BSL	X				
		255/65R17 110T	157069622	WRANGLER FORTITUDE HT	BSL			X	X	X
		255/65R17 110T	758069572	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSL			X	X	X
		P265/70R17 113S	410422177	WRANGLER AT/S	BSL	X				
		P235/50R18 97W	732483500	EAGLE RS-A	VS8	X				
		265/60R18 110T	157076622	WRANGLER FORTITUDE HT	BSL			X	X	X
	SIERRA	P265/70R17 113S	403422658	WRANGLER HP	BSL		X	X	X	X
		P265/70R17 113S	410422176	WRANGLER AT/S	OWL	X	X	X	X	X
		P265/70R17 113S	410422177	WRANGLER AT/S	BSL	X	X	X	X	X
		P265/70R17 113S	773422430	WRANGLER ST	BSL	X				
		265/65R18 114S	150644601	WRANGLER DURATRAC	OWL			X	X	X
		P265/65R18 112T	183051217	WRANGLER SR-A	VS8	X	X	X	X	X
		P265/65R18 112T	183051492	WRANGLER SR-A	OWL		X	X	X	X
		P265/65R18 112T	755664383	ASSURANCE <sup>CS</sup> FUEL MAX	VS8		X	X	X	X
		P265/65R18 112T	157051622	WRANGLER FORTITUDE HT	VS8					X
		P265/65R18 112T	157051620	WRANGLER FORTITUDE HT	OWL					X
		P275/55R20 111S	706069165	EAGLE LS-2	VS8	X	X	X	X	X
		P275/55R20 111S	183102217	WRANGLER SR-A	VS8		X	X	X	X
		P285/50R20 111H	106087625	EAGLE GT II	VS8	X	X	X	X	X
		285/45R22 114H	151621163	FORTERA SL	VS8	X	X	X	X	X
	SIERRA HD	LT265/70R17 121S	179696217	WRANGLER SR-A	BSL	X	X	X	X	X
		LT265/70R18 124Q	179040436	WRANGLER SR-A	VS8	X	X	X	X	X
		LT275/65R18 123Q	312011142	WRANGLER DURATRAC	OWL			X	X	X
		LT265/60R20 117R	179020436	WRANGLER SR-A	VS8	X	X	X	X	X
	YUKON	P265/70R17 113S	403422658	WRANGLER HP	BSL	X	X	X	X	X
		P265/70R17 113S	403767658	WRANGLER HP	BSL	X	X	X	X	X
		P265/70R17 113S	410422171	WRANGLER AT/S	BSL	X	X	X	X	X
		265/65R18 114S	150644601	WRANGLER DURATRAC	OWL			X	X	X
		P265/65R18 112T	755664383	ASSURANCE <sup>CS</sup> FUEL MAX	VS8			X	X	X
		P285/50R20 111H	106087625	EAGLE GT II	VS8	X	X	X	X	X
		285/45R22 114H	151621163	FORTERA SL	VS8	X	X	X	X	X
	YUKON DENALI	P285/50R20 111H	106087625	EAGLE GT II	VS8	X	X	X	X	X
	YUKON DENALI XL	P285/50R20 111H	106087625	EAGLE GT II	VS8	X	X	X	X	X
	YUKON XL	P265/70R17 113S	403422658	WRANGLER HP	BSL	X	X	X	X	X
		P265/70R17 113S	403767658	WRANGLER HP	BSL	X	X	X	X	X
		P265/70R17 113S	410422177	WRANGLER AT/S	BSL	X	X	X	X	X
		P285/50R20 111H	106087625	EAGLE GT II	VS8	X	X	X	X	X
	YUKON XL (EXPORT)	LT265/70R17 121S	179696217	WRANGLER SR-A	BSL	X	X	X	X	X



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR					
						2013	2014	2015	2016	2017	
<b>HONDA</b>											
	ACCORD	215/55R17 94V	738735571	ASSURANCE FUEL MAX	BSW	X	X	X	X	X	
		235/45R18 94V	706038163	EAGLE LS-2	BSW			X	X	X	
	PILOT	P245/65R17 105T	151494203	FORTERA HL	VSB	X	X	X			
<b>INFINITI</b>											
	FX35	P265/50R20 106V	732278500	EAGLE RS-A	VSB	X	X				
	FX45	P265/50R20 106V	732278500	EAGLE RS-A	VSB	X	X				
	G25	P225/55R17 95V	732941500	EAGLE RS-A	VSB	X	X	X	X	X	
	G37	P225/55R17 95V	732941500	EAGLE RS-A	VSB	X					
<b>JEEP</b>											
	COMPASS	P215/65R17 98S	183678418	WRANGLER SR-A	OWL	X	X				
	COMPASS / PATRIOT	P205/70R16 96T	706611163	EAGLE LS-2	VSB			X	X	X	
		P215/65R17 95S	183678418	WRANGLER SR-A	OWL			X	X	X	
	GRAND CHEROKEE	P245/70R17 108T	151056164	FORTERA HL	OWL	X	X		X		
		P245/70R17 108T	151056203	FORTERA HL	VSB	X	X	X	X	X	
		265/60R18 110T	758076630	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	VSB				X	X	
		265/50R20 107T	151093203	FORTERA HL	VSB	X	X	X	X	X	
		265/50R20 107T	758124630	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	VSB				X	X	
	GRAND CHEROKEE TRAILHAWK	P265/60R18 109T	758559188	WRANGLER SILENTARMOR	VSB	X	X				
		P205/70R16 96T	706611163	EAGLE LS-2	VSB	X	X				
	PATRIOT	P215/65R17 98S	183678418	WRANGLER SR-A	OWL	X	X				
	RENEGADE	215/60R17 96T	266004819	WRANGLER SR-A	VSB				X	X	
	RENEGADE TRAILHAWK	215/65R17 98S	183678418	WRANGLER SR-A				X			
	WRANGLER	P225/75R16 104S	773017415	WRANGLER ST	VSB	X	X	X	X	X	
		P245/75R17 110T	758912189	WRANGLER SILENTARMOR	OWL		X	X	X	X	
P255/75R17 113S		183107418	WRANGLER SR-A	OWL	X	X	X	X	X		
<b>LAND ROVER</b>											
	L405	255/55R20 110W XL	784074333	EAGLE F1 ASYMMETRIC SUV	VSB	X					
		275/45R21 110W XL	784072333	EAGLE F1 ASYMMETRIC SUV	VSB	X					
<b>LINCOLN</b>											
	CONTINENTAL	235/50R18 97W	104207357	EAGLE F1 ASYMMETRIC ALL-SEASON	VSB					X	
		245/40R20 99W XL	104433393	EAGLE F1 ASYMMETRIC ALL-SEASON SCT	VSB					X	
	MKT	255/45R20 101V	732007741	EAGLE RS-A	VSB	X	X	X	X	X	
	MKT LIMO	255/55R18 109H XL	706999308	EAGLE LS-2	VSB	X	X	X	X	X	
<b>MASERATI</b>											
	M161 - LEVANTE	255/60R18 108W	109106399	EAGLE SPORT ALL-SEASON	BLT					X	
		265/45R20 108Y XL	784741348	EAGLE F1 ASYMMETRIC2 SUV	BLT					X	
		265/50R19 110W XL	109105399	EAGLE SPORT ALL-SEASON	BLT					X	
<b>MERCEDES-BENZ</b>											
	A AND B PLATFORM	225/40R18 92W XL	784087359	EAGLE F1 ASYMMETRIC 2 ROF	BLT		X	X	X	X	
		C-CLASS									
		225/45R17 91W (F)	111870513	EXCELLENCE ROF	VSB	X	X				
		245/40R17 91W (R)	111985513	EXCELLENCE ROF	VSB	X	X				
	225/40R19 93Y (F)	784182359	EAGLE F1 ASYMMETRIC 2 ROF	BLT						X	
	245/35R19 93Y (R)	784140359	EAGLE F1 ASYMMETRIC 2 ROF	BLT						X	
	CLA	225/40R18 92W XL	784087359	EAGLE F1 ASYMMETRIC 2 ROF	BLT	X	X	X	X	X	
	CLK-CLASS	225/45R17 91W (F)	111870513	EXCELLENCE ROF	VSB	X	X				
		245/40R17 91W (R)	111985513	EXCELLENCE ROF	VSB	X	X				
	E-CLASS	225/55R17 97V	109094395	EAGLE SPORT ALL-SEASON * MOE ROF	BLT						X
		245/45R17 95H	706578322	EAGLE LS-2 ROF	BLT	X	X	X	X		
		245/45R18 100V XL	109095395	EAGLE SPORT ALL-SEASON * MOE ROF	BLT						X
		245/40R19 98V XL	109107395	EAGLE SPORT ALL-SEASON * MOE ROF	BLT						X
		245/40R19 98Y XL (F)	783836385	EAGLE F1 ASYMMETRIC 3 * MOE ROF	BLT						X
		275/35R19 100Y XL (R)	783857385	EAGLE F1 ASYMMETRIC 3 * MOE ROF	BLT						X
		245/35R20 95Y XL (F)	783718385	EAGLE F1 ASYMMETRIC 3 * MOE ROF	BLT						X
		275/30R20 97Y XL (R)	783723385	EAGLE F1 ASYMMETRIC 3 * MOE ROF	BLT						X
	ML-CLASS	255/50R19 103W	784287347	EAGLE F1 ASYMMETRIC	VSB	X		X	X	X	
	S-CLASS	255/45R18 99Y (F)	111350513	EXCELLENCE ROF	BLT	X					
		275/45R18 103Y (R)	111636513	EXCELLENCE ROF	BLT	X					
		245/40R20 99Y XL (F)	784117359	EAGLE F1 ASYMMETRIC 2 ROF	BLT		X	X	X	X	X
		275/35R20 102Y (R)	784118359	EAGLE F1 ASYMMETRIC 2 ROF	BLT		X	X	X	X	X
	S-CLASS MAYBACH	245/40R20 99Y XL	784117392	EAGLE F1 ASYMMETRIC 2 ROF SCT	BLT				X	X	
		275/35R20 102Y (R)	784118392	EAGLE F1 ASYMMETRIC 2 ROF SCT	BLT				X	X	
	SLK-CLASS	225/45R17 91W (F)	111870513	EXCELLENCE ROF	VSB	X	X	X	X	X	X
		245/40R17 91W (R)	111985513	EXCELLENCE ROF	VSB	X	X	X	X	X	X

VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>MINI</b>										
	COOPER S	195/55R16 87H	111968513	EXCELLENCE ROF	BLT	X				
		195/55R16 87V	111971513	EXCELLENCE ROF	VSB	X				
	COUNTRYMAN	225/45R18 91V	112206344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X
<b>MITSUBISHI</b>										
	GALANT	P235/45R18 94V	732516500	EAGLE RS-A	VSB	X				
	OUTLANDER	225/55R18 98H	706569153	EAGLE LS-2	VSB		X	X	X	
<b>NISSAN</b>										
	JUKE	P215/55R17 93V	732234500	EAGLE RS-A	VSB	X	X	X	X	X
	MAXIMA	P245/45R18 96V	732279438	EAGLE RS-A	VSB	X	X	X		
		245/40R19 94W	104388357	EAGLE F1 ASYMMETRIC ALL-SEASON	VSB				X	X
		P245/40R19 94V	732647500	EAGLE RS-A	VSB	X	X	X		
	MURANO	P235/65R18 104T	706901492	EAGLE LS	VSB	X	X			
	ROGUE	225/65R17 102H	755667383	ASSURANCE <sup>CS</sup> FUEL MAX	VSB		X	X	X	X
	TITAN CE/LE	P265/70R18 114S	183487418	WRANGLER SR-A	OWL	X	X	X		
		P275/60R20 114S	183934436	WRANGLER SR-A	VSB	X	X	X	X	X
<b>PORSCHE</b>										
	911	235/40ZR19 92Y (F)	784045348	EAGLE F1 ASYMMETRIC 2	BLT	X	X		X	X
		285/35ZR19 103Y XL (R)	784048348	EAGLE F1 ASYMMETRIC 2	BLT	X	X			
		295/35ZR19 100Y (R)	784093348	EAGLE F1 ASYMMETRIC 2	BLT	X	X		X	X
	BOXSTER / CAYMAN	235/45ZR18 94Y (F)	784055348	EAGLE F1 ASYMMETRIC 2	BLT	X	X	X	X	X
		265/45ZR18 101Y (R)	784066348	EAGLE F1 ASYMMETRIC 2	BLT	X	X	X	X	X
		235/40ZR19 92Y (F)	784045348	EAGLE F1 ASYMMETRIC 2	BLT	X	X	X		
		265/40ZR19 98Y (R)	784067348	EAGLE F1 ASYMMETRIC 2	BLT	X	X	X		
		235/35ZR20 88Y (F)	784194348	EAGLE F1 ASYMMETRIC 2	BLT			X	X	X
	CAYENNE	265/35ZR20 95Y (R)	784204348	EAGLE F1 ASYMMETRIC 2	BLT			X	X	X
		255/55R18 109V XL	706939308	EAGLE LS-2	BLT	X	X	X	X	X
		265/50R19 110Y XL	706215308	EAGLE LS-2	BLT	X	X	X	X	X
		265/50R19 110Y XL	784255333	EAGLE F1 ASYMMETRIC SUV	BLT	X	X	X	X	X
		275/45R20 110V XL	706274308	EAGLE LS-2	BLT	X	X			
	MACAN	275/45R20 110V XL	784248333	EAGLE LS-2	BLT			X	X	X
		235/55R19 101 V (F)	706414308	EAGLE LS-2	BLT				X	X
		255/50R19 103 V (R)	706422308	EAGLE LS-2	BLT				X	X
		235/55R19 101 Y (F)	784001287	EAGLE F1 ASYMMETRIC SUV	BLT				X	X
	PANAMERA	255/50R19 103 Y (R)	784439348	EAGLE F1 ASYMMETRIC SUV	BLT				X	X
		255/45ZR19 100V (F)	706016165	EAGLE LS-2	BLT	X				
		285/40ZR19 103V (R)	706017165	EAGLE LS-2	BLT	X				
		255/45ZR19 100Y (F)	784001287	EAGLE F1 ASYMMETRIC	BLT	X				
		285/40ZR19 103Y (R)	784006287	EAGLE F1 ASYMMETRIC	BLT	X				
<b>RAM</b>										
	1500	P265/70R17 113R	183106418	WRANGLER SR-A	OWL	X	X	X	X	X
		P265/70R17 113R	183106436	WRANGLER SR-A	VSB	X	X	X	X	X
		P265/70R17 113S	403422171	WRANGLER HP	VSB	X	X	X	X	X
		LT265/70R17 121R	748535189	WRANGLER SA	OWL	X	X	X	X	X
		P275/60R20 114S	183934492	WRANGLER SR-A	OWL	X	X	X	X	X
		P275/60R20 114S	183934470	WRANGLER SR-A	VSB	X	X	X	X	X
		P275/60R20 114T	758649189	WRANGLER SA	OWL	X	X	X	X	X
		285/45R22 114H XL	151621163	FORTERA SL	VSB	X	X	X	X	X
		2500 POWER WAGON	LT285/70R17 121Q	312015027	WRANGLER DURATRAC	OWL	X	X	X	X
	P275/60R20 114T		758649189	WRANGLER SA	OWL		X			
<b>ROLLS-ROYCE</b>										
	GHOST	255/45R20 101Y (F)	112126344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X
		285/40R20 104Y (R)	112185344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X
		255/50R19 103Y	112068344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X
	PHANTOM	255/50R21 106W (F)	797650149	EAGLE NCT 5 EMT	VSB	X	X	X	X	X
		285/45R21 109W (R)	797652149	EAGLE NCT 5 EMT	VSB	X	X	X	X	X
<b>SCION</b>										
	iQ	175/60R16 82H	738529571	ASSURANCE FUEL MAX	VSB	X	X	X	X	X
	xB	P205/55R16 89H	732177500	EAGLE RS-A	VSB	X	X	X	X	X
<b>SUBARU</b>										
	LEGACY	225/50R18 95H	706171163	EAGLE LS-2	BSW			X	X	X
		225/55R17 97V	738754571	ASSURANCE FUEL MAX	BSW			X	X	X
	TRIBECA	P255/55R18 104H	706532163	EAGLE LS-2	VSB	X	X			



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>TESLA</b>										
	MODEL S	P245/45R19 98V	107172343	EAGLE RS-A2	VSB	X	X	X	X	X
		245/45R19 98W	102851396	EAGLE TOURING SCT	VSB					X
	MODEL X	265/35R22 102W XL (F)	783407388	EAGLE F1 ASYMMETRIC 3	BLT				X	X
		265/35R22 102W XL (F)	783407394	EAGLE F1 ASYMMETRIC 3 SCT	BLT				X	X
		285/35R22 106W XL (R)	783411388	EAGLE F1 ASYMMETRIC 3	BLT				X	X
		285/35R22 106W XL (R)	783411394	EAGLE F1 ASYMMETRIC 3 SCT	BLT				X	X
<b>TOYOTA</b>										
	COROLLA	P195/65R15 89S	706648163	EAGLE LS-2	VSB	X				
		195/65R15 91S	738584571	ASSURANCE FUEL MAX	VSB	X				
		P205/55R16 89H	732674500	EAGLE RS-A	VSB	X	X	X	X	X
		P215/45R17 87W	732682500	EAGLE RS-A	VSB	X	X			
	MATRIX	P205/55R16 89H	732674500	EAGLE RS-A	VSB	X				
		P215/45R17 87W	732682500	EAGLE RS-A	VSB	X				
		P215/45R18 89W	480686273	EAGLE F1 A/S-C	VSB	X				
	PRIUS	P175/65R15 84H	738609571	ASSURANCE FUEL MAX	VSB	X	X			X
		195/65R15 91H	684108397	EXCELLENCE	VSB					X
		P195/65R15 89S	738289571	ASSURANCE FUEL MAX	VSB	X	X	X	X	
	PRIUS C	P195/65R15 89S	738289571	ASSURANCE FUEL MAX	VSB					X
	SIENNA	235/55R18 100V	732222500	EAGLE RS-A	VSB					X
		P235/55R18 99V	732373500	EAGLE RS-A	VSB	X	X	X	X	
	TACOMA	265/70R16 112T	758045630	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSW				X	X
	VENZA	P245/50R20 102H	732899500	EAGLE RS-A	VSB	X	X	X	X	X
	YARIS	P175/65R15 84H	738609571	ASSURANCE FUEL MAX	VSB	X	X	X	X	X
<b>VOLKSWAGEN</b>										
	EOS	235/45R17 97H XL	706604163	EAGLE LS-2	VSB	X				
	GOLF VI	195/65R15 91H	684067293	EXCELLENCE	BLT	X				
	JETTA	205/55R16 94V XL	771588353	EAGLE VECTOR	BLT	X				
	PASSAT	215/55R16 97H XL	706581163	EAGLE LS-2	VSB	X	X			
	TIGUAN	235/50R18 97V	709001281	EAGLE F1 GS-D3	BLT	X				
	TOUAREG	255/55R18 109H XL	706999308	EAGLE LS-2	VSB	X	X			
		255/55R18 109V XL	706939165	EAGLE LS-2	BLT	X	X			
		265/50R19 110H XL	706598308	EAGLE LS-2	BLT	X	X			
		275/45R20 110H XL	706940308	EAGLE LS-2	BLT	X				

# 2017 DUNLOP® TIRE LINES

DUNLOP TIRE LINES



# THE ADVANTAGES OF DUNLOP®



## PERFORMANCE FOR THE JOURNEY, STYLE FOR THE ARRIVAL

Dunlop understands there are some drivers who value the arrival as much as the journey. That's why we make tires that deliver style with performance to match.

## WHAT DUNLOP MEANS TO YOU

Dunlop gives you an edge that can add up to more sales opportunities.

### A HERITAGE OF SUCCESS

Dunlop is an established brand that has been thriving for more than 120 years. Thanks to greater brand acceptance, consumers are more likely to consider purchasing Dunlop tires than several other brands, which helps you close the sale.


### GENERATES SHOPPER TRAFFIC

Dunlop tires have been chosen as Original Equipment on many popular vehicles including Honda, Mazda and Toyota, along with premium brands like Lexus and Porsche. That means more consumers are likely to consider shopping at retailers that sell Dunlop tires, which means more traffic in your outlets.

### SIMPLIFIES YOUR BUSINESS


Dunlop offers you a simplified product screen with something for every driver. The Dunlop Signature Power Line offers more than 50 SKUs covering a significant portion of the mid-tier segment. Plus, Dunlop winter products offer selections for cold weather climates. A product selection that covers a broad range of drivers makes it easier for you to match tire to consumer.

## MAX FLANGE SHIELD®



The Max Flange Shield is a firm rubber guard that extends beyond the rim and wraps around the lower sidewall of the tire to help protect rims from accidental curb damage.

## SILICARBON MATRIX™



Made of silica and carbon black, the Silicarbon Matrix tread aids grip in both rain and dry weather.

## DIMENSIONALLY STABLE POLYESTER™



To help maintain uniformity, toughness and a smooth, comfortable ride, Dimensionally Stable Polyester ply material goes through a special manufacturing process to pre-cure and pre-stretch the ply cords.

## JOINTLESS BAND TECHNOLOGY™



Jointless Band Technology helps maintain the tire's shape at highway speeds. With fabric positioned in all the right places to enhance handling and treadwear, this continuous spiral ply serves to help reduce vibration.

## MULTI-RADIUS TREAD TECHNOLOGY™




Innovative Multi-Radius Tread Technology distributes pressure evenly over the contact patch through all stages of cornering, for excellent dry traction and handling while enhancing wet performance.

## VERSALOAD TECHNOLOGY™



By optimizing the tire mold for each tire size, Versaload Technology helps maximize the amount of the footprint that comes in contact with the road for consistent traction, handling, ride comfort and treadwear under various loading conditions.

## 5-PITCH TECHNOLOGY™



5-Pitch Technology counterbalances vehicle disturbance while minimizing road and pass-by noise. Five different block sizes create various frequencies to help break up sound waves, so drivers can enjoy a quiet ride.

## HYDRO-PADDLE TECHNOLOGY™




Hydro-Paddle Technology utilizes tread grooves to help pull water quickly and efficiently through the tread pattern. Its hydrodynamic design evacuates water through a narrower channel to help keep more rubber on the road for outstanding traction.

## TWIN HYDRO-PADDLE TECHNOLOGY™




Twin Hydro-Paddle Technology employs two tread regions to help efficiently evacuate water out from under the footprint for responsive handling on wet roads. There are no sipes in this tread design, which means quick, turbulence-free water dispersion.

## MULTI-PITCH TREAD DESIGN TECHNOLOGY™



Multi-Pitch Tread Design Technology uses various sizes of tread blocks which produce specific sound frequencies calibrated to help cancel each other out, so drivers can enjoy a smooth, quiet ride.

## TRACTION WEB TECHNOLOGY™



The Traction Web Technology tread pattern features a web-like block and groove alignment. This increases responsiveness, optimizes water evacuation and enhances traction for confident wet, dry and situational handling.


## MSI TRACTION TECHNOLOGY™



MSI Traction Technology features a combination of lateral tread grooves, multiple tread block edges and cross sipes. These elements work together to create scores of biting edges which enhance rubber-to-road contact for excellent wet and dry traction, handling and responsiveness.

# DUNLOP® TECHNOLOGIES

## DUNLOP SELF-SUPPORTING TECHNOLOGY®



Dunlop Self-Supporting Technology incorporates special reinforcements into the tire sidewalls so that driving may continue for up to 50 miles at speeds up to 50 mph, even after a complete loss of air pressure. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

## EVAQUA GROOVES™



Angled Evaqua Grooves are situated to help efficiently evacuate water away from the footprint for responsive handling on wet roads.

## ACTIVE TRACTION SIPE SYSTEM™

Dunlop's cutting-edge Active Traction Sipe System is key to the ability of the SP Winter Sport 3D® to maintain optimum performance as driving conditions change. This integrated design consists of three unique types of sipes positioned throughout the treadface. Together, they help pull, grip and enhance traction to help provide high-performance cornering and handling in icy, snowy, wet and dry driving conditions.

### Unparalleled Pulling Power



The center-block sipes help "pull," which results in superior traction and braking on ice and snow.

### Confident Stability



High-amplitude sipes enhance lateral stability for confident handling in wet and slushy conditions.

### 3D Grip



At low speeds, the 3D shoulder sipes are open and flexible to help provide "biting" edges for strong grip in winter driving conditions.



In dry conditions, the 3D sipes lock together to help provide a solid, stable surface for superb dry handling.

## 4D SIPE SYSTEM




An increased number of sipes across the tire spectrum help provide extra traction during winter conditions. With self-interlocking and transversal sipes, the 4D Sipe System was specifically designed to enhance snow handling performance.

## V-SHAPED GROOVES AND DEEP SNOW NOTCHES



These uniquely shaped grooves help optimize winter performance, while the deep snow notches aid in increased snow traction.

## MAXX SHARP EDGE WITH MIURA-ORI SIPES



Maxx Sharp Edge with Miura-Ori Sipes utilizes an inventive zigzag sipe pattern to maximize surface contact. Not only does this promote even wear, but it also helps prevent block distortion.

## NANO-FIT RUBBER



Nano-Fit Rubber is an innovative material that is both flexible and rigid. These distinctive properties help tire tread latch on to icy surfaces.

## NOISESHIELD TECHNOLOGY®



Polyurethane foam bonded to the tire's inner surface helps to reduce the level of interior vehicle noise, offering passengers a quieter, more comfortable ride.

# PERFORMANCE



<b>SP Sport Maxx® GT</b>	<b>SP Sport Maxx RT2</b>	<b>Direzza® DZ102</b>	<b>Signature HP</b>	<b>SP Sport® 5000</b>	<b>SP Sport 7000 A/S®</b>
Outstanding Driver Feedback and Responsive Handling	A Champion in Grip and Steering Precision	Sleek Styling Meets Impressive Handling for Head-Turning Performance	Bold Styling Meets Experienced Handling for All-Season Performance	High Performance All-Season Tires	All-Season High Performance and a Smooth, Quiet Ride

# PERFORMANCE TIRE SELECTOR CHART

	SUMMER UHP											ALL-SEASON UHP				ALL-SEASON SPORT/TOURING																							
	SP Sport Maxx® GT with NoiseShield Technology® (Pg. 138)	SP Sport Maxx® GT ROF (Pg. 138)	Sport Maxx RT™ with NoiseShield Technology® (Pg. 138)	Sport Maxx RT ROF (Pg. 138)	SP Sport Maxx® TT (Pg. 140)	SP Sport Maxx® TT DSST® (Pg. 140)	SP Sport Maxx® (Pg. 142)	SP Sport Maxx® DSST® ROF (Pg. 142)	Direzza® DZ102 (Pg. 144)	Sport Maxx Race™ (Pg. 146)	Sport Maxx RT2 Sport Maxx RT2 ROF (Pg. 148)	SP Sport Maxx® 050, SP Sport Maxx® 050 DSST® CTT SP Sport Maxx® 050 DSST® CTT with Noise Reduction Technology® (Pg. 149)	SP Sport Maxx® A, SP Sport Maxx® A1 SP Sport Maxx® 101 (Pg. 150)	SP Sport® 2030 SP Sport® 2050 (Pg. 152)	SP Sport® 600 (Pg. 153)	SP Sport Maxx® GT 600 DSST® (Pg. 153)	Sport BluResponse™ (Pg. 154)	SP Sport® Fast Response™ (Pg. 155)	SP Quattro Maxx (Pg. 156)	SP Sport® 01 (Pg. 158)	SP Sport® 01 DSST® ROF (Pg. 158)	SP Sport® 01 A SP Sport® 01 A/S (Pg. 160)	SP Sport® 01 A DSST® ROF SP Sport® 01 A/S DSST® ROF (Pg. 160)	Signature HP (Pg. 162)	SP Sport Maxx® A1 A/S SP Sport Maxx® A1-A A/S (Pg. 164)	SP Sport® 7010 A/S DSST® (Pg. 165)	SP Sport 7000 A/S® (Pg. 166)	SP Sport 4000® DSST® CTT (Pg. 167)	SP Sport® 5000 SP Sport® 5000M (Pg. 168)	SP Sport® 5000 DSST® CTT SP Sport® 5000M DSST® CTT (Pg. 168)	SP Sport® 5000 DSST® with Noise Reduction Technology® (Pg. 168)	SP Sport® 5100 (Pg. 170)							
175/65R15																84H																							
195/50R15								82V																															
195/55R15								85V																															
195/65R15																																					89H		
205/50R15								86V																															
205/55R15								88V																															
185/55R16																																					83H		
195/50R16								84V																															
195/55R16																					87H, 87V															86V			
195/60R16																																					89H		
205/45R16								87W																															
205/50R16								87V																															
205/55R16								91V																	91V														
205/60R16																								92V															
215/50R16								90V																															
215/55R16								93V																															
215/60R16																																					94H, 94V		
225/50R16								92V																															
225/55R16								95V																															
205/45R17			88W	88W				88W																														84W	
205/50R17																																							
205/50ZR17																																							
205/55R17																																							
215/45R17																																							
215/50R17																																							
215/55R17																																							
225/45ZR17			91Y*, 94Y																																				
225/45R17						91W	90W																															91W	
225/50R17			94Y*, 98Y																																				
225/50RF17																																							
225/50R17																																							
225/55ZR17																																							
225/55R17																																							
225/60R17																																							
235/45R17			94W, 94Y																																				
235/50R17																																							
235/50ZR17																																							
235/55R17																																							
235/55ZR17																																							
245/40R17			91Y*																																				
245/45R17																																							
245/50ZR17																																							
255/40R17																																							
255/60R17																																							
275/55R17																																							

\*Discontinued 2016.









# SP SPORT MAXX® GT

(Select sizes with ROF<sup>†</sup>/NoiseShield Technology®)

Outstanding Driver Feedback and Responsive Handling



## FEATURES

### TOUCH TECHNOLOGY™

Multi-Radius Tread Technology™

Flatter tread profile

Reinforced sidewall construction

Asymmetric tread design

Unique bead fit system

Hybrid Jointless Band Technology™

Performance compounding

Non-directional tread

## BENEFITS

Helps provide enhanced communication between driver and road for fast driver feedback and precise steering response

Helps deliver superb dry handling while maintaining wet handling

Enlarged contact patch for enhanced cornering capability

Helps reduce lateral flex during cornering to enhance the driver's feel for the road

Helps provide a balance of wet and dry performance

Helps enhance force transmission between tire and wheel for superb driver feedback

Helps maintain tire shape for smooth performance at highway speeds and helps prevent flatspotting after vehicle is parked for extended periods

Enhanced ride and traction

Allows for tire rotation on staggered fitments common to high-end performance vehicles, helping to promote long tread life



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Audi, Bentley, BMW, Cadillac, Jaguar, Mercedes-Benz, Porsche and Volkswagen

<sup>†</sup> Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

## SP SPORT MAXX GT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
235/40R18	91Y	SL	BLT	265023803	217593	8.0 - 9.5	8.5	9.5	25.4	1,356	10	823	240 AA A	Mercedes-Benz E-Class: 10-11 (F)
235/40ZR18	95Y	XL	BLT	265023833	228284	8.0 - 9.5	8.5	0.0	25.4	1,521	10	823	240 AA A	Mercedes-Benz AMG: 13
235/45ZR18	94Y	SL	BLT	265023813	222113	7.5 - 9.0	8.0	9.3	26.3	1,477	9	794	240 AA A	Porsche Boxter/Cayman: 14 (F)
245/40ZR18	93Y	SL	BLT	265023784	209674	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	240 AA A	Audi A4: 10-15
245/45R18	96Y	SL	BLT	265023828	225396	7.5 - 9.0	8.0	9.6	26.7	1,565	10	784	240 AA A	Audi A4: 13
245/50ZR18	104Y	XL	BLT	265023857	226426	7.0 - 8.5	7.5	10.0	27.7	1,984	9	755	240 AA A	
255/35R18	94Y	XL	BLT	265023804	217603	8.5 - 10.0	9.0	10.2	25.0	1,477	10	836	240 AA A	Mercedes-Benz E-Class: 10-11 (R)
* 255/40R18	95W	SL	BLT	265023786	209662	8.5 - 10.0	9.0	10.2	26.0	1,521	10	803	240 AA A	Mercedes-Benz SL-Class: 09-13 (F)
265/45ZR18	101Y	SL	BLT	265023814	222114	8.5 - 10.0	9.0	10.5	27.4	1,819	8	764	240 AA A	Porsche Boxter/Cayman: 14 (R)
275/45ZR18	107Y	XL	BLT	265023858	226427	8.5 - 10.5	9.0	10.8	27.8	2,149	9	753	240 AA A	
285/35R18	97W	SL	BLT	265023787	209663	9.5 - 11.0	10.0	11.4	25.9	1,609	9	807	240 AA A	Mercedes-Benz SL-Class: 09-13 (R)
245/40ZR19	98Y	XL	BLT	265023851	223452	8.0 - 9.5	8.5	9.8	26.7	1,653	9	782	240 AA A	
255/35ZR19	96Y	XL	BLT	265023729	206320	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803	240 AA A	Audi A5: 11-15
255/40R19	96W	SL	BLT	265023788	209664	8.5 - 10.0	9.0	10.2	27.0	1,545	9	773	240 AA A	Volkswagen Tiguan: 09-13
* 265/35ZR19	98Y	XL	BLT	265023728	210225	9.0 - 10.5	9.5	10.7	26.3	1,653	9	795	240 AA A	Mercedes-Benz SL-Class: 09 (F)
* 285/35ZR19	99Y	XL	BLT	265023718	208344	9.5 - 11.0	10.0	11.4	26.9	1,929	9	777	240 AA A	
245/40ZR20	99Y	XL	BLT	265023801	216801	8.0 - 9.5	8.5	9.8	27.7	1,709	9	754	240 AA A	Jaguar XJ: 10 (F), Cadillac ELR-V: 16-17
255/35ZR20	97Y	XL	BLT	265023859	230824	8.5 - 10.0	9.0	10.2	27.0	1,609	9	774	240 AA A	
255/45R20	101W	SL	BLT	265023783	209673	8.0 - 9.5	8.5	10.0	29.1	1,819	9	719	240 AA A	Audi Q5: 09-14
265/30ZR20	94Y	XL	BLT	265023794	214431	9.0 - 10.0	9.5	10.7	26.3	1,477	10	795	240 AA A	Audi A5: 09-14
265/35R20	99Y	XL	BLT	265023812	221787	9.0 - 10.5	9.5	10.7	27.3	1,709	9	765	240 AA A	Audi A7: 12-17
265/45R20	104Y	SL	VSB	265025943	218489	8.5 - 10.0	9.0	10.5	29.4	1,984	10	712	240 AA A	Mercedes-Benz ML-Class: 13
265/45ZR20	108Y	XL	BLT	265023805	218533	8.5 - 10.0	9.0	10.5	29.4	2,205	8	711	240 AA A	Bentley Mulsanne: 11-17 (F)
275/30R20	97Y	XL	BLT	265023822	223821	9.0 - 10.0	9.5	10.9	28.7	1,609	9	729	240 AA A	
275/35ZR20	102Y	XL	BLT	265023802	216802	9.0 - 11.0	9.5	10.9	27.6	1,874	9	758	240 AA A	Jaguar XJ: 10 (R)
295/30ZR20	101Y	XL	BLT	265023820	222981	10.0 - 11.0	10.5	11.9	27.0	1,819	8	774	240 AA A	
325/30ZR20	102Y	SL	BLT	265023785	209677	11.0 - 12.0	11.5	13.0	27.7	1,874	9	755	240 AA A	Mercedes-Benz SL-Class: 09 (R)
255/40R21	102Y	XL	BLT	265023856	225064	8.5 - 10.0	9.0	10.2	29.0	1,874	9	720	240 AA A	
265/40ZR21	105Y	XL	BLT	265023806	218534	8.5 - 10.0	9.0	10.5	30.4	2,039	8	689	240 AA A	Bentley Mulsanne: 11-17 (R)
275/30ZR21	98Y	XL	BLT	265023834	230678	9.0 - 10.0	9.5	10.9	27.5	1,653	10	760	240 AA A	
275/35ZR21	103Y	XL	BLT	265023825	223898	9.0 - 11.0	9.5	10.9	28.5	1,929	9	732	240 AA A	Audi A8: 11-17
<b>SP SPORT MAXX GT NST (NOISESHIELD TECHNOLOGY)</b>														
275/30ZR21	103Y	XL	BLT	265040900	228934	9.0 - 11.0	9.5	10.9	28.5	1,929	9	732	240 AA A	
<b>SP SPORT MAXX GT R0F</b>														
245/45R18	96Y	SL	BLT	265027403	217113	7.5 - 9.0	8.0	9.6	26.7	1,565	9	784	240 AA A	BMW 5 Series/6 Series: 11-13, 16-17 (F)
245/50R18	100Y	SL	BLT	265027400	208839	7.0 - 8.5	7.5	10.0	27.7	1,754	9	755	240 AA A	BMW 7 Series/5 GT: 09-13, 16-17
245/50R18	100W	SL	BLT	265027407	219078	7.0 - 8.5	7.5	10.0	27.7	1,764	10	755	240 AA A	
255/40R18	95Y	SL	BLT	265027410	223103	8.5 - 10.0	9.0	10.2	26.0	1,521	10	803	240 AA A	
275/40R18	99Y	SL	BLT	265027404	217114	9.0 - 11.0	9.5	10.9	26.7	1,709	9	784	240 AA A	BMW 5 Series/6 Series: 11-13, 16-17 (R)
285/35R18	97Y	SL	BLT	265027411	223104	9.5 - 11.0	10.0	11.4	25.8	1,609	10	808	240 AA A	
225/35R19	88Y	XL	BLT	265027416	227098	7.5 - 9.0	8.0	9.1	25.2	1,235	9	828	240 AA A	BMW 2 Series: 16, BMW 1 Series: 17
245/30R19	89Y	XL	BLT	265027417	227099	8.0 - 9.0	8.5	9.8	24.8	1,279	9	841	240 AA A	BMW 2 Series: 16, BMW 1 Series: 17
245/40R19	94Y	SL	BLT	265023807	218842	8.0 - 9.5	8.5	9.8	26.7	1,477	9	782	240 AA A	BMW 5 Series/6 Series: 11, 16-17
245/45R19	98Y	SL	BLT	265027401	209626	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	240 AA A	BMW 7 Series/5 GT: 09-13, 16-17
275/35R19	96Y	SL	BLT	265023808	218843	9.0 - 11.0	9.5	10.9	26.6	1,565	9	787	240 AA A	BMW 5 Series/6 Series: 11, 16-17
275/40R19	101Y	SL	BLT	265027402	210621	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	240 AA A	BMW 7 Series/5 GT: 09-13, 16-17
225/35R20	90Y	XL	BLT	265027408	222700	7.5 - 9.0	8.0	9.1	26.2	1,323	10	797	240 AA A	BMW 3 Series: 16-17
245/35R20	95Y	XL	BLT	265027405	217240	8.0 - 9.5	8.5	9.8	26.8	1,521	9	781	240 AA A	BMW 5 Series/6 Series: 11-13, 16-17 (F)
* 255/30R20	92Y	XL	BLT	265027409	222701	8.5 - 9.5	9.0	10.2	26.1	1,389	9	802	240 AA A	BMW 3 Series: 16-17
275/30R20	97Y	XL	BLT	265027406	217321	9.0 - 10.0	9.5	10.9	26.5	1,609	10	788	240 AA A	BMW 5 Series/6 Series: 11-13, 16-17 (R)
275/40R20	106W	XL	BLT	265027415	225846	9.0 - 11.0	9.5	10.9	28.7	2,094	10	729	240 AA A	BMW X5/X6 Series: 16-17
315/35R20	110W	XL	BLT	265027414	225845	10.5 - 12.5	11.0	12.6	28.7	2,337	10	729	240 AA A	BMW X5/X6 Series: 16-17

\*Discontinued 2016.



# SPORT MAXX RT™

(Select sizes with ROF<sup>†</sup>/NoiseShield Technology<sup>®</sup>)

Ultra High-Performance With Grip and Braking Developed at the Race Track



## FEATURES

Adaptive tread compound

Massive outer shoulder blocks

Power braking blocks

Low weight construction

## BENEFITS

Helps deliver racing grip and improved braking performance

Help promote increased stability and sure handling when cornering

Help enhance stopping power for shorter braking distance at high speeds

Helps to lower rolling resistance for better performance



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Audi, Maserati, Mini and Subaru

<sup>†</sup> Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

## SPORT MAXX RT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
205/45R17	88W	XL	BLT	265029326	227384	6.5 - 7.5	7.0	8.1	24.3	1,235	9	862	240 AA A	Mini Cooper S: 16-17
225/45ZR17	94Y	XL	BLT	265029301	224662	7.0 - 8.5	7.5	8.9	25.0	1,477	10	836	240 AA A	
* 225/45ZR17	91Y	SL	BLT	265029302	224663	7.0 - 8.5	7.5	8.9	25.0	1,356	10	836	240 AA A	
* 225/50R17	94Y	SL	BLT	265029304	224665	6.0 - 8.0	7.0	9.2	25.9	1,477	9	807	240 AA A	
225/50R17	98Y	XL	BLT	265029333	230365	6.0 - 8.0	7.0	9.2	25.9	1,653	10	807	240 AA A	
225/55R17	97Y	SL	BLT	265029305	224666	6.0 - 8.0	7.0	9.2	26.8	1,609	10	780	240 AA A	
235/45R17	97Y	XL	BLT	265029303	224664	7.5 - 9.0	8.0	9.3	25.4	1,609	9	824	240 AA A	
235/45R17	94W	SL	BLT	265029322	226946	7.5 - 9.0	8.0	9.3	25.4	1,477	9	824	240 AA A	Subaru Impreza WRX: 16 - 17
* 245/40R17	91Y	SL	BLT	265029300	224661	8.0 - 9.5	8.5	9.8	24.7	1,356	10	846	240 AA A	
* 225/40ZR18	92Y	XL	BLT	265029306	224667	8.0 - 9.0	7.5	9.1	25.1	1,389	9	833	240 AA A	
225/45R18	95Y	XL	BLT	265029335	230367	7.5 - 9.0	9.0	9.6	26.7	1,521	10	784	240 AA A	
* 235/40ZR18	95Y	XL	BLT	265029307	224668	8.0 - 9.5	8.5	9.5	25.4	1,521	9	823	240 AA A	
245/35ZR18	92Y	XL	BLT	265029313	224674	8.0 - 9.5	8.5	9.8	25.8	1,389	10	810	240 AA A	
* 245/40ZR18	97Y	XL	BLT	265029308	224669	7.5 - 9.0	8.0	9.8	25.7	1,609	10	813	240 AA A	
245/40R18	97W	XL	BLT	265029323	226947	8.0 - 9.5	8.5	9.8	25.7	1,609	9	813	240 AA A	Subaru Impreza WRX: 16 - 17
245/45ZR18	100Y	XL	BLT	265029309	224670	7.5 - 9.0	9.0	9.6	26.7	1,764	10	784	240 AA A	
* 255/35ZR18	94Y	XL	BLT	265029312	224673	8.5 - 10.0	9.0	10.2	25.0	1,477	9	836	240 AA A	
225/40R19	93Y	XL	BLT	265029332	230364	7.5 - 9.0	8.0	9.1	26.1	1,433	10	801	240 AA A	
* 235/35ZR19	91Y	XL	BLT	265029311	224672	8.0 - 9.5	8.5	9.5	25.5	1,356	10	820	240 AA A	
235/35ZR19	91Y	XL	BLT	265029321	226429	8.0 - 9.5	8.5	9.5	25.5	1,356	9	821	240 AA A	
235/35R19	91Y	XL	BLT	265029329	227422	8.0 - 9.5	8.5	9.5	25.5	1,356	9	821	240 AA A	Audi A3: 15
* 245/35ZR19	93Y	XL	BLT	265029324	226970	8.0 - 9.5	8.5	9.8	25.8	1,433	9	810	240 AA A	
245/35ZR19	93Y	XL	BLT	265029330	228743	8.0 - 9.5	8.5	9.8	25.8	1,433	8	810	240 AA A	
245/45ZR19	98Y	SL	BLT	265029317	225266	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	240 AA A	Maserati Quattroporte: 13-17, Maserati Ghibli: 14-17
245/45R19	102Y	XL	BLT	265029319	225466	7.5 - 9.0	8.0	9.6	27.7	1,874	10	755	240 AA A	
* 255/30ZR19	91Y	XL	BLT	265029314	224675	8.5 - 9.5	9.0	10.2	25.1	1,356	10	833	240 AA A	
* 255/35ZR19	96Y	XL	BLT	265029315	224676	8.5 - 10.0	9.0	10.2	26.0	1,565	9	803	240 AA A	
255/35R19	96Y	XL	BLT	265029334	230366	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803	240 AA A	
* 255/40ZR19	100Y	XL	BLT	265029310	224671	8.5 - 10.0	9.0	10.2	27.0	1,764	10	773	240 AA A	
265/35ZR19	98Y	XL	BLT	265029331	228744	9.0 - 10.5	9.5	10.7	26.3	1,653	9	794	240 AA A	
275/40ZR19	101Y	SL	BLT	265029318	225267	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	240 AA A	Maserati Quattroporte: 13-17, Maserati Ghibli: 14-17
275/40R19	101Y	SL	BLT	265029320	225605	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	240 AA A	
285/30ZR19	98Y	XL	BLT	265029316	224677	9.5 - 11.0	10.0	11.4	25.8	1,653	10	810	240 AA A	
285/30ZR20	99Y	XL	BLT	265029325	227161	9.5 - 10.5	10.0	11.4	26.8	1,709	10	781	240 AA A	
<b>SPORT MAXX RT NST (NOISESHIELD TECHNOLOGY)</b>														
275/30ZR21	98Y	XL	BLT	265029900	227193	9.0 - 10.0	9.5	10.9	27.5	1,653	9	760	240 AA A	Audi R57: 14-15
<b>SPORT MAXX RT ROF</b>														
205/45R17	88W	XL	BLT	265029327	227385	6.5 - 7.5	7.0	8.1	24.3	1,235	9	862	240 AA A	Mini Cooper: 14
205/40R18	86W	XL	BLT	265029328	227386	7.0 - 8.0	7.5	8.4	24.5	1,168	9	855	240 AA A	Mini Cooper S: 16-17

\*Discontinued 2016.



# SP SPORT MAXX® TT

(Select sizes with DSST®)

Driving Precision Powered by Dupont™ Kevlar®



## FEATURES

### TOUCH TECHNOLOGY™

Multi-Radius Tread Technology™

Flatter tread profile

Asymmetric tread design

Unique bead fit system

DuPont™ Kevlar® reinforced lower sidewalls

Motorsport-inspired tread

Jointless Band Technology™

Max Flange Shield®

## BENEFITS

Helps provide enhanced communication between driver and road for fast driver feedback and precise steering response

Helps deliver superb dry handling while maintaining wet handling

Enlarged contact patch for enhanced cornering capability

Helps provide a balance of wet and dry performance

Helps enhance force transmission between tire and wheel for superb driver feedback

Helps enhance road feedback and driving precision

Helps enhance wet and dry grip while maintaining tread life

Helps maintain the tire's shape and enables smooth performance at highway speeds

Helps protect rims from accidental curb damage



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Rugged Toughness from DuPont™ Kevlar®



Original Equipment on BMW

## SP SPORT MAXX TT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* 275/40ZR19	101Y	SL	BLT	263027226	214774	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	240 AA A	
* 275/45ZR19	108Y	XL	BLT	263027239	225282	8.5 - 10.5	9.0	10.8	28.8	2,205	10	726	240 AA A	
* 245/35ZR20	95Y	XL	BLT	263027227	214775	8.0 - 9.5	8.5	9.8	26.8	1,521	10	781	240 AA A	
* 275/30ZR20	97Y	XL	BLT	263027231	214779	9.0 - 10.0	9.5	10.9	26.5	1,609	10	789	240 AA A	
* 275/40ZR20	106Y	XL	BLT	263027238	225281	9.0 - 11.0	9.5	10.9	28.7	2,094	10	729	240 AA A	
* 265/35ZR22	102Y	XL	BLT	263027230	214778	9.0 - 10.5	9.5	10.7	29.3	1,874	10	713	240 AA A	
<b>SP SPORT MAXX TT DSST</b>														
225/45R17	91W	SL	BLT	263027240	227094	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	240 AA A	BMW 2 Series: 16, BMW 1 Series: 17
245/40R17	91W	SL	BLT	263027241	227095	8.0 - 9.5	8.5	9.8	24.7	1,356	9	846	240 AA A	BMW 2 Series: 16, BMW 1 Series: 17

\*Discontinued 2016.



# SP SPORT MAXX®

(Select sizes with DSST® ROF†)

Luxury Sport Tire With Commanding Power



## FEATURES

Multi-Radius Tread Technology™

Twin Hydro-Paddle Technology™

Integral Rubber Matrix tread comprised of an optimized blend of silica and high-structured carbon black

Continuous, solid center rib

5-Pitch Technology™

Jointless Band Technology™

Max Flange Shield®

Dunlop® Self-Supporting Technology (DSST)†\*

## BENEFITS

Helps deliver superb dry handling while maintaining wet handling

Incorporates a directional tread design that helps to rapidly and efficiently drain water for enhanced wet handling and deep-water performance

Demonstrates excellent acceleration and braking performance

Transfers lateral forces to help provide excellent stability at highway speeds

Aids noise reduction for a quiet ride

Helps maintain the tire's shape and enables smooth performance at highway speeds

Helps protect rims from accidental curb damage

Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Original Equipment on Audi, BMW, Jaguar, Lexus and Mercedes-Benz

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

\* Only on SP Sport Maxx DSST ROF.

## SP SPORT MAXX SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/45R17	90W	SL	BSW	265023846	198848	7.0 - 8.5	7.5	8.9	24.9	1,323	10	836	240 A A	Lexus LS: 06-16 (F)
225/60R18	100H	SL	BSW	265023809	220161	6.0 - 8.0	6.5	9.0	28.6	1,764	10	731	300 A A	
235/50R19	99V	SL	BLT	265023823	223896	6.5 - 8.5	7.5	9.7	28.3	1,709	9	738	240 AA A	
255/45R19	100V	SL	BLT	265023824	223897	8.0 - 9.5	8.5	10.0	28.1	1,764	9	745	240 AA A	
275/55R19	111V	SL	BSW	265025755	201718	7.5 - 9.5	8.5	11.2	30.9	2,403	9	676	240 AA A	Mercedes-Benz GL-Class: 06-12
255/35R20	97Y	XL	BLT	265023939	209619	8.5 - 10.0	9.0	10.2	27.0	1,609	10	774	240 AA A	Jaguar XF: 08-13
255/35ZR20	97Y	XL	BLT	265040735	214437	8.5 - 10.0	9.0	10.2	27.0	1,609	10	774	240 AA A	Jaguar XFR: 10-15 (F)
275/35ZR20	102Y	XL	BSW	265023739	196519	9.0 - 11.0	9.5	10.9	27.6	1,874	10	758	240 AA A	Audi A8: 05-10
275/50R20	109W	SL	BSW	265023850	203391	7.5 - 9.5	8.5	11.2	30.9	2,271	9	676	240 AA A	Mercedes-Benz GL-Class: 07-12
275/50R20	113W	XL	BLT	265023942	232897	7.5 - 9.5	8.5	11.2	30.9	2,535	9	677	240 AA A	
*275/50R20	113W	XL	BLT	265023941	225130	7.5 - 9.5	8.5	11.2	30.9	2,535	9	677	240 AA A	Mercedes-Benz AMG: 13
285/30ZR20	99Y	XL	BLT	265040736	214438	9.5 - 10.5	10.0	11.4	26.8	1,709	10	780	240 AA A	Jaguar XFR: 10-15 (R)
275/40ZR21	107Y	XL	BLT	265023778	206587	9.0 - 11.0	9.5	10.7	29.6	2,149	10	704	240 AA A	Audi Q7: 08-10
295/35R21	107Y	XL	BSW	265023776	202041	10.0 - 11.5	10.5	11.9	29.1	2,149	10	718	240 AA A	Audi Q7: 07-15
<b>SP SPORT MAXX DSST R0F</b>														
275/40R19	101Y	XL	BLT	265027402	210621	9.0 - 11.0	9.5	10.9	27.7	1,819	19	755	240 AA A	
285/35R21	105Y	XL	BLT	265026337	219124	9.5 - 11.0	10.0	11.4	28.9	2,039	8	724	240 AA A	BMW X5: 11-13 (F), BMW X6: 11-13 (F)
325/30R21	108Y	XL	BLT	265026338	219245	11.0 - 12.5	11.5	13.0	28.7	2,205	10	728	240 AA A	BMW X5: 11-13 (R), BMW X6: 11-13 (R)

\*Discontinued 2016.



# DIREZZA® DZ102

Sleek Styling Meets Impressive Handling for Head-Turning Performance



## FEATURES

Aggressive Unidirectional Tread Design

Silicarbon Matrix™ is a special blend of silica and carbon black

5-Pitch Technology™ and wear trimming

Deeper lateral cuts and shoulder grooves

Performance-inspired tread and sidewall design

Jointless Band Technology™

Max Flange Shield®

## BENEFITS

Offers better water evacuation performance in wet conditions

Offers enhanced wet and dry traction

Aid noise reduction and help reduce irregular wear

Maintain design and performance integrity

Enhance the overall appearance and ride of the vehicle

Enables smooth performance at highway speeds

Helps protect rims from accidental curb damage



Dry Traction



Ultra Wet  
Traction



Cornering  
Stability



Steering  
Responsiveness

## DIREZZA DZ102 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
195/50R15	82V	SL	BSW	265029800	226797	5.5 - 7.0	6.0	7.9	22.7	1,047	9	925	460 A A
195/55R15	85V	SL	BSW	265029820	226837	5.5 - 7.0	6.0	7.9	23.4	1,135	9	898	460 A A
205/50R15	86V	SL	BSW	265029801	226798	5.5 - 7.5	6.5	8.4	23.1	1,168	9	911	460 A A
205/55R15	88V	SL	BSW	265029831	226848	5.5 - 7.5	6.5	8.4	23.9	1,235	9	883	460 A A
195/50R16	84V	SL	BSW	265029802	226799	5.5 - 7.0	6.0	7.9	23.7	1,102	9	886	460 A A
205/45R16	87W	XL	BSW	265029811	226828	6.5 - 7.5	7.0	8.1	23.2	1,201	9	895	460 A A
205/50R16	87V	SL	BSW	265029803	226800	5.5 - 7.5	6.5	8.4	24.1	1,201	9	874	460 A A
205/55R16	91V	SL	BSW	265029841	226858	5.5 - 7.5	6.5	8.4	24.9	1,356	9	845	460 A A
215/50R16	90V	SL	BSW	265029804	226821	6.0 - 7.5	7.0	8.9	24.5	1,323	10	860	460 A A
215/55R16	93V	SL	BSW	265029842	226859	6.0 - 7.5	7.0	8.9	25.3	1,433	10	834	460 A A
225/50R16	92V	SL	BSW	265029805	226822	6.0 - 8.0	7.0	9.2	24.9	1,389	10	845	460 A A
225/55R16	95V	SL	BSW	265029843	226860	6.0 - 8.0	7.0	9.2	25.7	1,521	10	821	460 A A
205/45R17	88W	XL	BSW	265029812	226829	6.5 - 7.5	7.0	8.1	24.3	1,235	9	856	460 A A
205/50ZR17	93W	XL	BSW	265029806	226823	5.5 - 7.5	6.5	8.4	25.1	1,433	9	837	460 A A
215/45R17	91W	XL	BSW	265029813	226830	7.0 - 8.0	7.0	8.4	24.6	1,356	9	842	460 A A
215/50R17	91V	SL	BSW	265029807	226824	6.0 - 7.5	7.0	8.9	25.5	1,356	10	823	460 A A
215/55R17	94V	SL	BSW	265029844	226861	6.0 - 7.5	7.0	8.9	26.3	1,477	10	800	460 A A
225/45R17	94W	XL	BSW	265029814	226831	7.0 - 8.5	7.5	8.8	25.0	1,477	10	834	460 A A
225/50R17	94W	SL	BSW	265029808	226825	6.0 - 8.0	7.0	9.2	25.9	1,477	10	811	460 A A
235/45R17	94W	SL	BSW	265029815	226832	7.5 - 9.0	8.0	9.3	25.4	1,477	10	821	460 A A
235/50ZR17	96W	SL	BSW	265029809	226826	6.5 - 8.5	7.5	9.7	26.3	1,565	10	800	460 A A
235/55ZR17	99W	SL	BSW	265029845	226862	6.5 - 8.5	7.5	9.7	27.2	1,709	10	778	460 A A
245/40R17	91W	SL	BSW	265029821	226838	8.0 - 9.5	8.5	9.8	24.7	1,356	10	842	460 A A
245/45R17	95W	SL	BSW	265029816	226833	7.5 - 9.0	8.0	9.6	25.7	1,521	10	813	460 A A
255/40R17	94W	SL	BSW	265029822	226839	8.5 - 10.0	9.0	10.2	25.0	1,477	10	832	460 A A
225/40R18	92W	XL	BSW	265029823	226840	7.5 - 9.0	8.0	9.0	25.1	1,389	10	826	460 A A
225/45R18	95W	XL	BSW	265029817	226834	7.0 - 8.5	7.5	8.8	25.9	1,521	10	803	460 A A
235/40R18	95W	XL	BSW	265029824	226841	8.0 - 9.5	8.5	9.5	25.4	1,521	10	818	460 A A
235/50ZR18	97W	SL	BSW	265029810	226827	6.5 - 8.5	7.5	9.7	27.3	1,609	10	771	460 A A
245/40R18	97W	XL	BSW	265029825	226842	8.0 - 9.5	8.5	9.8	25.7	1,609	10	808	460 A A
245/45R18	100W	XL	BSW	265029818	226835	7.5 - 9.0	8.0	9.6	26.7	1,764	10	783	460 A A
255/35R18	94W	XL	BSW	265029829	226846	8.5 - 10.0	9.0	10.2	25.0	1,477	10	832	460 A A
255/45ZR18	99W	SL	BSW	265029819	226836	8.0 - 9.5	8.5	10.0	27.0	1,709	10	771	460 A A
265/35R18	97W	XL	BSW	265029830	226847	9.0 - 10.5	9.5	10.7	25.3	1,609	10	821	460 A A
275/35R18	95W	SL	BSW	265029832	226849	9.0 - 11.0	9.5	10.9	25.6	1,521	10	816	460 A A
275/40R18	99W	SL	BSW	265029826	226843	9.0 - 11.0	9.5	10.9	26.7	1,709	10	783	460 A A
225/35R19	88W	XL	BSW	265029833	226850	7.5 - 9.0	8.0	9.0	25.2	1,235	10	818	460 A A
235/35R19	91W	XL	BSW	265029846	226863	8.0 - 9.5	8.5	9.5	25.5	1,356	10	813	460 A A
245/35R19	93W	XL	BSW	265029834	226851	8.0 - 9.5	8.5	9.8	25.8	1,433	10	803	460 A A
245/40ZR19	94W	SL	BSW	265029827	226844	8.0 - 9.5	8.5	9.8	26.7	1,477	10	776	460 A A
*265/30R19	93W	XL	BSW	265029839	226856	9.0 - 10.0	9.5	10.7	25.3	1,433	10	818	460 A A
275/30R19	96W	XL	BSW	265029840	226857	9.0 - 11.0	9.5	10.9	25.6	1,565	10	808	460 A A
285/35ZR19	99W	SL	BSW	265029835	226852	9.5 - 11.0	10.0	11.4	26.9	1,709	10	771	460 A A
245/35ZR20	95W	XL	BSW	265029836	226853	8.0 - 9.5	8.5	9.8	26.8	1,521	10	774	460 A A
245/40ZR20	99W	XL	BSW	265029828	226845	8.0 - 9.5	8.5	9.8	27.7	1,709	10	749	460 A A
255/35R20	97W	XL	BSW	265029837	226854	8.5 - 10.0	9.0	10.2	27.0	1,609	10	767	460 A A
265/35ZR22	102W	XL	BSW	265029838	226855	9.0 - 10.5	10.0	10.7	29.3	1,874	10	705	460 A A

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# SPORT MAXX RACE™

Exceptional Grip and Braking Performance on the Racetrack or the Highway



## FEATURES

Hybrid Aramid overlay

Asymmetric pattern design

Motorsport-derived tread compound

High angle ribs

## BENEFITS

Helps enhance steering and handling stability

Helps deliver excellent handling on dry pavement

Helps provide exceptional grip

Help improve grip while cornering



Dry Traction



Cornering  
Stability



Steering  
Responsiveness



Original Equipment on Mercedes-Benz and Porsche

## SPORT MAXX RACE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
235/35ZR19	91Y	XL	BLT	265029002	224381	8.0 - 9.5	8.5	9.5	25.5	1,356	8	820	80 AA A	
245/35ZR19	93Y	XL	BLT	265029003	224382	8.0 - 9.5	8.5	9.8	25.8	1,433	7	810	80 AA A	
255/35ZR19	96Y	XL	BLT	265029000	223063	8.5 - 10.0	9.0	10.2	26.0	1,565	7	803	80 A A	Mercedes-Benz C36 Black Series (F)
265/35ZR19	98Y	XL	BLT	265029004	224383	9.0 - 10.5	9.5	10.7	26.3	1,653	8	793	80 AA A	
265/35ZR19	98Y	XL	BLT	265029010	227049	9.0 - 10.5	9.5	10.7	26.3	1,653	7	794	80 AA A	Mercedes-Benz SLS AMG GT (F)
285/30ZR19	98Y	XL	BLT	265029001	223064	9.5 - 11.0	10.0	11.4	25.8	1,653	7	810	80 A A	Mercedes-Benz C36 Black Series (R)
305/30ZR19	102Y	XL	BLT	265029005	224384	10.5 - 12.0	11.0	12.3	26.3	1,874	7	796	80 AA A	
325/30ZR19	101Y	SL	BLT	265029006	224385	11.0 - 12.0	11.5	13.0	26.7	1,819	7	782	80 AA A	
245/35ZR20	91Y	SL	BLT	265029007	226652	8.0 - 9.5	8.5	9.8	26.8	1,356	8	781	80 AA A	Porsche 911 GT3 (F), Porsche 981 GT4 (F)
265/35ZR20	99Y	XL	BLT	265029012	230807	9.0 - 10.5	9.5	10.7	27.3	1,709	7	765	80 AA A	Porsche 991 GT3 RS (F)
295/30ZR20	101Y	XL	BLT	265029009	227048	10.0 - 11.0	10.5	11.9	27.0	1,819	7	774	80 AA A	Mercedes-Benz SLS AMG GT (R)
295/30ZR20	101Y	XL	BLT	265029011	230806	10.0 - 11.0	10.5	11.9	27.0	1,819	7	774	80 AA A	Porsche 981 GT4 (R)
305/30ZR20	103Y	XL	BLT	265029008	226653	10.5 - 11.5	11.0	12.3	27.2	1,929	7	767	80 AA A	Porsche 911 GT3 (R)
325/30ZR21	108Y	XL	BLT	265029013	230808	11.0 - 12.5	11.5	13.0	28.7	2,205	7	728	80 AA A	Porsche 991 GT3 RS (R)



# SPORT MAXX RT2

A Champion in Grip and Steering Precision

FEATURES	BENEFITS
Specific Bead Seat System	Strengthens the link between tyre and rim for a more precise driving experience
Jointless Belt	Reduces circumferential deformations at high speeds
Max Flange Shield	Firm rubber guard that extends beyond the rim and wraps around the lower sidewall of the tyre to help protect rims from accidental curb damage
Multi Radius Tread	Significantly better control over the evolution of the footprint in all driving conditions; responsive wet and dry handling; increased cornering control
Asymmetric Tread Design	Improved performance on straight lines and around corners; increased resistance to aquaplaning
Flatter Tread Profile	Increased stability and steering precision; reduced heel and toe wear; excellent cornering stability and precision; superior dry grip
Power Braking Blocks	Shorter braking distances, especially at high speeds

## SPORT MAXX RT2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/45R17	94W	XL	BLT	265008003	231823	7.0 - 8.5	7.5	8.9	25.0	1,477	9	836	240 AA A	Mini Clubman: 17
255/45R20	105Y	XL	BLT	265008004	233021	8.0 - 9.5	8.5	10.0	29.1	2,039	9	719	300 AA A	
285/40R20	108Y	XL	BLT	265008005	233031	9.5 - 11.0	10.0	11.4	28.9	2,205	9	721	300 AA A	
<b>SPORT MAXX RT2 R0F</b>														
225/45R19	92W	SL	BLT	265008002	230780	7.0 - 8.5	7.5	8.9	27	1,389	10	774	240 AA A	BMW 5 Series: 16



Original Equipment on BMW and Mini



# SP SPORT MAXX® 050

(Select sizes with DSST® CTT†)

High-Performance, Run-Flat Summer Tires

## FEATURES

High-performance tread design for summer use

Hybrid Kevlar®-Nylon Band\*

Reinforced side layer\*

Dimpled sidewall\*

## BENEFITS

Supports maximum handling and performance in warm, dry conditions

Helps maintain tire's structure to balance high-speed performance, comfort and noise

Temporarily supports the vehicle's weight when air pressure is lost

Helps limit temperature increases in the sidewall when the tire is driven while flat

### SP SPORT MAXX 050 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/50R17	94W	SL	BSW	265023815	222293	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	280 A A	Lexus GS: 12-17
225/40R18	88Y	SL	BSW	265023831	225603	7.5 - 9.0	8.0	9.1	25.1	1,235	9	833	280 A A	Lexus LS: 14-17 (F)
235/45R18	94Y	SL	BSW	265023816	222294	7.5 - 9.0	8.0	9.3	26.3	1,477	10	794	280 A A	Lexus GS: 12-17, Lexus RC: 15-17
255/35R18	90Y	SL	BSW	265023832	225604	8.5 - 10.0	9.0	10.2	25.0	1,323	9	836	280 A A	Lexus LS: 14-17 (R)
235/40R19	96Y	XL	BSW	265023817	222295	8.0 - 9.5	8.5	9.5	26.4	1,565	10	791	280 A A	Lexus GS: 12-17 (F), Lexus RC: 15-17
245/45R19	98Y	SL	BSW	265023826	224641	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	280 A A	Lexus LS: 13-16, Lexus LS Hybrid: 17
265/35R19	94Y	SL	BSW	265023818	222296	9.0 - 10.5	9.5	10.7	26.3	1,477	9	793	280 A A	Lexus GS: 12-17 (R), Lexus RC: 15-17
<b>SP SPORT MAXX 050 DSST CTT</b>														
245/40RF19	94W	SL	BLT	265023827	225410	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	260 A A	Infiniti Q50: 14-17
245/45RF19	98Y	SL	BLT	265023835	231721	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	280 A A	Lexus LS Hybrid: 17
<b>SP SPORT MAXX 050 DSST NRT (Noise Reduction Technology)</b>														
245/40RF19	94W	SL	BSW	265031601	231886	8.0 - 9.5	8.5	9.8	26.7	1,477	10	783	260 A A	Infiniti Q50: 17 (L)
245/40RF19	94W	SL	BLT	265023836	231936	8.0 - 9.5	8.5	9.8	26.7	1,477	10	783	260 A A	
265/35RF19	94W	SL	BSW	265031602	231887	9.0 - 10.5	9.5	10.7	26.3	1,477	10	794	260 A A	Infiniti Q50: 17 (R)



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Rugged Toughness from DuPont™ Kevlar®



Original Equipment on Infiniti and Lexus

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

\*Only on SP Sport Maxx 050 DSST CTT.

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.



# SP SPORT MAXX® A SP SPORT MAXX® A1 SP SPORT MAXX® 101

Luxury Sport Tire With Commanding Power



SP SPORT MAXX A

SP SPORT MAXX A1

SP SPORT MAXX 101

## FEATURES

Multi-Radius Tread Technology™

Integral Rubber Matrix tread comprised of an optimized blend of silica and high-structured carbon black

Multi-Pitch Tread Design Technology™

Jointless Band Technology™

Max Flange Shield®

## BENEFITS

Helps deliver superb dry handling while maintaining wet handling

Demonstrates excellent acceleration and braking performance

Helps reduce noise for a quiet ride

Helps maintain the tire's shape and enables smooth performance at highway speeds

Helps protect rims from accidental curb damage



Ultra Wet  
Traction



Dry Traction



Comfortable,  
Refined Handling



Original Equipment on Lexus

## SP SPORT MAXX A SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
245/45R17	95W	SL	BSW	265023847	198849	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	240 A A	Lexus LS: 06-16 (R)
225/40R18	88Y	SL	BSW	265023772	198882	7.5 - 9.0	8.0	9.1	25.1	1,235	10	833	240 A A	Lexus LS: 06-13 (F)
255/40R18	95Y	SL	BSW	265023773	198883	8.5 - 10.0	9.0	10.2	26.0	1,521	10	803	240 A A	Lexus LS: 06-13 (R)

## SP SPORT MAXX A1 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
235/50R18	97W	XL	BSW	265040450	202196	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	280 A A	Lexus LS: 06-16, Lexus LS Hybrid: 17

## SP SPORT MAXX 101 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
245/45R19	98Y	SL	BSW	265040645	202198	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	280 A A	Lexus LS: 07-11



SP SPORT 2030

SP SPORT 2050

# SP SPORT® 2030 SP SPORT® 2050

## High-Performance Summer Tires

### FEATURES

Wide circumferential grooves with nearly vertical walls

Triple tread radius

Jointless Band Technology™

Fine-tuned groove depth and construction

### BENEFITS

Help maintain wet handling and traction throughout the life of the tire

Increased contact patch area during cornering for enhanced traction and control

Helps maintain the tire's shape and enables smooth performance at highway speeds

Smooth, luxurious ride

### SP SPORT 2030 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
245/40R18	93Y	SL	BSW	265039841	196532	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	360 A A	Lexus GS: 06-11, Lexus SC: 06-10

### SP SPORT 2050 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/50R17	94W	SL	BSW	265024050	196520	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	360 A A	Lexus GS: 06-11
P225/40R18	88Y	SL	BSW	265024051	214907	7.5 - 9.0	8.0	9.1	25.1	1,232	10	833	240 A A	Mazda MAZDA3: 10-13
225/40R18	88Y	SL	BSW	265024052	215641	7.5 - 9.0	8.0	9.1	25.1	1,235	10	834	240 A A	Lexus LS: 10-16 (F)
225/45R18	91W	SL	BSW	265024049	207971	7.0 - 8.5	7.5	8.9	25.9	1,356	10	807	240 A A	Mazda RX-8: 08-11
255/40R18	95Y	SL	BSW	265024053	215642	8.5 - 10.0	9.0	10.2	26.0	1,521	10	803	240 A A	Lexus LS: 10-16 (R)



Ultra Wet Traction



Dry Traction



Steering Responsiveness



Original Equipment on Lexus and Mazda



SP SPORT 600

SP SPORT MAXX GT 600 DSST

# SP SPORT® 600 SP SPORT MAXX® GT 600 DSST®†

High Performance With Wet and Dry Traction

FEATURES	BENEFITS
Asymmetric tread	Helps provide a balance of wet and dry performance
Solid center rib	Helps enhance steering response and driver feedback
Circumferential and lateral-sweeping grooves	Help provide efficient water evacuation for enhanced traction
Jointless Band Technology™	Helps maintain the tire's shape and enables smooth performance at highway speeds
Multi-Pitch Tread Design Technology™	Helps reduce noise for a quiet ride
Dunlop® Self-Supporting Technology (DSST)**	Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions

## SP SPORT 600 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
245/40R18	93W	SL	BSW	265023601	206343	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	200 A A	Subaru Impreza: 08-15

## SP SPORT MAXX GT 600 DSST SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
*255/40ZRF20	97(Y)	SL	BSW	265028802	224882	8.5 - 10.0	9.0	10.2	28.0	1,609	8	746	200 A A	Nissan GT-R: 11-16
255/40ZRF20	97Y	SL	BSW	265028803	226983	8.5 - 10.0	9.0	10.2	28.0	1,609	8	746	200 A A	Nissan GT-R: 16 -17
255/40ZRF20	97Y	SL	BSW	265028805	227270	8.5 - 10.0	9.0	10.2	28.0	1,609	6	746	200 A A	Nissan GT-R Nismo: 16-17 (F)
285/35ZRF20	100Y	SL	BSW	265028804	226984	9.5 - 11.0	10.0	11.4	27.9	1,764	8	749	200 A A	Nissan GT-R: 11-17
285/35ZRF20	100Y	SL	BSW	265028806	227421	9.5 - 11.0	10.0	11.4	27.9	1,764	7	749	200 A A	Nissan GT-R Nismo: 16-17 (R)

\*Discontinued 2016.



Dry Traction



Ultra Wet Traction



Steering Responsiveness



Original Equipment on Nissan and Subaru

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

\* Only on the SP Sport Maxx GT 600 DSST.



# SPORT BLURESPONSE™

All Grip. No Compromise.

## FEATURES

Specific Bead Seat System

Jointless Belt

Max Flange Shield

Multi Radius Tread

Asymmetric Tread Design

Flatter Tread Profile

## BENEFITS

Strengthens the link between tyre and rim for a more precise driving experience

Reduces circumferential deformations at high speeds

Firm rubber guard that extends beyond the rim and wraps around the lower sidewall of the tyre to help protect rims from accidental curb damage

Significantly better control over the evolution of the footprint in all driving conditions; responsive wet and dry handling; increased cornering control

Improved performance on straight lines and around corners; increased resistance to aquaplaning

Increased stability and steering precision; reduced heel and toe wear; excellent cornering stability and precision; superior dry grip

## SPORT BLURESPONSE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
175/65R15	84H	SL	BLT	265040300	227383	5.0 - 6.0	5.0	7.0	24.0	1,102	10	872	340 A A	Mini Cooper S: 16-17
205/55R17	95Y	XL	BLT	265040301	230363	5.5 - 7.5	6.5	25.9	25.9	1,521	10	807	340 A A	



Original Equipment on Mini

# SP SPORT® FAST RESPONSE™

Superb Road Feedback for Responsive Handling on Wet and Dry Roads



FEATURES	BENEFITS
Specific Bead Seat System	Strengthens the link between tyre and rim for a more precise driving experience
Jointless Belt	Reduces circumferential deformations at high speeds
Max Flange Shield	Firm rubber guard that extends beyond the rim and wraps around the lower sidewall of the tyre to help protect rims from accidental curb damage
Multi Radius Tread	Significantly better control over the evolution of the footprint in all driving conditions; responsive wet and dry handling; increased cornering control
Asymmetric Tread Design	Improved performance on straight lines and around corners; increased resistance to aquaplaning
Flatter Tread Profile	Increased stability and steering precision; reduced heel and toe wear; excellent cornering stability and precision; superior dry grip

## SP SPORT FAST RESPONSE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
205/55R17	91V	SL	BLT	265029500	225140	5.5 - 7.5	6.5	25.9	25.9	1,356	10	807	280 A A	Mini Paceman: 16-17



Original Equipment on Mini



# SP QUATTRO MAXX

## Sport Car Precision and Driving Pleasure for High Performance SUVs

### FEATURES

Apex containing Kevlar® fibre

Dual tread compound

Ultra-stiff breakers

### BENEFITS

Enhanced steering response when accelerating and braking, together with increased stability when cornering

Ultimate dry grip and excellent wet handling and braking

Improved road feedback and heavy handling performance

### SP QUATTRO MAXX SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/35R20	97Y	XL	BLT	265041000	230450	8.5 - 10.0	9.0	10.2	27.0	1,609	10	774	240 AA A	Audi A3: 16



Original Equipment on Audi



# SP SPORT® 01

(Select sizes with DSST® ROF†)

## Quiet, High-Performance Tires



### FEATURES

Jointless Band Technology™

Aramid-reinforced bead

Max Flange Shield®

Silica tread

Dunlop® Self-Supporting Technology (DSST)†\*

### BENEFITS

Helps maintain the tire's shape and enables smooth performance at highway speeds

Helps provide lower sidewall stiffness for enhanced responsiveness

Helps protect rims from accidental curb damage

Enhances dry and wet traction while helping to reduce rolling resistance

Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions



Dry Traction



Ultra Wet Traction



Steering Responsiveness



Original Equipment on Audi, BMW, Infiniti, Jaguar, Mini and Subaru

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

\* Only on SP Sport 01 DSST ROF.

## SP SPORT 01 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/45R17	91W	SL	BSW	265022461	208554	7.0 - 8.5	7.5	8.9	25.0	1,356	10	836	280 A A	Subaru Impreza: 09-10
225/50R17	94Y	SL	BLT	265022345	214426	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	280 A A	Audi A4: 09-15
235/45R17	94W	SL	BSW	265023344	206173	7.5 - 9.0	8.0	9.3	25.4	1,477	10	823	280 A A	Subaru Impreza: 08-15
245/40ZR19	94Y	SL	BSW	265022337	201434	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	280 A A	Jaguar XK: 07-10 (F)
275/35ZR19	96Y	SL	BSW	265022344	201435	9.0 - 11.0	9.5	10.9	26.6	1,565	10	786	280 A A	Jaguar XK: 07-10 (R)
265/45R21	104W	SL	BSW	265022321	207787	8.5 - 10.0	9.0	10.5	30.4	1,984	10	688	280 A A	Infiniti FX45: 08-14
<b>SP SPORT 01 DSST R0F</b>														
195/55R16	87H	SL	BSW	265025656	203101	5.5 - 7.0	6.0	7.9	24.4	1,201	10	856	280 A A	Mini Cooper S: 07-10
195/55R16	87V	SL	BSW	265025456	203102	5.5 - 7.0	6.0	7.9	24.4	1,201	10	857	280 A A	Mini Cooper S: 07-10
205/45R17	84W	SL	BSW	265023145	203104	6.5 - 7.5	7.0	8.1	24.3	1,102	10	862	280 A A	Mini Cooper S: 07-13, 16-17
215/40R18	85Y	SL	BLT	265025660	209778	7.0 - 8.5	7.5	8.6	24.8	1,135	10	844	280 A A	BMW 1 Series: 08-13 (F)
245/35R18	88Y	SL	BLT	265025654	209526	8.0 - 9.5	8.5	9.8	24.8	1,235	10	844	280 A A	BMW 1 Series: 08-13 (R)
245/40R18	93Y	SL	BSW	265023142	202231	8.0 - 9.5	8.5	9.8	25.7	1,430	9	813	280 A A	BMW 5 Series/6 Series: 07-10
*255/55R18	109V	SL	BLT	265025455	201065	7.0 - 9.0	8.0	10.4	29.0	2,271	9	720	280 A A	BMW X5: 07-13, BMW X6: 07-09
275/35R18	95Y	SL	BSW	265023138	202233	9.0 - 11.0	9.5	10.8	25.6	1,521	10	818	280 A A	BMW 5 Series/6 Series: 07-10 (R)
245/35R19	93Y	XL	BLT	265025658	209676	8.0 - 9.5	8.5	9.8	25.8	1,433	10	810	280 A A	BMW 5 Series/6 Series: 09-10

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# SP SPORT® 01 A SP SPORT® 01 A/S

(Select sizes with ROF†)

Quiet, High-Performance Tires



## FEATURES

Jointless Band Technology™

Aramid-reinforced bead

Max Flange Shield®

Silica tread

Dunlop® Self-Supporting Technology (DSST)†\*

## BENEFITS

Helps maintain the tire's shape and enables smooth performance at highway speeds

Helps provide lower sidewall stiffness for enhanced responsiveness

Helps protect rims from accidental curb damage

Enhances dry and wet traction while helping to reduce rolling resistance

Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions



All-Season



Dry Traction



Ultra Wet  
Traction



Steering  
Responsiveness



Original Equipment on Audi, BMW and Volkswagen

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

\* Only on SP Sport 01 A DSST ROF and SP Sport 01 A/S DSST ROF.

‡ Only on SP Sport 01 A/S and SP Sport 01 A/S DSST ROF.

## SP SPORT 01 A SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
245/45ZR19	98Y	SL	BLT	265020200	188121	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	280 A A	BMW 7 Series: 04-06 (F)
*275/40ZR19	101Y	SL	BSW	265020245	188122	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	280 A A	BMW 7 Series: 04-06 (R)
<b>SP SPORT 01 A DSST ROF</b>														
225/45R17	91V	SL	BLT	265027800	215067	7.0 - 8.5	7.5	8.9	25.0	1,356	10	836	280 A A	BMW 3 Series: 10
225/45R17	91W	SL	BLT	265027801	215068	7.0 - 8.5	7.5	8.9	25.0	1,356	10	836	280 A A	BMW 3 Series: 10

## SP SPORT 01 A/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/40R18	92H	XL	BLT	265026240	202749	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	220 A B	Volkswagen GTI: 07-15, Volkswagen R32: 07-13
<b>SP SPORT 01 A/S DSST ROF</b>														
*245/40R18	93H	SL	BLT	265026640	203994	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	220 A B	Audi TT: 07-15

\*Discontinued 2016.



# SIGNATURE HP

Bold Style Meets Experienced Handling for All-Season Performance



## FEATURES

Asymmetric tread design

Circumferential grooves

Innovative blade pattern

Contoured edges

Rim guard

Jointless Band Technology™

## BENEFITS

Offers superior all-season handling for wet or dry roads

Help channel water, slush and snow away from the tread for enhanced traction

Offers long-lasting traction and enhances turning in snow and on ice

Reduce noise and enhance tread life

Helps protect wheels from accidental curb damage

Helps maintain the tire's shape and enables smooth performance at highway speeds



All-Season



Dry Traction



Ultra Wet  
Traction



Steering  
Responsiveness



Cornering  
Stability

# ALL-SEASON SPORT/TOURING

PERFORMANCE

## SIGNATURE HP SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
205/55R16	91V	SL	BSW	264004915	223793	5.5 - 7.5	6.5	8.4	24.9	1,356	10	839	500 AA A
205/60R16	92V	SL	BSW	264004916	223794	5.5 - 7.5	6.0	8.2	25.7	1,389	10	813	500 AA A
205/50R17	93V	XL	BSW	264004900	219301	5.5 - 7.5	6.5	8.4	25.1	1,433	10	833	500 AA A
215/45R17	91W	XL	BSW	264004901	219302	7.0 - 8.0	7.0	8.4	24.7	1,356	10	848	500 AA A
225/45R17	94W	XL	BSW	264004902	219305	7.0 - 8.5	7.5	8.9	25.0	1,477	10	836	500 AA A
225/50R17	94W	SL	BSW	264004904	219307	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	500 AA A
225/55R17	97V	SL	BSW	264004917	223797	6.0 - 8.0	7.0	9.2	26.8	1,609	10	780	500 AA A
235/45R17	94W	SL	BSW	264004905	219311	7.5 - 9.0	8.0	9.3	25.4	1,477	10	823	500 AA A
235/50R17	96V	SL	BSW	264004919	223799	6.5 - 8.5	7.5	9.7	26.3	1,565	10	795	500 AA A
235/55R17	99W	SL	BSW	264004920	223800	6.5 - 8.5	7.5	9.7	27.2	1,709	10	768	500 AA A
245/40R17	91W	SL	BSW	264004921	223941	8.0 - 9.5	8.5	9.8	24.7	1,356	10	846	500 AA A
245/45R17	95W	SL	BSW	264004912	222523	7.5 - 9.0	8.0	9.6	25.7	1,521	10	813	500 AA A
215/45R18	93W	XL	BSW	264004914	222525	7.0 - 8.0	7.0	8.4	25.6	1,433	10	816	500 AA A
225/40R18	92W	XL	BSW	264004911	222522	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	500 AA A
225/45R18	95W	XL	BSW	264004903	219306	7.0 - 8.5	7.5	8.9	25.9	1,521	10	807	500 AA A
225/50R18	95W	SL	BSW	264004925	223945	6.0 - 8.0	7.0	9.2	26.9	1,521	10	777	500 AA A
225/60R18	100V	SL	BSW	264004910	222521	6.0 - 8.0	6.5	9.0	28.6	1,764	10	731	500 AA A
235/40R18	95W	XL	BSW	264004918	223798	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823	500 AA A
235/45R18	94V	SL	BSW	264004906	219312	7.5 - 9.0	8.0	9.3	26.3	1,477	10	795	500 AA A
235/50R18	97W	SL	BSW	264004907	219313	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	500 AA A
245/40R18	93W	SL	BSW	264004922	223942	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	500 AA A
*245/45R18	96W	SL	BSW	264004909	219317	7.5 - 9.0	8.0	9.6	26.7	1,565	10	783	500 AA A
255/35R18	94W	XL	BSW	264004928	224959	8.5 - 10.0	9.0	10.2	25.0	1,477	10	836	500 AA A
255/40R18	99W	XL	BSW	264004924	223944	8.5 - 10.0	9.0	10.2	26.0	1,709	10	804	500 AA A
255/45R18	99W	SL	BSW	264004927	223947	8.0 - 9.5	8.5	10.0	27.0	1,709	10	774	500 AA A
255/55R18	109V	XL	BSW	264004929	226971	7.0 - 9.0	8.0	10.4	29.0	2,271	10	29	500 AA A
245/40R19	94W	SL	BSW	264004908	219316	8.0 - 9.5	8.5	9.8	26.7	1,477	10	783	500 AA A
245/45R19	98W	SL	BSW	264004926	223946	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	500 AA A
255/35R19	96W	XL	BSW	264004923	223943	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803	500 AA A
255/50R19	107W	XL	BSW	264004913	222524	7.0 - 9.0	8.0	10.4	29.1	2,149	10	718	500 AA A

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



SP SPORT MAXX A1 A/S

SP SPORT MAXX A1-A A/S

# SP SPORT MAXX® A1 A/S SP SPORT MAXX® A1-A A/S

Luxury Sport Tire With Commanding Power

## FEATURES

Multi-Radius Tread Technology™

Optimal Tread Pattern Technology

Integral Rubber Matrix tread comprised of an optimized blend of silica and high-structured carbon black

Multi-Pitch Tread Design Technology™

Jointless Band Technology™

Max Flange Shield®

## BENEFITS

Helps deliver superb dry handling while maintaining wet handling

Enhances straight line stability and on-center steering feel

Demonstrates excellent acceleration and braking performance

Helps reduce noise for a quiet ride

Helps maintain the tire's shape and enables smooth performance at highway speeds

Helps protect rims from accidental curb damage

### SP SPORT MAXX A1 A/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P235/50R18	97V	XL	BSW	265040550	202197	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	340 A A	Lexus LS: 07-16, Lexus LS Hybrid: 17
P245/45R19	98V	SL	BSW	265040745	204414	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	340 A A	Lexus LS: 07-16, Lexus LS Hybrid: 17

### SP SPORT MAXX A1-A A/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P225/50R18	94V	SL	BSW	265040722	205093	6.0 - 8.0	7.0	9.2	26.9	1,477	10	777	260 A A	Infiniti G37 Convertible: 09-17 (F), Infiniti G37 Coupe: 09-17 (F), Infiniti G37: 08-13
P245/45R18	96V	SL	BSW	265040720	209525	7.5 - 9.0	8.0	9.6	26.7	1,565	10	784	260 A A	Infiniti G37 Convertible: 09-17 (R), Infiniti G37 Coupe: 09 (R)



All-Season



Comfortable,  
Refined Handling



Original Equipment on Infiniti and Lexus

# ALL-SEASON SPORT/TOURING

## SP SPORT® 7010 A/S DSST®†

Ultra Performance With Wet and Dry Traction

PERFORMANCE



### FEATURES

Asymmetric tread

M+S-rated, all-season tread design

Solid center rib

Circumferential and lateral-sweeping grooves

Jointless Band Technology™

Multi-Pitch Tread Design Technology™

Dunlop® Self-Supporting Technology (DSST)†

### BENEFITS

Helps provide a balance of wet and dry performance

Helps deliver consistent all-season traction and wet handling

Helps enhance steering response and driver feedback

Help provide efficient water evacuation for enhanced traction

Helps maintain the tire's shape and enables smooth performance at highway speeds

Helps reduce noise for a quiet ride

Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions

### SP SPORT 7010 A/S DSST SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/40RF20	97W	SL	BSW	265039947	207790	8.5 - 10.0	9.0	10.2	28.0	1,609	10	746	240 A A	Nissan GT-R: 09-17 (F)
285/35RF20	100W	SL	BSW	265039946	207789	9.5 - 11.0	10.0	11.4	27.9	1,764	10	749	240 A A	Nissan GT-R: 09-17 (R)



All-Season



Cornering Stability



Steering Responsiveness



Original Equipment on Nissan

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.



# SP SPORT 7000 A/S®

All-Season High Performance and a Smooth, Quiet Ride

## FEATURES

Multi-Radius Tread Technology™

5-Pitch Technology™

Jointless Band Technology™

## BENEFITS

Helps deliver superb dry handling while maintaining wet handling

Aids noise reduction for a quiet ride

Helps maintain the tire's shape and enables smooth performance at highway speeds

## SP SPORT 7000 A/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
185/55R16	83H	SL	BSW	265004140	208600	5.0 - 6.5	6.0	7.6	24.2	1,074	10	871	340 A A	Honda Access: 09, Honda Fit: 09-14
P195/55R16	86V	SL	BSW	265004155	217526	5.5 - 7.0	6.0	7.9	24.4	1,168	10	856	340 A A	Honda CR-Z: 11-17
P215/60R16	94H	SL	VSB	265004154	204025	6.0 - 7.5	6.5	8.7	26.1	1,477	10	800	340 A A	Honda Accord DX: 07-12
P215/60R16	94V	SL	BSW	265027902	215962	6.0 - 7.5	6.5	8.7	26.1	1,477	10	800	340 A A	Suzuki Kizashi: 10-13
P215/55R17	93V	SL	BSW	265027901	215961	6.0 - 7.5	7.0	8.9	26.3	1,433	10	795	340 A A	Suzuki Kizashi: 10-13
P225/55R18	97V	SL	BSW	265004178	206172	6.0 - 8.0	7.0	9.2	27.8	1,609	10	753	340 A A	Infiniti EX35: 11-17, Nissan Rogue: 10-13
*P235/45R18	94V	SL	BSW	265027900	215930	7.5 - 9.0	8.0	9.3	26.3	1,477	10	793	340 A A	Suzuki Kizashi: 10-13, Nissan Altima: 13-17
P235/45R18	94V	SL	BLT	265004179	223559	7.5 - 9.0	8.0	9.3	26.3	1,477	10	793	340 A A	
P235/50R19	99V	SL	VSB	265004190	207983	6.5 - 8.5	7.5	9.7	28.3	1,709	10	738	340 A A	Toyota Sienna: 11-17

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



All-Season



Dry Traction



Ultra Wet Traction



Original Equipment on Honda, Infiniti, Nissan, Suzuki and Toyota

# ALL-SEASON SPORT/TOURING

## SP SPORT 4000® DSST® CTT<sup>†</sup>

High-Performance All-Season Tire

PERFORMANCE



### FEATURES

Groove area optimized for traction on multiple surfaces

Rigid tread blocks for dry handling performance

Twin-shift noise reduction

Exclusive, high-performance, all-season tread

Circumferential rain groove tread design and placement

Dunlop® Self-Supporting Technology (DSST)<sup>†</sup>

Combined Tire Technology (CTT)

### BENEFITS

All-season traction

Excellent steering and control during cornering

Quiet performance

Enhanced grip, control, energy absorption and treadwear in a range of driving conditions

All-season and wet traction capabilities

Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions

Less tire weight and rounder cavity shape help provide a softer ride

### SP SPORT 4000 DSST CTT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P225/60R17	98T	SL	BSW	265004379	201541	6.0 - 8.0	6.5	9.0	27.6	1,653	11	756	360 A B	Toyota Sienna: 06-10



All-Season



Dry Traction



Comfortable,  
Refined Handling



Original Equipment on Toyota

<sup>†</sup> Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.



# SP SPORT® 5000 SP SPORT® 5000M

(Select sizes with DSST® CTT†)

## High-Performance All-Season Tires



TREAD PATTERN FOR  
MATERIAL #193265 ONLY†

### FEATURES

- Innovative, asymmetrical tread design
- Full-width, twin-cut steel belts
- Exclusive, high-performance, all-season tread
- Max Flange Shield® (available in select sizes)
- Dunlop® Self-Supporting Technology (DSST)†\*
- Combined Tire Technology (CTT)\*
- Jointless Band Technology™
- Reinforced Side Layer†
- Dimpled Sidewall†

### BENEFITS

- Helps provide a balance of wet and dry performance
- Ride uniformity and excellent footprint shape
- Enhanced grip, control, energy absorption and treadwear in a range of driving conditions
- Helps protect rims from accidental curb damage
- Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions
- Less tire weight and rounder cavity shape help provide a softer ride
- Helps maintain the tire's shape and enables smooth performance at highway speeds
- Temporarily supports the vehicle's weight when air pressure is lost
- Helps limit temperature increases in the sidewall when the tire is driven while flat



All-Season



Dry Traction



Ultra Wet  
Traction



Cornering  
Stability



Original Equipment on Chevrolet, Honda, Hyundai, Infiniti, Lexus, Mazda, Mercedes-Benz, Mitsubishi, Saab, Scion and Toyota

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

\* Only on SP Sport 5000 DSST CTT and SP Sport 5000M DSST CTT.

† Only on SP Sport 5000 A/S DSST CTT.

# ALL-SEASON SPORT/TOURING

PERFORMANCE

## SP SPORT 5000 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P195/65R15	89H	SL	BSL	265038565	196625	5.5 - 7.0	6.0	7.9	25.2	1,279	10	836	340 A A	Honda Civic: 06-10
195/60R16	89H	SL	BSW	265037601	204870	5.5 - 7.0	6.0	7.9	25.2	1,279	10	829	340 A A	Scion XD: 07-17
P215/60R16	94V	SL	BSW	265014754	177717	6.0 - 7.5	6.5	8.7	26.1	1,477	10	800	340 A A	Lexus ES 300, ES 330: 04-06, Toyota Camry: 04-06
P225/55R17	95H	SL	BSW	265037643	185228	6.0 - 8.0	7.0	9.2	26.8	1,521	10	781	340 A A	Lexus LS 430: 04-06
245/45R17	95V	SL	BSW	265037648	198881	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	340 A A	Lexus LS: 06-14 (R)
P245/50ZR17	98W	SL	BSW	265037613	173154	7.0 - 8.5	7.5	10.0	26.7	1,653	10	783	340 AA A	
255/60R17	106H	SL	VSF	265037661	193406	7.0 - 9.0	7.5	10.2	29.1	2,094	11	719	340 A A	Chevrolet TrailBlazer: 05-06
±275/55R17	109V	SL	BSW	265014756	193265	7.5 - 9.5	8.5	11.2	28.9	2,271	11	723	360 A A	Mercedes-Benz ML 320: 04, Mercedes-Benz ML 500: 04
215/45R18	89W	SL	BSW	265038960	225746	7.0 - 8.0	7.0	8.4	25.6	1,279	10	816	340 B A	Mazda MAZDA3: 14-17
225/55R18	98H	SL	BLT	265037658	231954	6.0 - 8.0	7.0	9.2	27.8	1,653	10	752	340 A A	Mitsubishi Outlander: 17
P245/45R18	96V	SL	BSW	265037645	194911	7.5 - 9.0	8.0	9.6	26.7	1,565	10	784	340 A A	Lexus LS 430: 05-06
P255/55R18	104H	SL	VSF	265037657	193408	7.0 - 9.0	8.0	10.4	29.0	1,984	11	720	340 AA A	Chevrolet TrailBlazer: 05, Saab 9-7X: 05-09
P225/45R19	92W	SL	BSW	265037649	224678	7.0 - 8.5	7.5	8.9	27.0	1,389	10	775	340 A A	Mazda MAZDA6: 14-17
<b>SP SPORT 5000 DSST CTT</b>														
P225/50RF17	93V	SL	BSW	265021150	196531	6.0 - 8.0	7.0	9.2	25.9	1,433	10	807	340 A A	Lexus GS: 06-11
P245/40RF19	94V	SL	BSW	265021144	225411	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	260 B A	Infiniti Q50: 15-16
P255/40RF19	96V	SL	BSW	265021145	232563	8.5 - 10.0	9.0	10.2	27.1	1,565	10	771	260 A A	Infiniti Q60: 17
<b>SP SPORT 5000 DSST NRT (Noise Reduction Technology)</b>														
P255/40RF19	94V	SL	BSW	265021153	231935	8.5 - 10.0	9.0	10.2	27.1	1,477	10	771	260 B A	

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

## SP SPORT 5000M SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/45R17	91V	SL	BSW	265037647	198850	7.0 - 8.5	7.5	8.9	25.0	1,356	10	836	340 A A	Lexus IS: 06-17 (F)
**P225/55R17	95H	SL	BSW	265021143	207751	6.0 - 8.0	7.0	9.2	26.8	1,521	10	781	340 A A	Hyundai Genesis: 08-12
P215/45R18	89V	SL	BSW	265025145	203379	7.0 - 8.0	7.0	8.4	25.6	1,279	10	815	360 A A	Mitsubishi Lancer: 08-17
P235/50R18	97V	SL	BSW	265021152	207740	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	340 A A	Hyundai Genesis: 08-16
P275/55R20	111H	SL	VSF	265014741	201035	7.5 - 9.5	8.5	11.2	31.9	2,403	11	655	340 A A	Toyota Sequoia: 07-17, Toyota Tundra: 07-17
<b>SP SPORT 5000M DSST CTT</b>														
245/40RF18	93Y	SL	BSW	265021141	201976	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	280 A A	Lexus GS: 06-11, Lexus SC: 06-10
P245/40RF18	93V	SL	BSW	265021142	201977	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	340 A A	Lexus GS: 06-11
P265/50R20	106V	SL	BSW	265021151	206280	7.5 - 9.5	8.5	10.9	30.5	2,094	10	686	280 A A	Infiniti FX45: 08

\*\*Discontinued 2016.



# ALL-SEASON SPORT/TOURING

## SP SPORT® 5100

### Ultra High-Performance All-Season Tire



#### FEATURES

Aggressive all-season tread design

Increased contact area

High speed rated

#### BENEFITS

Helps provide traction and control all year round

Optimizes grip in adverse weather

Helps limit temperature increases in the sidewall when the tire is driven while flat

#### SP SPORT 5100 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P235/45R18	94V	SL	BSW	265028100	222471	7.5 - 9.0	8.0	9.3	26.3	1,477	10	794	340 A A	Lexus GS: 13-17, Lexus RC: 15-17, Hyundai Tundra: 12-16



All-Season



Original Equipment on Hyundai and Lexus



# COMMUTER TOURING



<b>Grandtrek® AT20</b>	<b>Grandtrek Touring® A/S</b>	<b>Grandtrek® ST30</b>	<b>SP® 31</b>	<b>Enasave®</b>
An Excellent Choice for Your Luxury SUV	Original Equipment Luxury SUV Tire	Original Equipment All-Season Truck and SUV Tire	H- and S-Rated All-Season Tire	Original Equipment on Select Import Vehicles

COMMUTER TOURING

	PASSENGER					CUV/LIGHT TRUCK	CUV								
	Signature II (Pg. 174)	SP® 31 (Pg. 176)	SP® 31 A.A/S (Pg. 176)	Enesave® (Pg. 177)	SP® 10® (Not Shown)	Grandtrek® AT20 (Pg. 178)	Grandtrek® ST30 (Pg. 180)	Grandtrek® ST20 (Pg. 181)	Grandtrek Touring® AS (Pg. 182)	Grandtrek Touring® AS DSST (Pg. 182)	Grandtrek® PT2A (Pg. 183)	Grandtrek® AT21 (Pg. 184)	Grandtrek® AT23 (Pg. 184)	Grandtrek® PT3A (Not Shown)	Grandtrek® ST8000 (Not Shown)
165/65R14				79S											
175/65R14		81S			84S										
185/65R14	86T*			79S											
145/65R15				72H											
175/60R15				81H											
175/65R15		84S	84S												
185/60R15	84T*														
185/65R15	88T*														
195/55R15		84H													
195/60R15	88H*														
195/65R15	91H*			89S											
P195/65R15		89S													
205/55R15		84S	84S												
205/60R15	91H*														
205/65R15	94T*														
205/70R15	96T*														
215/70R15	98T*					97S									
185/55R16				83V											
195/50R16		84H													
195/55R16	87V*														
195/60R16		89S													
205/55R16	91H*														
205/60R16	92H*														
205/65R16	95H*														
215/55R16	93H*														
215/60R16	95H*														
215/65R16	98T*								98H						
215/70R16								99S, 99H							
225/60R16	98T*														
225/65R16	100H*														
235/60R16	100T*														
235/65R16	103T*														
245/75R16						109S									
265/70R16											111S				

\*Discontinued 2016.

# COMMUTER TOURING TIRE SELECTOR CHART

	PASSENGER					CUV/LIGHT TRUCK	CUV								
	Signature II (Pg. 174)	SP® 31 (Pg. 176)	SP® 31 A.A/S (Pg. 176)	Encasafe® (Pg. 177)	SP® 10® (Not Shown)	Grandtrek® AT20 (Pg. 178)	Grandtrek® ST30 (Pg. 180)	Grandtrek® ST20 (Pg. 181)	Grandtrek Touring® AS (Pg. 182)	Grandtrek Touring® AS DSST (Pg. 182)	Grandtrek® PT2A (Pg. 183)	Grandtrek® AT21 (Pg. 184)	Grandtrek® AT23 (Pg. 184)	Grandtrek® PT3A (Not Shown)	Grandtrek® ST8000 (Not Shown)
215/50R17	95V*														
215/55R17	94V*														
215/60R17	96T														
215/65R17	99T*														
225/50R17	94V*														
225/50R17	94V*														
225/55R17	97V*														
225/60R17	99T*							98H							
225/65R17	102T*						102H								
235/55R17	99H*														
245/65R17							105S								
265/65R17						110S									
265/70R17						113S									
225/55R18	98H*														
225/60R18						99H	100H								
235/60R18								103H, 102V							
265/70R18												116H			
275/60R18												111H			
285/60R18												114V, 116V			
235/50R19								99H	99H						
235/55R19								101V							
245/55R19							103H								
255/50R19								107H							
235/45R20								100H							
255/50R20															109V*
285/50R20										111V, 112V					
275/50R21													113V		

\*Discontinued 2016.



# SIGNATURE II

All-Season Grip and Contemporary Styling  
for Drivers Who Want Traction and a Sophisticated Look



FEATURES	BENEFITS
Optimized tread pattern	Helps promote long and even treadwear
VersaLoad Technology™	Helps provide consistent handling, ride comfort and treadwear in a wide range of load conditions
Evaqua Grooves™	Aid in effective water evacuation for all-season performance
Multi-directional siping	Helps provide effective grip for traction in wet and snow conditions
Sophisticated sidewall design	For enhanced on-vehicle appearance



All-Season



Comfortable,  
Refined Handling



Original Equipment on Jeep

## SIGNATURE II SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* 185/65R14	86T	SL	BSW	266004822	219566	5.0 - 6.5	5.5	7.4	23.5	1,168	10	889	620 A B	
* 185/60R15	84T	SL	BSW	266004800	219484	5.0 - 6.5	5.5	7.5	23.8	1,102	10	880	620 A B	
* 185/65R15	88T	SL	BSW	266004824	219568	5.0 - 6.5	5.5	7.4	24.5	1,235	10	855	620 A B	
* 195/60R15	88H	SL	BSW	266004801	219485	5.5 - 7.0	6.0	7.9	24.2	1,235	10	864	580 A A	
* 195/65R15	91H	SL	BSW	266004804	219488	5.5 - 7.0	6.0	7.9	25.0	1,356	10	836	580 A A	
* 205/60R15	91H	SL	BSW	266004802	219486	5.5 - 7.5	6.5	8.2	24.7	1,356	10	846	580 A A	
* 205/65R15	94T	SL	BSW	266004805	219489	5.5 - 7.5	6.0	8.3	25.5	1,477	10	820	620 A B	
* 205/70R15	96T	SL	BSW	266004827	219572	5.0 - 7.0	6.0	8.2	26.3	1,565	10	795	620 A B	
* 215/70R15	98T	SL	BSW	266004806	219490	5.5 - 7.0	6.5	8.7	26.9	1,653	10	777	620 A B	
* 195/55R16	87V	SL	BSW	266004828	225800	5.5 - 7.0	6.0	7.9	24.4	1,201	10	857	580 A A	
* 205/55R16	91H	SL	BSW	266004807	219551	5.5 - 7.5	6.5	8.4	24.9	1,356	10	840	580 A A	
* 205/60R16	92H	SL	BSW	266004809	219553	5.5 - 7.5	6.0	8.2	25.7	1,389	10	816	580 A A	
* 205/65R16	95H	SL	BSW	266004829	225882	5.5 - 7.5	6.0	8.2	26.5	1,521	10	789	580 A A	
* 215/55R16	93H	SL	BSW	266004808	219552	6.0 - 7.5	7.0	8.9	25.3	1,433	10	827	580 A A	
* 215/60R16	95H	SL	BSW	266004810	219554	6.0 - 7.5	6.5	8.7	26.1	1,521	10	800	580 A A	
* 215/65R16	98T	SL	BSW	266004812	219556	6.0 - 7.5	6.5	8.7	27.0	1,653	10	774	620 A B	
* 225/60R16	98T	SL	BSW	266004811	219555	6.0 - 8.0	6.5	9.0	26.6	1,653	10	786	620 A B	
* 225/65R16	100H	SL	BSW	266004826	219570	6.0 - 8.0	6.5	9.0	27.5	1,764	10	760	580 A A	
* 235/60R16	100T	SL	BSW	266004823	219567	6.5 - 8.5	7.0	9.5	27.1	1,764	10	771	620 A B	
* 235/65R16	103T	SL	BSW	266004813	219557	6.5 - 8.5	7.0	9.5	28.0	1,929	10	746	620 A B	
* 215/50R17	95V	XL	BSW	266004814	219558	6.0 - 7.5	7.0	8.9	25.5	1,521	10	820	580 A A	
* 215/55R17	94V	SL	BSW	266004816	219560	6.0 - 7.5	7.0	8.9	26.3	1,477	10	795	580 A A	
215/60R17	96T	SL	BSW	266004819	219563	6.0 - 7.5	6.5	8.7	27.2	1,565	10	768	620 A B	Jeep Renegade: 16
* 215/65R17	99T	SL	BSW	266004803	219487	6.0 - 7.5	6.5	8.7	28.0	1,709	10	746	620 A B	
* 225/50R17	94V	SL	BSW	266004815	219559	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807	580 A A	
* 225/55R17	97V	SL	BSW	266004817	219561	6.0 - 8.0	7.0	9.2	26.8	1,609	10	780	580 A A	
* 225/60R17	99T	SL	BSW	266004820	219564	6.0 - 8.0	6.5	9.0	27.6	1,709	10	756	620 A B	
* 225/65R17	102T	SL	BSW	266004821	219565	6.0 - 8.0	6.5	9.0	28.5	1,874	10	733	620 A B	
* 235/55R17	99H	SL	BSW	266004818	219562	6.5 - 8.5	7.5	9.7	27.2	1,709	10	769	580 A A	
* 225/55R18	98H	SL	BSW	266004825	219569	6.0 - 8.0	7.0	9.2	27.8	1,653	10	752	580 A A	

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



SP 31

SP 31 A A/S

# SP<sup>®</sup> 31 SP<sup>®</sup> 31 A A/S

## H- and S-Rated All-Season Tire

### FEATURES

Asymmetric tread

Multi-Pitch Tread  
Design Technology™

Circumferential tread grooves

M+S-rated, all-season  
tread design

### BENEFITS

Helps provide a balance of wet and  
dry performance

Helps reduce noise for a quiet ride

Help evacuate water away from the  
footprint for excellent wet traction

Helps deliver all-season traction and  
wet handling

### SP 31 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P175/65R14	81S	SL	BSW	265024566	200515	5.0 - 6.0	5.0	7.0	23.0	1,019	9	909	320 A B	
P175/65R14	81S	SL	BSW	265024567	200517	5.5 - 7.0	6.0	7.9	23.4	1,102	10	893	320 A A	
175/65R15	84S	SL	BSW	265024568	209091	5.0 - 6.0	5.0	7.0	24.0	1,102	9	871	320 A B	Honda Fit: 09-14
P195/55R15	84H	SL	BSW	265024555	200516	5.0 - 6.0	5.0	7.0	23.0	1,019	9	909	320 A B	
P195/65R15	89S	SL	BSW	265024565	199135	5.5 - 7.0	6.0	7.9	25.2	1,279	10	836	320 A B	Honda Civic Hybrid: 06-10, Honda Civic: 08-10

### SP 31 A A/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
175/65R15	84S	SL	BSW	263027501	214152	5.0 - 6.0	5.0	7.0	24.0	1,102	9	871	320 A B	Honda Insight: 10-14



All-Season



Original Equipment on Honda

# ENASAVE®

Original Equipment on Select Import Vehicles



## ENASAVE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
165/65R14	79S	SL	BSW	267028902	226033	4.5 - 6.0	5.0	7.9	24.0	963	9	871	340 A B	Mitsubishi Mirage: 14 -17
145/65R15	72H	SL	BSW	267028900	221613	4.0 - 5.0	4.5	5.9	22.4	783	8	933	340 A A	Mitsubishi IMIEV: 12-17 (F)
175/60R15	81H	SL	BSW	267028901	221614	5.0 - 6.0	5.0	7.0	23.3	1,019	9	898	340 A A	Mitsubishi IMIEV: 12-17 (R)
195/65R15	89S	SL	BSW	267028904	231271	5.5 - 7.0	6.0	7.9	25.0	1,356	8	836	540 A B	Toyota Prius: 17
185/55R16	83V	SL	BSW	267028903	226423	5.0 - 6.5	6.0	7.6	24.2	1,074	8	864	360 A A	Honda Fit: 14-15

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



All-Season



Fuel Efficiency



Original Equipment on Honda, Mitsubishi and Toyota



# GRANDTREK® AT20

An Excellent Choice for Your Luxury SUV

## FEATURES

VersaLoad Technology™

Aggressive all-season tread design

Multi-Pitch Tread Design Technology™

Open shoulder design with deep lateral grooves and cross-cut sipes

Bead apex design and Dimensionally Stable Polyester™

## BENEFITS

Consistent handling, ride comfort and treadwear in a wide range of load conditions

Helps grip and control in all-season conditions

Helps reduce noise for a quiet ride

Helps deliver all-season traction

Help maintain tire uniformity for a smooth, comfortable ride

## GRANDTREK AT20 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P215/70R15	97S	SL	BSL	290105531	190083	5.5 - 7.0	6.5	8.7	26.9	1,620	11	777	300 B B	Toyota Tacoma: 05-15
P245/75R16	109S	SL	BSL	290105537	190049	6.5 - 8.0	7.0	9.8	30.5	2,271	11	686	300 B B	Toyota Tacoma: 05-15
P265/65R17	110S	SL	BSL	290105539	190081	7.5 - 9.5	8.0	10.7	30.6	2,337	11	684	300 B B	Toyota Tacoma: 05-15
P265/70R17	113S	SL	BSW	290105041	200475	7.0 - 9.0	8.0	10.7	31.7	2,535	11	660	300 B B	Toyota 4Runner: 04-17, Toyota FJ Cruiser: 07-14
P225/60R18	99H	SL	BSW	290105216	209855	6.0 - 8.0	6.5	9.0	28.6	1,709	10	730	300 B A	Suzuki Grand Vitara: 09-11
P225/60R18	99H	SL	BSL	290105035	227553	6.0 - 8.0	6.5	9.0	28.6	1,709	10	730	300 B A	Honda CRV: 15-17

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



On-Road



Original Equipment on Honda, Suzuki and Toyota



# GRANDTREK® ST30

Original Equipment All-Season Truck and SUV Tire

## FEATURES

M+S-rated all-season tread pattern

Asymmetric tread pattern

Circumferential tread grooves

Multi-Pitch Tread Design Technology™

Jointless Band Technology™

Black serrated sidewall and raised black letter design

## BENEFITS

Aids control in all-season conditions

Helps provide a balance of wet and dry performance

Help evacuate water away from the footprint for excellent wet traction

Helps reduce noise for a quiet ride

Helps maintain the tire's shape and enables smooth performance at highway speeds

Stylish appearance

## GRANDTREK ST30 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/65R17	102H	SL	VSB	290126784	217104	6.0 - 8.0	6.5	9.0	724.0	1,874	10	733	360 A A	Toyota RAV4: 13-17, NX: 14-17
225/65R17	102H	SL	BSW	290126789	232633	6.0 - 8.0	6.5	9.0	724.0	1,874	10	733	360 A A	
225/65R17	102H	SL	BSW	290126785	224122	6.0 - 8.0	6.5	9.0	28.5	1,874	9	733	360 A A	Nissan Rogue: 17
P245/65R17	105S	SL	BSW	290126783	205081	7.0 - 8.5	7.0	9.8	29.5	2,039	10	708	360 A B	Toyota Highlander: 08-14
225/60R18	100H	SL	BSW	290126787	223143	6.0 - 8.0	6.5	9.0	28.6	1,764	10	730	360 A A	Nissan Rogue: 14-17
225/60R18	100H	SL	BSW	290126788	229637	6.0 - 8.0	6.5	9.0	28.6	1,764	10	730	360 A A	Nissan Rogue Hybrid: 17
245/55R19	103H	SL	BSW	290126786	224541	7.0 - 8.0	7.5	10.0	29.7	1,929	10	705	360 A A	

Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.

**NOTE:** When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



On-Road



Original Equipment on Nissan and Toyota



# GRANDTREK® ST20

Original Equipment All-Season Truck and SUV Tire

FEATURES	BENEFITS
M+S-rated all-season tread pattern	Aids control in all-season conditions
Circumferential tread grooves	Help evacuate water away from the footprint for excellent wet traction
Advanced tread	Enhanced wet-weather performance
5-Pitch Technology™	Aids noise reduction for a quiet ride
Black serrated sidewall and raised black letter design	Stylish appearance

## GRANDTREK ST20 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
215/70R16	99S	SL	BSW	290132910	176369	5.5 - 7.0	6.5	8.7	27.9	1,709	10	749	300 B B	Toyota RAV4: 04
P215/70R16	99H	SL	BLT	290139031	225654	5.5 - 7.0	6.5	8.7	27.9	1,709	10	750	300 B A	Mitsubishi Outlander: 14-16
P225/60R17	98H	SL	BSW	290139030	205083	6.0 - 8.0	6.5	9.0	27.6	1,653	10	756	300 B A	Nissan Rogue: 08-13

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death. Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



On-Road



Original Equipment on Mitsubishi, Nissan and Toyota



# GRANDTREK TOURING® A/S

(Select sizes with DSST®†)

Original Equipment Luxury SUV Tire

## FEATURES

M+S-rated all-season tread pattern

Multi-Pitch Tread Design Technology™

Jointless Band Technology™

VersaLoad Technology™

Silica tread

Dunlop® Self-Supporting Technology (DSST)†\*\*

## BENEFITS

Aids control in all-season conditions

Helps reduce noise for a quiet ride

Helps maintain the tire's shape and enables smooth performance at highway speeds

Consistent handling, ride comfort and treadwear in a wide range of load conditions

Enhances dry and wet traction while helping to reduce rolling resistance

Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions

## GRANDTREK TOURING A/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
*215/65R16	98H	SL	BLT	290123501	208704	6.0 - 7.5	6.5	8.7	27.0	1,653	10	774	200 A A	Volkswagen Tiguan: 08-14
215/65R16	98H	SL	BLT	290123514	231012	6.0 - 7.5	6.5	8.7	27.0	1,653	10	774	200 A A	
P235/60R18	102V	SL	BSW	290123503	209613	6.5 - 8.5	7.0	9.5	29.1	1,874	10	718	280 A A	Lexus RX: 09-17
235/60R18	103H	SL	BLT	290123511	229381	6.5 - 8.5	7.0	9.5	29.1	1,929	10	718	200 A A	
235/50R19	99H	SL	BLT	290123512	230191	6.5 - 8.5	7.5	9.7	28.3	1,709	10	738	200 A A	
P235/55R19	101V	SL	VSB	290123502	209411	8.5 - 6.5	7.5	9.7	29.2	1,819	10	716	280 A A	Lexus RX: 09-17
P235/55R19	101V	SL	BLT	290123515	231884	8.5 - 6.5	7.5	9.7	29.2	1,819	10	716	280 A A	
255/50R19	107H	XL	VSB	290123507	218487	7.0 - 9.0	8.0	10.4	29.1	2,149	10	718	200 A A	Mercedes-Benz ML-Class: 12-13
235/45R20	100H	XL	BLT	290123510	227602	7.5 - 9.0	8.0	9.3	28.4	1,764	10	739	200 A A	
<b>GRANDTREK TOURING A/S DSST</b>														
*235/50R19	99H	SL	BLT	290123509	223834	6.5 - 8.5	7.5	9.7	28.3	1,709	10	738	200 A A	Mercedes-Benz GLK-Class: 13
235/50R19	99H	SL	BLT	290123513	230704	6.5 - 8.5	7.5	9.7	28.3	1,709	10	738	200 A A	

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**



On-Road



Original Equipment on Lexus, Mercedes-Benz and Volkswagen

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

\*\* Only on Grandtrek Touring A/S DSST.



# GRANDTREK® PT2A

On-Road Luxury Performance With Off-Road Toughness

## FEATURES

- Multi-Pitch Tread Design Technology™
- Narrow centerline lug grooves
- Wide lug grooves

## BENEFITS

- Helps reduce noise for a quiet ride
- Help optimize noise reduction for a quiet ride
- Help provide traction in mud and snow

### GRANDTREK PT2A SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P285/50R20	111V	SL	BSW	290122310	206327	8.0 - 10.0	9.0	11.7	31.3	2,043	10	669	360 A A	Lexus LX: 08-15, Toyota Land Cruiser 200: 16-17
285/50R20	112V	SL	SBL	290122311	231002	8.0 - 10.0	9.0	11.7	31.3	2,469	10	669	360 A A	Lexus LX: 16

Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.

**NOTE:** When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



On-Road



Original Equipment on Lexus and Toyota

# GRANDTREK® AT21 GRANDTREK® AT23

Original Equipment All-Season Truck and SUV Tire



GRANDTREK AT23  
TREAD PATTERN



## FEATURES

- M+S-rated all-season tread pattern
- Circumferential tread grooves
- Advanced tread
- 5-Pitch Technology™

## BENEFITS

- Aids control in all-season conditions
- Help evacuate water away from the footprint for excellent wet traction
- Enhanced wet-weather performance
- Aids noise reduction for a quiet ride

### GRANDTREK AT21 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P265/70R16	111S	SL	BSW	290014814	166071	7.0 - 9.0	8.0	10.7	30.6	2,403	11	682	300 B B	Toyota Sequoia: 04-05, Toyota Tacoma 4X4: 04, Toyota Tundra: 04

### GRANDTREK AT23 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
265/70R18	116H	SL	BSW	290014826	232659	7.0 - 9.0	8.0	10.7	32.6	2,756	11	641	360 A A	Nissan Armada: 17
P275/60R18	111H	SL	BSW	290014824	185301	7.5 - 9.5	8.0	11.0	31.0	2,403	12	675	360 A A	Lexus LX 470, Toyota Land Cruiser: 04-07
P285/60R18	114V	SL	BSW	290014840	205267	8.0 - 10.0	8.5	11.5	31.5	2,601	11	663	360 A A	Toyota Land Cruiser: 08-15
285/60R18	116V	SL	SBL	290014825	231001	8.0 - 10.0	8.5	11.5	31.5	2,756	11	664	360 A A	Toyota Land Cruiser 200: 13-17

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death. Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.

**NOTE:** When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



On-Road



Original Equipment on Lexus and Toyota

# MZ MK3 SPARE

## MZ MK3 SPARE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
T125/70D16	96M	SL	BL	267037809	233012	4.0 - 4.0	4.0	5.2	22.9	1,565	5	886		
T125/90D16	98M	SL	BL	266012187	232672	3.5 - 3.5	3.5	5.0	24.9	1,653	4	836	#N/A	Mazda CX-3: 16-17
T155/90D18	113M	SL	BL	266012185	174001	4.0 - 4.0	4.0	6.0	29.0	2,535	4	721		
T165/90D18	107M	SL	BL	266012186	225819	4.0 - 6.0	4.0	6.3	29.7	2,149	4	703		Toyota RX: 16-17
T165/90D18	107M	SL	BL	266012186	225778	4.0 - 6.0	4.0	6.3	29.7	2,149	5	703		

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



Original Equipment on Mazda and Toyota

# WINTER



**SP Winter Sport 4D®**

**Winter Maxx®**

**Winter Maxx® SJ8**

**Grandtrek® SJ6**

Enhanced Grip and Performance in Winter Driving Conditions

Excellent Ice Grip for Passenger Vehicles

Strong Ice and Snow Performance for SUVs

Powerful Traction on Ice and Snow

# WINTER TIRE SELECTOR CHART

	PERFORMANCE							COMMUTER		LT/SUV					PERFORMANCE
	SP Winter Sport 4P® (Pg. 190)	SP Winter Sport 4P® with NoiseShield Technology® (Pg. 190)	SP Winter Sport 4P® ROF (Pg. 190)	SP Winter Sport 3P® (Pg. 192)	SP Winter Sport 3P® ROF (Pg. 192)	SP® Winter Sport M3 (Pg. 194)	SP® Winter Sport M3 DSST® ROF (Pg. 194)	Winter Maxx® (Pg. 196)	Winter Maxx® ROF (Pg. 196)	Winter Maxx® S.J6 (Pg. 196)	Grandtrek® S.J6 (Pg. 200)	Grandtrek® WT M3 (Pg. 202)	Grandtrek® WT M3 DSST® ROF (Pg. 202)	SP LT 60 (Pg. 204)	DSX DSST® ROF (Pg. 205)
175/70R13								82T							
175/65R14								82T							
175/70R14								84T							
185/60R14								82T							
185/65R14								86T							
185/70R14								88T							
175/65R15								84T							
185/55R15								82T							
185/60R15								84T							
185/65R15								88T							
195/55R15								85T							
195/60R15								88T							
195/65R15	91H							91T							
205/65R15								94T					102T		
205/70R15								96T		95Q					
215/70R15								98T		98Q					
225/70R15										100Q					
235/70R15										103Q					
265/70R15										110Q					
175/60R16					86H										
185/55R16								83T							
195/55R16					87H			91T							
205/55R16	91H					91H		94T							
205/60R16				92H				96T							
205/65R16								95T							
205/70R16										97Q					
215/55R16								97T							
215/60R16						95H		99T							
215/65R16								98T	98R	98Q					
215/70R16									100R	99Q					
225/55R16				95H				99T							
225/60R16				98H				102T							
225/70R16									103R						
225/75R16									104R						
235/60R16									100R						
235/70R16									106R	105Q*					
245/70R16									107R	107Q*					
245/75R16									111R	111Q					
255/65R16										109Q					
255/70R16										109Q					
265/70R16									112R	112Q					

\*Discontinued 2016.

	PERFORMANCE						COMMUTER		LT/SUV				PERFORMANCE	
	SP Winter Sport 4D® (Pg. 190)	SP Winter Sport 4D® with NoiseShield Technology® (Pg. 191)	SP Winter Sport 4D® ROF (Pg. 190)	SP Winter Sport 3D® (Pg. 192)	SP Winter Sport 3D® ROF (Pg. 192)	SP® Winter Sport M3 (Pg. 194)	SP® Winter Sport M3 DSST® ROF (Pg. 194)	Winter Maxx® (Pg. 196)	Winter Maxx® ROF (Pg. 196)	Winter Maxx® SJR (Pg. 198)	Grandtrek® S.M (Pg. 200)	Grandtrek® WT M3 (Pg. 202)	Grandtrek® WT M3 DSST® ROF (Pg. 202)	SP LT 60 (Pg. 204)
185/50R17					86H									
205/45R17			88V											
205/50R17				93H				93T						
215/45R17								91T						
215/50R17								95T						
215/55R17				98H				94T						
215/60R17				96H				96T	96R					
225/45R17	91H							94T						
225/50R17	94H, 98H		94H	94H, 98H		94H		98T						
225/55R17	101H		97H	97H	97H			101T	97R					
225/60R17					99H				99R	99Q*				
225/65R17									102R					
235/45R17				94H				97T						
235/55R17	99V			99H, 103V					99R					
235/60R17									102R					
235/65R17	108H			104H, 108H					108R	104Q*				
245/45R17				99H, 99V				99T						
245/65R17									107R					
245/70R17									110R					
255/45R17				98V										
265/65R17									112R					
265/70R17									115R	115Q				
215/45R18								93T						
215/55R18			95H											
225/40R18								92T						
225/45R18				95V				95T						
225/50R18				99H										
225/60R18									100R					
225/55R18								98T	98R					
235/40R18				95V, 95W, 98H, 94V										
235/45R18														
235/50R18	97V							101T	97R					
275/65R17										115Q				
235/55R18									100R					
235/60R18									107R	107Q*				
235/65R18									106R					
245/40R18				97V				97T						
245/45R18					100V			100T						
245/50R18			104V		100H									
245/60R18									105R					
255/40R18				95V										
255/45R18								103T						
255/55R18				105H, 109V					109R	109Q*		109H		
265/45R18				101V										
265/60R18									110R					
265/65R18									114R					
275/65R18									116R					
285/35R18				101W										

\*Discontinued 2016.

# WINTER TIRE SELECTOR CHART

	PERFORMANCE							COMMUTER		LT/SUV					PERFORMANCE
	SP Winter Sport 4P® (Pg. 190)	SP Winter Sport 4P® with NoiseShield Technology® (Pg. 190)	SP Winter Sport 4P® ROF (Pg. 190)	SP Winter Sport 3P® (Pg. 192)	SP Winter Sport 3P® ROF (Pg. 192)	SP® Winter Sport M3 (Pg. 194)	SP® Winter Sport M3 DSST® ROF (Pg. 194)	Winter Maxx® (Pg. 196)	Winter Maxx® ROF (Pg. 196)	Winter Maxx® SJ6 (Pg. 196)	Grandtrek® SJ6 (Pg. 200)	Grandtrek® WT M3 (Pg. 202)	Grandtrek® WT M3 DSST® ROF (Pg. 202)	SP LT 60 (Pg. 204)	DSX DSST® ROF (Pg. 205)
235/35R19				91W											
235/40R19				96V											
235/45R19				99V											
235/50R19				99H, 103H											
235/55R19	101V			101V						101R					
245/40RF19								94W							
245/45R19				102V	102V		98T								
245/55R19									103R	103Q*					
255/35R19				96V											
255/50R19	103V			107H					107R		107V				
255/60R19										109Q					
265/50R19				110V											
265/55R19											109H				
275/35R19						96V									
295/30R19				100W											
245/50R20									102R						
255/35R20				97V, 97W											
255/40RF20														97Q	
255/45R20				101V											
255/50R20									109R						
265/35R20				99V											
265/40R20				104V											
265/45R20	104V														
265/50R20									107R						
275/30R20				97W											
275/45R20				110V							110V				
275/55R20									113R						
275/60R20									115R						
285/35RF20														100Q	
285/50R20									112R						
295/40R20	106V														
275/30R21		98W	98W												
275/35R21				103W											
275/50R21									113R						

\*Discontinued 2016.



# SP WINTER SPORT 4D<sup>®</sup>

(Select sizes with ROF<sup>†</sup>/NoiseShield Technology<sup>®</sup>)

## Enhanced Grip and Performance in Winter Driving Conditions



### FEATURES

4D Sipe System

---

V-shape grooves and deep snow notches

---

Special tread compound

---

Low weight construction

### BENEFITS

Increased number of shoulder-area sipes helps enhance braking and acceleration on snow and ice

Self-interlocking sipes maintain tread block stiffness to help provide excellent handling

Transversal sipes help deliver improved lateral grip

Entire sipe system combines to create even pressure across the treadface, which helps increase snow handling performance and cornering grip

---

Help enhance snow traction and performance

---

Helps adhere to wet and icy surfaces

---

Helps lower rolling resistance for better performance



Severe Snow



Ice Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness

<sup>†</sup> Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

## SP WINTER SPORT 4D SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
195/65R15	91H	SL	BLT	265029123	227500	5.5 - 7.0	6.0	7.9	25.0	1,356	10	836
205/55R16	91H	SL	BLT	265029101	223722	5.5 - 7.5	6.5	8.4	24.9	1,356	10	840
225/50R17	94H	SL	BLT	265029125	228012	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807
225/50R17	98H	XL	BLT	265029128	230252	6.0 - 8.0	7.0	9.2	25.9	1,653	10	807
225/55R17	101H	XL	BLT	265029130	230767	6.0 - 8.0	7.0	9.2	26.8	1,819	11	780
235/55R17	99V	SL	BLT	265029110	223731	6.5 - 8.5	7.5	9.7	27.2	1,709	10	768
235/65R17	108H	XL	BLT	265029111	223732	6.5 - 8.5	7.0	9.5	29.1	2,205	11	719
235/50R18	97V	SL	BLT	265029124	228011	6.5 - 8.5	7.5	9.7	27.3	1,609	11	766
235/55R19	101V	SL	BLT	265029118	226424	6.5 - 8.5	7.5	9.7	29.2	1,819	10	716
255/50R19	103V	SL	BLT	265029119	227164	7.0 - 9.0	8.0	10.4	29.1	1,929	10	718
265/45R20	104V	SL	BLT	265029127	229731	8.5 - 10.0	9.0	10.5	29.4	1,984	11	712
295/40R20	106V	SL	BLT	265029126	229730	10.0 - 11.5	10.5	11.9	29.3	2,094	10	714
<b>SP WINTER SPORT 4D NST (NOISESHIELD TECHNOLOGY)</b>												
275/30R21	98W	XL	BLT	265040800	228135	9.0 - 10.0	9.5	10.9	27.5	1,653	10	750
<b>SP WINTER SPORT 4D ROF</b>												
205/45R17	88V	XL	BLT	265029120	227165	6.5 - 7.5	7.0	8.1	24.3	1,235	10	862
225/45R17	91H	SL	BLT	265029121	227166	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837
225/50R17	94H	SL	BLT	265029113	223886	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807
225/50R17	94H	SL	BLT	265029140	228013	6.0 - 8.0	7.0	9.2	25.9	1,477	10	807
225/55R17	97H	SL	BLT	265029129	230731	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781
215/55R18	95H	SL	BLT	265029141	228014	6.0 - 7.5	7.0	8.9	27.3	1,521	11	766
245/50R18	104V	XL	BLT	265029117	226516	7.0 - 8.5	7.5	10.0	27.7	1,984	9	755

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# SP WINTER SPORT 3D®

(Select sizes with ROF†)

Responsive Handling and Enhanced Winter Traction



## FEATURES

Active Traction Sipe System™

Directional tread design

Multi-Radius Tread Technology™

Jointless Band Technology™

Tread processed with reactive silica

## BENEFITS

Central-block “pulling” sipes help provide performance, traction and braking in ice and snow

Intermediate block sipes help provide enhanced lateral handling and control in wet and slushy conditions

Shoulder-area 3D sipes help provide enhanced grip on snow and ice, shoulder stability and excellent dry handling

Enhances wet handling and deep-water performance

Helps deliver superb dry handling while maintaining wet handling

Helps maintain the tire’s shape and enables smooth performance at highway speeds

Aids elasticity at lower temperatures while maintaining enhanced road contact and traction



Severe Snow



Ice Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

# PERFORMANCE

## SP WINTER SPORT 3D SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
205/60R16	92H	SL	BLT	265024760	215971	5.5 - 7.5	6.0	8.2	25.7	1,389	11	816
225/55R16	95H	SL	BLT	265024744	215943	6.0 - 8.0	7.0	9.2	25.8	1,521	11	810
225/60R16	98H	SL	BLT	265024774	219920	6.0 - 8.0	6.5	9.0	26.6	1,653	11	785
205/50R17	93H	XL	BLT	265024621	225606	5.5 - 7.5	6.5	8.4	25.1	1,433	10	832
215/55R17	98H	XL	BLT	265024759	215950	6.0 - 7.5	7.0	8.9	26.3	1,653	11	795
215/60R17	96H	SL	BLT	265024629	227940	6.0 - 7.5	6.5	8.7	27.2	1,565	11	769
225/50R17	98H	XL	BLT	265024721	215975	6.0 - 8.0	7.0	9.2	25.9	1,653	11	807
225/50R17	94H	SL	BLT	265024732	223271	6.0 - 8.0	7.0	9.2	25.9	1,477	11	807
225/55R17	97H	SL	BLT	265024757	215222	6.0 - 8.0	7.0	9.2	26.8	1,609	11	780
235/45R17	94H	SL	BLT	265024725	216177	7.5 - 9.0	8.0	9.3	25.4	1,477	10	827
235/55R17	99H	SL	BLT	265024742	208495	6.5 - 8.5	7.5	9.7	27.2	1,709	11	768
235/55R17	103V	XL	BLT	265024672	214409	6.5 - 8.5	7.5	9.7	27.2	1,929	11	768
235/65R17	108H	SL	BSW	265024667	203053	6.5 - 8.5	7.0	9.5	29.1	2,205	11	720
235/65R17	104H	SL	BLT	265024628	223451	6.5 - 8.5	7.0	9.5	29.1	1,984	11	719
245/45R17	99H	XL	BLT	265024724	216176	7.5 - 9.0	8.0	9.6	25.7	1,709	10	814
245/45R17	99V	XL	BLT	265024764	217584	7.5 - 9.0	8.0	9.6	25.7	1,709	10	814
255/45R17	98V	SL	BSW	265024718	212593	8.0 - 9.5	8.5	10.0	26.1	1,653	8	801
225/45R18	95V	XL	BLT	265024762	217582	7.0 - 8.5	7.5	8.9	25.9	1,521	11	806
225/50R18	99H	XL	BLT	265024726	220044	6.0 - 8.0	7.0	9.2	26.9	1,709	11	777
235/40R18	95W	XL	BLT	265024620	206345	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823
235/40R18	95V	XL	BSW	265024765	217585	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823
235/45R18	98H	XL	BLT	265024776	219931	7.5 - 9.0	8.0	9.3	26.3	1,653	10	792
235/45R18	94V	SL	BLT	265024747	223925	7.5 - 9.0	8.0	9.3	26.3	1,477	10	794
245/40R18	97V	XL	BLT	265024758	215949	8.0 - 9.5	8.5	9.8	25.7	1,609	10	813
255/40R18	95V	SL	BLT	265024719	212594	8.5 - 10.0	9.0	10.2	26.0	1,521	10	803
255/55R18	109V	XL	BLT	265024767	217587	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720
255/55R18	105H	SL	BLT	265024625	220320	7.0 - 9.0	8.0	10.4	29.0	2,039	10	720
265/45R18	101V	SL	BLT	265024748	223926	8.5 - 10.0	9.0	10.5	27.4	1,819	10	764
285/35R18	101W	XL	BLT	265024730	220029	9.5 - 11.0	10.0	11.4	25.9	1,819	10	807
235/35R19	91W	SL	BLT	265024623	206324	8.0 - 9.5	8.5	9.5	25.5	1,356	10	820
235/40R19	96V	XL	BLT	265024619	224592	8.0 - 9.5	8.5	9.5	26.4	1,565	10	791
235/45R19	99V	XL	BLT	265024727	220045	7.5 - 9.0	8.0	9.3	27.4	1,709	11	763
235/50R19	99H	SL	BLT	265024720	215661	6.5 - 8.5	7.5	9.7	28.3	1,709	10	739
235/50R19	103H	XL	BLT	265024768	217664	6.5 - 8.5	7.5	9.7	28.3	1,929	10	739
235/55R19	101V	SL	BLT	265024777	219932	6.5 - 8.5	7.5	9.7	29.2	1,819	10	716
245/45R19	102V	XL	BLT	265024617	221974	7.5 - 9.0	8.0	9.6	27.7	1,874	10	755
255/35R19	96V	XL	BLT	265024766	217586	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803
255/50R19	107H	XL	BLT	265024626	220371	7.0 - 9.0	8.0	10.4	29.1	2,149	11	718
265/50R19	110V	XL	BLT	265024770	217666	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709
295/30R19	100W	XL	BLT	265024624	206325	10.0 - 11.0	10.5	11.9	26.0	1,764	10	804
255/35R20	97W	XL	BLT	265024731	222494	8.5 - 10.0	9.0	10.2	27.0	1,609	10	774
255/35R20	97V	XL	BLT	265024733	225834	8.5 - 10.0	9.0	10.2	27.0	1,609	9	773
255/45R20	101V	SL	BLT	265024627	221471	8.0 - 9.5	8.5	10.0	29.1	1,819	10	719
265/35R20	99V	XL	BLT	265024728	220046	9.0 - 10.5	9.5	10.7	27.3	1,709	10	765
265/40R20	104V	XL	BLT	265024769	217665	9.0 - 10.5	9.5	10.7	28.4	1,984	10	737
275/30R20	97W	XL	BLT	265024772	219917	9.0 - 10.0	9.5	10.9	26.5	1,609	10	788
275/45R20	110V	XL	BLT	265024771	217733	8.5 - 10.5	9.0	10.7	29.8	2,337	10	702
275/35R21	103W	XL	BLT	265024618	222512	9.0 - 11.0	9.0	10.9	28.5	1,929	10	732
<b>SP WINTER SPORT 3D R0F</b>												
175/60R16	86H	XL	BLT	265025062	226981	5.0 - 6.0	5.0	7.0	24.3	1,168	11	862
195/55R16	87H	SL	BLT	265025052	220485	5.5 - 7.0	6.0	7.9	24.4	1,201	11	856
185/50R17	86H	XL	BLT	265025057	214427	5.0 - 6.5	6.0	7.5	24.3	1,168	10	860
225/55R17	97H	SL	BLT	265025059	217732	6.0 - 8.0	7.0	9.2	26.8	1,609	11	780
225/60R17	99H	SL	BLT	265025060	219247	6.0 - 8.0	6.5	9.0	27.6	1,709	10	756
245/45R18	100V	XL	BLT	265025058	217525	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784
245/50R18	100H	SL	BLT	265025056	204617	7.0 - 8.5	7.5	10.0	27.7	1,764	10	755
245/45R19	102V	XL	BLT	265025051	210622	7.5 - 9.0	8.0	9.6	27.7	1,874	10	755

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



# SP<sup>®</sup> WINTER SPORT M3

(Select sizes with DSST<sup>®</sup> ROF<sup>†</sup>)

A Winter Performance Tire, OE-Approved for  
Some of the World's Finest Vehicles

## FEATURES

Directional tread pattern and high-density sipes

Max Flange Shield<sup>®</sup> (on select sizes)

Dunlop<sup>®</sup> Self-Supporting Technology (DSST)<sup>†\*</sup>

## BENEFITS

Help handling in adverse winter conditions

Helps protect rims from accidental curb damage

Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions

## SP WINTER SPORT M3 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
215/60R16	95H	SL	BSW	264038861	193508	6.0 - 7.5	6.5	8.7	26.1	1,521	11	801
275/35R19	96V	SL	BLT	264038824	225597	9.0 - 11.0	9.5	10.9	26.6	1,565	11	786
<b>SP WINTER SPORT M3 DSST ROF</b>												
205/55R16	91H	SL	BSW	264025855	201720	5.5 - 7.5	6.5	8.4	24.9	1,356	11	839
225/50R17	94H	SL	BSW	264025850	201719	6.0 - 8.0	7.0	9.2	25.9	1,477	11	807

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.



<sup>†</sup> Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

\* Only on SP Winter Sport M3 DSST ROF.



# WINTER MAXX®

(Select sizes with ROF†)

Excellent Ice Grip for Passenger Vehicles



## FEATURES

Maxx Sharp Edge with Miura-Ori Sipes

Nano-Fit Rubber

Wide grooves and lugs

Asymmetric tread design

## BENEFITS

Higher blade density helps prevent block distortion and increase tread-to-ice contact

Combines flexibility and rigidity to help rubber tread adhere to the ice surface

Help improve snow traction and wet handling

Helps enhance handling in snow, wet and dry conditions



Severe Snow



Ice Traction



Ultra Wet  
Traction



Cornering  
Stability

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

## WINTER MAXX SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
175/70R13	82T	SL	BSW	266029700	225467	4.5 - 6.0	5.0	7.0	22.7	1,047	11	921
175/65R14	82T	SL	BSW	266029703	225470	5.0 - 6.0	5.0	7.0	23.0	1,047	11	910
175/65R14	79S	SL	BSW	266029746	230332	5.0 - 6.0	5.0	7.0	23.0	963	11	910
175/70R14	84T	SL	BSW	266029701	225468	4.5 - 6.0	5.0	7.0	23.7	1,102	11	882
185/60R14	82T	SL	BSW	266029705	225472	5.0 - 6.5	5.5	7.5	22.8	1,047	11	917
185/65R14	86T	SL	BSW	266029704	225471	5.0 - 6.5	5.5	7.4	23.5	1,168	11	889
185/70R14	88T	SL	BSW	266029702	225469	4.5 - 6.0	5.5	7.4	24.3	1,235	11	860
175/65R15	84T	SL	BSW	266029708	225475	5.0 - 6.0	5.0	7.0	24.0	1,102	11	871
185/55R15	82T	SL	BSW	266029714	225481	5.0 - 6.5	5.0	7.6	23.0	1,047	11	908
185/60R15	84T	SL	BSW	266029712	225479	5.0 - 6.5	5.5	7.5	23.8	1,102	11	880
185/65R15	88T	SL	BSW	266029709	225476	5.0 - 6.5	5.5	7.4	24.5	1,235	11	855
195/55R15	85T	SL	BSW	266029715	225482	5.5 - 7.0	6.0	7.9	23.4	1,135	11	892
195/60R15	88T	SL	BSW	266029713	225480	5.5 - 7.0	6.0	7.9	24.2	1,235	11	864
195/65R15	91T	SL	BSW	266029710	225477	5.5 - 7.0	6.0	7.9	25.0	1,356	11	836
205/65R15	94T	SL	BSW	266029711	225478	5.5 - 7.5	6.0	8.3	25.5	1,477	11	820
205/70R15	96T	SL	BSW	266029706	225473	5.0 - 7.0	6.0	8.2	26.3	1,565	11	795
215/70R15	98T	SL	BSW	266029707	225474	5.5 - 7.0	6.5	8.7	26.9	1,653	11	777
185/55R16	83T	SL	BSW	266029721	225488	5.0 - 6.5	6.0	7.6	24.2	1,074	11	870
195/55R16	91T	XL	BSW	266029722	225489	5.5 - 7.0	6.0	7.9	24.4	1,356	11	856
205/55R16	94T	XL	BSW	266029723	225490	5.5 - 7.5	6.5	8.4	24.9	1,477	11	840
205/60R16	96T	XL	BSW	266029718	225485	5.5 - 7.5	6.0	8.2	25.7	1,565	11	813
205/65R16	95T	SL	BSW	266029716	225483	5.5 - 7.5	6.0	8.2	26.5	1,521	11	820
215/55R16	97T	XL	BSW	266029724	225491	6.0 - 7.5	7.0	8.9	25.3	1,609	11	827
215/60R16	99T	XL	BSW	266029719	225486	6.0 - 7.5	6.5	8.7	26.1	1,709	11	801
215/65R16	98T	SL	BSW	266029717	225484	6.0 - 7.5	6.5	8.7	27.0	1,653	11	774
225/55R16	99T	XL	BSW	266029725	225397	6.0 - 8.0	7.0	9.2	25.8	1,709	11	811
225/60R16	102T	XL	BSW	266029720	225487	6.0 - 8.0	6.5	9.0	26.6	1,874	11	786
205/50R17	93T	XL	BSW	266029729	225501	5.5 - 7.5	6.5	8.4	25.1	1,433	11	832
215/45R17	91T	XL	BSW	266029732	225504	7.0 - 8.0	7.0	8.4	24.7	1,356	11	846
215/50R17	95T	XL	BSW	266029730	225502	6.0 - 7.5	7.0	8.9	25.5	1,521	11	820
215/55R17	94T	SL	BSW	266029727	225399	6.0 - 7.5	7.0	8.9	26.3	1,477	11	768
215/60R17	96T	SL	BSW	266029726	225398	6.0 - 7.5	6.5	8.7	27.2	1,565	11	769
225/45R17	94T	XL	BSW	266029733	225505	7.0 - 8.5	7.5	8.9	25.0	1,477	11	837
225/50R17	98T	XL	BSW	266029731	225503	6.0 - 8.0	7.0	9.2	25.9	1,653	11	807
225/55R17	101T	XL	BSW	266029728	225400	6.0 - 8.0	7.0	9.2	26.8	1,819	11	781
235/45R17	97T	XL	BSW	266029734	225506	7.5 - 9.0	8.0	9.3	25.4	1,609	11	824
245/45R17	99T	XL	BSW	266029735	225507	7.5 - 9.0	8.0	9.6	25.7	1,709	12	814
215/45R18	93T	XL	BSW	266029738	225510	7.0 - 8.0	7.0	8.4	25.6	1,433	11	815
225/40R18	92T	XL	BSW	266029742	225514	7.5 - 9.0	8.0	9.1	25.1	1,389	11	833
225/45R18	95T	XL	BSW	266029739	225511	7.0 - 8.5	7.5	8.9	25.9	1,521	11	807
225/55R18	98T	SL	BSW	266029736	225508	6.0 - 8.0	7.0	9.2	27.8	1,653	11	752
235/50R18	101T	XL	BSW	266029737	225509	6.5 - 8.5	7.5	9.7	27.3	1,819	11	766
245/40R18	97T	XL	BSW	266029743	225515	8.0 - 9.5	8.5	9.8	25.7	1,609	12	812
245/45R18	100T	XL	BSW	266029740	225512	7.5 - 9.0	8.0	9.6	26.7	1,764	12	784
255/45R18	103T	XL	BSW	266029741	225513	8.0 - 9.5	8.5	10.0	27.1	1,929	12	771
245/45R19	98T	SL	BSW	266029744	225516	7.5 - 9.0	8.0	9.6	27.7	1,653	12	755
<b>WINTER MAXX ROF</b>												
245/40R19	94W	SL	BSW	266029745	226568	8.0 - 9.5	8.5	9.8	26.9	1,477	12	782

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# WINTER MAXX<sup>®</sup> SJ8

Strong Ice and Snow Performance



## FEATURES

Nano-Fit Rubber

Maxx Sharp Edge with Miura-Ori Sipes

Optimal groove patterns

## BENEFITS

Combines flexibility and rigidity to help rubber tread adhere to ice surface

Offers higher blade density to help prevent block distortion and increase tread-to-ice contact

Enhance grip on snow surface and help performance in wet conditions



Severe Snow



Ice Traction



Ultra Wet  
Traction



Cornering  
Stability

WINTER MAXX SJ8 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
215/65R16	98R	SL	BSW	290124106	230047	6.0 - 7.5	6.5	8.7	27.0	1,653	14	774
215/70R16	100R	SL	BSW	290124101	230042	5.5 - 7.0	6.5	8.7	27.9	1,764	14	749
225/70R16	103R	SL	BSW	290124102	230043	6.0 - 7.5	6.5	9.0	28.4	1,929	14	735
225/75R16	104R	SL	BSW	290124100	230041	6.0 - 7.5	6.0	8.8	29.3	1,984	14	714
235/60R16	100R	SL	BSW	290124107	230048	6.5 - 8.5	7.0	9.5	27.1	1,764	14	772
235/70R16	106R	SL	BSW	290124103	230044	6.0 - 8.0	7.0	9.5	29.0	2,094	14	721
245/70R16	107R	SL	BSW	290124104	230045	6.5 - 8.0	7.0	9.8	29.5	2,149	14	708
245/75R16	111R	SL	BSW	290124133	232398	6.5 - 8.0	7.0	9.8	30.5	2,403	14	685
265/70R16	112R	SL	BSW	290124105	230046	7.0 - 9.0	8.0	10.7	30.6	2,469	14	682
215/60R17	96R	SL	BSW	290124112	230053	6.0 - 8.0	6.5	9.0	27.6	1,565	14	756
225/55R17	97R	SL	BSW	290124115	230056	6.0 - 8.0	7.0	9.2	28.8	1,609	14	781
225/60R17	99R	SL	BSW	290124113	230054	6.0 - 8.0	6.5	9.0	27.6	1,709	14	756
225/65R17	102R	SL	BSW	290124108	230049	6.0 - 8.0	6.5	9.0	28.5	1,874	14	733
235/55R17	99R	SL	BSW	290124116	230057	6.5 - 8.5	7.5	9.7	27.2	1,709	14	769
235/60R17	102R	SL	BSW	290124114	230055	6.5 - 8.5	7.0	9.5	28.1	1,874	14	744
235/65R17	108R	XL	BSW	290124109	230050	6.5 - 8.5	7.0	9.5	29.1	2,205	14	719
245/65R17	107R	SL	BSW	290124110	230051	7.0 - 8.5	7.0	9.8	29.5	2,149	14	708
245/70R17	110R	SL	BSW	290124134	232399	6.5 - 8.0	7.0	9.8	30.6	2,337	14	683
265/65R17	112R	SL	BSW	290124111	230052	7.5 - 9.5	8.0	10.7	30.6	2,469	14	684
265/70R17	115R	SL	BSW	290124135	232400	7.0 - 9.0	8.0	10.7	31.7	2,679	14	659
225/55R18	98R	SL	BSW	290124121	230062	6.0 - 8.0	7.0	9.2	27.8	1,653	14	753
225/60R18	100R	SL	BSW	290124138	232423	6.0 - 8.0	6.5	9.0	28.6	1,764	14	731
235/50R18	97R	SL	BSW	290124124	230065	6.5 - 8.5	7.5	9.7	27.3	1,609	14	766
235/55R18	100R	SL	BSW	290124122	230063	6.5 - 8.5	7.5	9.7	28.2	1,764	14	742
235/60R18	107R	XL	BSW	290124118	230059	6.5 - 8.5	7.0	9.5	29.1	2,149	14	718
235/65R18	106R	SL	BSW	290124117	230058	6.5 - 8.5	7.0	9.5	30.0	2,094	14	696
245/60R18	105R	SL	BSW	290124119	230060	7.0 - 8.5	7.0	9.8	29.6	2,039	14	707
255/55R18	109R	XL	BSW	290124123	230064	7.0 - 9.0	8.0	10.4	29.0	2,271	14	720
265/60R18	110R	SL	BSW	290124120	230061	7.5 - 9.5	8.0	10.7	30.5	2,337	14	685
265/65R18	114R	SL	BSW	290124136	232421	7.5 - 9.5	8.0	10.7	31.5	2,601	14	663
275/65R18	116R	SL	BSW	290124137	232422	7.5 - 9.5	8.0	11.0	32.1	2,756	14	651
235/55R19	101R	SL	BSW	290124125	230066	6.5 - 8.5	7.5	9.7	29.2	1,819	14	716
245/55R19	103R	SL	BSW	290124126	230067	7.0 - 8.5	7.5	10.0	29.7	1,929	14	705
255/50R19	107R	XL	BSW	290124127	230068	7.0 - 9.0	8.0	10.4	29.1	2,149	14	718
245/50R20	102R	SL	BSW	290124128	230069	7.0 - 8.5	7.5	10.0	29.7	1,874	14	704
255/50R20	109R	XL	BSW	290124129	230070	7.0 - 9.0	8.0	10.9	30.1	2,271	14	695
265/50R20	107R	SL	BSW	290124130	230071	7.5 - 9.5	8.5	10.9	30.5	2,149	14	686
275/55R20	113R	SL	BSW	290124140	232425	7.5 - 9.5	8.5	11.2	31.9	2,535	14	655
275/60R20	115R	SL	BSW	290124139	232424	7.5 - 9.5	8.0	11.0	33.0	2,679	14	633
285/50R20	112R	SL	BSW	290124131	230072	8.0 - 10.0	9.0	11.7	31.3	2,469	14	669
275/50R21	113R	XL	BSW	290124132	230942	7.5 - 9.5	8.5	11.2	31.9	2,535	14	655

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# GRANDTREK® SJ6

Powerful Traction on Ice and Snow



## FEATURES

Zigzag grooves in the center create strong twin snow pillars

Optimized groove distribution and tread design

Special glass fiber-reinforced tread

Optimized mold shape and ply line

Special tread design

Stylish sidewall design

## BENEFITS

Help provide powerful traction and braking in snowy conditions

Help provide quiet ride on dry road conditions and even wear

Helps provide outstanding grip on ice

Help provide consistent contact patch at highway speeds

Creates a wide footprint to help provide enhanced grip on ice and longer life

Great appearance



Severe Snow



Ice Traction



Ultra Wet  
Traction



Cornering  
Stability

**GRANDTREK SJ6 SPECIFICATIONS**

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
205/70R15	95Q	SL	BSW	290126540	198331	5.0 - 7.0	6.0	8.2	26.3	1,521	14	795
215/70R15	98Q	SL	BSW	290126510	198339	5.5 - 7.0	6.5	8.7	26.9	1,653	14	777
225/70R15	100Q	SL	BSW	290126593	198341	6.0 - 7.5	6.5	9.0	27.4	1,764	14	763
235/70R15	103Q	SL	BSW	291120814	193447	6.0 - 8.0	7.0	9.5	28.0	1,929	14	746
265/70R15	110Q	SL	BSW	291120820	193448	7.0 - 9.0	8.0	10.7	29.7	2,337	15	704
205/70R16	97Q	SL	BSW	290126541	198338	5.0 - 7.0	6.0	8.2	27.3	1,609	14	766
215/65R16	98Q	SL	BLT	291120832	193462	6.0 - 7.5	6.5	8.7	27.0	1,653	14	774
215/70R16	99Q	SL	BSW	291120822	193449	5.5 - 7.0	6.5	8.7	27.9	1,709	14	749
* 235/70R16	105Q	SL	BSW	290126599	198344	6.0 - 8.0	7.0	9.5	29.0	2,039	14	721
* 245/70R16	107Q	SL	BSW	291120810	190900	6.5 - 8.0	7.0	9.8	29.5	2,149	14	708
245/75R16	111Q	SL	BSL	291120833	223572	6.5 - 8.0	7.0	9.8	30.5	2,403	14	686
255/65R16	109Q	SL	BSW	290126579	198345	7.0 - 9.0	7.5	10.2	29.1	2,271	14	718
255/70R16	109Q	SL	BSW	290126586	198346	6.5 - 8.5	7.5	10.2	30.1	2,271	14	695
265/70R16	112Q	SL	BSW	291120828	193450	7.0 - 9.0	8.0	10.7	30.6	2,469	15	682
* 225/60R17	99Q	SL	BSW	291120812	190901	6.0 - 8.0	6.5	9.0	27.6	1,708	14	757
* 235/65R17	104Q	SL	BSW	290126509	198343	6.5 - 8.5	7.0	9.5	29.1	1,984	14	718
265/70R17	115Q	SL	BSL	291120834	223573	7.0 - 9.0	8.0	10.7	31.7	2,679	15	660
275/65R17	115Q	SL	BSW	291120815	226425	7.5 - 9.5	8.0	11.0	31.1	2,679	15	672
* 235/60R18	107Q	XL	BSL	291120839	223578	6.5 - 8.5	7.0	9.5	29.1	2,149	14	718
* 255/55R18	109Q	XL	BSL	291120841	223580	7.0 - 9.0	8.0	10.4	29.0	2,271	14	720
* 245/55R19	103Q	SL	BSL	291120842	223581	7.0 - 7.5	8.0	10.0	29.7	1,929	14	705
255/60R19	109Q	SL	BSL	291120837	223576	7.0 - 9.0	7.5	10.2	31.1	2,271	14	672

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.



# GRANDTREK® WT M3

(Select sizes with DSST® ROF†)

Winter Performance Tire for Luxury SUVs



## FEATURES

High-performance winter traction

Directional tread pattern with high-density sipes

Lateral zigzag sipes and independent tread blocks

High-density sipes and increased contact area

Dunlop® Self-Supporting Technology (DSST)†

## BENEFITS

Powerful traction for all weather conditions

Handling in winter conditions

Help bite through ice and snow

Enhance ice grip and tread life

Sidewall construction to help allow continued driving on a flat tire for up to 50 miles at 50 mph in normal conditions



Severe Snow



Ice Traction



Cornering  
Stability



Steering  
Responsiveness

† Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Tire pressure monitoring system required. Sold separately.

**GRANDTREK WT M3 SPECIFICATIONS**

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
255/50R19	107V	XL	BSW	291121926	202650	7.0 - 9.0	8.0	10.4	29.1	2,149	11	718
265/55R19	109H	SL	BLT	291121927	231341	7.5 - 9.5	8.5	10.9	30.5	2,271	11	685
275/45R20	110V	XL	BLT	291121936	201956	8.5 - 10.5	9.0	10.7	29.8	2,337	11	702
<b>GRANDTREK WT M3 DSST ROF</b>												
255/55R18	109H	XL	BSW	290122296	201954	7.0 - 9.0	8.0	10.4	29.0	2,271	11	720

Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.



LT/SUV

# SP LT 60

Excellent Rain, Snow and Mud Traction for Winter Conditions

## SP LT 60 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
205/65R15	102T	SL	BLT	291105050	229716	5.5 - 7.5	6.0	8.2	25.5	1,875	12	821

Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.

# DSX DSST® ROF

## DSX DSST ROF SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
255/40RF20	97Q	SL	BSW	265029200	224602	8.5 - 10.0	9.0	10.2	28.2	1,609	11	746
285/35RF20	100Q	SL	BSW	265029201	224603	9.5 - 11.0	10.0	11.4	28.1	1,764	11	750

Always maintain tire inflation pressure at levels recommended by the vehicle manufacturer as shown on the vehicle placard or in the owner's manual.



Severe Snow



Ice Traction



# 2017 DUNLOP® OE FITMENTS

## The Right Style

Having Dunlop tires is a statement that says you care about the way your tires make your car look as much as you care about its performance aspects.

Many vehicle manufacturers realize this about Dunlop tires and have them as original equipment on premium brands like Lexus and Porsche. Customers who value style and performance will often use Dunlop for replacement tires, so the following charts are intended to help you help them make the right choice.



# 2017 DUNLOP® OE FITMENTS

# OE FITMENT GUIDE

## **Dunlop®. Original Equipment Fitments to Drive Shopper Traffic.**

OE fitments are the reason why consumers will come knocking on your door. With fitments on the most desired models from many of the world's major manufacturers, Dunlop is the right brand for car, truck and sport utility vehicle owners.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>AUDI</b>										
AUDI	A4	225/50R17 94Y	265022345	SP SPORT 01	BLT	X	X	X		
		245/45R17 95H	265026242	SP SPORT 01 A/S DSST ROF	BSW	X	X			
		245/45ZR17 95Y	265023800	SP SPORT MAXX GT	BLT	X	X			
		245/40ZR18 93Y	265023784	SP SPORT MAXX GT	BSW	X	X	X		
	A5	255/35ZR19 96Y	265023782	SP SPORT MAXX GT	BSW	X	X	X		
		265/30ZR20 94Y XL	265023794	SP SPORT MAXX GT	BLT	X	X			
	A6	245/45R17 95H	265026242	SP SPORT 01 A/S DSST ROF	BSW	X	X			
	A7	265/35R20 99Y XL	265023812	SP SPORT MAXX GT	BLT	X	X	X	X	X
	A8	275/35ZR21 103Y XL	265023825	SP SPORT MAXX GT	BLT	X	X	X	X	X
	Q5	235/65R17 104W	265022346	SP SPORT MAXX GT	BLT	X	X		X	X
		235/60R18 103H	290123506	GRANDTREK TOURING A/S	BLT	X	X	X	X	X
		255/45R20 101W	265023783	SP SPORT MAXX GT	BLT	X	X			
	Q7	295/35ZR21 107Y XL	265023776	SP SPORT MAXX	BSW	X	X	X		
	TT	245/45R17 95V	265026241	SP SPORT 01 A/S	BLT	X	X	X		
245/40R18 93H		265026640	SP SPORT 01 A/S DSST ROF	BSW	X	X	X			
<b>BENTLEY</b>										
BENTLEY	MULSANNE	265/45ZR20 108Y (F)	265023805	SP SPORT MAXX GT B	BLT	X	X	X	X	X
		265/40ZR21 105Y (R)	265023806	SP SPORT MAXX GT B	BLT	X	X	X	X	X
<b>BMW</b>										
BMW	1 SERIES	215/40R18 85Y (F)	265025660	SP SPORT 01 DSST	BLT	X				
		245/35R18 88Y (R)	265025654	SP SPORT 01 DSST	BLT	X				
	1 SERIES / 2 SERIES	225/45R17 91W (F)	263027240	SP SPORT MAXX TT DSST	BLT					X
		245/40R17 91W (R)	263027241	SP SPORT MAXX GT ROF	BLT					X
		245/40R17 88Y (F)	265027416	SP SPORT MAXX GT ROF	BLT					X
		245/30R19 89Y (R)	265027417	SP SPORT MAXX GT ROF	BLT					X
	2 SERIES	225/45R17 91W (F)	263027240	SP SPORT MAXX TT DSST	BLT				X	
		245/40R17 91W (R)	263027241	SP SPORT MAXX GT ROF	BLT				X	
		245/40R17 88Y (F)	265027416	SP SPORT MAXX GT ROF	BLT				X	
		245/30R19 89Y (R)	265027417	SP SPORT MAXX GT ROF	BLT				X	
	3 SERIES	225/35R20 90Y (F)	265027408	SP SPORT MAXX GT ROF	BLT				X	X
		225/30R20 92Y (R)	265027409	SP SPORT MAXX GT ROF	BLT				X	X
	5 SERIES / 6 SERIES	245/45R18 96Y (F)	265027403	SP SPORT MAXX GT DSST ROF	BLT	X			X	X
		275/40R18 99Y (R)	265027404	SP SPORT MAXX GT DSST ROF	BLT	X			X	X
		245/40R19 94Y (F)	265023807	SP SPORT MAXX GT DSST ROF	BLT				X	X
		275/35R19 96Y (R)	265023808	SP SPORT MAXX GT DSST ROF	BLT				X	X
		245/35R20 95Y XL (F)	265027405	SP SPORT MAXX GT DSST ROF	BLT	X			X	X
		275/30R20 97Y XL (R)	265027406	SP SPORT MAXX GT DSST ROF	BLT	X			X	X
	7 SERIES / 5 GT	245/50R18 100Y	265027400	SP SPORT MAXX GT DSST ROF	BLT	X			X	X
		245/45R19 98Y (F)	265027401	SP SPORT MAXX GT DSST ROF	BLT	X			X	X
		275/40R19 101Y (R)	265027402	SP SPORT MAXX GT DSST ROF	BLT	X			X	X
	X3	225/60R17 99V XL	263027237	SP SPORT MAXX TT DSST	BLT	X				
	X5	255/55R18 109V	265025455	SP SPORT 01 DSST	BSW	X				
		275/40R20 106W XL (F)	265026340	SP SPORT MAXX DSST ROF	BSW	X				
		315/35R20 110W XL (R)	265026336	SP SPORT MAXX DSST ROF	BSW	X				
		275/40R20 106W	265027415	SP SPORT MAXX GT ROF	BLT				X	X
		315/35R20 110W	265027414	SP SPORT MAXX GT ROF	BLT				X	X
		285/35R21 105Y XL (F)	265026337	SP SPORT MAXX DSST ROF	BLT	X				
		325/30R21 108Y XL (R)	265026338	SP SPORT MAXX DSST ROF	BLT	X				
		275/40R20 106W	265027415	SP SPORT MAXX GT ROF	BLT				X	X
	X6	315/35R20 110W	265027414	SP SPORT MAXX GT ROF	BLT				X	X
		275/40R20 106W XL (F)	265026340	SP SPORT MAXX DSST ROF	BSW	X				
		315/35R20 110W XL (R)	265026336	SP SPORT MAXX DSST ROF	BSW	X				
285/35R21 105Y XL (F)		265026337	SP SPORT MAXX DSST ROF	BLT	X					
325/30R21 108Y XL (R)		265026338	SP SPORT MAXX DSST ROF	BLT	X					
<b>CADILLAC</b>										
CADILLAC	ELR-V	245/40R19 99Y	265023801	SP SPORT MAXX GT	BLT				X	X
<b>HONDA</b>										
HONDA	CRV	P225/60R18 99H	290105035	GRANDTREK AT20	BSW			X	X	X
	CR-Z	P195/55R16 86V	265004155	SP SPORT 7000 A/S	BSW	X	X	X	X	X
	FIT	175/65R15 84S	265024568	SP 31	BSW	X	X			
		185/55R16 83H	265004140	SP SPORT 7000 A/S	BSW	X	X			
	INSIGHT	175/65R15 84S	263027501	SP 31 A	BSW	X	X			
<b>INFINITI</b>										
INFINITI	EX35	P225/55R18 97V	265004178	SP SPORT 7000 A/S	BSW	X	X	X	X	X
	FX45	265/45R21 104W	265022321	SP SPORT 01	BSW	X	X			
	G37	P225/50R18 94V	265040722	SP SPORT MAXX A1-A A/S	BSW	X				

VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR					
						2013	2014	2015	2016	2017	
<b>INFINITI (Cont.)</b>											
	G37 CONVERTIBLE	P225/50R18 94V (F)	265040722	SP SPORT MAXX A1-A/A/S	BSW	X	X	X	X	X	
		P245/45R18 96V (R)	265040720	SP SPORT MAXX A1-A/A/S	BSW	X	X	X	X	X	
	G37 COUPE	P225/50R18 94V (F)	265040722	SP SPORT MAXX A1-A/A/S	BSW	X	X	X	X	X	
	Q50	245/40R19 94V	265023827	SP SPORT MAXX 050 DSST CTT	BSW		X	X	X	X	
		245/40RF19 94W (F)	265031601	SP SPORT MAXX 050 DSST CTT	BSW					X	
		265/35RF19 94W (R)	265031602	SP SPORT MAXX 050 DSST CTT	BSW					X	
		P245/40R19 94V	755667383	SP SPORT 5000 A/S DSST CTT	BSW		X	X	X	X	
Q60	P255/40RF19 96V	265021145	SP SPORT 5000 DSST CTT	BSW					X		
<b>JAGUAR</b>											
	XF	255/35R20 97Y XL	265023939	SP SPORT MAXX	BLT	X					
	XFR	255/35ZR20 97Y XL (F)	265040735	SP SPORT MAXX	BLT	X		X			
		285/30ZR20 99Y XL (R)	265040736	SP SPORT MAXX	BLT	X		X			
<b>LEXUS</b>											
	GS	225/50R17 94W	265023815	SP SPORT MAXX 050	BSW	X	X	X	X	X	
		235/45R18 94Y	265023816	SP SPORT MAXX 050	BSW	X	X	X	X	X	
		P235/45R18 94V	265028100	SP SPORT 5100	BSW	X	X	X	X	X	
		235/40R19 96Y (F)	265023817	SP SPORT MAXX 050	BSW	X	X	X	X	X	
		265/35R19 94Y (R)	265023818	SP SPORT MAXX 050	BSW	X	X	X	X	X	
		T155/70D17 110M	266012170	SPACE MICER MK3	BSW			X	X	X	
		IS	225/45R17 90W (F)	265023846	SP SPORT MAXX A	BSW	X	X	X	X	
	245/45R17 95W (R)		265023847	SP SPORT MAXX A	BSW	X	X	X	X		
	225/45R17 91V (F)		265037647	SP SPORT 5000	BSW	X	X				
	245/45R17 95V (R)		265037648	SP SPORT 5000	BSW	X	X				
	225/45R17 91V		265037647	SP SPORT 5000	BSW			X	X	X	
	225/40R18 88Y (F)		265024052	SP SPORT 2050	BSW	X	X	X	X		
	255/40R18 95Y (R)		265024053	SP SPORT 2050	BSW	X	X	X	X		
	225/40R18 88Y (F)		265023772	SP SPORT MAXX A	BSW	X					
	255/40R18 95Y (R)		265023773	SP SPORT MAXX A	BSW	X					
	225/40R18 88Y (F)		265023831	SP SPORT MAXX 050	BSW		X	X	X	X	
	255/35R18 90Y (R)		265023832	SP SPORT MAXX 050	BSW		X	X	X	X	
	LS		235/50R18 97W	265040450	SP SPORT MAXX A1	BSW	X	X	X	X	
			P235/50R18 97V	265040550	SP SPORT MAXX A1 A/S	BSW	X	X	X	X	
		245/45R19 98Y	265023826	SP SPORT MAXX 050	BSW	X	X	X	X		
		P245/45R19 98V	265040745	SP SPORT MAXX A1 A/S	BSW	X	X	X	X		
		LS / LS Hybrid	235/50R18 97W	265040450	SP SPORT MAXX A1	BSW					X
	245/45R19 98Y		265023826	SP SPORT MAXX 050	BSW					X	
	P235/50R18 97V		265040550	SP SPORT MAXX A1 A/S	BSW					X	
	P245/45R19 98V		265040745	SP SPORT MAXX A1 A/S	BSW					X	
	245/45RF19 98Y		265023835	SP SPORT MAXX 050 DSST CTT	BSW					X	
	LX	P285/50R20 111V	290122310	GRANDTREK PT2A	BSW	X	X	X			
		LX570	P275/50R21 113V	290124400	GRANDTREK PT3A	BSW				X	X
	RC		235/45R18 94Y	265023816	SP SPORT MAXX 050	BSW			X	X	X
		P235/45R18 94V	265028100	SP SPORT 5100	BSW			X	X	X	
		235/40R19 96Y (F)	265023817	SP SPORT MAXX 050	BSW			X	X	X	
		265/35R19 94Y (R)	265023818	SP SPORT MAXX 050	BSW			X	X	X	
		T155/70D17 110M	266012170	SPACE MICER MK3	BSW			X	X	X	
	RX	P235/60R18 102V	290123503	GRANDTREK TOURING A/S	BSW	X	X	X	X	X	
		P235/55R19 101V	290123502	GRANDTREK TOURING A/S	VSB	X	X	X	X	X	
	<b>MASERATI</b>										
		QUATTROPORTE	245/45ZR19 98Y (F)	265029317	SP SPORT MAXX RT	BLT	X	X	X	X	X
			275/40ZR19 101Y (R)	265029318	SP SPORT MAXX RT	BLT	X	X	X	X	X
		GHIBLI	245/45ZR19 98Y (F)	265029317	SP SPORT MAXX RT	BLT		X	X	X	X
			275/40ZR19 101Y (R)	265029318	SP SPORT MAXX RT	BLT		X	X	X	X
	<b>MAZDA</b>										
		MAZDA3	T125/90D16 98M	266012187	SPACE MICER MK3	BSW				X	X
			P225/40R18 88Y	265024051	SP SPORT 2050	BSW	X				
			215/45R18 89W	265038960	SP SPORT 5000	VSB		X	X	X	X
	MAZDA6	P225/45R19 92W	265037649	SP SPORT 5000	VSB		X	X	X	X	
	<b>MERCEDES-BENZ</b>										
		GLK-CLASS	235/50R19 99H	290123505	GRANDTREK TOURING A/S	BLT	X				
235/45R20 100H			290123504	GRANDTREK TOURING A/S	BLT	X					
MIL-CLASS		255/55R18 105H	290123508	GRANDTREK TOURING A/S	BLT	X					
		255/50R19 107H XL	290123507	GRANDTREK TOURING A/S	BLT	X					
SL-CLASS		265/45R20 104Y	265025943	SP SPORT MAXX GT	BLT	X					
		255/40R18 95W (F)	265023786	SP SPORT MAXX GT	BLT	X					
		285/35R18 97W (R)	265023787	SP SPORT MAXX GT	BLT	X					



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>MINI</b>										
	CLUBMAN	225/45R17 94W XL	265008003	SPORT MAXX RT2*	BLT					X
	COOPER S	205/45R17 84W	265023145	SP SPORT 01 DSST ROF	BSW	X			X	X
		205/45R17 88W	265029326	SPORT MAXX RT ROF	BLT				X	X
		205/40R18 86W	265029328	SPORT MAXX RT ROF	BLT				X	X
		175/65R15 84H	265040300	SPORT BLUERESPONSE	BLT				X	X
	PACEMAN	205/55R17 91V	265029500	SP SPORT FAST RESPONSE	BLT				X	X
<b>MITSUBISHI</b>										
	iMIEV	145/65R15 72H (F)	267028900	ENASAVE 01	BSW	X	X	X	X	X
		175/60R15 81H (R)	267028901	ENASAVE 01	BSW	X	X	X	X	X
	LANCER	P215/45R18 89V	265025145	SP SPORT 5000M	BSW	X	X	X	X	X
	MIRAGE	165/65R14 79S	267028902	ENASAVE 01 A/S	VSB		X	X	X	X
	OUTLANDER	P215/70R16 99H	290139031	GRANDTREK ST20	VSB		X	X	X	
		225/55R18 98H	265037658	SP SPORT 5000	VSB					X
<b>NISSAN</b>										
	ALTIMA	P235/45R18 94V	265027900	SP SPORT 7000 A/S	BSW	X	X	X	X	X
	ARMADA	265/70R18 116H	290014826	GRANDTREK AT23	BSW					X
	GT-R	255/40ZRF20 97Y (F)	265027073	SP SPORT 600 DSST	BSW	X	X	X		
		285/35ZRF20 100Y (R)	265027044	SP SPORT 600 DSST	BSW	X	X	X		
		255/40RF20 97W (F)	265039947	SP SPORT 7010 DSST A/S	BSW	X	X	X	X	X
		285/35RF20 100W (R)	265039946	SP SPORT 7010 DSST A/S	BSW	X	X	X	X	X
		255/40ZRF20 97Y (F)	265028803	SP SPORT 600 DSST CTT	BSW				X	
		285/35ZRF20 100Y (R)	265028804	SP SPORT 600 DSST CTT	BSW				X	
		255/40ZRF20 97Y (F)	265028803	SP SPORT 600 DSST CTT	BSW					X
		285/35ZRF20 100Y (R)	265028804	SP SPORT 600 DSST CTT	BSW					X
	GT-R NISMO	255/40ZRF20 97Y (F)	265028801	SP SPORT 600 DSST CTT	BSW				X	
		285/35ZRF20 100Y (R)	265028800	SP SPORT 600 DSST CTT	BSW				X	
		255/40ZRF20 97Y (F)	265028801	SP SPORT 600 DSST CTT	BSW					X
	ROGUE	285/35ZRF20 100Y (R)	265028800	SP SPORT 600 DSST CTT	BSW					X
		225/65R17 102H	290126785	GRANDTREK ST30	VSB					X
		P225/60R17 98H	290139030	GRANDTREK ST20	BSW	X				
	ROGUE HYBRID	225/60R18 100H	290126787	GRANDTREK ST30	BSW		X	X	X	X
		P225/55R18 97V	265004178	SP SPORT 7000 A/S	BSW	X				
		225/60R18 100H	290126788	GRANDTREK ST30	BSW					X
<b>PORSCHE</b>										
	BOXTER / CAYMAN	235/45ZR18 94Y (F)	265023813	SP SPORT MAXX GT	BLT		X			
		265/45ZR18 101Y (R)	265023814	SP SPORT MAXX GT	BLT		X			
<b>SCION</b>										
	XD	195/60R16 89H	265037601	SP SPORT 5000	BSW	X	X	X	X	X
<b>SUBARU</b>										
	IMPREZA	235/45R17 94W	265023344	SP SPORT 01	BSW	X	X	X		
		245/40R18 93W	265023601	SP SPORT 600	BSW	X	X	X		
	IMPREZA WRX	235/45R17 94W	265029322	SP SPORT MAXX RT	BSW				X	X
	IMPREZA WRX STI	245/40R18 97W	265029323	SP SPORT MAXX RT	BSW				X	X
<b>SUZUKI</b>										
	GRAND VITARA	225/60R18 100H	265025942	SP SPORT 01	BSW	X				
	KIZASHI	P215/60R16 94V	265027902	SP SPORT 7000 A/S	BSW	X				
		P215/55R17 93V	265027901	SP SPORT 7000 A/S	BSW	X				
		P235/45R18 94V	265027900	SP SPORT 7000 A/S	BSW	X				
	SX 4	P205/50R17 88V	265004150	SP SPORT 7000 A/S	BSW	X	X			
<b>TOYOTA</b>										
	4RUNNER	P265/70R17 113S	290105041	GRANDTREK AT20	BSW	X	X	X	X	X
	FJ CRUISER	P265/70R17 113S	290105041	GRANDTREK AT20	BSW	X	X			
	HIGHLANDER	P245/65R17 105S	290126783	GRANDTREK ST30	BSW	X	X			
	LAND CRUISER	P285/60R18 114V	290014840	GRANDTREK AT23	BSW	X	X	X		
	LAND CRUISER 200	P285/60R18 116V	290014825	GRANDTREK AT23	BSW	X	X	X	X	X
		285/50R20 112V	290122311	GRANDTREK PT2A	BSW				X	X
	NX	225/65R17 102H	290126784	GRANDTREK ST30	BSW			X	X	
	NX / NX Hybrid	225/65R17 102H	290126784	GRANDTREK ST30	BSW					X
	PRIVUS	P195/65R15 89S	267028904	ENASAVE 01 A/S	VSB					X
	RAV4	225/65R17 102H	290126784	GRANDTREK ST30	BSW	X	X	X	X	X
	RX	T165/90D18 107M	266012186	SPACE MIGER MK3	BSW				X	X
	SEQUOIA	P275/55R20 111H	265014741	SP SPORT 5000M	VSB	X	X	X	X	X
	SIENNA	P235/50R19 99V	265004190	SP SPORT 7000 A/S	VSB	X	X	X	X	X
	TACOMA	P215/70R15 97S	290105531	GRANDTREK AT20	BSL	X	X	X		
		P245/75R16 109S	290105537	GRANDTREK AT20	BSL	X	X	X		
		P265/65R17 110S	290105539	GRANDTREK AT20	BSL	X	X	X		
	TUNDRA	P275/55R20 111H	265014741	SP SPORT 5000M	VSB	X	X	X	X	X

VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR				
						2013	2014	2015	2016	2017
<b>VOLKSWAGEN</b>										
	GTI	225/40R18 92H	265026240	SP SPORT 01 A/S	BSW	X	X			
		225/40R18 92H XL	265026240	SP SPORT 01 A/S	BSW			X		
	R32	225/40R18 92H	265026240	SP SPORT 01 A/S	BSW	X				
	TIGUAN	215/65R16 98H	290123501	GRANDTREK TOURING A/S	BLT	X	X			
		255/40R19 96V	265023788	SP SPORT MAXX GT	BSW	X				

# 2017 KELLY® TIRE LINES



# THE ADVANTAGES OF KELLY®

## A Simple Offering For Everyday Driving

Kelly tires are a smart choice for practical drivers who simply want great all-season traction at an attractive price.

## THE SPIRIT OF THE KELLY BRAND

### Long History

Kelly Tires began in 1894, making rubber carriage wheels. Today, Kelly is celebrating more than 120 years in the tire business, establishing it as the oldest tire brand in the United States.

### Quality Tires

Kelly continues to grow and evolve while maintaining a simple, straightforward and uncomplicated attitude. It offers everyday drivers multiple quality tire lines that are available in popular sizes to fit a broad range of today's vehicles.

### Great Value

Value-conscious drivers want tires that fit within their budgets, but they don't want to sacrifice quality and all-season traction. Kelly offers it all, earning a notable reputation for delivering "A Good Deal On A Great Tire."

### Smart Choice

Kelly makes drivers feel informed and empowered. Tools such as the 30-Day Test Drive Program and Tread Life Limited Warranties give drivers the confidence to choose Kelly Tires and the reassurance that they've made a good decision.

# PERFORMANCE, COMMUTER TOURING, ALL-TERRAIN



Kelly Edge HP®	Kelly Edge A/S®	Kelly Edge AT®	Safari® TSR
A Hardworking, Quality Tire With All-Season Traction for Performance Driving	A Hardworking, Quality Tire With All-Season Traction for Everyday Driving	A Hardworking, Quality Tire With Highway and Off-Road Traction for Everyday Driving	Rugged All-Terrain Traction Tire With Enhanced Grip Both On- and Off-Highway

# TIRE SELECTOR CHART

	PERFORMANCE	PASSENGER/CIUV	ON-/OFF-ROAD	
	Edge HP® (Pg. 216)	Edge A/S® (Pg. 218)	Edge AT® (Pg. 220)	Safari® TSR (Pg. 222)
185/65R14		86H		
185/70R14		88T		
195/70R14		91T		
185/60R15		84T		
185/65R15		88H		
195/55R15	85V			
195/60R15		88H		
195/65R15		91H		
205/60R15		91H		
205/65R15		94H		
205/70R15		96T		
215/60R15		94H		
215/70R15		98T		
225/75R15			102S	
235/75R15			105S	
LT235/75R15				C
31X10.50R15LT			C	C
195/50R16		84V		
195/55R16	87V			
205/50R16		87H		
205/55R16	91V	91H		
205/60R16		92V		
205/65R16		95H		
215/55R16		93H		
215/60R16		95H		
215/65R16		98T		
215/70R16		100H		
225/50R16	92V			
225/55R16	95V			
225/60R16		98H		
225/65R16		100T		
225/70R16		103T		
225/75R16			104S	
235/60R16		100H		
235/65R16		103T		
235/70R16		106T	106T	
235/75R16			112S	
245/70R16		107T	107T	
245/75R16			111S	
255/70R16			111S	
265/70R16			112T	
265/75R16			116T	
LT215/85R16			E	
LT225/75R16			E	E
LT235/85R16			E	E
LT245/75R16			E	E
LT265/75R16			E	C*, E
LT285/75R16			E	E
LT315/75R16				E

	PERFORMANCE	PASSENGER/CIUV	ON-/OFF-ROAD	
	Edge HP® (Pg. 216)	Edge A/S® (Pg. 218)	Edge AT® (Pg. 220)	Safari® TSR (Pg. 222)
205/45R17	84V*, 88V			
205/50R17		89V		
215/45R17	91W	87V		
215/50R17		91V		
215/55R17		94V		
215/60R17		96T		
215/65R17		99T		
225/45R17	94W	91V		
225/50R17	94W	94V*		
225/55R17		97V		
225/60R17		99H		
225/65R17		102H		
235/45R17	94W*, 97W			
235/55R17		99H		
235/60R17		102T		
235/70R17			109S	
235/65R17		104H		
245/40R17	91W*, 95W			
245/45R17	95V			
245/65R17		107T		
245/70R17			110S	
255/65R17			110S	
255/70R17			112S	
265/65R17		112T	112T	
265/70R17			115T	
LT235/80R17			E	
LT245/70R17			E	E
LT245/75R17			E	E
LT265/70R17			E	C, E
LT285/70R17			E	D
LT315/70R17				D
215/45R18	93W			
225/40R18	92W			
225/45R18	95V	91V		
225/55R18		98H		
235/40R18	95W			
235/45R18	94V*, 98V			
235/50R18	97V			
235/55R18		100H		
235/60R18		103H		
235/65R18		106T		
245/40R18	93W*, 97W			
245/45R18	96V			
245/60R18		105H		
255/65R18		111T		
265/60R18			110S	
265/65R18			114S	
275/65R18			116T	
LT275/65R18			E	E
LT275/70R18			E	E
275/55R20			113S	
275/60R20			115S	
LT275/65R20			E	

\*Discontinued 2016.

# KELLY EDGE HP®

A Hardworking, Quality Tire With All-Season Traction For Performance Driving



## FEATURES

Asymmetric tread and proven tread compound

Wide center rib

Solid shoulder blocks

Blades with biting edges

Enhanced tread block sequence

## BENEFITS

Offer all-season traction in wet, dry and snowy conditions

Helps to provide confident handling

Help stabilize the footprint for enhanced cornering

Enhance handling, especially while turning

Helps to reduce noise so drivers can enjoy a quiet ride



All-Season



Cornering  
Stability

# ALL-SEASON SPORT/TOURING

## EDGE HP SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
195/55R15	85V	SL	VS	356508041	225539	5.5 - 7.0	6.0	7.9	23.4	1,135	9	892	460 A A
195/55R16	87V	SL	VS	356815041	226134	5.5 - 7.0	6.0	7.9	24.4	1,201	9	856	460 A A
205/55R16	91V	XL	VS	356758041	225541	5.5 - 7.5	6.5	8.4	24.9	1,356	9	840	460 A A
225/50R16	92V	SL	VS	356759041	225543	6.0 - 8.0	7.0	9.2	24.9	1,389	9	839	460 A A
225/55R16	95V	SL	VS	356760041	225544	6.0 - 8.0	7.0	9.2	25.8	1,521	9	812	460 A A
* 205/45R17	84V	XL	VS	356816041	226606	6.5 - 7.5	7.0	8.1	24.3	1,102	9	862	460 A A
205/45R17	88V	XL	VS	356824041	232333	6.5 - 7.5	7.0	8.1	24.3	1,235	9	862	460 A A
215/45R17	91W	XL	VS	356761041	225546	7.0 - 8.0	7.0	8.4	24.7	1,356	9	848	460 A A
225/45R17	94W	SL	VS	356762041	225549	7.0 - 8.5	7.5	8.9	25.0	1,477	9	837	460 A A
225/50R17	94W	XL	VS	356763041	225550	6.0 - 8.0	7.0	9.2	25.9	1,477	9	807	460 A A
* 235/45R17	94W	SL	VS	356764041	225552	7.5 - 9.0	8.0	9.3	25.4	1,477	9	824	460 A A
235/45R17	97W	XL	VS	356822041	232331	7.5 - 9.0	8.0	9.3	25.4	1,477	9	824	460 A A
* 245/40R17	91W	SL	VS	356765041	225554	8.0 - 9.5	8.5	9.8	24.7	1,356	9	846	460 A A
245/40R17	95W	XL	VS	356823041	232332	8.0 - 9.5	8.5	9.8	24.7	1,521	9	845	460 A A
245/45R17	95V	SL	VS	356766041	225555	7.5 - 9.0	8.0	9.6	25.7	1,521	9	814	460 A A
215/45R18	93W	XL	VS	356767041	225556	7.0 - 8.0	7.0	8.4	25.6	1,433	9	815	460 A A
225/40R18	92W	XL	VS	356768041	225557	7.5 - 9.0	8.0	9.1	25.1	1,389	9	833	460 A A
225/45R18	95V	SL	VS	356776041	225558	7.0 - 8.5	7.5	8.9	25.9	1,521	9	806	460 A A
235/40R18	95W	SL	VS	356777041	225559	8.0 - 9.5	8.5	9.5	25.4	1,521	9	823	460 A A
* 235/45R18	94V	SL	VS	356814041	226132	7.5 - 9.0	8.0	9.3	26.3	1,477	9	794	460 A A
235/45R18	98V	XL	VS	356828041	232335	7.5 - 9.0	8.0	9.3	26.3	1,653	9	793	460 A A
235/50R18	97V	SL	VS	356778041	225560	6.5 - 8.5	7.5	9.7	27.3	1,609	9	766	460 A A
* 245/40R18	93W	SL	VS	356779041	225561	8.0 - 9.5	8.5	9.8	25.7	1,433	9	813	460 A A
245/40R18	97W	XL	VS	356825041	232334	8.0 - 9.5	8.5	9.8	25.7	1,609	9	813	460 A A
245/45R18	96V	SL	VS	356813041	225562	7.5 - 9.0	8.0	9.6	26.7	1,565	9	784	460 A A

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# KELLY EDGE A/S®

A Hardworking, Quality Tire With All-Season Traction For Everyday Driving



## FEATURES

Biting tread block edges

Broad tread grooves

Sturdy tread blocks

Proven tread pattern

## BENEFITS

Offer all-season traction in wet, dry and snowy conditions

Help evacuate water and slush from the tread for enhanced grip

Help stabilize the tread footprint to promote long treadwear for enhanced value

Enhances handling



All-Season

## EDGE A/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
185/65R14	86H	SL	VS	356826026	227277	5.0 - 6.5	5.5	7.4	23.5	1,168	9	889	500 A B
185/70R14	88T	SL	VS	356631026	227278	4.5 - 6.0	5.5	7.4	24.3	1,235	9	860	500 A B
195/70R14	91T	SL	VS	356012026	227279	5.0 - 6.5	6.0	7.9	24.8	1,356	9	843	500 A B
185/60R15	84T	SL	VS	356303026	227280	5.0 - 6.5	5.5	7.5	23.8	1,102	9	880	500 A B
185/65R15	88H	SL	VS	356382026	227281	5.0 - 6.5	5.5	7.4	24.5	1,235	9	855	500 A B
195/60R15	88H	SL	VS	356475026	227282	5.5 - 7.0	6.0	7.9	24.2	1,235	9	864	500 A B
195/65R15	91H	SL	VS	356200026	227283	5.5 - 7.0	6.0	7.9	25.0	1,356	9	836	500 A B
205/60R15	91H	SL	VS	356326030	227284	5.5 - 7.5	6.5	8.2	24.7	1,356	9	846	500 A B
205/65R15	94H	SL	VS	356009026	227286	5.5 - 7.5	6.0	8.3	25.5	1,477	9	821	500 A B
205/70R15	96T	SL	VS	356784026	227287	5.0 - 7.0	6.0	8.2	26.3	1,565	9	793	500 A B
215/60R15	94H	SL	VS	356122026	227285	6.0 - 7.5	7.0	8.7	25.2	1,477	9	829	500 A B
215/70R15	98T	SL	VS	356166026	227288	5.5 - 7.0	6.5	8.7	26.9	1,653	9	777	500 A B
195/50R16	84V	SL	VS	356651030	227289	5.5 - 7.0	6.0	7.9	23.7	1,102	9	886	500 A B
205/50R16	87H	SL	VS	356632030	227581	5.5 - 7.5	6.5	8.4	24.1	1,201	9	855	500 A B
205/55R16	91H	SL	VS	356272030	227290	5.5 - 7.5	6.5	8.4	24.9	1,356	9	840	500 A B
205/60R16	92V	SL	VS	356652030	227292	5.5 - 7.5	6.0	8.2	25.7	1,389	9	816	500 A B
205/65R16	95H	SL	VS	356218026	227296	5.5 - 7.5	6.0	8.2	26.5	1,521	9	789	500 A B
215/55R16	93H	SL	VS	356570030	227291	6.0 - 7.5	7.0	8.9	25.3	1,433	9	829	500 A B
215/60R16	95H	SL	VS	356125026	227293	6.0 - 7.5	6.5	8.7	26.1	1,521	9	800	500 A B
215/65R16	98T	SL	VS	356443026	227297	6.0 - 7.5	6.5	8.7	27.0	1,653	9	774	500 A B
215/70R16	100H	SL	VS	356658026	227300	5.5 - 7.0	6.5	8.7	27.9	1,764	9	749	500 A B
225/60R16	98H	SL	VS	356077026	227294	6.0 - 8.0	6.5	9.0	26.6	1,653	9	785	500 A B
225/65R16	100T	SL	VS	356655026	227298	6.0 - 8.0	6.5	9.0	27.5	1,764	9	760	500 A B
225/70R16	103T	SL	VS	356659026	227301	6.0 - 7.5	6.5	9.0	28.4	1,929	9	736	500 A B
235/60R16	100H	SL	VS	356575026	227295	6.5 - 8.5	7.0	9.5	27.1	1,764	9	771	500 A B
235/65R16	103T	SL	VS	356621026	227299	6.5 - 8.5	7.0	9.5	28.0	1,929	9	746	500 A B
235/70R16	106T	SL	VS	356660026	227302	6.0 - 8.0	7.0	9.5	29.0	2,094	9	721	500 A B
245/70R16	107T	SL	VS	356662026	227303	6.5 - 8.0	7.0	9.8	29.5	2,149	11	708	500 A B
205/50R17	89V	SL	VS	356663030	227307	5.5 - 7.5	6.5	8.4	25.1	1,279	9	832	500 A B
215/45R17	87V	SL	VS	356649030	227305	7.0 - 8.0	7.0	8.4	24.7	1,201	9	846	500 A B
215/50R17	91V	SL	VS	356664030	227308	6.0 - 7.5	7.0	8.9	25.5	1,356	9	819	500 A B
215/55R17	94V	SL	VS	356627030	227310	6.0 - 7.5	7.0	8.9	26.3	1,477	9	795	500 A B
215/60R17	96T	SL	VS	356665026	227313	6.0 - 7.5	6.5	8.7	27.2	1,565	9	768	500 A B
215/65R17	99T	SL	VS	356844026	227316	6.0 - 7.5	6.5	8.7	28.0	1,709	9	746	500 A B
225/45R17	91V	SL	VS	356305030	227306	7.0 - 8.5	7.5	8.9	25.0	1,356	9	837	500 A B
*225/50R17	94V	SL	VS	356628030	227309	6.0 - 8.0	7.0	9.2	25.9	1,477	9	807	500 A B
225/50R17	94V	SL	VS	356819030	230589	6.0 - 8.0	7.0	9.2	25.9	1,477	9	807	500 A B
225/55R17	97V	SL	VS	356225030	227311	6.0 - 8.0	7.0	9.2	26.8	1,609	9	780	500 A B
225/60R17	99H	SL	VS	356667026	227314	6.0 - 8.0	6.5	9.0	27.6	1,709	9	756	500 A B
225/65R17	102H	SL	VS	356674026	227317	6.0 - 8.0	6.5	9.0	28.5	1,874	9	733	500 A B
235/55R17	99H	SL	VS	356221030	227312	6.5 - 8.5	7.5	9.7	27.2	1,709	9	768	500 A B
235/60R17	102T	SL	VS	356673026	227315	6.5 - 8.5	7.0	9.5	28.1	1,874	9	744	500 A B
235/65R17	104H	SL	VS	356229026	227318	6.5 - 8.5	7.0	9.5	29.1	1,984	9	719	500 A B
245/65R17	107T	SL	VS	356676026	227319	7.0 - 8.5	7.0	9.8	29.5	2,149	11	708	500 A B
265/65R17	112T	SL	VS	356677026	227320	7.5 - 9.5	8.0	10.7	30.6	2,469	11	684	500 A B
225/45R18	91V	SL	VS	356689030	227583	7.0 - 8.5	7.5	8.9	25.9	1,356	9	806	500 A B
225/55R18	98H	SL	VS	356841026	227324	6.0 - 8.0	7.0	9.2	27.8	1,653	9	753	500 A B
235/55R18	100H	SL	VS	356681030	227325	6.5 - 8.5	7.5	9.7	28.1	1,764	9	744	500 A B
235/60R18	103H	SL	VS	356683026	227327	6.5 - 8.5	7.0	9.5	29.1	1,929	9	718	500 A B
235/65R18	106T	SL	VS	356685026	227330	6.5 - 8.5	7.0	9.5	30.0	2,094	9	696	500 A B
245/60R18	105H	SL	VS	356684026	227328	7.0 - 8.5	7.0	9.8	29.6	2,039	10	707	500 A B
255/65R18	111T	SL	VS	356687026	227331	7.0 - 9.0	7.5	10.2	31.1	2,403	11	673	500 A B

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

# KELLY EDGE AT®

A Hardworking, Quality Tire With Highway and Off-Road Traction for Everyday Driving



EDGE AT TREAD PATTERN  
VARIES WITH SIZE  
AND APPLICATION

## FEATURES

- Flared tread block edges
- Deep tread grooves
- Sturdy tread blocks
- Proven tread compound

## BENEFITS

- Help shovel mud, dirt and gravel away from the tread for off-road traction
- Help evacuate water and slush from the tread for enhanced on-highway grip
- Help stabilize the footprint to promote long treadwear for enhanced value
- Enhances wet traction on the highway and helps improve endurance for off-road terrain



All-Terrain

## EDGE AT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
225/75R15	102S	SL	OWL	357757286	228659	6.0 - 7.5	6.0	8.8	28.3	1,874	12	738	560 A B
235/75R15	105S	SL	OWL	357571286	221753	6.8 - 8.0	6.5	9.3	28.9	2,039	12	724	560 A B
225/75R16	104S	SL	OWL	357748286	225788	6.0 - 7.5	6.0	8.8	29.3	1,984	12	714	560 A B
235/70R16	106T	SL	OWL	357206286	228215	6.8 - 8.0	7.0	9.5	29.0	2,094	12	721	560 A B
235/75R16	112S	XL	OWL	357760286	228668	6.0 - 8.0	6.5	9.3	29.8	2,469	12	700	560 A B
245/70R16	107T	SL	OWL	357762286	228571	6.5 - 8.0	7.0	9.8	29.5	2,149	12	707	560 A B
245/75R16	111S	SL	OWL	357566286	225770	6.5 - 8.0	7.0	9.8	30.5	2,403	12	686	560 A B
255/70R16	111S	SL	OWL	357567286	225766	6.5 - 8.0	7.5	10.2	30.1	2,403	12	695	560 A B
265/70R16	112T	SL	OWL	357317286	221751	7.0 - 9.0	8.0	10.7	30.6	2,469	12	682	560 A B
265/75R16	116T	SL	OWL	357292286	225768	7.0 - 9.0	7.5	10.5	31.7	2,756	12	660	560 A B
235/70R17	109S	XL	BSL	357672279	228662	6.0 - 8.0	7.0	9.5	30.0	2,271	12	697	560 A B
245/70R17	110S	SL	BSL	357675279	228660	6.5 - 8.0	7.0	9.8	30.6	2,337	12	684	560 A B
255/65R17	110S	SL	OWL	357756286	228663	7.0 - 9.0	7.5	10.2	30.1	2,337	12	691	560 A B
255/70R17	112S	SL	OWL	357758286	228664	6.5 - 8.5	7.5	10.3	31.1	2,469	12	672	560 A B
265/65R17	112T	SL	OWL	357338286	228661	7.5 - 9.5	8.0	10.7	30.6	2,469	12	684	560 A B
265/70R17	115T	SL	OWL	357747286	221714	7.0 - 9.0	8.0	10.7	31.7	2,679	12	660	560 A B
265/60R18	110S	SL	OWL	357525286	228666	7.5 - 9.5	8.0	10.7	30.5	2,337	12	685	560 A B
265/65R18	114S	SL	OWL	357644286	228667	7.5 - 9.5	8.0	10.7	31.5	2,601	12	663	560 A B
275/65R18	116T	SL	OWL	357759286	228665	7.5 - 9.5	8.0	11.0	32.1	2,756	12	651	560 A B
275/55R20	113S	SL	BSL	357636279	228657	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	560 A B
275/60R20	115S	SL	BSL	357678279	228658	7.5 - 9.5	8.0	11.0	33.0	2,679	12	634	560 A B
<b>EDGE AT LT</b>													
31X10.50R15LT	109R	C	OWL	357510286	221745	7.0 - 9.0	8.5	10.6	30.5	2,270	14	685	
LT215/85R16	115R	E	BSL	357517279	221737	5.5 - 7.0	6.0	8.6	30.5	2,680	14	682	
LT225/75R16	115R	E	BSL	357468279	221734	6.0 - 7.0	6.0	8.8	29.3	2,680	14	710	
LT235/85R16	120R	E	BSL	357485279	221720	6.0 - 7.5	6.5	9.3	31.7	3,042	14	656	
LT245/75R16	120S	E	BSL	357722279	221716	6.5 - 8.0	7.0	9.8	30.5	3,042	14	682	
LT265/75R16	123R	E	OWL	357475286	221732	7.0 - 8.0	7.5	10.5	31.7	3,415	14	656	
LT285/75R16	126R	E	OWL	357746286	228635	7.5 - 9.0	8.0	11.3	33.1	3,750	14	628	
LT235/80R17	120R	E	BSL	357730279	221738	6.0 - 7.5	6.5	9.3	31.8	3,085	14	654	
LT245/70R17	119S	E	BSL	357707279	221735	6.5 - 8.0	7.0	9.8	30.6	3,000	14	679	
LT245/75R17	121S	E	BSL	357727279	221736	6.5 - 7.5	7.0	9.8	31.5	3,195	14	660	
LT265/70R17	121S	E	BSL	357726279	221718	7.0 - 8.5	8.0	10.7	31.7	3,195	14	656	
LT285/70R17	121R	E	OWL	357750286	228669	7.5 - 9.0	8.5	11.5	33.0	3,195	14	638	
LT275/65R18	123S	E	OWL	357732286	221741	7.5 - 9.0	8.0	11.0	32.1	3,415	14	648	
LT275/70R18	125R	E	OWL	357511286	221740	7.0 - 8.5	8.0	11.0	33.4	3,640	14	623	
LT275/65R20	126S	E	OWL	357735286	221743	7.5 - 9.5	8.0	11.0	34.1	3,750	14	610	

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**

# SAFARI® TSR

Rugged All-Terrain Traction Tire With Enhanced Grip Both On- and Off-Highway



## FEATURES

Rock-patterned tread

Deep, self-cleaning tread elements and staggered shoulder blocks

Pinned for #16 metal studs▼

Rim protector

Multi-directional zigzag siping

Non-symmetric, free-form interlocking tread blocks

## BENEFITS

Offers enhanced traction and appearance

For enhanced handling in deep mud, sand and gravel

For enhanced traction in winter conditions

Helps protect wheels from accidental curb damage

For enhanced handling in wet weather conditions

Help reduce noise and improve traction



All-Terrain

## SAFARI TSR SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
31X10.50R15LT	109Q	C	OWL	357322300	209166	7.0 - 9.0	8.5	10.6	30.8	2,270	18	682
LT235/75R15	104Q	C	OWL	357327300	209167	6.0 - 7.0	6.5	9.3	28.9	1,985	18	724
LT225/75R16	115Q	E	BSL	357528298	216884	6.0 - 7.0	6.0	8.8	29.3	2,680	18	714
LT235/85R16	120Q	E	BSL	357605298	220279	6.0 - 7.5	6.5	9.3	31.7	3,042	18	659
LT245/75R16	120Q	E	BSL	357607298	209201	6.5 - 8.0	7.0	9.8	30.7	3,042	18	686
*LT265/75R16	112Q	C	OWL	357330300	216886	7.0 - 8.0	7.5	10.5	31.7	2,470	18	660
LT265/75R16	123Q	E	BSL	357610298	223552	7.0 - 8.0	7.5	10.5	31.7	3,415	18	660
LT285/75R16	126P	E	BSL	357584298	223551	7.5 - 9.0	8.0	11.3	33.1	3,750	18	637
LT315/75R16	127Q	E	BSL	357291298	209204	8.0 - 10.0	8.5	12.3	34.8	3,860	18	602
LT245/70R17	119Q	E	BSL	357598298	216882	6.5 - 8.0	7.0	9.8	30.6	3,000	18	684
LT245/75R17	121Q	E	OWL	357290300	209205	6.5 - 7.5	7.0	9.8	31.7	3,195	18	663
LT265/70R17	121Q	E	BSL	357289298	209206	7.0 - 8.5	8.0	10.7	31.7	3,195	18	660
LT265/70R17	112Q	C	OWL	357608300	216885	7.0 - 8.5	8.0	10.7	31.7	2,470	18	660
LT285/70R17	121Q	D	OWL	357310300	209207	7.5 - 9.0	8.5	11.5	33.0	3,195	18	638
LT315/70R17	121Q	D	BSL	357300298	209208	8.5 - 10.0	9.5	12.7	34.4	3,195	18	607
LT275/65R18	123Q	E	BSL	357301298	209209	7.5 - 9.0	8.0	11.0	32.1	3,415	18	651
LT275/70R18	125Q	E	BSL	357600298	216883	7.0 - 8.5	8.0	11.0	33.4	3,640	18	630

\*Discontinued 2016.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

**NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.**

# REFERENCE

## UTQG LEGEND

### Tire Grades: Uniform Tire Quality Grading System or UTQG

Except for winter, light truck and trailer tires, the Department of Transportation requires tire manufacturers to grade passenger car tires based on three performance factors: treadwear, traction and temperature resistance. The UTQG rating of each Goodyear tire is listed in this catalog.

#### Treadwear

- More than 100 – Better
- 100 – Baseline
- Less than 100 – Poorer

The treadwear grade is a comparative rating based on the wear rate of the tire when tested for 7,200 miles on a government specified course. A tire graded 200 would wear twice as long on the government specified course as one graded 100. (Actual tire mileage may vary.) Note: Treadwear grade is valid only for comparisons within a manufacturer's product line, not between manufacturers. For example, a 700 rating from one tire manufacturer is not necessarily better than a 600 from another.

#### Traction

- AA
- A
- B
- C

Traction grades, from highest to lowest, are AA, A, B and C. They represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete. The traction grades are based upon "straight ahead" braking tests. They do not indicate cornering ability or resistance to hydroplaning.

#### Temperature

- A – Best
- B – Intermediate
- C – Acceptable

Temperature grades represent the tire's resistance to heat generated by running at high speed. Sustained high temperatures can cause the materials of the tire to degenerate and thus reduce tire life. Excessive temperatures can lead to tire failure. Federal Motor Vehicle Safety Standards require that all passenger tires meet at least the minimal level of performance—Grade C.

## NUMERICAL RATING SCALE

### 1 = Lower Performance | 10 = Higher Performance

The rating scale can help you compare tires within each category. However, using the scale to distinguish between tires across different types of categories would be misleading. For example, utilizing the rating scale to compare a passenger tire to a performance tire will not generate an accurate comparison.

## SIDEWALL EXPLANATION

- B01** = Broken Serrated Band
- B02** = Broken Serrated Band – EMT
- BLK** = Blackwall
- BLT** = Black Letters
- BSL** = Black Serrated Letters
- BSW** = Black Sidewall
- NW** = Narrow White Stripe
- OWL** = Outlined White Letters
- RWL** = Raised White Letters
- SBL** = Serrated Black Letters
- VSB** = Vertical Serrated Band
- XNW** = Extra Narrow White Stripe

## SPEED RATINGS\*

Speed ratings are indicated as follows:

Speed Symbol	Maximum Speed	Open-Ended Speed Category
L	120 km/h (75 mph)	
M	130 km/h (81 mph)	
N	140 km/h (87 mph)	
P	150 km/h (93 mph)	
Q	160 km/h (99 mph)	
R	170 km/h (106 mph)	
S	180 km/h (112 mph)	
T	190 km/h (118 mph)	
U	200 km/h (124 mph)	
H	210 km/h (130 mph)	
V	240 km/h (149 mph)	
W	270 km/h (168 mph)	ZR**
Y	300 km/h (186 mph)	
(Y)**	Above 300 km/h (186 mph)	

\*The Goodyear Tire & Rubber Company does not recommend the use of any of its products in excess of the legal speed limits.

\*\*Per the TR&A 2016 yearbook, for tires having a maximum speed capability above 240 kph (149 mph), a "ZR" may appear in the size designation. For tires having a maximum speed capability above 300 kph (186 mph), a "ZR" must appear in the size designation and a Service Description, including the Y Speed Symbol, must be included in brackets.

Many Goodyear tires are available in speed-rated versions to match the speed capabilities of the world's fastest cars. Generally, it is recommended that a speed-rated tire be replaced with a tire having an equivalent or greater speed rating.

However, if you never drive at speeds near the limits of your speed-rated tires, you may choose to replace them with tires having a lesser top-speed rating.

In situations where tires having different top-speed ratings are mixed on a vehicle, the maximum speed certification is limited to the top-speed certification of the tire with the lowest speed rating.

Speed ratings do not indicate how well a tire handles or corners. They only certify a tire's ability to withstand high speed.

**WARNING:** Vehicle handling, traction, ride comfort and other performance parameters may be significantly affected by a change in tire size or type. Before replacing tires, always consult and follow the vehicle owner's manual because some vehicle manufacturers prohibit changing tire size. When selecting tires that are different from the original equipment size make certain: (1) The tires have adequate load-carrying capacity based on the vehicle placard, (2) The tires have sufficient inflation pressure to carry the load and (3) There is proper clearance with no interference points between the tire and vehicle. The consumer must be aware to always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow any of these warnings may result in loss of control of the vehicle, leading to an accident and serious injury or death.

# LOAD INDEX

**WARNING: DO NOT OVERLOAD TIRES. OVERLOADING TIRES CAN RESULT IN TIRE FAILURE, PERSONAL INJURY AND/OR DEATH.**

The load index is a numerical code associated with the maximum load a tire can carry at the speed indicated by its Speed Symbol under specified service conditions up to 210 km/h (130 mph). Check the doorjamb or owner's manual to determine the maximum vehicle load.

LOAD INDEX AND LOAD					
Load Index	Load		Load Index	Load	
	Passenger	Light Truck		Passenger	Light Truck
79	437 kg (963 lbs.)	437 kg (965 lbs.)	105	925 kg (2039 lbs.)	925 kg (2040 lbs.)
80	450 kg (992 lbs.)	450 kg (990 lbs.)	106	950 kg (2094 lbs.)	950 kg (2095 lbs.)
81	462 kg (1019 lbs.)	462 kg (1020 lbs.)	107	975 kg (2149 lbs.)	975 kg (2150 lbs.)
82	475 kg (1047 lbs.)	475 kg (1045 lbs.)	108	1000 kg (2205 lbs.)	1000 kg (2205 lbs.)
83	487 kg (1074 lbs.)	487 kg (1075 lbs.)	109	1030 kg (2271 lbs.)	1030 kg (2270 lbs.)
84	500 kg (1102 lbs.)	500 kg (1100 lbs.)	110	1060 kg (2337 lbs.)	1060 kg (2335 lbs.)
85	515 kg (1135 lbs.)	515 kg (1135 lbs.)	111	1090 kg (2403 lbs.)	1090 kg (2405 lbs.)
86	530 kg (1168 lbs.)	530 kg (1170 lbs.)	112	1120 kg (2469 lbs.)	1120 kg (2470 lbs.)
87	545 kg (1201 lbs.)	545 kg (1200 lbs.)	113	1150 kg (2535 lbs.)	1150 kg (2535 lbs.)
88	560 kg (1235 lbs.)	560 kg (1235 lbs.)	114	1180 kg (2601 lbs.)	1180 kg (2600 lbs.)
89	580 kg (1279 lbs.)	580 kg (1280 lbs.)	115	1215 kg (2679 lbs.)	1215 kg (2680 lbs.)
90	600 kg (1323 lbs.)	600 kg (1325 lbs.)	116	1250 kg (2756 lbs.)	1250 kg (2755 lbs.)
91	615 kg (1356 lbs.)	615 kg (1355 lbs.)	117	1285 kg (2833 lbs.)	1285 kg (2835 lbs.)
92	630 kg (1389 lbs.)	630 kg (1390 lbs.)	118	1320 kg (2910 lbs.)	1320 kg (2910 lbs.)
93	650 kg (1433 lbs.)	650 kg (1435 lbs.)	119	1360 kg (2998 lbs.)	1360 kg (3000 lbs.)
94	670 kg (1477 lbs.)	670 kg (1475 lbs.)	120	1400 kg (3086 lbs.)	1400 kg (3085 lbs.)
95	690 kg (1521 lbs.)	690 kg (1520 lbs.)	121	1450 kg (3197 lbs.)	1450 kg (3195 lbs.)
96	710 kg (1565 lbs.)	710 kg (1565 lbs.)	122	1500 kg (3307 lbs.)	1500 kg (3305 lbs.)
97	730 kg (1609 lbs.)	730 kg (1610 lbs.)	123	1550 kg (3417 lbs.)	1550 kg (3415 lbs.)
98	750 kg (1653 lbs.)	750 kg (1655 lbs.)	124	1600 kg (3527 lbs.)	1600 kg (3525 lbs.)
99	775 kg (1709 lbs.)	775 kg (1710 lbs.)	125	1650 kg (3638 lbs.)	1650 kg (3640 lbs.)
100	800 kg (1764 lbs.)	800 kg (1765 lbs.)	126		1700 kg (3750 lbs.)
101	825 kg (1819 lbs.)	825 kg (1820 lbs.)	127		1750 kg (3860 lbs.)
102	850 kg (1874 lbs.)	850 kg (1875 lbs.)	128		1800 kg (3970 lbs.)
103	875 kg (1929 lbs.)	875 kg (1930 lbs.)	129		1850 kg (4080 lbs.)
104	900 kg (1984 lbs.)	900 kg (1985 lbs.)	130		1900 kg (4190 lbs.)

Note: for European-Metric passenger tires, reference "Passenger" load; for tires marked with prefixes "LT" or "ST" or suffixes "LT" or "C", reference "Light Truck" load.

**WARNING:** Vehicle handling, traction, ride comfort and other performance parameters may be significantly affected by a change in tire size or type. Before replacing tires, always consult and follow the vehicle owner's manual because some vehicle manufacturers prohibit changing tire size. When selecting tires that are different from the original equipment size, make certain: (1) The tires have adequate load-carrying capacity based on the vehicle placard, (2) The tires have sufficient inflation pressure to carry the load and (3) There is proper clearance with no interference points between the tire and vehicle. The consumer must be aware to always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow any of these warnings may result in loss of control of the vehicle, leading to an accident and serious injury or death.

**NEVER FIT TIRES TO A VEHICLE THAT MAY HAVE LESS LOAD-CARRYING CAPACITY THAN REQUIRED BY THE ORIGINAL EQUIPMENT MANUFACTURER.**

**Examples:** Many vehicles, such as large passenger vans, require Load Range E tires as designated by the vehicle manufacturer. Fitment of a tire with less carrying capacity, such as Load Range D, is not allowed.

In other cases, tires of the same size may carry different load indexes in the service description. You must make certain the replacement tires fitted to the vehicle have a load-carrying capacity equal to or greater than what the original equipment manufacturer specifies.

**NOTE:** Goodyear manufactured and/or marketed European-Metric passenger tires and P-Metric passenger tires are interchangeable as long as they have the same section width, same aspect ratio, same rim diameter. Conversely, Goodyear manufactured and/or marketed P-Metric passenger tires and European-Metric passenger tires are interchangeable as long as they have the same section width, same aspect ration, same rim diameter.

**Caution:** Never substitute a "Standard Load" (SL) tire for an "Extra Load" (XL) tire. If the vehicle was originally equipped with "Extra Load" (XL) tires, replace those tires with similar sized XL tires.

**\*\* SAFETY WARNING \*\***

Serious injury may result from:

- Tire failure due to underinflation/overloading – follow the owner's manual or tire placard in vehicle.
- Explosion of tire/rim assembly due to improper mounting – only specially trained persons should mount tires.
- Do not spin wheels in excess of 35 mph as indicated on the speedometer. Personal injury and severe damage may result from excessive wheel spinning, including tire disintegration or axle failure.

**PROTECT YOUR TIRE INVESTMENT – REGISTER YOUR NEW TIRES.**