

2021 HANKOOK TIRE

PRODUCT CATALOG

Passenger and Light Truck tires

United States of America



OFFICIAL TIRE OF
MAJOR LEAGUE
BASEBALL





Contents

Basic Tire Knowledge	1	Dynapro HP2 (RA33 & RA33D)	85
Tire Conversion Chart	2	Dynapro AT-M (RF10) - LT Metric	87
		Dynapro AT-M (RF10) - P Metric	87
		Dynapro AT2 (RF11) - P Metric	89
		Dynapro HT (RH12) - P Metric	91
		Dynapro HT (RH12) - LT Metric	91
		Kinergy Eco (K425)	93
		Kinergy Eco ² (K435)	93
		Kinergy AS ev (K435)	93
		Ventus V4 es (H105)	93
		Dynapro AT (RF08)	94
		Optimo H418 (H418)	94
		Ventus S1 AS (H125)	94
		Optimo H428 (H428)	94
		Optimo H724 (H724)	94
		Dynapro AS (RH03)	95
		Vantra LT (RA18)	95
Passenger (Pattern Code)		Runflat (Pattern Code)	
Ventus V12 evo ² (K120)	5	Ventus S1 Prime ³ (K125)	101
Ventus S1 Noble ² (H452 & H452B)	9	Ventus S1 Noble ² (H452B)	101
Ventus V ² Concept ² (H457)	13	Ventus S1 evo ³ (K127B)	101
Kinergy 4S ² (H750)	15	Ventus S1 evo ³ SUV (K127C)	101
Kinergy 4S ² x (H750A)	17	Ventus S1 evo ² (K117B)	102
Kinergy GT (H436 & H436B)	19	Ventus PRIME ² (K115B)	102
Kinergy PT (H737)	23	Ventus S1 evo ² SUV (K117C)	102
Kinergy ST (H735)	27	Kinergy GT (H436B)	102
		Optimo H426 (H426B)	102
SUV/LTR (Pattern Code)		Important Safety Warning	105
Ventus S1 evo ² (K117A & K117C)	33	Limited Warranty	109
Ventus ST (RH06)	35	Claim Adjustment Procedure	111
Ventus AS (RH07)	37	Claim Procedure Flow Chart	112
Dynapro HP2 (RA33 & RA33D)	39	Claim Form Sample	113
Dynapro HT (RH12) - P Metric	41	Credit Percentage Table	114
Dynapro HT (RH12) - LT Metric	43	Adjustment Percentage for Customer	115
Dynapro AT2 (RF11) - P Metric	45	Load Inflation Pressure Tables	117
Dynapro AT2 (RF11) - LT Metric	47		
Dynapro MT2 (RT05)	51		
Vantra LT (RA18)	53		
Original Equipment (Pattern Code)			
Ventus S1 evo Z (K129)	59		
Ventus S1 evo ³ (K127, K127B, & K127E)	61		
Ventus S1 evo ³ SUV (K127A & K127C)	63		
Ventus S1 evo ² (K117 & K117B)	65		
Ventus S1 evo ² (K117A & K117C)	67		
Ventus S1 Prime ³ (K125)	69		
Ventus PRIME ² (K115 & K115B)	71		
Ventus S1 Noble ² (H452 & H452B)	73		
Kinergy GT (H436 & H436B)	75		
Optimo H426 (H426 & H426B)	79		
Optimo H725 (H725)	81		
Optimo H725 (H725) (A & B Type)	83		

The data in this booklet can be changed by the manufacturer without prior notice.

Application Guide & General Instructions

APPLICATION GUIDE

IMPORTANT :

Always refer to the vehicle tire information table/chart for the correct tire size and inflation pressure. If a tire size other than shown on vehicle table/chart is desired, follow these instructions to assure satisfactory tire performance.

GENERAL INSTRUCTIONS

1. This chart is intended for use as a guide for tire applications on conventional passenger vehicles.
Tires of different basic construction :
diagonal (bias), belted bias and radial may vary in series (profiles), dimensions and ride characteristics. These differences may seriously affect vehicle handling characteristics if tires are mixed improperly.
2. Adherence to recommended inflation pressures is important for proper vehicle and tire performance.
Follow the recommendations of the vehicle or tire manufacturer.
3. SIZES Never mix different tire sizes on the same axle.
4. CONSTRUCTION Never mix different construction (bias, belted bias or radial) on the same axle.
5. STATION WAGONS AND ALL VEHICLES USED IN TRAILER TOWING SERVICE
It is recommendable that tires on all wheel positions of these vehicles be of the same size and construction (bias, belted bias or radial). These vehicles may require Load Range C or D tires.
6. WORN TIRE It is preferred that tires having approximately the same amount of tread depth remaining be placed on the same axle.

DEFINITIONS

Overall Diameter

Diameter of the tire from tread surface to tread surface while inflated but unladen.

Tread Width

The width of the tread surface, designed for contact with the road.

R. P. M.

Revolutions Per Mile

Rim Width

Distance between the inside of the rim flanges.

Section Height

Distance from the bead seat to the outer tread surface of the inflated tire.

Section Width

Distance between the outer sidewalls of an inflated tire.

U.T.Q.G.

Uniform Tire Quality Grading.

Speed Symbol

Speed Symbol		Speed (km/h)	Speed (mp/h)
K		110	68
L		120	74
M		130	81
N		140	87
P		150	93
Q		160	99
R		170	106
S		180	112
T		190	118
U		200	124
H		210	130
V		240	149
ZR	W	270	168
	Y (Y)	300 Above 300	186 Above 186

Load Range Chart

Load Range (LR)	Ply Range (PR)
A	2
B	4
C	6
D	8
E	10
F	12
G	14
H	16
J	18
L	20
M	22
N	24

Sidewall Type Information

BSW : Black Sidewall

WSW : White Sidewall

OWL : Outlined White Letter

RWL: Raised White Letter

Passenger Tire Conversion Chart

82 SERIES	P-80, 80 SERIES	P-75 SERIES	70 SERIES	P-70 SERIES	65 SERIES	P-65 SERIES	60 SERIES	P-60 SERIES	P-55,55 SERIES	P-50, 50 SERIES	P-45, 45 SERIES	P-40, 40 SERIES
135R12			135/70R13 155/70R12									
145R12	145/80R12		145/70R13 165/70R12	P165/70R12	155/65R13 165/65R13		175/60R13					
135R13	135/80R13		155/70R13		175/65R13		185/60R13			P215/50R13		
155R12	155/80R12		175/70R12		165/65R14 185/65R13							
145R13	145/80R13		165/70R13	P165/70R13	165/65R14 185/65R13							
155R13	155/80R13 P155/80R13		175/70R13	P175/70R13	175/65R14	P175/65R14	205/60R13 185/60R14	P205/60R13 P185/60R14		195/50R15		
			165/70R14						185/55R15	205/50R15 P205/50R15		
165R13	165/80R13 P165/80R13		185/70R13 175/70R14	P185/70R13	185/65R14		195/60R14 205/60R14	P195/60R14	195/55R15		205/45R16	
175R13	P175/80R13	P185/75R13		P195/70R13	195/65R14			P215/60R14	205/55R15	225/50R16 P225/50R15	225/45R16	
165R14		P175/75R14	185/70R14	P185/70R14	185/65R15		195/60R15	P195/60R15				235/40R17
185R13	P185/80R13				205/65R14		205/60R15	P205/60R15			245/45R16	
155R15			195/70R14	P195/70R14					225/55R15 205/55R16	225/50R16		
175R14	175/80R14	P185/75R14			195/65R15	P195/65R15	215/60R15	P235/60R14 P215/60R15	P205/55R16	P225/50R16	225/45R17	255/40R17
165R15						P215/65R14						
185R14	185/80R14	P195/75R14	205/70R14 195/70R15	P205/70R14	205/65R15	P205/65R15	225/60R15	P245/60R14 P225/60R15		P245/50R16	235/45R17	
		P205/75R14		P215/70R14	215/65R15	P215/65R15	215/60R16	P235/60R15 P215/60R16		P255/50R16		
185R15		P215/75R14	205/70R15	P205/70R15			225/60R16	P245/60R15 P225/60R16		P295/50R15		
195R15		P205/75R15		P215/70R15			255/60R15	P255/60R15				
		P215/75R15		P225/70R15 P235/70R15				P275/60R15				
215R15		P225/75R15 P235/75R15	255/70R15	P245/70R15 P255/70R15								

Note: The recommendations shown in the chart above do not always guarantee complete interchangeability, primarily because of the differences in section widths. Therefore before replacing tires with different sizes, always consult your HANKOOK technical representative or tire dealer about proper clearance between tire and fender for your particular automobile.

OD : Overall Diameter of a tire when mounted or inflated. Tire sizes on the borderline belong to both the upper and lower horizontal row of sizes (Example: size 225/60R13, which is on the 600mm overall diameter line, is interchangeable with sizes shown between lines 580 and 600 or 600 and 610).

Load Index and Equivalent Loads

Load Index	Load (kg)	Load (lbs)
75	387	853
76	400	882
77	412	908
78	425	937
79	437	963
80	450	992
81	462	1019
82	475	1047
83	487	1074
84	500	1102
85	515	1135
86	530	1168
87	545	1201
88	560	1235

Load Index	Load (kg)	Load (lbs)
89	580	1279
90	600	1323
91	615	1356
92	630	1389
93	650	1433
94	670	1477
95	690	1521
96	710	1585
97	730	1609
98	750	1653
99	775	1709
100	800	1764
101	825	1819
102	850	1874

Load Index	Load (kg)	Load (lbs)
103	875	1929
104	900	1984
105	925	2039
106	950	2094
107	975	2149
108	1000	2205
109	1030	2271
110	1050	2337
111	1090	2403
112	1120	2469
113	1150	2535
114	1180	2601
115	1215	2679



Passenger Car Radial Tire

If you want speed with a sense of stability,
Hankook Tire has the solution.

TIRE

K120, H452, H457, H750, H436, H737, H735

NOTES

T/T : Tube Type

T/L : Tubeless Type

❄️ : Snow Tire

❄️ 🌀 ❄️ : All Season Tire

This List cancels all previous lists and is subject to change without prior notice



Ultra-High Performance Summer



ventus V12 evo²



reddot design award
product design 2014

Extreme running through advanced technology

A tire designed for drivers who like to express their own style which delivers outstanding performance in sports driving.



Dry handling



Wet handling



Cornering



Grip



Traction



30 DAY
FREE
TRIAL



ROAD
HAZARD
WARRANTY

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						(psi)	(lbs)								
16															
1015379	205/55ZR16	XL	94W	BSW	6.5	5.5-7.5	50	1,477	24.7	8.7	6.5	10.0	842	19.1	320/AA/A
17															
1015410	205/45ZR17	XL	88W	BSW	7.0	6.5-7.5	50	1,235	24.0	8.4	6.8	10.0	865	18.2	320/AA/A
1015234	205/50ZR17	XL	93Y	BSW	6.5	5.5-7.5	50	1,433	24.9	8.8	6.8	10.0	834	19.3	320/AA/A
1015401	215/45ZR17	XL	91Y	BSW	7.0	7.0-8.0	50	1,356	24.4	8.7	7.4	10.0	851	19.4	320/AA/A
1015690	215/50ZR17	XL	95W	BSW	7.0	6.0-7.5	50	1,521	25.3	9.4	6.7	10.0	821	21.8	320/AA/A
1015402	225/45ZR17	XL	94Y	BSW	7.5	7.0-8.5	50	1,477	24.7	9.2	7.7	10.0	840	20.3	320/AA/A
1015689	225/50ZR17	XL	98Y	BSW	7.0	6.0-8.0	50	1,653	25.7	9.7	7.5	10.0	809	23.1	320/AA/A
1015237	235/45ZR17	XL	97Y	BSW	8.0	7.5-9.0	50	1,609	25.1	9.6	8.0	10.0	827	22.9	320/AA/A
1015239	245/40ZR17	XL	95Y	BSW	8.5	8.0-9.5	50	1,521	24.5	10.1	8.4	10.0	848	22.0	320/AA/A
1015240	245/45ZR17	XL	99Y	BSW	8.0	7.5-9.0	50	1,709	25.5	9.9	8.4	10.0	814	24.0	320/AA/A
1015413	255/40ZR17	XL	98Y	BSW	9.0	8.5-10.0	50	1,653	24.8	10.6	8.7	10.0	837	23.2	320/AA/A
18															
1015242	215/40ZR18	XL	89Y	BSW	7.5	7.0-8.5	50	1,279	24.6	8.9	7.4	10.0	846	18.8	320/AA/A
1015243	215/45ZR18	XL	93Y	BSW	7.0	7.0-8.0	50	1,433	25.4	8.7	7.4	10.0	817	19.9	320/AA/A
1015414	225/40ZR18	XL	92Y	BSW	8.0	7.5-9.0	50	1,389	24.9	9.4	7.7	10.0	833	21.9	320/AA/A
1015415	225/45ZR18	XL	95Y	BSW	7.5	7.0-8.5	50	1,521	25.7	9.2	7.7	10.0	807	22.3	320/AA/A
1015416	235/40ZR18	XL	95Y	BSW	8.5	8.0-9.5	50	1,521	25.2	9.8	8.0	10.0	825	22.6	320/AA/A
1015247	235/50ZR18	XL	101Y	BSW	7.5	6.5-8.5	50	1,819	27.1	10.0	7.8	10.0	767	25.9	320/AA/A
1015248	245/35ZR18	XL	92Y	BSW	8.5	8.0-9.5	50	1,389	24.6	10.0	8.4	10.0	846	21.8	320/AA/A
1015418	245/40ZR18	XL	97Y	BSW	8.5	8.0-9.5	50	1,609	25.5	10.1	8.3	10.0	815	23.0	320/AA/A
1015250	245/45ZR18	XL	100Y	BSW	8.0	7.5-9.0	50	1,764	26.4	9.9	8.4	10.0	786	25.2	320/AA/A
1015251	255/35ZR18	XL	94Y	BSW	9.0	8.5-10.0	50	1,477	24.8	10.6	8.7	10.0	838	21.5	320/AA/A
1015252	255/40ZR18	XL	99Y	BSW	9.0	8.5-10.0	50	1,709	25.8	10.6	8.7	10.0	805	24.2	320/AA/A
1015253	255/45ZR18	XL	103Y	BSW	8.5	8.0-9.5	50	1,929	26.8	10.4	8.7	10.0	774	26.0	320/AA/A
1015417	265/35ZR18	XL	97Y	BSW	9.5	9.0-10.5	50	1,609	25.1	11.0	9.1	10.0	827	24.3	320/AA/A
1015255	265/40ZR18	XL	101Y	BSW	9.5	9.0-10.5	50	1,819	26.1	11.0	9.1	10.0	795	26.1	320/AA/A
1015256	275/35ZR18	XL	99Y	BSW	9.5	9.0-11.0	50	1,709	25.3	11.2	9.4	10.0	820	25.4	320/AA/A
1015257	275/40ZR18	XL	103Y	BSW	9.5	9.0-11.0	50	1,929	26.4	11.3	9.4	10.0	786	26.9	320/AA/A
1015258	285/35ZR18	XL	101Y	BSW	10.0	9.5-11.0	50	1,819	25.6	11.7	9.8	10.0	810	26.1	320/AA/A
19															
1015281	225/35ZR19	XL	88Y	BSW	8.0	7.5-9.0	50	1,235	25.0	9.4	7.7	10.0	831	21.8	320/AA/A
1015282	225/40ZR19	XL	93Y	BSW	8.0	7.5-9.0	50	1,433	25.9	9.4	7.7	10.0	803	22.2	320/AA/A
1015283	225/45ZR19	XL	96Y	BSW	7.5	7.0-8.5	50	1,565	26.7	9.2	7.7	10.0	777	23.3	320/AA/A
1015419	235/35ZR19	XL	91Y	BSW	8.5	8.0-9.5	50	1,356	25.2	9.8	8.0	10.0	823	22.1	320/AA/A
1015285	245/35ZR19	XL	93Y	BSW	8.5	8.0-9.5	50	1,433	25.6	10.0	8.3	10.0	813	22.7	320/AA/A
1015286	245/40ZR19	XL	98Y	BSW	8.5	8.0-9.5	50	1,653	26.5	10.1	8.4	10.0	784	24.3	320/AA/A
1015287	245/45ZR19	XL	102Y	BSW	8.0	7.5-9.0	50	1,874	27.4	9.9	8.3	10.0	757	26.2	320/AA/A
1015288	255/30ZR19	XL	91Y	BSW	9.0	8.5-9.5	50	1,356	24.8	10.9	9.0	10.0	836	22.6	320/AA/A
1015420	255/35ZR19	XL	96Y	BSW	9.0	8.5-10.0	50	1,565	25.8	10.5	8.7	10.0	805	24.9	320/AA/A
1015290	255/40ZR19	XL	100Y	BSW	9.0	8.5-10.0	50	1,764	26.8	10.6	8.7	10.0	775	25.4	320/AA/A
1015291	255/45ZR19	XL	104Y	BSW	8.5	8.0-9.5	50	1,984	27.8	10.4	8.7	10.0	746	27.3	320/AA/A
1015292	265/30ZR19	XL	93Y	BSW	9.5	9.0-10.0	50	1,433	25.1	10.9	9.4	10.0	828	23.5	320/AA/A
1015293	265/35ZR19	XL	98Y	BSW	9.5	9.0-10.5	50	1,653	26.1	11.0	9.1	10.0	796	25.4	320/AA/A
1015294	275/30ZR19	XL	96Y	BSW	9.5	9.0-10.0	50	1,565	25.3	11.5	9.8	10.0	820	25.1	320/AA/A
1015295	275/35ZR19	XL	100Y	BSW	9.5	9.0-11.0	50	1,764	26.3	11.2	9.4	10.0	789	26.5	320/AA/A
1015296	275/40ZR19	XL	105Y	BSW	9.5	9.0-11.0	50	2,039	27.4	11.3	9.4	10.0	757	28.1	320/AA/A
1015297	285/30ZR19	XL	98Y	BSW	10.0	9.5-10.5	50	1,653	25.6	12.0	10.1	10.0	813	26.1	320/AA/A
1015298	285/35ZR19	XL	103Y	BSW	10.0	9.5-11.0	50	1,929	26.7	11.7	9.8	10.0	779	27.2	320/AA/A
1015299	295/30ZR19	XL	100Y	BSW	10.5	10.0-11.0	50	1,764	25.8	12.3	10.5	10.0	805	27.2	320/AA/A
1015300	305/30ZR19	XL	102Y	BSW	11.0	10.5-11.5	50	1,874	26.0	12.6	10.8	10.0	798	28.4	320/AA/A
1015301	325/30ZR19	XL	105Y	BSW	11.5	11.0-12.0	50	2,039	26.5	13.7	11.5	10.0	784	30.7	320/AA/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Ultra-High Performance Summer



ventus V12 evo²



reddot design award
product design 2014

Extreme running through advanced technology

A tire designed for drivers who like to express their own style which delivers outstanding performance in sports driving.



Dry handling



Wet handling



Cornering



Grip



Traction



30 DAY
FREE
TRIAL



ROAD
HAZARD
WARRANTY

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						(psi)	(lbs)								
20															
1015364	245/30ZR20	XL	90Y	BSW	8.5	8.0-9.0	50	1,323	25.7	10.2	8.4	10.0	807	23.9	320/AA/A
1015365	245/35ZR20	XL	95Y	BSW	8.5	8.0-9.5	50	1,521	26.6	10.0	8.4	10.0	782	24.0	320/AA/A
1015366	245/40ZR20	XL	99Y	BSW	8.5	8.0-9.5	50	1,709	27.5	10.1	8.4	10.0	755	25.3	320/AA/A
1015367	245/45ZR20	XL	103Y	BSW	8.0	7.5-9.0	50	1,929	28.4	9.9	8.4	10.0	730	27.1	320/AA/A
1015368	255/30ZR20	XL	92Y	BSW	9.0	8.5-9.5	50	1,389	25.8	10.9	9.0	10.0	804	24.2	320/AA/A
1015369	255/35ZR20	XL	97Y	BSW	9.0	8.5-10.0	50	1,609	26.8	10.5	8.7	10.0	775	25.3	320/AA/A
1015370	255/45ZR20	XL	105Y	BSW	8.5	8.0-9.5	50	2,039	28.8	10.4	8.7	10.0	720	28.4	320/AA/A
1015371	275/30ZR20	XL	97Y	BSW	9.5	9.0-10.0	50	1,609	26.3	11.5	9.8	10.0	789	25.9	320/AA/A
1015372	275/35ZR20	XL	102Y	BSW	9.5	9.0-11.0	50	1,874	27.3	11.2	9.4	10.0	760	27.6	320/AA/A
1017382	275/40ZR20	XL	106Y	BSW	9.5	9.0-11.0	50	2,094	28.4	11.3	9.4	10.0	730	29.3	320/AA/A
1015373	285/30ZR20	XL	99Y	BSW	10.0	9.5-10.5	50	1,709	26.6	12.0	10.1	10.0	782	27.3	320/AA/A
1015374	305/25ZR20	XL	97Y	BSW	11.0	10.5-11.5	50	1,609	25.8	12.9	10.8	10.0	804	28.8	320/AA/A

21

1015375	245/35ZR21	XL	96Y	BSW	8.5	8.0-9.5	50	1,565	27.5	10.0	8.4	10.0	754	25.0	320/AA/A
1015758	275/30ZR21	XL	98Y	BSW	9.5	9.0-10.0	50	1,653	27.3	11.5	9.8	10.0	760	26.6	320/AA/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Ultra-High Performance All-Season / Runflat



ventus S1 noble²



The ideal balance of ultra-high performance all-season

Ventus S1 noble² is premium ultra-high performance all-season tire developed for drivers of sports cars seeking a comfortable drive.



Dry handling



Wet handling



Snow handling



Comfort



Low noise



Grip



30 DAY
FREE TRIAL



50K
warranty



ROAD
HAZARD
WARRANTY



M+S

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								
16															
1016065	195/55R16		87V	BSW	6.0	5.5-7.0	51	1,202	24.3	8.4	6.5	10.0	856	17.9	500/AA/A
1014500	205/55ZR16		91W	BSW	6.5	5.5-7.5	51	1,356	24.7	8.7	6.8	10.0	840	19.7	500/AA/A
1014531	215/55ZR16	XL	97W	BSW	7.0	6.0-7.5	50	1,609	25.1	9.1	7.1	10.0	827	22.8	500/AA/A
1014501	225/50ZR16		92W	BSW	7.0	6.0-8.0	51	1,389	24.7	9.8	7.4	10.0	840	21.0	500/AA/A
1014502	225/55ZR16		95W	BSW	7.0	6.0-8.0	51	1,521	25.6	9.6	7.4	10.0	811	24.2	500/AA/A
17															
1014515	205/45ZR17	XL	88W	BSW	7.0	6.5-7.5	50	1,235	24.1	8.4	7.0	10.0	862	18.9	500/AA/A
1014532	205/50ZR17	XL	93W	BSW	6.5	5.5-7.5	50	1,433	25.0	8.8	6.8	10.0	832	19.3	500/AA/A
1014504	215/45ZR17	XL	91W	BSW	7.0	7.0-8.0	50	1,356	24.5	8.7	7.4	10.0	848	20.7	500/AA/A
1014533	215/50ZR17	XL	95W	BSW	7.0	6.0-7.5	50	1,521	25.4	9.4	7.1	10.0	819	21.7	500/AA/A
1014503	215/55ZR17		94W	BSW	7.0	6.0-7.5	50	1,433	26.2	9.1	6.8	10.0	794	22.9	500/AA/A
1014505	225/45ZR17		91W	BSW	7.5	7.0-8.5	51	1,356	24.8	9.2	7.7	10.0	837	20.9	500/AA/A
1014506	225/50ZR17		94W	BSW	7.0	6.0-8.0	51	1,477	25.8	9.7	7.5	10.0	806	22.0	500/AA/A
1015312	225/55R17		97H	BSW	7.0	6.0-8.0	51	1,609	26.9	9.8	7.2	10.0	773	25.3	400/A/A BMW X1 ('15-'22)
1015480	225/55R17	XL	101H	BSW	7.0	6.0-8.0	50	1,819	26.6	9.6	7.5	10.0	782	26.5	500/B/A MERCEDES BENZ Metris ('15-'21)
1014507	225/55ZR17		97W	BSW	7.0	6.0-8.0	51	1,609	26.6	9.6	7.5	10.0	780	24.9	500/AA/A
1014508	235/45ZR17		94W	BSW	8.0	7.5-9.0	51	1,477	25.2	9.6	8.0	10.0	824	21.0	500/AA/A
1014516	235/50ZR17		96W	BSW	7.5	6.5-8.5	51	1,565	26.2	10.0	7.8	10.0	794	24.9	500/AA/A
1014867	235/55R17		99H	BSW	7.5	6.5-8.5	51	1,709	27.4	10.1	7.2	9.0	759	28.0	700/B/A FORD Mustang ('14-'20)
1014509	235/55ZR17		99W	BSW	7.5	6.5-8.5	51	1,709	27.0	10.0	7.8	10.0	769	26.1	500/AA/A
1014510	245/40ZR17		91W	BSW	8.5	8.0-9.5	51	1,356	24.6	10.1	8.4	10.0	845	20.8	500/AA/A
1014534	245/45ZR17	XL	99W	BSW	8.0	7.5-9.0	50	1,709	25.5	9.9	8.3	10.0	814	24.0	500/AA/A
1024104	245/50ZR17		99W	BSW	7.5	7.0-8.5	51	1,709	26.5	10.5	8.3	10.0	782	26.7	500/AA/A
18															
1024612	215/40ZR18	XL	89Y	BSW	7.5	7.0-8.5	50	1,279	24.6	8.9	7.6	10.0	843	20.2	500/AA/A
1024106	215/45ZR18	XL	93Y	BSW	7.0	7.0-8.0	50	1,433	25.5	8.7	7.6	10.0	815	21.1	500/AA/A
1016111	225/40R18		88W	BSW	8.0	7.5-9.0	51	1,235	24.9	9.5	7.4	10.0	833	21.6	500/AA/A HYUNDAI Elantra ('15-21), Elantra GT ('16-23)
1014873	225/40R18	XL	92H	BSW	8.0	7.5-9.0	50	1,389	24.9	9.4	7.5	10.0	833	22.5	500/A/A VOLKSWAGEN Golf ('14-'18)
1014499	225/40ZR18	XL	92W	BSW	8.0	7.5-9.0	50	1,389	24.9	9.5	7.7	10.0	833	23.9	500/AA/A
1021835	225/45R18	XL	95H	BSW	7.5	7.0-8.5	50	1,521	25.9	9.0	7.8	9.5	802	22.4	360/A/A BMW 3/4 Series ('19-'25)
1014511	225/45ZR18	XL	95W	BSW	7.5	7.0-8.5	50	1,521	25.8	9.2	7.7	10.0	805	22.3	500/AA/A
1014518	225/50ZR18		95W	BSW	7.0	6.0-8.0	51	1,521	26.8	9.7	7.5	10.0	776	24.6	500/AA/A
1024108	225/55ZR18		98W	BSW	7.0	6.0-8.0	51	1,653	27.6	9.6	7.6	10.0	752	27.0	500/AA/A
1021085	225/60ZR18		100W	BSW	6.5	6.0-8.0	51	1,764	28.5	9.3	7.1	10.0	729	26.5	500/AA/A
1014535	235/40ZR18	XL	95W	BSW	8.5	8.0-9.5	50	1,521	25.3	9.8	8.0	10.0	822	22.3	500/AA/A
1021755	235/45R18		94V	BSW	8.0	7.5-9.0	51	1,477	26.3	9.5	7.7	10.0	790	25.6	500/A/A HYUNDAI Kona ('17-'23), Sonata ('14-'16), KIA Soul ('18~)
1014517	235/45ZR18	XL	98W	BSW	8.0	7.5-9.0	50	1,653	26.2	9.6	8.0	10.0	793	24.5	500/AA/A
1014512	235/50ZR18		97W	BSW	7.5	6.5-8.5	51	1,609	27.2	10.0	7.8	10.0	765	25.9	500/AA/A
1021084	235/55ZR18		100W	BSW	7.5	6.5-8.5	51	1,764	28.0	10.0	7.4	10.0	741	26.4	500/AA/A
1024613	235/60R18		103W	BSW	7.0	6.5-8.5	51	1,929	29.0	9.6	7.6	10.0	717	30.9	500/AA/A
1014536	245/40ZR18	XL	97W	BSW	8.5	8.0-9.5	50	1,609	25.6	10.1	8.4	10.0	812	23.9	500/AA/A
1022126	245/45R18		96V	BSW	8.0	7.5-9.0	51	1,565	26.5	10.0	8.3	9.5	782	26.5	500/AA/A HYUNDAI Azera, KIA Cadenza ('16-'20)
1014537	245/45ZR18	XL	100W	BSW	8.0	7.5-9.0	50	1,764	26.5	9.9	8.3	10.0	784	25.9	500/AA/A
1014530	245/50ZR18		100W	BSW	7.5	7.0-8.5	51	1,764	27.5	10.5	8.1	10.0	754	26.8	500/AA/A
1024109	245/55ZR18		103W	BSW	7.5	7.0-8.5	51	1,929	28.5	10.4	8.3	10.0	729	29.6	500/AA/A
1014513	255/35ZR18	XL	94W	BSW	9.0	8.5-10.0	50	1,477	24.9	10.6	8.7	10.0	835	22.4	500/AA/A
1014519	255/40ZR18		95W	BSW	9.0	8.5-10.0	51	1,521	25.9	10.6	8.7	10.0	802	24.5	500/AA/A
1014520	255/45ZR18		99W	BSW	8.5	8.0-9.5	51	1,709	26.9	10.4	8.7	10.0	772	26.2	500/AA/A
1014521	265/35ZR18	XL	97W	BSW	9.5	9.0-10.5	50	1,609	25.2	11.0	9.1	10.0	825	24.6	500/AA/A
1014522	275/35ZR18		95W	BSW	9.5	9.0-11.0	51	1,521	25.4	11.2	9.4	10.0	817	25.9	500/AA/A
1014538	285/35ZR18	XL	101W	BSW	10.0	9.5-11.0	50	1,819	25.7	11.7	9.8	10.0	807	27.1	500/AA/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Road Hazard and Mileage warranties do not apply to Runflat Tires.

Ultra-High Performance All-Season / Runflat



ventus S1 noble²



The ideal balance of ultra-high performance all-season

Ventus S1 noble² is premium ultra-high performance all-season tire developed for drivers of sports cars seeking a comfortable drive.



Dry handling



Wet handling



Snow handling



Comfort



Low noise



Grip



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								
19															
1021080	225/45ZR19	XL	96Y	BSW	7.5	7.0-8.5	50	1,565	26.8	9.2	7.7	10.0	775	24.2	500/AA/A
1015408	235/50R19		99H	BSW	7.5	6.5-8.5	51	1,709	28.3	10.1	8.1	10.0	735	28.5	500/A/A
1024110	235/55ZR19	XL	105W	BSW	7.5	6.5-8.5	50	2,039	29.0	10.1	8.0	10.0	716	31.1	500/AA/A
1024111	245/40ZR19	XL	98Y	BSW	8.5	8.0-9.5	50	1,653	26.7	10.2	9.1	9.5	778	28.2	500/AA/A
1014523	245/45ZR19	XL	102W	BSW	8.0	7.5-9.0	50	1,874	27.5	9.9	8.4	10.0	755	26.1	500/AA/A
1021083	245/50ZR19	XL	105W	BSW	7.5	7.0-8.5	50	2,039	28.5	10.5	8.1	10.0	728	28.8	500/AA/A
1014868	245/55R19		103V	BSW	7.5	7.0-8.5	51	1,929	29.8	10.4	8.2	10.0	697	32.2	500/AA/A
1014514	255/35ZR19	XL	96W	BSW	9.0	8.5-10.0	50	1,565	25.9	10.6	8.7	10.0	803	24.8	500/AA/A
1014524	255/40ZR19	XL	100W	BSW	9.0	8.5-10.0	50	1,764	26.9	10.6	8.7	10.0	772	25.9	500/AA/A
1022739	255/45R19		100H	BSW	8.5	8.0-9.5	51	1,764	28.1	10.6	8.7	10.0	740	29.8	500/B/A
1014525	255/45ZR19	XL	104W	BSW	8.5	8.0-9.5	50	1,984	27.9	10.4	8.7	10.0	744	27.8	500/AA/A
1014526	275/40ZR19	XL	105W	BSW	9.5	9.0-11.0	50	2,039	27.5	11.3	9.4	10.0	755	29.0	500/AA/A
1021077	285/35ZR19	XL	103Y	BSW	10.0	9.5-11.0	50	1,929	26.7	11.7	9.8	10.0	777	27.9	500/AA/A

20															
1024112	245/35ZR20	XL	95Y	BSW	8.5	8.0-9.5	50	1,521	26.6	10.1	8.6	10.0	780	25.6	500/AA/A
1014527	245/40ZR20	XL	99W	BSW	8.5	8.0-9.5	50	1,709	27.6	10.1	8.4	10.0	753	26.0	500/AA/A
1021081	245/45ZR20	XL	103Y	BSW	8.0	7.5-9.0	50	1,929	28.5	9.9	8.4	10.0	728	28.0	500/AA/A
1014869	245/50R20		102V	BSW	7.5	7.0-8.5	51	1,874	29.8	10.4	8.2	10.0	697	33.3	660/A/A
1022658	245/50R20		102V	BSW	7.5	7.0-8.5	51	1,874	29.5	10.5	8.2	10.0	703	31.0	500/A/A
1014528	255/35ZR20	XL	97W	BSW	9.0	8.5-10.0	50	1,565	26.9	10.6	8.7	10.0	774	26.5	500/AA/A
1022762	255/40R20	XL	101H	BSW	9.0	8.5-10.0	50	1,819	27.9	10.9	8.5	10.0	744	28.9	500/B/A
1021082	255/45ZR20	XL	105W	BSW	8.5	8.0-9.5	50	2,039	28.9	10.4	8.4	10.0	718	29.7	500/AA/A
1017315	255/50R20		105H	BSW	8.0	7.0-9.0	51	2,039	30.2	10.9	8.4	10.0	688	34.0	500/A/A
1014529	275/35ZR20	XL	102W	BSW	9.5	9.0-11.0	50	1,874	27.4	11.2	9.4	10.0	758	27.7	500/AA/A
1021079	275/40ZR20	XL	106Y	BSW	9.5	9.0-11.0	50	2,094	28.5	11.3	9.4	10.0	728	31.0	500/AA/A

H452B Runflat

18															
1021836	225/45R18	XL	95H	BSW	7.5	7.0-8.5	50	1,521	25.7	9.5	7.6	8.0	808	25.4	400/A/A
1015152	245/45R18	XL	100H	BSW	8.0	7.5-9.0	50	1,764	26.6	10.0	6.2	9.5	782	31.7	380/A/A

19															
1022328	255/45R19	XL	104H	BSW	8.5	8.0-9.5	50	1,984	28.0	10.4	8.9	10.0	741	33.5	440/A/A

20															
1023793	255/40R20	XL	101H	BSW	9.0	8.5-10.0	50	1,819	27.9	10.6	9.2	10.0	744	34.2	460/A/A
1025595	255/40R20	XL	101H	BSW	9.0	8.5-10.0	50	1,819	27.9	10.6	8.6	10.0	744	35.2	460/A/A
1027181	285/35R20	XL	104H	BSW	10.0	9.5-11.0	50	1,984	27.7	12.3	10.2	10.0	750	37.4	320/A/A
1024646	285/35R20	XL	104H	BSW	10.0	9.5-11.0	50	1,984	27.7	12.3	10.2	10.0	750	36.4	320/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to Runflat Tires.

High Performance All-Season



ventus V2 concept²



 GOOD DESIGN
AWARD 2013



Experience the pleasure of driving with a stylish and economical tire

Dynamic and technical tread design offers excellent handling performance to drivers who pursue their own style and uniqueness.



Comfort



Dry handling



Drainage



Dry braking



30 DAY
FREE
TRIAL



45K
warranty



ROAD
HAZARD
WARRANTY



M+S

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						(psi)	(lbs)								
15															
1014361	195/50R15		82H	BSW	6.0	5.5-7.0	51	1,047	22.6	8.5	6.1	9.5	920	15.9	500/AA/A
1014359	195/55R15		85V	BSW	6.0	5.5-7.0	51	1,135	23.3	8.4	6.1	9.5	892	16.6	500/AA/A
1014376	205/50R15		86H	BSW	6.5	5.5-7.5	51	1,168	22.9	8.9	6.5	9.5	905	18.7	500/AA/A
16															
1014375	185/55R16		83H	BSW	6.0	5.0-6.5	51	1,074	23.9	7.8	5.8	9.5	870	16.6	500/AA/A
1014367	205/45R16		83V	BSW	7.0	6.5-7.5	51	1,074	23.2	8.4	6.8	9.5	897	17.9	500/AA/A
1014360	205/50R16		87V	BSW	6.5	5.5-7.5	51	1,201	23.9	8.9	6.5	9.5	867	19.5	500/AA/A
1014358	205/55R16	XL	94V	BSW	6.5	5.5-7.5	50	1,477	24.7	8.7	6.5	9.5	840	20.5	500/AA/A
1014373	215/55R16	XL	97V	BSW	7.0	6.0-7.5	50	1,609	25.1	9.1	6.7	9.5	827	22.3	500/AA/A
1014369	225/50R16		92V	BSW	7.0	6.0-8.0	51	1,389	24.8	9.7	7.1	9.5	837	21.8	500/AA/A
1014368	225/55R16	XL	99V	BSW	7.0	6.0-8.0	50	1,709	25.6	9.6	7.0	9.5	811	23.6	500/AA/A
1014372	245/50R16		97H	BSW	7.5	7.0-8.5	51	1,609	25.6	10.4	7.7	9.5	811	23.9	500/AA/A
17															
1014378	205/40R17	XL	84V	BSW	7.5	7.0-8.0	50	1,102	23.3	8.7	6.8	9.5	891	18.0	500/AA/A
1014371	205/45R17	XL	88V	BSW	7.0	6.5-7.5	50	1,235	24.1	8.4	6.8	9.5	862	18.6	500/AA/A
1014370	205/50R17	XL	93V	BSW	6.5	5.5-7.5	50	1,433	25.0	8.8	6.5	9.5	832	19.4	500/AA/A
1014363	215/45R17	XL	91V	BSW	7.0	7.0-8.0	50	1,356	24.5	8.7	7.1	9.5	848	20.2	500/AA/A
1014362	215/50R17		91V	BSW	7.0	6.0-7.5	51	1,356	25.4	9.4	6.7	9.5	819	22.0	500/AA/A
* 1027427	215/55R17		94W	BSW	7.0	6.0-7.5	51	1,477	26.1	9.1	6.9	9.5	772	21.4	500/AA/A
1014365	225/45R17	XL	94V	BSW	7.5	7.0-8.5	50	1,477	24.8	9.2	7.5	9.5	837	21.2	500/AA/A
1014364	225/50R17	XL	98V	BSW	7.0	6.0-8.0	50	1,653	25.8	9.7	7.0	9.5	806	23.5	500/AA/A
* 1027428	225/55R17	XL	101W	BSW	7.0	6.0-8.0	50	1,819	26.6	9.3	7.2	9.5	757	25.0	500/AA/A
1014366	235/45R17	XL	97V	BSW	8.0	7.5-9.0	50	1,609	25.2	9.6	7.8	9.5	824	22.8	500/AA/A
* 1027429	235/50R17		96W	BSW	7.5	6.5-8.5	51	1,565	26.1	10.1	7.5	9.5	772	23.9	500/AA/A
* 1027430	245/40R17	XL	95W	BSW	8.5	8.0-9.5	50	1,521	24.6	10.1	8.2	9.5	822	22.2	500/AA/A
1014379	245/45R17		95V	BSW	8.0	7.5-9.0	51	1,521	25.5	9.9	8.1	9.5	814	24.2	500/AA/A
18															
1014377	215/45R18	XL	93V	BSW	7.0	7.0-8.0	50	1,433	25.5	8.7	7.1	9.5	815	19.8	500/AA/A
1015032	225/40R18	XL	92W	BSW	8.0	7.5-9.0	50	1,389	24.9	9.4	7.5	9.5	833	21.1	500/AA/A
* 1027431	225/45R18	XL	95W	BSW	7.5	7.0-8.5	50	1,521	25.8	9.2	7.6	9.5	783	22.4	500/AA/A
* 1027432	225/50R18		95W	BSW	7.0	6.0-8.0	51	1,521	26.7	9.6	7.2	9.5	755	23.9	500/AA/A
* 1027433	235/40R18	XL	95W	BSW	8.5	8.0-9.5	50	1,521	25.2	9.8	8.0	9.5	800	21.7	500/AA/A
* 1027434	235/45R18	XL	98W	BSW	8.0	7.5-9.0	50	1,653	26.2	9.6	7.9	9.5	770	24.1	500/AA/A
* 1027435	235/50R18	XL	101W	BSW	7.5	6.5-8.5	50	1,819	27.2	10.1	7.5	9.5	743	25.7	500/AA/A
* 1027436	245/40R18	XL	97W	BSW	8.5	8.0-9.5	50	1,609	25.5	10.1	8.2	9.5	790	23.1	500/AA/A
* 1027437	245/45R18	XL	100W	BSW	8.0	7.5-9.0	50	1,764	26.5	9.9	8.2	9.5	761	25.3	500/AA/A
* 1027438	245/55R18		103W	BSW	7.5	7.0-8.5	51	1,929	28.5	10.2	7.8	9.5	708	27.9	500/AA/A
* 1027439	255/35R18	XL	94W	BSW	9.0	8.5-10.0	50	1,477	24.8	10.6	8.6	9.5	813	21.1	500/AA/A
* 1027440	255/40R18	XL	99W	BSW	9.0	8.5-10.0	50	1,709	25.9	10.6	8.6	9.5	779	24.7	500/AA/A
19															
* 1027441	225/45R19	XL	96W	BSW	7.5	7.0-8.5	50	1,565	26.8	9.2	7.6	9.5	753	23.4	500/AA/A
* 1027442	245/40R19	XL	98W	BSW	8.5	8.0-9.5	50	1,653	26.6	10.1	8.2	9.5	759	24.9	500/AA/A
* 1027443	245/45R19	XL	102W	BSW	8.0	7.5-9.0	50	1,874	27.5	9.9	8.2	9.5	733	26.6	500/AA/A
* 1027444	255/35R19	XL	96W	BSW	9.0	8.5-10.0	50	1,565	25.9	10.6	8.6	9.5	780	23.4	500/AA/A
* 1027445	255/40R19	XL	100W	BSW	9.0	8.5-10.0	50	1,764	26.9	10.6	8.6	9.5	750	26.1	500/AA/A
20															
* 1027446	245/40R20	XL	99W	BSW	8.5	8.0-9.5	50	1,709	27.6	10.1	8.2	9.5	731	26.3	500/AA/A
* 1027447	245/45R20	XL	103W	BSW	8.0	7.5-9.0	50	1,929	28.5	9.9	8.2	9.5	707	27.7	500/AA/A
* 1027448	255/45R20	XL	105W	BSW	8.5	8.0-9.5	50	2,039	28.9	10.4	8.6	10.0	698	28.7	500/AA/A
* 1027449	275/40R20	XL	106W	BSW	9.5	9.0-11.0	50	2,094	28.5	11.3	9.3	9.5	707	30.9	500/AA/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

* - New in 2021

All-Weather



KINERGY 4S²



Just one, whatever the weather

The tire compound guarantees high grip even at low temperatures, while the extra-wide grooves disperse water and slush efficiently to the sides. Yet even when the summer heat makes demands on the tire, it impresses with short braking distances due to the solid block structure. The performance package of the KINERGY 4S2 is rounded off by a low rolling noise due to the zigzag pattern in the center of the tread.



Broad lateral groove



Slush edge



Tie bar



3D-Sipe



Crude oil compound



3PMSF



Mileage



Wet braking



Snow braking



Meets the severe snow service requirement of the U.S. Tire Manufacturer's Association (USTMA)



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG
						(psi)	(lbs)							

15

1026501	185/65R15		88H	BSW	5.5	5.0-6.5	51	1,235	24.3	7.8	5.8	9.5	851	16.4	500/A/A
1024946	195/60R15		88V	BSW	6.0	5.5-7.0	51	1,235	24.1	8.2	6.3	9.5	858	17.0	500/A/A
1026493	195/65R15		91H	BSW	6.0	5.0-6.5	51	1,356	24.8	8.1	6.0	9.5	835	18.1	500/A/A
1024949	205/65R15		94H	BSW	6.0	5.5-7.5	51	1,477	25.3	8.5	6.6	10.0	819	19.6	500/A/A

16

1026993	205/55R16		91V	BSW	6.5	5.5-7.5	51	1,356	24.7	8.7	6.7	9.5	837	19.6	500/A/A
1026944	205/60R16	XL	96V	BSW	6.0	5.5-7.5	50	1,565	25.6	8.6	6.7	9.5	810	20.8	500/A/A
1027001	205/65R16		95H	BSW	6.0	5.5-7.5	51	1,521	26.5	8.1	6.6	9.5	784	20.7	500/A/A
1024954	215/55R16	XL	97V	BSW	7.0	6.0-7.5	50	1,609	25.1	9.1	7.2	10.0	825	21.9	500/A/A
1026994	215/60R16		95V	BSW	6.5	6.0-7.5	51	1,521	26.0	9.0	6.7	9.5	796	22.0	500/A/A
1026945	215/65R16	XL	102V	BSW	6.5	6.0-7.5	50	1,874	26.9	8.8	6.6	9.5	771	22.3	500/A/A
1027003	215/70R16		100H	BSW	6.5	5.5-7.0	51	1,764	27.7	8.7	6.5	10.0	749	23.7	500/A/A
1027002	225/60R16		98H	BSW	6.5	6.0-8.0	51	1,653	26.4	9.3	7.1	10.0	784	23.5	500/A/A

17

1024957	205/50R17	XL	93W	BSW	6.5	5.5-7.5	50	1,433	25.0	8.8	7.0	10.0	828	19.3	500/A/A
1024960	215/45R17	XL	91W	BSW	7.0	7.0-8.0	50	1,356	24.6	8.3	7.2	9.5	841	19.4	500/A/A
1024959	215/50R17	XL	95W	BSW	7.0	6.0-8.0	50	1,521	25.4	9.4	7.2	10.0	815	22.0	500/A/A
1027005	215/55R17		94V	BSW	7.0	6.0-7.5	51	1,477	26.1	9.2	7.1	10.0	793	21.1	500/A/A
1026500	225/45R17	XL	94W	BSW	7.5	7.0-8.5	50	1,477	24.8	9.2	7.6	8.5	835	20.3	500/A/A
1026943	225/50R17	XL	98V	BSW	7.0	6.0-8.0	51	1,477	25.8	9.7	7.6	10.0	804	23.9	500/A/A
1024963	225/55R17	XL	101W	BSW	7.0	6.0-8.0	50	1,819	26.6	9.6	7.5	10.0	780	25.1	500/A/A
1027007	235/50R17		96V	BSW	7.5	6.5-8.5	51	1,565	26.3	9.6	7.8	10.0	788	23.9	500/A/A
1026995	235/55R17		99W	BSW	7.5	6.5-8.5	51	1,709	27.0	10.0	7.8	9.5	768	26.2	500/A/A
1027006	235/60R17		102H	BSW	7.0	6.5-8.5	51	1,874	27.9	9.7	7.5	10.0	743	25.9	500/A/A

18

1027000	225/40R18	XL	92W	BSW	8.0	7.5-9.0	50	1,389	24.9	9.4	7.7	10.0	830	20.1	500/A/A
1026996	225/45R18	XL	95W	BSW	7.5	7.0-8.5	50	1,521	25.8	9.2	7.8	9.5	803	22.8	500/A/A
1027011	225/50R18		95W	BSW	7.0	6.0-8.0	51	1,521	26.9	9.0	7.6	9.5	771	24.1	500/A/A
1027010	225/55R18		98V	BSW	7.0	6.0-8.0	51	1,653	27.8	9.1	7.6	10.0	748	26.1	500/A/A
1027009	225/60R18		100H	BSW	6.5	6.0-8.0	51	1,764	28.6	9.0	7.2	10.0	726	26.1	500/A/A
1026997	235/45R18	XL	98W	BSW	8.0	7.5-9.0	50	1,653	26.3	9.3	8.1	10.0	788	24.2	500/A/A
1024969	235/50R18	XL	101V	BSW	7.5	6.5-8.5	50	1,819	27.4	9.5	7.8	9.5	757	25.8	500/A/A
1026998	245/45R18		96W	BSW	8.0	7.5-9.0	51	1,565	26.6	9.5	8.4	9.5	780	25.6	500/A/A

19

1027016	235/40R19		92W	BSW	8.5	8.0-9.5	51	1,389	26.3	9.8	8.1	9.5	790	21.7	500/A/A
1027014	245/40R19		94W	BSW	8.5	8.0-9.5	51	1,477	26.6	10.1	8.4	10.0	781	23.9	500/A/A
1027015	245/45R19		98W	BSW	8.0	7.5-9.0	51	1,653	27.5	9.9	8.4	9.5	754	26.4	500/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

All-Weather



KINERGY 4S² X



Just one SUV tire, whatever the weather

This all-season SUV tire guarantees high grip even at low temperatures, while the extra-wide grooves disperse water and slush efficiently to the sides. This superior SUV tire even performs when the summer heat makes demands on the tire, it impresses with short braking distances due to the solid block structure. The performance package of the Kinergy 4S2 X is rounded off by a low rolling noise due to the zigzag pattern in the center of the tread.



Broad lateral groove



Slush edge



Tie bar



3D-Sipe



Crude oil compound



3PMSF



Mileage



Wet braking



Snow braking



Meets the severe snow service requirement of the U.S. Tire Manufacturer's Association (USTMA)



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG
						(psi)	(lbs)							

16

1027004	235/70R16		106H	BSW	7.0	6.0-8.0	51	2,094	28.9	9.4	7.0	10.0	719	27.0	500/A/A
---------	-----------	--	------	-----	-----	---------	----	-------	------	-----	-----	------	-----	------	---------

17

1025469	225/60R17		99H	BSW	6.5	6.0-8.0	51	1,709	27.5	9.3	7.2	10.0	755	25.2	500/A/A
1025468	225/65R17	XL	106H	BSW	6.5	6.0-8.0	50	2,094	28.4	9.1	7.3	10.0	732	26.8	500/A/A
1025470	235/65R17	XL	108V	BSW	7.0	6.5-8.5	50	2,205	28.9	9.5	7.6	9.5	719	28.6	500/A/A
1027008	245/65R17		107H	BSW	7.0	7.0-8.5	51	2,149	29.5	9.7	7.7	10.5	705	29.3	500/A/A

18

1025473	235/55R18	XL	104V	BSW	7.5	6.5-8.5	50	1,984	28.0	10.0	7.8	10.0	742	28.0	500/A/A
1025471	235/60R18	XL	107W	BSW	7.0	6.5-8.5	50	2,149	29.0	9.7	7.5	10.0	717	27.9	500/A/A
1027013	235/65R18		106V	BSW	7.0	6.5-8.5	51	2,094	29.9	9.5	7.6	10.5	696	29.6	500/A/A
1027012	245/60R18		105V	BSW	7.0	7.0-8.5	51	2,039	29.4	10.0	7.7	10.5	706	29.6	500/A/A

19

1025474	235/55R19	XL	105W	BSW	7.5	6.5-8.5	50	2,039	29.0	10.0	7.8	10.0	717	29.2	500/A/A
---------	-----------	----	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------

20

1027017	245/50R20		102V	BSW	7.5	7.0-8.5	51	1,874	29.6	10.5	8.1	10.0	704	30.8	500/A/A
---------	-----------	--	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Premium Grand Touring All-Season / Runflat



Premium grand touring all-season tire for all road

Kinergy GT satisfies the strict performance requirements of automakers. This is outstanding in all aspects including wet, dry, winter performance. Also, it provides quiet and comfortable driving experience.



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								
1022094	185/65R15	88H	BSW	5.5	5.0-6.5	51	1,235	24.4	7.8	5.7	9.0	850	16.7	500/A/A	HYUNDAI Venue ('19-'25)
1016154	185/65R15	88H	BSW	5.5	5.0-6.5	51	1,235	24.3	7.8	5.8	10.0	854	16.8	540/A/A	
1016155	195/60R15	88H	BSW	6.0	5.5-7.0	51	1,235	24.1	8.3	6.1	10.5	861	18.4	540/A/A	
1016156	195/65R15	91H	BSW	6.0	5.5-7.0	51	1,356	24.9	8.2	6.1	10.0	834	17.9	540/A/A	
1015532	195/65R15	91T	BSW	6.0	5.5-7.0	51	1,356	24.7	8.4	6.0	9.5	840	16.9	540/A/A	HYUNDAI Elantra ('15-'17)
1024032	195/65R15	91H	BSW	6.0	5.5-7.0	51	1,356	24.8	8.3	6.2	8.5	838	16.9	540/A/A	HYUNDAI Elantra ('20-'25)
1021371	205/60R15	91H	BSW	6.0	5.5-7.5	51	1,356	24.6	8.9	6.5	10.0	844	20.5	540/A/A	
1016157	205/65R15	94H	BSW	6.0	5.5-7.5	51	1,477	25.4	8.6	6.5	10.0	818	20.0	540/A/A	

16

1021366	195/60R16	89H	BSW	6.0	5.5-7.0	51	1,279	25.1	8.6	6.1	10.0	827	19.9	540/A/A	
1014871	205/55R16	91H	BSW	6.5	5.5-7.5	51	1,356	24.8	6.4	6.4	10.0	837	20.4	540/A/A	VOLKSWAGEN Golf ('15-'19), VOLKSWAGEN Jetta ('15-'19)
1016295	205/55R16	91H	BSW	6.5	5.5-7.5	51	1,356	24.8	9.1	6.2	8.5	839	18.4	520/B/A	CHEVROLET Cruz ('16-'19)
1015534	205/55R16	91H	BSW	6.5	5.5-7.5	51	1,356	24.8	8.9	6.5	9.5	837	18.5	540/A/A	HYUNDAI Elantra ('15-'17)
1022888	205/55R16	91H	BSW	6.5	5.5-7.5	51	1,356	24.9	8.9	6.5	9.5	834	18.5	500/A/A	TOYOTA Corolla ('19-'24)
1016158	205/60R16	92H	BSW	6.0	5.5-7.5	51	1,389	25.6	8.7	6.5	10.0	811	20.9	540/A/A	
1019647	205/60R16	92H	BSW	6.0	5.5-7.5	51	1,389	25.8	8.6	6.5	9.5	806	19.6	500/A/A	HYUNDAI Kona ('17-'23), KIA Soul ('17-'23)
1020211	205/60R16	92H	BSW	6.0	5.5-7.5	51	1,389	25.7	8.8	6.5	10.0	807	20.8	500/B/A	VOLKSWAGEN Jetta ('17-'22)
1022795	205/60R16	92H	BSW	6.0	5.5-7.5	51	1,389	25.8	8.7	6.5	9.5	804	20.3	500/A/A	NISSAN Sentra ('19 ~ TBD)
1021370	205/60R16	92V	BSW	6.0	5.5-7.5	51	1,389	25.6	8.9	6.5	10.0	811	23.0	540/A/A	
1015397	205/65R16	95H	BSW	6.0	5.5-7.5	51	1,521	26.2	8.5	6.4	10.0	793	21.9	500/A/A	HYUNDAI Sonata ('14-'19), KIA Optima ('15-'19)
1015886	215/55R16	93H	BSW	7.0	6.0-7.5	51	1,433	25.1	9.1	6.5	9.5	827	20.4	500/A/A	HONDA Civic_4DR ('15-'24)
1020876	215/55R16	93H	BSW	7.0	6.0-7.5	51	1,433	25.1	9.1	6.5	9.5	827	21.5	500/A/A	HONDA Civic_5DR ('16-'21)
1015790	215/60R16	95V	BSW	6.5	6.0-7.5	51	1,521	26.0	9.0	6.8	10.0	798	22.0	540/A/A	
1014971	215/60R16	95T	BSW	6.5	6.0-7.5	51	1,521	26.2	8.9	6.7	10.0	793	23.4	540/A/A	VOLKSWAGEN Passat ('14-'19), VOLKSWAGEN Beetle ('14-'19)
1020898	215/60R16	95H	BSW	6.5	6.0-7.5	51	1,521	26.2	8.9	6.7	10.0	793	21.5	500/A/A	NISSAN Altima ('18-'23)
1021358	215/65R16	98H	BSW	6.5	6.0-7.5	51	1,653	27.0	9.1	6.8	10.0	770	25.1	540/A/A	
1021931	215/65R16	98H	BSW	6.5	6.0-7.5	51	1,653	27.0	9.0	6.8	10.0	769	23.9	460/B/A	Chevrolet Trailblazer ('20-'26)
1021373	225/60R16	98H	BSW	6.5	6.0-8.0	51	1,653	26.5	9.6	7.1	10.0	783	25.4	540/A/A	
1016159	225/60R16	98V	BSW	6.5	6.0-8.0	51	1,653	26.5	9.4	7.1	10.0	784	24.2	540/A/A	
1021374	225/65R16	100H	BSW	6.5	6.0-8.0	51	1,764	27.4	9.4	7.1	10.0	758	26.0	540/A/A	

17

1020212	205/55R17	91H	BSW	6.5	5.5-7.5	51	1,356	25.9	9.2	6.5	10.0	803	20.9	500/B/A	VOLKSWAGEN Jetta ('17-'22)
1016160	215/45R17 XL	91V	BSW	7.0	7.0-8.0	50	1,356	24.5	8.7	7.1	10.0	848	19.5	540/A/A	
1016161	215/50R17 XL	95V	BSW	7.0	6.0-7.5	50	1,521	25.4	9.4	6.7	10.0	819	22.9	540/A/A	
1016785	215/55R17	94V	BSW	7.0	6.0-7.5	51	1,477	26.1	9.3	7.0	10.0	795	22.5	500/A/A	HYUNDAI Sonata ('14-'19)
1020513	215/55R17	94V	BSW	7.0	6.0-7.5	51	1,477	26.2	9.3	7.1	10.0	793	23.0	500/A/A	HYUNDAI Kona ('17-'23), KIA Soul ('18~)
1014972	215/55R17	94H	BSW	7.0	6.0-7.5	51	1,477	26.3	9.4	6.7	10.0	789	22.5	540/A/A	VOLKSWAGEN Passat ('14-'19), VOLKSWAGEN Beetle ('14-'19)
1016162	215/60R17	96H	BSW	6.5	6.0-7.5	51	1,565	27.1	9.0	6.8	10.0	767	24.1	540/A/A	
1014872	225/45R17	91H	BSW	7.5	7.0-8.5	51	1,356	24.9	9.3	7.5	10.0	835	21.8	540/A/A	VOLKSWAGEN Golf ('14-'18)
1015535	225/45R17	91W	BSW	7.5	7.0-8.5	51	1,356	24.9	9.2	7.2	10.0	836	20.6	540/A/A	HYUNDAI Elantra ('15-'17)
1024034	225/45R17	91W	BSW	7.5	7.0-8.5	51	1,356	24.8	9.2	7.9	8.5	839	20.5	540/A/A	Hyundai Elantra ('20-'25)
1016163	225/50R17	94V	BSW	7.0	6.0-8.0	51	1,477	25.8	9.7	7.0	10.0	806	22.6	540/A/A	
1017808	225/50R17	94V	BSW	7.0	6.0-8.0	51	1,477	25.9	9.4	7.4	9.0	801	22.8	500/A/A	HONDA Accord ('17-'22)
1021372	225/55R17	97V	BSW	7.0	6.0-8.0	51	1,609	26.6	10.0	7.0	10.0	779	26.1	540/A/A	
1015527	225/60R17	99H	BSW	6.5	6.0-8.0	51	1,709	27.6	9.6	7.1	10.0	751	26.0	540/A/A	HYUNDAI Tucson ('15-'21), KIA Sportage ('15-'21)
1016164	235/45R17	94H	BSW	8.0	7.5-9.0	51	1,477	25.2	9.6	7.8	10.0	824	21.7	540/A/A	

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to Runflat Tires.

Premium Grand Touring All-Season / Runflat



Premium grand touring all-season tire for all road

Kinergy GT satisfies the strict performance requirements of automakers. This is outstanding in all aspects including wet, dry, winter performance. Also, it provides a quiet and comfortable driving experience.



Dry braking



Comfort



Dry handling



Low noise



30 DAY
FREE
TRIAL



70K
warranty



ROAD
HAZARD
WARRANTY



M+S

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

17 cont...

1016165	235/55R17	99H	BSW	7.5	6.5-8.5	51	1,709	27.0	10.0	7.4	10.0	769	26.4	540/A/A	
1021376	235/55R17	99W	BSW	7.5	6.5-8.5	51	1,709	27.1	10.0	7.4	10.0	767	27.3	540/A/A	
1019226	235/65R17	104H	BSW	7.0	6.5-8.5	51	1,984	29.3	9.1	7.2	10.0	709	28.7	540/A/A	HONDA CR-V ('16-'21)
1021367	245/50R17	99V	BSW	7.5	7.0-8.5	51	1,709	26.6	10.7	7.7	10.0	781	26.8	540/A/A	
1015891	P225/55R17	95H	BSW	7.0	6.0-8.0	51	1,521	26.7	9.4	7.2	9.0	779	23.3	540/B/A	CHEVROLET Malibu ('15-'23)
1025644	215/55R17	94V	BSW	7.0	6.0-7.5	51	1,477	26.2	9.3	7.4	9.5	793	22.9	500/A/A	HYUNDAI Kona ('20-'25)
1028628	225/45R17	91W	BSW	7.5	7.0-8.5	51	1,356	24.8	9.2	7.6	8.5	839	20.2	540/A/A	HYUNDAI ELANTRA HEV ('20-'26)

18

1022797	215/45R18	89V	BSW	7.0	7.0-8.0	51	1,279	25.6	9.1	7.2	9.0	812	21.5	500/A/A	NISSAN Sentra ('19 ~ TBD)
1020213	225/45R18	91H	BSW	7.5	7.0-8.5	51	1,356	25.9	9.4	7.0	10.0	802	21.1	540/B/A	VOLKSWAGEN Jetta ('17-'22)
1016166	225/45R18	91V	BSW	7.5	7.0-8.5	51	1,356	25.8	9.2	7.5	10.0	805	22.1	540/A/A	
1021375	225/55R18	98H	BSW	7.0	6.0-8.0	51	1,653	27.6	10.0	7.0	10.0	751	26.8	540/A/A	
1021933	225/55R18	98H	BSW	7.0	6.0-8.0	51	1,653	27.6	9.6	7.2	10.0	751	26.7	700/B/A	CHEVROLET Trailblazer ('20 ~'24)
1021369	225/60R18	100H	BSW	6.5	6.0-8.0	51	1,764	28.5	9.6	7.1	10.0	728	28.1	540/A/A	
1020853	235/45R18	94V	BSW	8.0	7.5-9.0	51	1,477	26.3	9.6	7.7	10.0	790	24.4	540/A/A	TOYOTA Camry ('17-'22)
1014973	235/45R18	94H	BSW	8.0	7.5-9.0	51	1,477	26.3	9.7	7.8	10.0	790	24.1	540/A/A	VOLKSWAGEN Passat ('14~), VOLKSWAGEN Beetle('14-'19)
1017534	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.3	9.8	7.3	10.0	709	30.1	540/A/A	HONDA CR-V ('16-'21)
1016167	245/45R18	96V	BSW	8.0	7.5-9.0	51	1,565	26.5	9.9	8.1	10.0	783	25.5	540/A/A	
1022016	255/65R18	111H	BSW	7.5	7.0-9.0	51	2,403	30.8	10.4	8.0	10.5	675	35.2	500/A/A	FORD Explorer ('19-'25)

19

1021368	225/55R19	99H	BSW	7.0	6.0-8.0	51	1,709	28.7	10.0	7.0	10.0	725	28.3	540/A/A	
1018940	235/40R19	92V	BSW	8.5	8.0-9.5	51	1,389	26.3	9.8	8.1	10.0	791	25.3	500/A/A	NISSAN Altima ('18-'23)
1016168	245/40R19	94V	BSW	8.5	8.0-9.5	51	1,477	26.6	10.1	8.1	10.0	782	25.0	540/A/A	
1015528	245/45R19	98H	BSW	8.0	7.5-9.0	51	1,653	27.4	10.0	8.0	10.0	759	27.7	540/A/A	HYUNDAI Tucson ('15-'21), KIA Sportage ('15-'21)
1024217	235/50R19	99H	BSW	7.5	6.5-8.5	51	1,709	28.2	10.2	8.7	10.0	736	28.1	500/A/A	CHEVROLET Equinox, GMC Terrain ('20-'25)

H436B Runflat

17

1020496	205/55R17	91H	BSW	6.5	5.5-7.5	51	1,356	25.9	8.7	6.5	9.5	803	24.5	500/A/A	MERCEDES BENZ A & B Class ('18-'25)
---------	-----------	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	-------------------------------------

18

1019371	225/60R18	XL	104H	BSW	6.5	6.0-8.0	50	1,984	28.6	9.5	7.1	9.5	726	36.1	500/A/A	BMW X3/X4 ('17-'24)
---------	-----------	----	------	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	---------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to Runflat Tires.

Premium Touring All-Season



The Premium touring all-season tire for long mileage

The Hankook Kinergy PT is a Premium Touring All-Season tire and offered with a No.1 "860/A/A" UTQG rating as well as an optimized 90,000 mileage warranty. Enhanced block stiffness and high structure and small particle size carbon provides low rolling resistance delivering high mileage to drivers.



Dry braking



Comfort



Dry handling



Low noise



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						(psi)	(lbs)								
14															
1023463	185/65R14		BSW	5.5	5.0-6.5	51	1,168	23.3	8.0	5.8	11.0	891	16.5	860/A/A	
15															
1025056	185/55R15		BSW	6.0	5.0-6.5	51	1,047	22.9	7.9	6.1	10.0	908	16.2	800/A/A	
1021404	185/60R15		BSW	5.5	5.0-6.5	51	1,102	23.6	8.0	5.8	11.0	880	17.0	860/A/A	
1025057	185/65R15		BSW	5.5	5.0-6.5	51	1,235	24.3	7.8	5.8	11.0	854	17.4	860/A/A	
1025058	195/55R15		BSW	6.0	5.5-7.0	51	1,135	23.3	8.2	6.5	10.0	893	17.2	800/A/A	
1021394	195/60R15		BSW	6.0	5.5-7.0	51	1,235	24.1	8.5	6.1	10.5	862	18.1	860/A/A	
1021389	195/65R15		BSW	6.0	5.5-7.0	51	1,356	24.9	8.4	6.1	11.0	835	19.0	860/A/A	
1021410	205/60R15		BSW	6.0	5.5-7.5	51	1,356	24.6	8.9	6.5	11.0	846	19.6	860/A/A	
1023464	205/65R15		BSW	6.0	5.5-7.5	51	1,477	25.3	8.7	6.5	11.0	819	20.8	860/A/A	
1021402	205/70R15		BSW	6.0	5.0-7.0	51	1,565	26.2	8.4	6.1	11.0	792	21.8	860/A/A	
1023465	215/60R15		BSW	6.5	6.0-7.5	51	1,477	25.0	9.3	6.8	11.0	830	21.6	860/A/A	
1021395	215/70R15		BSW	6.5	5.5-7.0	51	1,653	26.8	8.9	6.5	10.5	776	23.7	860/A/A	
1021411	225/70R15		BSW	6.5	6.0-7.5	51	1,764	27.3	9.1	6.8	11.0	760	25.0	860/A/A	
1021412	235/70R15		BSW	7.0	6.0-8.0	51	1,929	27.9	9.6	7.0	11.0	745	26.3	860/A/A	
1021359	235/75R15	XL	109T	BSW	6.5	6.0-8.0	50	2,271	28.7	9.3	7.0	723	28.7	860/A/A	
16															
1025059	185/55R16		BSW	6.0	5.0-6.5	51	1,074	23.9	7.9	6.1	11.0	870	17.6	860/A/A	
1025060	195/55R16		BSW	6.0	5.5-7.0	51	1,202	24.3	8.2	6.5	10.0	856	18.4	800/A/A	
1021390	205/55R16		BSW	6.5	5.5-7.5	51	1,356	24.8	8.9	6.8	11.0	838	20.1	860/A/A	
1021398	205/60R16		BSW	6.0	5.5-7.5	51	1,389	25.6	8.9	6.5	10.5	813	21.0	860/A/A	
1021391	205/65R16		BSW	6.0	5.5-7.5	51	1,521	26.3	8.7	6.5	11.0	788	22.2	860/A/A	
1025061	215/55R16		BSW	7.0	6.0-7.5	51	1,433	25.1	9.2	7.1	11.0	827	21.1	860/A/A	
1023419	215/60R16		BSW	6.5	6.0-7.5	51	1,521	26.0	9.1	6.9	11.0	798	23.1	860/A/A	
1021325	215/60R16		BSW	6.5	6.0-7.5	51	1,521	26.0	9.1	6.9	11.0	798	23.1	860/A/A	
1023466	215/65R16		BSW	6.5	6.0-7.5	51	1,653	26.9	9.0	6.8	11.0	772	24.8	860/A/A	
1021387	225/60R16		BSW	6.5	6.0-8.0	51	1,653	26.5	8.4	7.1	11.0	784	25.5	860/A/A	
1021386	225/65R16		BSW	6.5	6.0-8.0	51	1,764	27.4	9.3	7.1	11.0	759	25.2	860/A/A	
1021406	235/60R16		BSW	7.0	6.5-8.5	51	1,764	27.0	9.9	7.4	11.0	770	26.2	860/A/A	
1021392	235/65R16		BSW	7.0	6.5-8.5	51	1,929	27.9	9.7	7.4	11.0	744	26.9	860/A/A	
1027450	205/70R16		BSW	6.0	5.0-7.0	51	1,609	27.3	8.2	6.5	11.0	762	23.6	860/A/A	
17															
1025062	205/50R17		BSW	6.5	5.5-7.5	50	1,433	25.0	8.9	6.8	10.0	832	20.6	800/A/A	
1025063	215/45R17		BSW	7.0	7.0-8.0	51	1,202	24.5	8.7	7.1	10.0	848	19.1	800/A/A	
1025064	215/50R17	XL	95V	BSW	7.0	6.0-7.5	50	1,521	25.4	9.2	7.1	10.0	819	23.2	800/A/A
1024168	215/55R17		BSW	7.0	6.0-7.5	51	1,477	26.2	9.2	7.1	11.0	793	23.3	860/A/A	
1025065	215/55R17		BSW	7.0	6.0-7.5	51	1,477	26.2	9.2	7.1	10.0	794	22.3	800/A/A	
1021405	215/60R17		BSW	6.5	6.0-7.5	51	1,565	27.1	9.3	6.8	11.0	768	24.9	860/A/A	
1021407	215/65R17		BSW	6.5	6.0-7.5	51	1,709	27.9	9.0	6.8	11.0	744	25.7	860/A/A	
1025066	225/45R17	XL	94V	BSW	7.5	7.0-8.5	50	1,477	24.8	9.2	7.5	10.0	837	20.4	800/A/A
1025067	225/50R17		BSW	7.0	6.0-8.0	51	1,477	25.8	9.6	7.5	10.0	806	22.3	800/A/A	
1021400	225/55R17		BSW	7.0	6.0-8.0	51	1,609	26.7	9.8	7.5	11.0	779	25.7	860/A/A	
1021393	225/60R17		BSW	6.5	6.0-8.0	51	1,709	27.5	9.6	7.1	10.5	754	26.5	860/A/A	
1021397	225/65R17		BSW	6.5	6.0-8.0	51	1,874	28.4	9.4	7.1	11.0	731	27.1	860/A/A	
1025068	235/45R17	XL	97V	BSW	8.0	7.5-9.0	50	1,609	25.2	9.6	7.8	10.0	824	23.0	800/A/A
1025069	235/50R17		BSW	7.5	6.5-8.5	51	1,565	26.2	10.1	7.8	10.0	794	25.8	800/A/A	
1025070	235/55R17		BSW	7.5	6.5-8.5	51	1,709	27.0	9.8	7.8	11.0	769	26.8	860/A/A	
1021409	235/60R17		BSW	7.0	6.5-8.5	51	1,874	28.0	9.9	7.4	11.0	742	28.0	860/A/A	
1025071	235/65R17		BSW	7.0	6.5-8.5	51	1,984	28.9	9.8	7.4	11.0	718	28.4	860/A/A	
1025072	245/45R17	XL	99H	BSW	8.0	7.5-9.0	50	1,709	25.5	9.9	8.1	11.0	814	24.6	860/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tires with a "V" speed rating have a 75K mile warranty.

Premium Touring All-Season



The Premium touring all-season tire for long mileage

The Hankook Kinergy PT is a Premium Touring All-Season tire and offered with a No.1 "860/A/A" UTQG rating as well as an optimized 90,000 mileage warranty. Enhanced block stiffness and high structure and small particle size carbon provides low rolling resistance delivering high mileage to drivers.



Dry braking



Comfort



Dry handling



Low noise



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG
						(psi)	(lbs)							

18

1021408	215/55R18		95H	BSW	7.0	6.0-7.5	51	1,521	27.2	9.2	7.1	11.0	764	25.2	860/A/A
1025073	225/40R18	XL	92V	BSW	8.0	7.5-9.0	50	1,389	24.9	9.4	7.5	10.0	833	20.8	800/A/A
1025074	225/45R18	XL	95V	BSW	7.5	7.0-8.5	50	1,521	25.8	9.2	7.5	10.0	805	23.1	800/A/A
1021403	225/50R18		95H	BSW	7.0	6.0-8.0	51	1,521	26.8	9.8	7.5	11.0	775	25.4	860/A/A
1021396	225/55R18		98H	BSW	7.0	6.0-8.0	51	1,653	27.7	9.8	7.5	11.0	751	27.1	860/A/A
1025075	225/60R18		100H	BSW	6.5	6.0-8.0	51	1,764	28.5	9.1	7.1	11.0	729	27.9	860/A/A
1025076	235/45R18		94V	BSW	8.0	7.5-9.0	51	1,477	26.2	9.6	7.8	10.0	793	22.6	800/A/A
1025077	235/50R18		97V	BSW	7.5	6.5-8.5	51	1,609	27.2	10.1	7.8	10.0	765	26.9	800/A/A
1025078	235/55R18		100V	BSW	7.5	6.5-8.5	51	1,764	28.0	9.8	7.8	10.0	741	28.2	800/A/A
1025079	235/60R18	XL	107V	BSW	7.0	6.5-8.5	50	2,149	29.0	9.6	7.4	10.5	717	29.5	800/A/A
1025080	245/40R18	XL	97V	BSW	8.5	8.0-9.5	50	1,609	25.6	10.1	8.1	10.0	813	24.1	800/A/A
1025081	245/45R18	XL	100V	BSW	8.0	7.5-9.0	50	1,764	26.5	9.9	8.1	10.0	783	26.1	800/A/A
1025082	245/50R18		100V	BSW	7.5	7.0-8.5	51	1,764	27.5	10.5	8.1	10.0	754	28.5	800/A/A
1025083	245/55R18		103V	BSW	7.5	7.0-8.5	51	1,929	28.5	10.4	8.1	10.0	729	30.1	800/A/A

19

1025084	235/40R19	XL	96V	BSW	8.5	8.0-9.5	50	1,565	26.3	9.8	7.8	10.0	791	24.8	800/A/A
1025085	245/40R19	XL	98V	BSW	8.5	8.0-9.5	50	1,653	26.6	10.1	8.1	10.0	782	26.8	800/A/A
1025086	245/45R19	XL	102V	BSW	8.0	7.5-9.0	50	1,874	27.5	9.9	8.1	10.0	755	28.4	800/A/A
1025087	255/45R19	XL	104V	BSW	8.5	8.0-9.5	50	1,984	27.9	10.4	8.4	10.0	744	28.7	800/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Tires with a "V" speed rating have a 75K mile warranty.

Standard Touring All-Season



Standard touring all-season tire

The KINERGY ST is a standard touring all-season tire that utilizes ever-evolving technology and construction methods to offer confidence-inspiring handling and stability while delivering outstanding fuel efficiency and excellent tread life.



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG
						(psi)	(lbs)							
13														
1022033	175/70R13	82T	BSW	5.0	4.5-6.0	51	1,047	22.6	7.0	5.2	8.5	920	13.7	680/A/A
14														
1022037	175/65R14	82T	BSW	5.0	5.0-6.0	51	1,047	22.9	7.3	5.6	8.5	909	14.3	680/A/A
1021903	175/70R14	84T	BSW	5.0	4.5-6.0	51	1,102	23.6	7.4	5.2	8.5	882	15.0	680/A/A
1021904	185/60R14	82T	BSW	5.5	5.0-6.5	51	1,047	22.6	8.0	5.8	8.5	918	14.8	680/A/A
1021905	185/65R14	86T	BSW	5.5	5.0-6.5	51	1,168	23.3	8.0	5.8	8.5	891	15.8	680/A/A
1021906	185/70R14	88T	BSW	5.5	4.5-6.0	51	1,235	24.1	7.7	5.6	8.5	861	16.0	680/A/A
1024733	185/75R14	89T	WSW	5.0	4.5-6.0	51	1,279	24.8	7.2	5.3	8.5	837	16.7	680/A/A
1022038	185/75R14	89T	BSW	5.0	4.5-6.0	51	1,279	24.8	7.2	5.3	8.5	837	16.0	680/A/A
1021907	195/60R14	86T	BSW	6.0	5.5-7.0	51	1,168	23.1	8.5	6.1	8.5	900	16.5	680/A/A
1021908	195/70R14	91T	BSW	6.0	5.0-6.5	51	1,356	24.7	8.2	5.6	8.5	842	17.3	680/A/A
1022039	195/75R14	92T	BSW	5.5	5.0-6.5	51	1,389	25.4	7.6	5.6	8.5	819	17.5	680/A/A
1024734	195/75R14	92T	WSW	5.5	5.0-6.5	51	1,389	25.4	7.6	5.5	8.5	819	18.6	680/A/A
1022040	205/70R14	95T	BSW	6.0	5.0-7.0	51	1,521	25.2	8.2	5.8	8.5	824	18.7	680/A/A
1022041	205/75R14	95T	BSW	5.5	5.0-7.0	51	1,521	26.0	7.8	5.8	8.5	799	18.9	680/A/A
1024735	205/75R14	95T	WSW	5.5	5.0-7.0	51	1,521	26.0	7.8	5.8	8.5	799	19.8	680/A/A
1021909	215/70R14	96T	BSW	6.5	5.5-7.0	51	1,565	25.8	8.9	6.1	8.5	806	20.1	680/A/A
1021910	215/75R14	100T	BSW	6.0	5.5-7.0	51	1,764	26.6	8.6	6.1	8.5	782	20.6	680/A/A
1024736	215/75R14	100T	WSW	6.0	5.5-7.0	51	1,764	26.6	8.4	6.1	8.5	782	21.0	680/A/A
1021911	225/70R14	99T	BSW	6.5	6.0-7.5	51	1,709	26.3	9.1	6.4	8.5	789	22.3	680/A/A
15														
1024758	175/65R15	84H	BSW	5.0	5.0-6.0	51	1,102	23.9	7.3	5.5	8.5	871	15.1	680/A/A
1021912	185/60R15	84T	BSW	5.5	5.0-6.5	51	1,102	23.6	8.0	5.8	8.5	880	15.4	680/A/A
1021913	185/65R15	88T	BSW	5.5	5.0-6.5	51	1,235	24.3	8.0	5.8	8.5	854	16.7	680/A/A
1021914	195/60R15	88T	BSW	6.0	5.5-7.0	51	1,235	24.1	8.5	6.1	8.5	862	17.4	680/A/A
1021915	195/65R15	91T	BSW	6.0	5.5-7.0	51	1,356	24.9	8.4	5.8	8.5	835	17.9	680/A/A
1021916	205/60R15	91T	BSW	6.0	5.5-7.5	51	1,356	24.6	8.7	6.5	8.5	846	18.3	680/A/A
1021917	205/65R15	94T	BSW	6.0	5.5-7.5	51	1,477	25.3	8.7	6.1	8.5	819	19.0	680/A/A
1022042	205/70R15	96T	BSW	6.0	5.0-7.0	51	1,565	26.2	8.2	5.8	8.5	792	19.4	680/A/A
1022043	205/75R15	97T	BSW	5.5	5.0-7.0	51	1,609	27.0	7.8	5.8	8.5	769	20.1	680/A/A
1024737	205/75R15	97T	WSW	5.5	5.0-7.0	51	1,609	27.0	7.8	5.8	8.5	769	21.0	680/A/A
1021918	215/65R15	96T	BSW	6.5	6.0-7.5	51	1,565	25.9	9.0	6.5	8.5	802	20.3	680/A/A
1021919	215/70R15	98T	BSW	6.5	5.5-7.0	51	1,653	26.8	8.9	6.1	8.5	776	22.2	680/A/A
1022044	215/75R15	100T	BSW	6.0	5.5-7.0	51	1,764	27.6	8.4	6.1	8.5	754	22.5	680/A/A
1024738	215/75R15	100T	WSW	6.0	5.5-7.0	51	1,764	27.6	8.4	6.1	8.5	754	23.3	680/A/A
1022045	225/70R15	100T	BSW	6.5	6.0-7.5	51	1,764	27.3	8.9	6.4	8.5	760	23.3	680/A/A
1022046	225/75R15	102T	BSW	6.0	6.0-7.5	51	1,874	28.2	8.5	6.4	8.5	737	24.3	680/A/A
1024739	225/75R15	102T	WSW	6.0	6.0-7.5	51	1,874	28.2	8.5	6.4	8.5	737	24.3	680/A/A
1024759	235/60R15	98T	RWL	7.0	6.5-8.5	51	1,653	26.0	9.7	6.7	8.5	800	23.9	680/A/A
1021920	235/70R15	103T	BSW	7.0	6.0-8.0	51	1,929	27.9	9.6	6.7	8.5	745	24.7	680/A/A
1022047	235/75R15	105T	BSW	6.5	6.0-8.0	51	2,039	28.7	9.1	6.7	8.5	723	26.6	680/A/A
1024740	235/75R15	105T	WSW	6.5	6.0-8.0	51	2,039	28.7	9.1	6.7	8.5	723	26.9	680/A/A
1024760	245/60R15	101T	RWL	7.0	7.0-8.5	51	1,819	26.4	10.0	7.7	8.5	785	25.6	680/A/A
1024761	255/60R15	102T	RWL	7.5	7.0-9.0	51	1,874	26.9	10.3	8.0	8.5	771	26.8	680/A/A
1024746	255/70R15	108T	RWL	7.5	6.5-8.5	51	2,205	29.0	10.1	7.2	8.5	717	28.9	680/A/A
1024777	P265/50R15	99T	RWL	8.5	7.5-9.5	51	1,720	25.3	11.4	8.3	10.5	821	26.5	680/A/A
1024762	P275/60R15	107T	RWL	8.0	7.5-9.5	51	2,149	27.9	11.0	8.7	10.5	745	30.0	680/A/A
1024763	P295/50R15	105T	RWL	9.5	8.0-10.5	51	2,061	26.5	12.6	9.8	10.5	784	30.2	680/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Standard Touring All-Season



KINERGYST



Standard touring all-season tire

The KINERGY ST is a standard touring all-season tire that utilizes ever-evolving technology and construction methods to offer confidence-inspiring handling and stability while delivering outstanding fuel efficiency and excellent tread life.



Mileage



Dry handling



Wet braking



Comfort



Snow traction

M+S

**30 DAY
FREE
TRIAL**

**70K
warranty**

**ROAD
HAZARD
WARRANTY**

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max.Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	
						(psi)	(lbs)								
16															
1021503	205/55R16		91H	BSW	6.5	5.5-7.5	51	1,356	24.8	8.8	6.5	8.5	838	18.4	680/A/A
1021500	205/60R16		92T	BSW	6.0	5.5-7.5	51	1,389	25.6	8.7	6.5	8.5	813	19.5	680/A/A
1021498	205/65R16		95H	BSW	6.0	5.5-7.5	51	1,521	26.3	8.7	6.1	8.5	788	19.8	680/A/A
1025088	215/55R16	XL	97H	BSW	7.0	6.0-7.5	50	1,609	25.1	9.2	6.7	8.5	827	21.4	680/A/A
1021496	215/60R16		95H	BSW	6.5	6.0-7.5	51	1,521	26.1	9.3	6.8	8.5	797	20.7	680/A/A
1022048	215/65R16		98T	BSW	6.5	6.0-7.5	51	1,653	26.9	8.8	6.5	8.5	772	22.1	680/A/A
1021504	215/70R16		100T	BSW	6.5	5.5-7.0	51	1,764	27.8	8.9	6.1	8.5	748	23.4	680/A/A
1021495	225/60R16		98T	BSW	6.5	6.0-8.0	51	1,653	26.5	9.6	7.1	8.5	784	23.1	680/A/A
1025089	225/65R16		100T	BSW	6.5	6.0-8.0	51	1,764	27.4	9.1	6.7	8.5	759	23.6	680/A/A
1021506	225/70R16		103T	BSW	6.5	6.0-7.5	51	1,929	28.3	9.1	6.4	8.5	734	24.8	680/A/A
1021501	235/60R16		100T	BSW	7.0	6.5-8.5	51	1,764	27.0	9.9	7.4	8.5	770	24.7	680/A/A
1021499	235/65R16		103T	BSW	7.0	6.5-8.5	51	1,929	27.9	9.7	7.0	8.5	744	25.5	680/A/A

17

1021508	215/50R17	91H	BSW	7.0	6.0-7.5	51	1,356	25.4	9.4	6.8	8.5	818	19.3	680/A/A
1021509	215/55R17	94H	BSW	7.0	6.0-7.5	51	1,477	26.2	9.3	6.8	8.5	793	20.6	680/A/A
1021502	215/60R17	96T	BSW	6.5	6.0-7.5	51	1,565	27.1	9.3	6.8	8.5	768	23.0	680/A/A
1021505	215/65R17	99T	BSW	6.5	6.0-7.5	51	1,709	27.9	9.0	6.5	8.5	744	23.3	680/A/A
1025090	225/45R17	91H	BSW	7.5	7.0-8.5	51	1,356	24.8	9.2	7.4	8.5	837	18.9	680/A/A
1021511	225/50R17	94T	BSW	7.0	6.0-8.0	51	1,477	25.8	9.8	7.1	8.5	805	20.6	680/A/A
1025091	225/55R17	97H	BSW	7.0	6.0-8.0	51	1,609	26.6	9.6	7.5	8.5	780	23.5	680/A/A
1021497	225/60R17	99T	BSW	6.5	6.0-8.0	51	1,709	27.5	9.6	7.1	8.5	754	24.4	680/A/A
1021507	225/65R17	102T	BSW	6.5	6.0-8.0	51	1,874	28.4	9.4	6.7	8.5	731	24.7	680/A/A
1025092	235/55R17	99H	BSW	7.5	6.5-8.5	51	1,709	27.0	10.1	7.4	8.5	769	24.8	680/A/A
1025093	235/60R17	102T	BSW	7.0	6.5-8.5	51	1,874	28.0	9.6	7.4	8.5	742	25.1	680/A/A
1021510	235/65R17	104H	BSW	7.0	6.5-8.5	51	1,984	28.9	9.7	7.0	8.5	718	26.5	680/A/A
1025094	245/45R17	XL 99H	BSW	8.0	7.5-9.0	50	1,709	25.5	9.9	8.1	8.5	814	22.8	680/A/A

18															
1025095	225/50R18	XL	99T	BSW	7.0	6.0-8.0	50	1,709	26.8	9.5	7.0	8.5	776	23.4	680/A/A
1025096	225/55R18		98H	BSW	7.0	6.0-8.0	51	1,653	27.6	9.6	7.5	8.5	752	24.8	680/A/A
1025097	225/60R18		100H	BSW	6.5	6.0-8.0	51	1,764	28.5	9.3	7.8	8.5	729	25.6	680/A/A
1025098	235/55R18		100H	BSW	7.5	6.5-8.5	51	1,764	28.0	10.1	7.4	8.5	741	25.7	680/A/A
1025099	235/60R18	XL	107H	BSW	7.0	6.5-8.5	50	2,149	29.0	9.6	7.4	8.5	717	28.0	680/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

SUV / Light Truck Radial Tire

Whatever you drive,
Hankook Tire has the solution.

TIRE

K117A, RH06, RH07, RA33, RH12, RF11, RT05, RA18

NOTES

T/T : Tube Type

T/L : Tubeless Type

❄️ : Snow Tire

❄️ 🌧️ ❄️ : All Season Tire

This List cancels all previous lists and is subject to change without prior notice



Ultra-High Performance Summer / Runflat



ventus S1 evo² SUV



The best balance between wet & dry performance!

The Ventus S1 evo² is a premium performance tire that provides precise, controlled cornering at high-speeds and environmentally friendly performance through minimized rolling resistance and optimal profile implementation.



Fuel efficiency



Dry braking



Low noise



Dry handling

S.Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG		
						psi	lbs									
17																
1013924	235/65R17		104V	BSW	7.0	6.5-8.5	51	1,984	29.1	9.8	7.4	11.0	713	30.9	260/A/A	MERCEDES BENZ GLC ('15-'22)
18																
1021645	235/55R18		100V	BSW	7.5	6.5-8.5	51	1,764	28.1	10.0	7.8	10.0	739	28.2	280/AA/A	AUDI Q3 ('18-'22)
1013925	235/60R18		103/V	BSW	7.0	6.5-8.5	51	1,929	29.1	10.1	7.4	10.5	713	30.6	260/A/A	MERCEDES BENZ GLC ('15-'19)
1014999	235/60R18		103W	BSW	7.0	6.5-8.5	50	1,929	29.2	10.2	7.4	10.0	711	32.7	220/AA/A	PORSCHE Macan ('13-'18)
1015505	235/60R18		103W	BSW	7.0	6.5-8.5	51	1,929	29.2	10.0	7.6	10.5	711	31.1	280/AA/A	AUDI Q5 ('16-'19)
1022249	235/60R18		103W	BSW	7.0	6.5-8.5	51	1,929	29.1	10.3	7.4	10.5	713	28.6	220/AA/A	PORSCHE Macan ('18-'23)
1022250	255/55R18		105W	BSW	8.0	7.0-9.0	51	2,039	28.9	11.5	8.5	10.0	719	31.3	220/AA/A	PORSCHE Macan ('18-'23)
19																
1021647	235/50R19		99V	BSW	7.5	6.5-8.5	51	1,709	28.2	10.3	7.8	10.0	737	28.4	280/AA/A	AUDI Q3 ('18-'22)
1020563	235/55R19		101Y	BSW	7.5	6.5-8.5	51	1,819	29.1	10.4	8.0	10.0	714	34.2	220/AA/A	MERCEDES BENZ GLC Coupe ('16-'19)
1023480	255/45R19	XL	104Y	BSW	8.5	8.0-9.5	50	1,984	28.0	10.4	8.4	9.5	743	31.6	240/AA/A	AUDI Q3 ('18-'22)
1020564	255/50R19		103Y	BSW	8.0	7.0-9.0	51	1,929	29.1	11.3	8.7	10.0	714	34.6	220/AA/A	MERCEDES BENZ GLC Coupe ('16-'19)
1015385	255/50ZR19	XL	107Y	BSW	8.0	7.0-9.0	50	2,149	28.9	11.0	8.7	10.0	720	31.4	220/AA/A	
1015387	275/55R19		111V	BSW	8.5	7.5-9.5	51	2,403	30.7	11.6	8.7	10.0	677	34.2	220/AA/A	
20																
1023482	255/40R20	XL	101Y	BSW	9.0	8.5-10.0	50	1,819	27.9	10.9	8.4	9.5	744	32.7	240/AA/A	AUDI Q3 ('18-'22)
1012743	275/40ZR20	XL	106Y	BSW	9.5	9.0-11.0	50	2,094	28.4	11.3	9.4	10.0	730	31.3	220/AA/A	
1015484	275/45ZR20	XL	110Y	BSW	9.0	8.5-10.5	50	2,337	29.5	11.1	9.4	10.0	703	34.6	220/AA/A	
1015389	275/50ZR20		109W	BSW	8.5	7.5-9.5	51	2,271	30.6	11.7	9.1	10.0	678	34.1	220/AA/A	
21																
1015391	295/40ZR21	XL	111W	BSW	10.5	10.0-11.5	50	2,403	30.1	12.2	10.1	10.0	691	35.3	220/AA/A	
22																
1020860	285/35R22	XL	106Y	BSW	10.0	9.5-11.0	50	2,094	29.9	12.2	10.1	10.0	695	37.8	220/AA/A	AUDI Q7 ('16-'22)

K117C SUV Runflat

18																	
1019370	225/60R18	XL		104W	BSW	6.5	6.0-8.0	50	1,984	28.6	9.5	7.1	9.5	726	35.1	280/AA/A	BMW X3/X4 ('17-'24)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Sport Performance All-Season



ventus *ST*



Sporty all-season SUV tire: with high-speed driving performance and stylish design

The Ventus ST is a high-performance tire designed for SUVs and sport trucks. Provides outstanding dry and wet performance, sturdy handling and improved mileage.



Low noise



Dry handling



S.Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/Mile	Weight	UTQG
						psi	lbs							

17

1004322	255/50R17		101W	BSW	8.0	7.0-9.0	51	1,819	27.0	10.6	8.8	10.5	770	30.3	420/A/A
1003968	275/60R17		110V	BSW	8.0	7.5-9.5	44	2,337	30.0	11.4	9.4	10.0	693	36.7	420/A/A

18

1004324	295/45R18		108V	BSW	10.0	9.5-11.0	51	2,205	28.4	11.9	9.8	10.5	732	34.3	420/A/A
---------	-----------	--	------	-----	------	----------	----	-------	------	------	-----	------	-----	------	---------

20

1004328	275/40R20	XL	106W	BSW	9.5	9.0-11.0	50	2,094	28.6	11.1	9.5	10.0	727	33.1	420/A/A
1004296	275/45R20	XL	109V	BSW	9.0	8.5-10.5	50	2,271	29.7	10.9	9.2	10.0	700	34.7	420/A/A
1004295	275/55R20	XL	117V	BSW	8.5	7.5-9.5	50	2,833	31.8	11.4	9.2	10.0	653	39.9	420/A/A
1004231	295/45R20	XL	114V	BSW	10.0	9.5-11.0	50	2,601	30.3	12.0	9.8	10.0	685	38.0	420/A/A

22

1004914	265/35R22	XL	102W	BSW	9.5	9.0-10.5	50	1,874	29.2	10.9	8.8	10.5	711	32.0	420/A/A
1007457	265/40R22	XL	106V	BSW	9.5	9.0-10.5	50	2,094	30.2	10.9	8.8	10.5	687	34.1	420/A/A
1008409	275/45R22	XL	112V	BSW	9.0	8.5-10.5	50	2,469	31.7	10.9	9.2	10.0	656	37.4	420/A/A
1007301	285/45R22	XL	114V	BSW	9.5	9.0-10.5	50	2,601	32.0	11.4	9.5	10.5	650	40.7	420/A/A
1005412	305/40R22	XL	114V	BSW	11.0	10.0-12.0	50	2,601	31.5	12.5	10.5	10.0	659	39.7	420/A/A
1004712	305/45R22	XL	118V	BSW	10.0	9.5-11.5	50	2,910	32.7	12.1	10.6	10.0	635	42.5	420/A/A

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Sport Performance All-Season



ventus AS



All-season LT/SUV tire for OE fitments

Ventus AS is designed to provide the ride comfort, low noise and all-season traction that exists in these original equipment tires.



Dry braking



Comfort



Low noise



Dry handling



S.Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/Mile	Weight	UTQG
						psi	lbs							

17

1007771	275/55R17	109V	BSW	8.5	7.5-9.5	44	2,271	28.8	11.4	9.2	10.5	721	35.1	420/A/A
---------	-----------	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Performance All-Season



Dynapro HP2



High-performance all-season tire for luxury SUVs.

A high-performance tire for premium SUVs. The Dynapro HP2 meets all the conditions required for premium European SUVs including excellent wet performance, low noise, low rolling resistance and excellent mileage.



Mileage



Dry braking



Comfort



Low noise



Dry handling



30 DAY
FREE
TRIAL



65K
warranty



ROAD
HAZARD
WARRANTY



M+S

S.Code	Size	LI SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Fitment
						psi	lbs								
16															
1014141	215/70R16	100H	BSW	6.5	5.5-7.0	51	1,764	27.8	8.7	6.8	10.5	747	26.9	640/A/A	
1014139	225/70R16	103H	BSW	6.5	6.0-7.5	51	1,929	28.4	9.0	7.1	10.5	732	28.2	640/A/A	
1014142	235/60R16	100H	BSW	7.0	6.5-8.5	51	1,764	26.9	9.8	7.4	10.5	771	27.7	640/A/A	
1021437	235/70R16	106H	BSW	7.0	6.0-8.0	51	2,094	28.8	10.0	7.4	10.5	720	30.0	640/A/A	
1014586	245/70R16	XL 111H	BSW	7.0	6.5-8.0	50	2,403	29.5	9.6	7.7	10.5	705	31.8	640/A/A	
1014138	255/65R16	109H	BSW	7.5	7.0-9.0	51	2,271	28.9	10.2	8.0	10.5	719	30.9	640/A/A	
17															
1014145	225/65R17	102H	BSW	6.5	6.0-8.0	51	1,874	28.6	9.4	7.1	10.5	727	29.9	640/A/A	
1014144	235/60R17	102V	BSW	7.0	6.5-8.5	51	1,873	28.2	9.8	7.4	10.0	738	29.4	640/A/A	
1021940	235/65R17	104H	BSW	7.0	6.5-8.5	51	1,984	29.0	9.5	7.2	10.0	717	28.5	540/A/A	HYUNDAI Santa Fe ('18-'24), KIA Sorento ('15-'21) Sedona ('14-'21)
1024124	235/65R17	104H	BSW	7.0	6.5-8.5	51	1,984	29.0	9.2	7.1	9.5	716	28.4	540/A/A	KIA Sedona ('20-'26)
1014585	245/65R17	XL 111H	BSW	7.0	7.0-8.5	50	2,403	29.5	10.2	7.7	10.5	704	33.3	640/A/A	
1014150	255/60R17	106V	BSW	7.5	7.0-9.0	51	2,094	28.9	10.6	8.0	10.0	718	32.1	640/A/A	
18															
1015261	235/50R18	97V	BSW	7.5	6.5-8.5	51	1,609	27.2	10.6	7.8	10.0	764	27.0	640/A/A	
1015262	235/55R18	100V	BSW	7.5	6.5-8.5	51	1,764	28.1	10.1	7.8	10.0	738	29.3	640/A/A	
1011758	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.0	9.6	7.3	10.5	716	29.4	540/A/A	KIA Sedona ('14-'20)
1020206	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.1	9.7	7.5	10.0	714	29.2	540/A/A	HYUNDAI Santa Fe ('18-'24)
1025244	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.2	9.9	6.9	8.0	711	25.0	440/A/A	NISSAN Rogue ('20-'25)
1025144	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.1	9.6	7.5	9.5	715	29.1	540/A/A	HYUNDAI Santa Fe ('20-'24)
1014129	235/60R18	XL 107V	BSW	7.0	6.5-8.5	50	2,149	29.2	9.8	7.4	10.5	712	31.0	640/A/A	
1015263	235/65R18	106H	BSW	7.0	6.5-8.5	51	2,094	29.9	9.7	7.4	10.5	694	31.3	640/A/A	
1014133	245/60R18	105H	BSW	7.0	7.0-8.5	51	2,039	29.5	10.2	7.7	10.0	705	31.9	640/A/A	
1015264	255/55R18	XL 109V	BSW	8.0	7.0-9.0	50	2,271	28.9	10.9	8.4	10.0	718	32.5	640/A/A	
1015303	255/60R18	XL 112V	BSW	7.5	7.0-9.0	50	2,469	29.9	10.6	8.0	10.5	694	34.6	640/A/A	
1015266	265/60R18	110V	BSW	8.0	7.5-9.5	51	2,337	30.4	11.0	8.3	10.5	682	36.3	640/A/A	
1015304	275/60R18	113H	BSW	8.0	7.5-9.5	51	2,535	30.9	11.3	8.7	10.5	672	38.3	640/A/A	
1015267	275/65R18	116H	BSW	8.0	7.5-9.5	51	2,756	32.0	11.0	8.7	10.5	649	38.9	640/A/A	
1015268	285/60R18	116V	BSW	8.5	8.0-10.0	51	2,756	31.4	11.8	9.0	10.5	662	39.2	640/A/A	
1015265	P255/65R18	109H	BSW	7.5	7.0-9.0	51	2,271	31.1	10.2	8.0	10.5	667	35.2	640/A/A	
19															
1021561	235/45R19	95V	BSW	8.0	7.5-9.0	51	1,521	27.3	9.6	7.8	10.0	761	27.2	640/A/A	
1015269	235/50R19	99V	BSW	7.5	6.5-8.5	51	1,709	28.2	10.6	7.8	10.0	737	29.3	640/A/A	
1020207	235/55R19	101H	BSW	7.5	6.5-8.5	51	1,819	29.1	9.7	7.5	10.0	714	30.1	540/A/A	HYUNDAI Santa Fe ('18-'20)
1015053	235/55R19	101V	BSW	7.5	6.5-8.5	50	1,819	29.1	10.1	7.8	10.0	713	30.5	540/A/A	KIA Sorento ('14-'19)
1025145	235/55R19	101H	BSW	7.5	6.5-8.5	51	1,819	28.8	10.2	7.9	9.5	720	29.8	540/A/A	HYUNDAI Santa Fe ('20-'24)
1015271	245/55R19	103H	BSW	7.5	7.0-8.5	51	1,929	29.5	10.4	8.1	10.0	704	31.5	640/A/A	
1015272	255/50R19	XL 107H	BSW	8.0	7.0-9.0	50	2,150	29.0	10.8	8.4	10.0	716	32.0	640/A/A	
1015396	255/55R19	XL 111V	BSW	8.0	7.0-9.0	50	2,403	29.9	10.9	8.4	10.0	694	34.0	640/A/A	
1021560	275/55R19	111V	BSW	8.5	7.5-9.5	51	2,403	30.8	11.6	9.1	10.0	675	38.3	640/A/A	
1015273	P255/60R19	108H	BSW	7.5	7.0-9.0	51	2,205	30.9	10.6	8.0	10.5	671	36.1	640/A/A	
20															
1015274	235/55R20	102H	BSW	7.5	6.5-8.5	51	1,874	30.1	10.1	7.8	10.0	689	32.3	640/A/A	
1015275	245/50R20	102V	BSW	7.5	7.0-8.5	51	1,874	29.6	10.7	8.1	10.0	702	31.9	640/A/A	
1025265	255/50R20	105H	BSW	8.0	7.0-9.0	51	2,039	30.1	11.0	8.2	9.0	691	31.1	460/A/A	NISSAN Pathfinder ('21-'26)
1015276	255/50R20	XL 109V	BSW	8.0	7.0-9.0	50	2,271	30.0	10.8	8.4	10.0	692	34.4	640/A/A	
1021562	265/45R20	XL 108V	BSW	9.0	8.5-10.0	50	2,205	29.2	10.8	8.7	10.0	711	34.1	640/A/A	
1015277	265/50R20	107V	BSW	8.5	7.5-9.5	51	2,150	30.4	9.5	8.7	10.0	684	35.8	640/A/A	
1021564	275/55R20	XL 117V	BSW	8.5	7.5-9.5	50	2,833	31.8	11.6	9.1	10.0	654	40.1	640/A/A	
1015278	275/60R20	115H	BSW	8.0	7.5-9.5	51	2,679	33.0	11.3	8.7	10.5	630	40.8	640/A/A	
1015279	285/50R20	112V	BSW	9.0	8.0-10.0	51	2,469	31.2	12.1	9.4	10.0	667	40.2	640/A/A	
1015302	P255/55R20	107H	BSW	8.0	7.0-9.0	51	2,149	30.9	10.9	8.4	10.5	672	34.6	640/A/A	
22															
1025931	275/50R22	111H	BSW	8.5	7.5-9.5	51	2,403	32.8	11.7	9.1	10.0	634	41.0	640/A/A	
RA33D															
20															
1023844	275/50R20	XL 113H	BSW	8.5	7.5-9.5	50	2,535	30.8	12.1	9.4	10.0	675	41.1	560/A/A	AUDI Q8 ('18-'22)
21															
1023846	285/45R21	XL 113H	BSW	9.5	9.0-10.5	50	2,535	31.0	12.1	9.7	10.0	670	41.1	560/A/A	AUDI Q8 ('18-'22)
22															
1023847	285/40R22	XL 110H	BSW	10.0	9.5-11.0	50	2,337	31.2	11.7	9.8	10.0	666	41.6	560/A/A	AUDI Q8 ('18-'22)
1021938	285/40R22	XL 110H	BSW	10.0	9.5-11.0	50	2,337	31.2	11.7	9.8	10.0	666	40.7	560/A/A	AUDI Q8 ('18-'22)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Premium Highway All-Season



Dynapro HT



Combining all-season functionality with performance for highway driving

A sport truck and SUV tire that provides a smooth, powerful ride, the Dynapro HT provides greater mileage through specialized treadwear. Excellent snow traction makes driving possible on winter roads while low-rolling resistance offers excellent fuel economy.



Dry braking



Comfort



Drainage



Mileage



Dry handling



Low noise



S.Code	Size	LI SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Fitment
						psi	lbs								
15															
1024789	P205/65R15 XL	95T	BSW	6.0	5.5-7.5	50	1,521	25.3	8.4	6.5	12.5	821	24.5	700/A/B	
1011330	P235/75R15 XL	108T	OWL	6.5	6.0-8.0	41	2,183	28.8	9.3	6.9	12.0	721	31.5	700/A/B	
16															
1024796	215/55R16H XL	97H	BSW	7.0	6.0-7.5	50	1,609	25.1	9.1	6.8	12.5	827	24.5	700/A/B	
1021744	255/70R16	111T	BSW	7.5	6.5-8.5	51	2,403	29.9	9.8	6.8	10.0	695	30.4	500/B/A	FORD Ranger XL (18-21)
1011332	P215/70R16	99T	BSW	6.5	5.5-7.0	51	1,709	27.9	8.7	6.6	12.0	744	26.8	700/A/B	
1013909	P225/70R16	101T	BSW	6.5	6.0-7.5	51	1,819	28.5	9.1	6.9	12.0	729	29.1	700/A/B	
1013911	P225/75R16	104T	BSW	6.0	6.0-7.5	51	1,984	29.3	8.9	6.7	12.0	710	29.6	700/A/B	
1011334	P235/70R16 XL	107T	OWL	7.0	6.0-8.0	41	2,149	29.0	9.5	7.2	12.0	716	32.4	700/A/B	
1011339	P235/75R16 XL	109T	OWL	6.5	6.0-8.0	41	2,271	29.8	9.3	6.9	12.0	697	33.1	700/A/B	
1011335	P245/70R16	106T	OWL	7.0	6.5-8.0	51	2,094	29.6	9.9	7.5	12.0	702	33.6	700/A/B	
1011340	P245/75R16	109T	OWL	7.0	6.5-8.0	51	2,271	30.4	9.8	7.2	12.0	682	34.3	700/A/B	
1015220	P245/75R16	109S	BSW	7.0	6.5-8.0	51	2,271	30.4	9.6	6.9	10.5	682	31.4	500/B/B	TOYOTA Tacoma (15-21)
1011336	P255/70R16	109T	OWL	7.5	6.5-8.5	51	2,271	30.1	10.3	7.8	12.5	689	34.8	700/A/B	
1011337	P265/70R16	111T	OWL	8.0	7.0-9.0	51	2,403	30.7	10.7	8.1	12.5	677	37.9	700/A/B	
1017446	P265/70R16	111T	BSW	8.0	7.0-9.0	51	2,403	30.6	10.9	8.1	12.0	680	35.1	700/A/B	NISSAN Frontier (15-20)
1011341	P265/75R16	114T	OWL	7.5	7.0-9.0	51	2,601	31.6	10.6	7.9	12.5	657	37.7	700/A/B	
17															
1014070	225/65R17	102H	BSW	6.5	6.0-8.0	51	1,874	28.5	9.3	6.8	10.0	708	26.8	380/A/A	NISSAN Rogue (13-20)
1023527	225/65R17	102H	BSW	6.5	6.0-8.0	51	1,874	28.4	9.3	6.8	10.0	731	27.3	380/A/A	NISSAN Rogue (17-20)
1025932	235/75R17	109T	BSW	6.5	6.0-8.0	51	2,271	30.8	9.2	6.9	12.5	655	33.8	700/A/B	
1012468	P235/70R17 XL	108T	BSW	7.0	6.0-8.0	50	2,205	30.0	9.5	7.2	12.0	691	32.9	700/A/B	
1013912	P245/65R17	105T	BSW	7.0	7.0-8.5	51	2,039	29.6	10.3	7.7	12.0	702	32.2	700/A/B	
1011345	P245/70R17	108T	OWL	7.0	6.5-8.0	51	2,205	30.6	9.9	7.5	12.0	679	34.4	700/A/B	
1011343	P255/65R17	108T	OWL	7.5	7.0-9.0	51	2,205	30.1	10.7	8.0	12.0	689	34.5	700/A/B	
1011346	P255/70R17	110T	OWL	7.5	6.5-8.5	51	2,337	31.2	10.3	7.8	12.5	667	37.0	700/A/B	
1011344	P265/65R17	110T	BSW	8.0	7.5-9.5	51	2,337	30.6	11.1	8.3	12.0	679	38.0	700/A/B	
1011347	P265/70R17	113T	OWL	8.0	7.0-9.0	51	2,535	31.7	10.7	8.1	12.5	655	40.1	700/A/B	
18															
1013169	265/60R18	110T	BSW	8.0	7.5-9.5	51	2,337	30.6	10.6	7.9	12.0	680	34.3	700/B/A	FORD F-150 (14-21)
1024246	265/60R18	110T	BSW	8.0	7.5-9.5	51	2,337	30.4	10.7	7.7	10.0	682	34.3	600/A/B	FORD F-150 (20-25)
1016508	275/65R18	116H	BSW	8.0	7.5-9.5	51	2,756	32.1	11.0	8.2	11.0	647	39.5	700/B/A	FORD Expedition (17-22), LINCOLN Navigator (17-22)
1011350	P255/70R18	112T	BSW	7.5	6.5-8.5	51	2,469	32.1	10.3	7.8	12.5	647	38.4	700/A/B	
1017448	P265/60R18	109T	BSW	8.0	7.5-9.5	51	2,271	30.5	11.3	8.5	12.0	680	34.5	700/A/B	NISSAN Frontier (15-19)
1013843	P265/65R18	112T	BSW	8.0	7.5-9.5	51	2,469	31.6	11.1	8.3	12.0	658	39.8	700/A/B	
1011351	P265/70R18	114T	BSW	8.0	7.0-9.0	51	2,601	32.7	10.7	8.1	12.5	636	40.8	700/A/B	
1011349	P275/65R18	114T	BSW	8.0	7.5-9.5	51	2,601	32.1	11.5	8.7	12.5	647	40.5	700/A/B	
20															
1013171	275/55R20	113T	BSW	8.5	7.5-9.5	51	2,535	32.0	11.5	8.9	11.0	649	40.7	700/A/B	FORD Expedition(14-17), LINCOLN Navigator(14-17)
1012466	P275/55R20	111H	BSW	8.5	7.5-9.5	51	2,403	31.9	11.7	9.1	12.5	651	40.4	700/A/B	
1013844	P275/60R20	114T	BSW	8.0	7.5-9.5	51	2,601	33.0	11.7	8.9	12.5	629	42.0	700/A/B	RAM 1500 (16~)
22															
1016510	285/45R22 XL	114H	BSW	9.5	9.0-10.5	50	2,601	32.3	11.4	9.1	11.0	643	39.5	700/A/A	FORD Expedition(17-22), LINCOLN Navigator(17-22)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Premium Highway All-Season

Dynapro HT



Combining all-season functionality with performance for highway driving

A sport truck and SUV tire that provides a smooth, powerful ride, the Dynapro HT provides greater mileage through specialized treadwear. Excellent snow traction makes driving possible on winter roads while low-rolling resistance offers excellent fuel economy.



Dry braking



Comfort



Drainage



Mileage



Dry handling



Low noise

40K
warranty

M+S

S.Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	OE Fitment
							psi	lbs							
15															
2021133	185/60R15C	94/92T	BSW	6 (C)	5.5	5.5-6.0	54	(S) 1,475 (D) 1,390	23.7	7.7	6.1	14.0	884	24.1	
2002008	LT235/75R15	104/101Q	OWL	6 (C)	6.5	6.0-8.0	50	(S) 1,985 (D) 1,820	28.8	9.2	6.9	14.5	726	37.1	
16															
2001864	195/75R16C	107/105R	BSW	8 (D)	5.5	5.0-6.0	70	(S) 2,150 (D) 2,040	27.5	7.9	6.1	12.5	761	32.6	FORD Transit 150/250/350 ('14-'19)
2020826	205/75R16C	113/111R	BSW	10 (E)	5.5	5.5-6.5	76	(S) 2,535 (D) 2,403	27.9	8.2	6.5	11.5	750	34.2	FORD Transit 150/250/350 ('19-)
2001863	235/65R16C	121/119R	BSW	10 (E)	7.0	6.5-7.5	85	(S) 3,195 (D) 3,000	28.0	9.4	7.5	12.5	746	40.4	FORD Transit 150/250/350 ('14-'19)
2001832	LT215/85R16	115/112Q	BSW	10 (E)	6.0	5.5-7.0	80	(S) 2,680 (D) 2,470	30.3	8.2	6.1	14.5	689	39.6	
2001831	LT225/75R16	115/112S	BSW	10 (E)	6.0	6.0-7.5	80	(S) 2,680 (D) 2,470	29.2	8.8	6.7	14.5	715	39.9	FORD Econoline E250/ E350 ('17-'19)
2001811	LT235/85R16	120/116Q	BSW	10 (E)	6.5	6.0-7.5	80	(S) 3,042 (D) 2,778	31.7	9.1	6.7	14.5	660	43.7	
2001614	LT245/75R16	120/116S	BSW	10 (E)	7.0	6.5-8.0	80	(S) 3,042 (D) 2,778	30.4	9.5	7.2	14.5	687	43.1	
2001812	LT265/75R16	123/120S	BSW	10 (E)	7.5	7.0-9.0	80	(S) 3,415 (D) 3,085	31.6	10.5	7.8	14.5	661	47.4	
17															
2001835	LT235/80R17	120/117R	BSW	10 (E)	6.5	6.0-8.0	80	(S) 3,085 (D) 2,835	31.7	9.0	7.2	14.5	659	45.5	
2001833	LT245/70R17	119/116S	BSW	10 (E)	7.0	6.5-8.0	80	(S) 3,000 (D) 2,755	30.5	9.8	7.5	14.5	686	43.8	
2001834	LT245/75R17	121/118S	BSW	10 (E)	7.0	6.5-8.0	80	(S) 3,195 (D) 2,910	31.4	9.6	7.2	14.5	665	46.0	
2001848	LT265/70R17	121/118S	BSW	10 (E)	8.0	7.0-9.0	80	(S) 3,195 (D) 2,910	31.6	10.6	8.1	14.5	662	48.0	
2021230	LT285/70R17	121/118S	BSW	10 (E)	8.5	7.5-9.5	80	(S) 3,195 (D) 2,910	32.7	11.4	8.4	14.5	639	57.9	
18															
2021229	LT265/70R18	124/121S	BSW	10 (E)	8.0	7.0-9.0	80	(S) 3,525 (D) 3,195	32.5	10.7	7.8	15.0	643	49.6	
2021227	LT275/65R18	123/120S	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,415 (D) 3,085	32.1	11.0	8.1	16.5	652	57.7	
2021226	LT275/70R18	128/125S	BSW	10 (E)	8.0	7.0-9.0	80	(S) 3,640 (D) 3,305	33.2	11.0	8.1	15.0	630	60.2	
20															
2021231	LT265/60R20	121/118S	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,195 (D) 2,910	32.5	10.7	7.8	15.0	643	51.9	
2021228	LT275/65R20	126/123S	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,750 (D) 3,415	34.1	11.0	8.1	15.0	613	62.1	

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage warranties apply only to replacement tires. Original Equipment tires are excluded.

Premium All-Terrain



Dynapro AT2



For aggressive all-terrain driving

The best on/off-road tire for 4x4 vehicles, the Dynapro AT2 employs a tough pattern design and block structure to overcome any road.



Meets the severe snow service requirement of the U.S. Tire Manufacturer's Association (USTMA)



Traction



Low noise



Off-road



Mileage



Snow traction



30 DAY
FREE
TRIAL



60K
warranty



ROAD
HAZARD
WARRANTY



M+S

S.Code	Size	LI SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Fitment
						psi	lbs								
15															
* 1026002	225/70R15	100T	BSW	6.5	6.0-7.5	51	1,764	27.4	8.7	7.0	12.5	735	29.5	660/A/B	
1023440	235/75R15	XL 109T	OWL	6.5	6.0-8.0	50	2,271	28.8	9.2	7.4	11.5	722	33.3	660/A/B	
16															
1024100	215/70R16	100T	OWL	6.5	5.5-7.0	51	1,764	27.8	8.7	6.8	12.5	747	29.1	660/A/B	
1023441	225/70R16	103T	OWL	6.5	6.0-7.5	51	1,929	28.4	8.9	7.1	12.5	731	30.5	660/A/B	
1023442	225/75R16	XL 108T	OWL	6.0	6.0-7.5	50	2,183	29.2	8.7	7.1	12.5	710	32.8	660/A/B	
1023443	235/70R16	XL 109T	OWL	7.0	6.0-8.0	50	2,271	28.9	9.4	7.4	12.5	718	34.1	660/A/B	
1023444	235/75R16	XL 112T	OWL	6.5	6.0-8.0	50	2,649	29.8	9.1	7.4	12.5	698	35.4	660/A/B	
1023445	245/70R16	XL 111T	OWL	7.0	6.5-8.0	50	2,403	29.5	9.6	7.7	12.5	703	35.0	660/A/B	
1023446	245/75R16	111T	OWL	7.0	6.5-8.0	51	2,403	30.4	9.6	7.7	12.5	682	37.3	660/A/B	
1023447	255/65R16	109T	OWL	7.5	7.0-9.0	51	2,271	29.0	10.2	8.4	12.5	715	35.1	660/A/B	
1023448	255/70R16	111T	OWL	7.5	6.5-8.5	51	2,403	30.0	10.2	8.0	12.5	691	38.0	660/A/B	
1023449	265/70R16	112T	OWL	8.0	7.0-9.0	51	2,469	30.6	10.7	8.4	12.5	678	40.3	660/A/B	
1023450	265/75R16	116T	OWL	7.5	7.0-9.0	51	2,756	31.6	10.4	8.4	12.5	658	40.9	660/A/B	
17															
* 1026122	215/65R17	99T	BSW	6.5	6.0-7.5	51	1,709	28.0	8.6	7.0	12.5	720	28.7	660/A/B	CHEVROLET Trailblazer (’20-’26)
* 1025783	225/60R17	99H	BSW	6.5	6.0-8.0	51	1,708	27.7	9.6	7.7	10.5	750	27.2	660/A/A	
1023451	235/65R17	104T	OWL	7.0	6.5-8.5	51	1,984	29.0	9.6	7.8	12.5	716	34.2	660/A/B	
1023452	235/75R17	109T	OWL	6.5	6.0-8.0	51	2,271	30.8	9.2	7.4	12.5	674	35.6	660/A/B	
1023453	245/65R17	XL 111T	OWL	7.0	7.0-8.5	50	2,403	29.6	10.0	8.1	12.5	702	36.2	660/A/B	
1023454	245/70R17	110T	OWL	7.0	6.5-8.0	51	2,337	30.5	9.7	7.7	12.5	681	37.9	660/A/B	
1021539	245/75R17	112T	BSW	7.0	6.5-8.0	51	2,469	31.4	9.9	7.7	12.5	660	38.5	660/A/B	
1023455	255/65R17	110T	OWL	7.5	7.0-9.0	51	2,337	30.1	10.4	8.4	11.5	690	37.5	660/A/B	
1023456	255/70R17	112T	OWL	7.5	6.5-8.5	51	2,469	31.1	10.2	8.0	12.5	669	39.8	660/A/B	
1021538	255/75R17	115T	BSW	7.0	6.5-8.5	51	2,679	32.0	10.0	8.0	12.5	649	40.7	660/A/B	
1023457	265/65R17	112T	OWL	8.0	7.5-9.5	51	2,469	30.5	10.9	8.7	11.5	682	40.0	660/A/B	
1016678	265/70R17	115T	OWL	8.0	7.0-9.0	51	2,679	31.6	10.6	8.4	12.5	657	39.3	660/A/B	
1027182	265/70R17	115T	BSW	8.0	7.0-9.0	51	2,679	31.6	10.6	8.4	12.5	657	39.4	660/A/B	
18															
1024805	235/60R18	103T	BSW	7.0	6.5-8.5	51	1,929	29.1	9.9	7.8	12.5	715	33.4	660/A/B	
* 1026005	235/65R18	XL 110H	BSW	7.0	6.5-8.5	50	2,337	30.0	9.5	7.8	12.5	672	36.5	660/A/B	
1021541	255/60R18	108T	BSW	7.5	7.0-9.0	51	2,205	30.0	11.2	8.4	12.5	693	37.8	660/A/B	
1021536	255/70R18	113T	BSW	7.5	6.5-8.5	51	2,535	32.0	10.7	8.0	12.5	648	41.1	660/A/B	
1021537	265/60R18	XL 114T	BSW	8.0	7.5-9.5	50	2,601	30.4	11.3	8.7	12.5	682	41.1	660/A/B	
1023458	265/65R18	114T	BSW	8.0	7.5-9.5	51	2,601	31.5	10.9	8.8	11.5	660	40.3	660/A/B	
1023459	265/70R18	116T	BSW	8.0	7.0-9.0	51	2,756	32.6	10.6	8.4	12.5	637	42.4	660/A/B	
1023460	275/65R18	116T	BSW	8.0	7.5-9.5	51	2,756	32.1	11.2	9.1	11.5	647	42.9	660/A/B	
20															
1025194	265/50R20	XL 111T	BSW	8.5	7.5-9.5	50	2,403	30.5	11.4	8.8	12.5	681	40.3	660/A/B	
* 1024188	275/55R20	113T	BSW	8.5	7.5-9.5	51	2,535	32.1	11.3	8.4	11.5	647	40.7	440/A/A	FORD F-150 (’18-’21)
1021535	275/60R20	115T	BSW	8.0	7.5-9.5	51	2,679	32.9	11.9	9.1	12.5	631	45.8	660/A/B	
* 1024247	275/60R20	115T	BSW	8.0	7.5-9.5	51	2,679	32.8	11.2	10.6	10.5	634	41.3	440/A/A	FORD F-150 XLT, Lariat, Platinum, Limited (’20-’25)
1021540	305/50R20	XL 120T	BSW	9.5	8.5-11.0	50	3,086	32.0	13.2	10.1	13.0	650	47.8	660/A/B	
22															
1024103	285/45R22	110T	BSW	9.5	9.0-10.5	51	2,337	32.0	11.5	9.8	12.5	650	43.4	660/A/B	
1023462	305/45R22	XL 118T	BSW	10.0	9.5-11.5	50	2,910	32.7	12.1	10.4	12.5	635	46.7	660/A/B	

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

* - New in 2021

* - Do not have the Severe Snowmark

Premium All-Terrain



Dynapro AT2



For aggressive all-terrain driving

The best on/off-road tire for 4x4 vehicles, the Dynapro AT2 employs a tough pattern design and block structure to overcome any road.



Meets the severe snow service requirement of the U.S. Tire Manufacturer's Association (USTMA)



Traction



Low noise



Off-road



Mileage



Snow traction



S.Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight
							psi	lbs						
15														
2020845	30X9.50R15LT	104S	OWL	6 (C)	7.5	6.0-8.0	50	(S) 1,985	29.5	8.9	7.6	15.5	708	40.0
2020995	31X10.50R15LT	109S	OWL	6 (C)	8.5	7.0-9.0	50	(S) 2,270	30.5	9.9	8.4	15.5	686	44.2
2021245	32X11.50R15LT	113S	OWL	6 (C)	7.5	6.5-8.5	50	(S) 2,535	31.5	10.6	9.2	15.9	640	28.7
2020847	33x12.50R15LT	108S	OWL	6 (C)	10.0	8.0-10.5	35	(S) 2,205	32.6	11.9	10.0	15.5	641	57.2
2021290	LT215/75R15	100/97S	OWL	6 (C)	6.0	5.5-7.0	50	(S) 1,765 (D) 1,610	27.6	8.5	6.8	14.5	758	34.4
2020844	LT235/75R15	104/101S	OWL	6 (C)	6.5	6.0-8.0	50	(S) 1,985 (D) 1,820	28.8	9.0	7.4	15.5	725	38.8

16

2020848	LT215/85R16	115/112S	OWL	10 (E)	6.0	5.5-7.0	80	(S) 2,680 (D) 2,470	30.3	8.1	6.8	15.0	691	41.7
2020692	LT225/75R16	115/112S	BSW	10 (E)	6.0	6.0-7.5	80	(S) 2,680 (D) 2,470	29.2	9.0	7.1	15.0	716	42.3
2020849	LT235/85R16	120/116S	BSW	10 (E)	6.5	6.0-7.5	80	(S) 3,042 (D) 2,778	31.6	8.6	7.0	16.0	661	46.5
2020850	LT245/75R16	120/116S	OWL	10 (E)	7.0	6.5-8.0	80	(S) 3,042 (D) 2,778	30.4	9.5	7.7	15.5	688	45.5
2020851	LT265/70R16	117/114S	OWL	8 (D)	8.0	7.0-9.0	65	(S) 2,835 (D) 2,600	30.6	10.5	8.4	15.5	683	47.4
2020690	LT265/75R16	123/120S	BSW	10 (E)	7.5	7.0-9.0	80	(S) 3,415 (D) 3,085	31.7	10.3	8.3	15.5	660	50.9
2020871	LT285/75R16	126/123S	OWL	10 (E)	8.0	7.5-9.5	80	(S) 3,750 (D) 3,415	32.8	10.7	9.0	15.5	637	60.6
2020855	LT305/70R16	124/121S	OWL	10 (E)	9.0	8.0-10.0	65	(S) 3,525 (D) 3,195	32.8	11.9	9.6	15.5	637	62.4
2020856	LT315/75R16	121/118S	OWL	8 (D)	8.5	8.0-10.5	50	(S) 3,195 (D) 2,910	34.5	11.6	9.9	15.5	605	67.5

17

2021066	35X12.50R17LT	121S	OWL	10 (E)	10.0	8.0-10.5	65	(S) 3,195	34.5	12.3	10.0	15.5	606	68.6
* 2021461	LT225/65R17	107/103S	BSW	8 (D)	6.5	6.0-8.0	65	(S) 2,150 (D) 1,930	28.5	8.7	7.1	15.2	709	28.7
2020693	LT225/75R17	116/113S	BSW	10 (E)	6.0	6.0-7.5	80	(S) 2,755 (D) 2,535	30.2	8.8	7.1	15.0	691	43.6
2020691	LT235/80R17	120/117S	BSW	10 (E)	6.5	6.0-8.0	80	(S) 3,085 (D) 2,835	31.7	9.1	7.4	15.5	659	48.2
* 2021253	LT245/65R17	111/108S	OWL	8 (D)	7.0	7.0-8.5	65	(S) 2,405 (D) 2,205	29.5	9.6	7.7	15.9	685	28.7
2020852	LT245/70R17	119/116S	OWL	10 (E)	7.0	6.5-8.0	80	(S) 3,000 (D) 2,755	30.5	9.6	7.7	15.5	685	46.1
2020853	LT245/75R17	121/118S	OWL	10 (E)	7.0	6.5-8.0	80	(S) 3,195 (D) 2,910	31.4	9.5	7.7	15.0	665	46.7
2021364	LT245/75R17	121/118S	BSW	10 (E)	7.0	6.5-8.0	80	(S) 3,195 (D) 2,910	31.4	9.5	7.7	15.0	665	46.7
* 2021250	LT255/75R17	111/108S	BSW	6 (C)	7.0	6.5-8.5	80	(S) 3,195 (D) 2,910	32.0	9.7	8.0	15.2	631	28.7
2020188	LT265/70R17	121/118S	OWL	10 (E)	8.0	7.0-9.0	80	(S) 3,195 (D) 2,910	31.6	10.5	8.3	15.0	661	48.8
2021363	LT265/70R17	121/118S	BSW	10 (E)	8.0	7.0-9.0	80	(S) 3,195 (D) 2,910	31.6	10.5	8.3	15.0	661	48.8
2020857	LT275/70R17	121/118S	OWL	10 (E)	8.0	7.0-9.0	80	(S) 3,195 (D) 2,910	32.1	10.7	8.7	15.0	650	58.2
2020858	LT285/70R17	121/118S	OWL	10 (E)	8.5	7.5-9.5	80	(S) 3,195 (D) 2,910	32.7	11.2	9.0	15.5	639	60.2
* 2021255	LT285/75R17	121/118S	BSW	10 (E)	8.0	7.5-9.5	80	(S) 3,195 (D) 2,910	33.9	10.6	9.0	15.9	596	62.1
2020859	LT295/70R17	121/118S	BSW	10 (E)	8.5	7.5-10.0	80	(S) 3,195 (D) 2,910	33.2	11.6	9.3	15.5	629	62.3
2020860	LT315/70R17	121/118S	OWL	10 (E)	9.5	8.0-10.5	65	(S) 3,195 (D) 2,910	34.4	12.3	9.9	15.5	608	66.9

18

* 2021397	33X12.50R18LT	122S	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,305	32.5	12.5	10.5	15.9	621	68.4
2021068	35X12.50R18LT	123S	BSW	10 (E)	10.0	8.5-11.0	65	(S) 3,415	34.5	12.2	10.0	15.0	605	72.7
* 2021398	35X12.50R18LT	128S	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,970	34.5	12.2	10.0	15.2	584	72.1
* 2021460	LT265/60R18	119/116S	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,000 (D) 2,755	30.5	10.8	8.7	14.6	663	47.3

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

* - New in 2021

Premium All-Terrain



Dynapro AT2



For aggressive all-terrain driving

The best on/off-road tire for 4x4 vehicles, the Dynapro AT2 employs a tough pattern design and block structure to overcome any road.



Meets the severe snow service requirement of the U.S. Tire Manufacturer's Association (USTMA)



Traction



Low noise



Off-road



Mileage



Snow traction



S.Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight
							psi	lbs						
18 cont...														
* 2021259	LT265/65R18	122/119S	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,305 (D) 3,000	31.4	10.6	8.7	13.5	642	49.4
2020854	LT265/70R18	124/121S	BSW	10 (E)	8.0	7.0-9.0	80	(S) 3,525 (D) 3,195	32.6	10.5	8.4	15.0	641	50.9
2020861	LT275/65R18	123/120S	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,415 (D) 3,085	32.0	11.0	9.1	15.0	652	63.7
2020862	LT275/70R18	125/122S	BSW	10 (E)	8.0	7.0-9.0	80	(S) 3,640 (D) 3,305	33.1	10.8	8.7	15.0	631	63.0
2020863	LT285/65R18	125/122S	BSW	10 (E)	8.5	8.5-10.0	80	(S) 3,640 (D) 3,195	32.5	11.5	9.4	14.5	643	64.9
* 2021247	LT285/75R18	129/126S	BSW	10 (E)	8.0	7.5-9.5	80	(S) 4,080 (D) 3,750	34.8	10.6	9.0	15.9	579	68.3
* 2021254	LT295/70R18	129/126S	BSW	10 (E)	8.5	7.5-10.0	80	(S) 4,080 (D) 3,750	34.2	11.5	9.3	15.9	589	67.9
2021067	LT305/65R18	124/121S	BSW	10 (E)	9.0	9.0-11.0	65	(S) 3,525 (D) 3,195	33.5	11.9	9.6	15.0	623	68.4
2020864	LT325/60R18	124/121S	BSW	10 (E)	9.5	9.5-11.5	65	(S) 3,525 (D) 3,195	33.3	13.2	10.7	14.5	628	70.6
2020865	LT325/65R18	127/124S	BSW	10 (E)	9.5	9.5-11.5	65	(S) 3,860 (D) 3,525	34.6	12.9	10.7	14.5	605	75.3

20

* 2021399	33X12.50R20LT	119S	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,000	32.6	12.6	10.5	15.9	619	66.6
2021074	35X12.50R20LT	121S	BSW	10 (E)	10.0	8.5-11.0	65	(S) 3,195	34.5	12.5	10.5	15.5	606	76.5
* 2021400	35X12.50R20LT	125S	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,640	34.5	12.5	10.5	15.9	585	76.5
2021069	LT265/60R20	121/118S	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,195 (D) 2,910	32.4	11.0	8.3	14.5	645	54.6
2021070	LT275/55R20	115/112S	BSW	8 (D)	8.5	8.0-9.5	65	(S) 2,680 (D) 2,470	31.9	11.5	9.1	14.5	656	56.8
2021071	LT275/60R20	119/116S	BSW	8 (D)	8.0	8.0-9.5	65	(S) 3,000 (D) 2,755	32.9	11.1	9.1	14.5	635	58.6
2020866	LT275/65R20	126/123S	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,750 (D) 3,415	34.0	11.2	9.1	14.5	614	66.7
2020867	LT285/55R20	122/119S	BSW	10 (E)	9.0	8.5-10.0	80	(S) 3,305 (D) 3,000	32.4	11.1	9.4	16.0	646	63.4
* 2021246	LT285/60R20	125/122S	BSW	10 (E)	8.5	8.5-10.0	80	(S) 3,640 (D) 3,305	33.4	11.7	9.4	14.6	603	65.6
2021072	LT285/65R20	127/124S	BSW	10 (E)	8.5	8.5-10.0	80	(S) 3,860 (D) 3,525	34.6	11.5	9.4	14.5	605	68.3
* 2021251	LT295/55R20	123/120S	BSW	10 (E)	9.5	8.5-10.5	80	(S) 3,415 (D) 3,085	32.8	12.3	9.8	16.5	616	64.2
2021073	LT295/60R20	126/123S	BSW	10 (E)	8.5	8.5-10.5	80	(S) 3,750 (D) 3,415	33.9	12.1	9.3	15.0	617	71.1
* 2021248	LT295/65R20	129/126S	BSW	10 (E)	8.5	8.5-10.5	80	(S) 4,080 (D) 3,750	35.1	11.9	9.3	14.6	575	71.8
2020868	LT305/55R20	121/118S	BSW	10 (E)	9.5	9.0-11.0	65	(S) 3,195 (D) 2,910	33.2	12.3	10.1	16.0	630	69.3
* 2021401	LT305/55R20	125/122S	BSW	12 (F)	9.5	9.0-11.0	80	(S) 3,640 (D) 3,305	33.2	12.3	10.1	16.5	608	69.2
2020869	LT325/60R20	126/123S	BSW	10 (E)	9.5	9.5-11.5	65	(S) 3,750 (D) 3,415	35.3	12.9	10.8	15.5	592	76.0

22

* 2021403	35X12.50R22LT	121S	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,195	34.6	12.6	10.5	15.9	583	70.5
2020870	LT325/50R22	122S	BSW	10 (E)	10.0	9.5-11.5	65	(S) 3,305	34.8	13.3	10.8	16.0	600	78.4

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

* - New in 2021

Mud Terrain



Dynapro MT2



Off-road driving excitement

The Dynapro MT2 boasts superb multi-directional traction and excellent grip, acceleration and anti-puncture capability. Even under harsh off-road conditions, expect the best possible driving performance with excellent handling and stability on any road type.



Compound



Stone ejector



Sidewall shield



Off-road traction



Durability



S.Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/Mile	Weight	OE Fitment	
							psi	lbs								
15																
2020980	30X9.50R15LT	104Q	OWL	6 (C)	7.5	6.0-8.0	50	(S) 1,985	29.7	9.0	7.6	17.0	704	41.3		
2020982	32X11.50R15LT	113Q	OWL	6 (C)	7.5	6.5-8.5	50	(S) 2,535	31.8	10.6	9.2	17.0	657	52.9		
2020985	LT215/75R15	100/97Q	OWL	6 (C)	6.0	5.5-7.0	50	(S) 1,765 (D) 1,610	27.8	8.3	6.8	15.5	751	35.7		
2020981	31X10.50R15LT	109Q	OWL	6 (C)	8.5	7.0-9.0	50	(S) 2,270	30.7	10.1	8.4	17.5	679	47.5		
2020983	33X12.50R15LT	108Q	OWL	6 (C)	10.0	8.5-11.0	35	(S) 2,205	32.8	11.7	10.0	17.0	636	59.6		
2020986	LT235/75R15	104/101Q	OWL	6 (C)	6.5	6.0-8.0	50	(S) 1,985 (D) 1,820	29.0	8.9	7.4	16.0	720	39.1		
16																
2020730	LT215/85R16	115/112Q	BSW	10 (E)	6.0	5.5-7.0	80	(S) 2,680 (D) 2,470	30.5	8.0	6.7	17.0	685	43.9		
2020799	LT225/75R16	115/112Q	BSW	10 (E)	6.0	6.0-7.5	80	(S) 2,680 (D) 2,470	29.4	8.5	7.1	17.0	710	42.4		
2020800	LT245/75R16	120/116Q	BSW	10 (E)	7.0	6.5-8.0	80	(S) 3,042 (D) 2,778	30.6	9.5	7.7	17.5	684	48.0		
2020988	LT265/75R16	123/120Q	OWL	10 (E)	7.5	7.0-9.0	80	(S) 3,415 (D) 3,085	31.8	10.0	8.3	17.0	657	54.1		
2021075	LT305/70R16	124/121Q	OWL	10 (E)	9.0	8.0-10.0	65	(S) 3,525 (D) 3,195	33.0	11.8	9.6	18.5	633	67.9		
2020798	LT235/85R16	120/116Q	BSW	10 (E)	6.5	6.0-7.5	80	(S) 3,042 (D) 2,778	31.9	8.8	7.4	17.0	655	48.9		
2020990	LT315/75R16	127/124Q	OWL	10 (E)	8.5	8.0-10.5	65	(S) 3,860 (D) 3,525	34.8	11.7	9.9	17.5	601	70.9		
2020989	LT285/75R16	126/123Q	OWL	10 (E)	8.0	7.5-9.5	80	(S) 3,750 (D) 3,415	33.0	10.6	9.0	17.0	633	63.4		
17																
2020790	35X12.50R17LT	121Q	BSW	10 (E)	10.0	8.0-10.5	65	(S) 3,195	34.7	12.0	10.0	18.5	602	73.4		
2021077	LT245/75R17	124/121Q	OWL	10 (E)	7.0	6.5-8.0	80	(S) 3,195 (D) 2,910	31.7	9.3	7.7	17.5	659	50.6		
2020801	LT255/75R17	121/118Q	BSW	10 (E)	7.0	6.5-8.5	80	(S) 3,195 (D) 2,910	32.2	9.8	8.0	17.0	650	51.4		
2020765	LT265/70R17	121/118Q	OWL	10 (E)	8.0	7.0-9.0	80	(S) 3,195 (D) 2,910	31.9	10.4	8.3	17.5	656	52.9		
2020991	LT285/70R17	121/118Q	OWL	10 (E)	8.5	7.5-9.5	80	(S) 3,195 (D) 2,910	32.9	11.3	9.0	18.5	635	64.4		
2020802	LT295/70R17	121/118Q	BSW	10 (E)	8.5	7.5-10.0	80	(S) 3,195 (D) 2,910	33.5	11.5	9.3	17.0	624	65.9		
2020803	LT315/70R17	121/118Q	BSW	8 (D)	9.5	8.0-10.5	50	(S) 3,195 (D) 2,910	34.6	12.3	9.9	18.0	605	72.9		
2021076	LT235/80R17	124/121Q	BSW	10 (E)	6.5	6.0-8.0	80	(S) 3,085 (D) 2,835	31.9	8.7	7.4	17.0	654	48.5		
18																
2020792	33X12.50R18LT	118Q	BSW	10 (E)	10.0	8.5-11.0	65	(S) 2,910	32.7	12.2	10.5	16.0	639	69.6		
*	2021406	33X12.50R18LT	122Q	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,305	32.7	12.2	10.5	16.5	616	69.4	
	2020832	35X12.50R18LT	123Q	BSW	10 (E)	10.0	8.5-11.0	65	(S) 3,415	34.8	12.0	10.0	18.5	601	76.1	
*	2021407	35X12.50R18LT	128Q	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,970	34.8	12.0	10.0	18.9	580	76.0	
	2020806	LT275/65R18	123/120Q	BSW	10 (E)	8.0	8.0-9.5	80	(S) 3,415 (D) 3,085	32.2	10.9	9.1	18.0	649	64.7	
*	2021223	LT275/70R18	125/122R	BSW	10 (E)	8.0	7.0-9.0	80	(S) 3,640 (D) 3,305	33.3	10.7	9.3	18.5	628	61.2	CHEVROLET Silverado HD (20-25), GMC Sierra HD (20-25)
	2020807	LT285/65R18	125/122Q	BSW	10 (E)	8.5	8.0-10.0	80	(S) 3,640 (D) 3,305	32.7	11.4	9.4	17.5	639	68.1	
	2020805	LT295/70R18	129/126Q	BSW	10 (E)	8.5	7.5-10.0	80	(S) 4,080 (D) 3,750	34.5	11.5	9.3	17.0	606	71.9	
	2021079	LT305/70R18	126/123Q	OWL	10 (E)	9.0	8.0-10.0	65	(S) 3,750 (D) 3,415	35.0	11.8	9.6	18.5	597	77.1	
20																
2020793	33X12.50R20LT	114Q	BSW	10 (E)	10.0	8.5-11.0	65	(S) 2,600	32.8	12.6	10.5	17.0	638	71.3		
*	2021409	33X12.50R20LT	119Q	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,000	32.8	12.6	10.5	17.1	616	69.6	
	2020794	35X12.50R20LT	121Q	BSW	10 (E)	10.0	8.5-11.0	65	(S) 3,195	34.7	12.4	10.5	17.5	602	77.7	
*	2021411	35X12.50R20LT	125Q	BSW	12 (F)	10.0	8.5-11.0	80	(S) 3,640 (S) 3,042	34.7	12.4	10.5	17.8	581	77.0	
	2021084	37X12.50R20LT	120/116Q	BSW	10 (E)	10.0	8.5-11.0	80	(D) 2,778	36.7	12.4	10.0	18.5	569	82.0	
	2020795	37X13.50R20LT	127Q	BSW	10 (E)	11.0	9.5-11.0	65	(S) 3,860 (S) 3,750	36.8	13.2	11.3	18.0	569	88.8	
	2020808	LT275/65R20	126/123Q	BSW	10 (E)	8.0	8.0-9.5	80	(D) 3,415 (S) 3,305	34.2	10.6	9.1	18.0	611	70.4	
	2021080	LT285/55R20	122/119Q	BSW	10 (E)	9.0	8.5-10.0	80	(D) 3,000 (S) 3,415	32.6	11.9	9.4	17.5	642	67.0	
	2020809	LT295/55R20	123/120Q	BSW	10 (E)	9.5	8.5-10.5	80	(D) 3,085	33.0	12.3	9.8	16.0	634	68.9	

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

* - New in 2021

Mud Terrain



Dynapro MT2



Off-road driving excitement

The Dynapro MT2 boasts superb multi-directional traction and excellent grip, acceleration and anti-puncture capability. Even under harsh off-road conditions, expect the best possible driving performance with excellent handling and stability on any road type.



Compound



Stone ejector



Sidewall shield



Off-road traction



Durability



S.Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	OE Fitment
							psi	lbs							

20 cont...

2021081	LT295/60R20	126/123Q	BSW	10 (E)	8.5	8.5-10.5	80	(S) 3,750 (D) 3,415	34.1	11.5	9.8	17.5	613	73.2	
2021082	LT295/65R20	129/126Q	BSW	10 (E)	8.5	8.5-10.5	80	(S) 4,080 (D) 3,750	35.3	11.6	9.8	16.0	592	75.1	
2020810	LT305/55R20	121/118Q	BSW	10 (E)	9.5	9.0-11.0	65	(S) 3,195 (D) 2,910	33.4	12.3	10.1	17.5	625	72.7	
* 2021414	LT305/55R20	125/122Q	BSW	12 (F)	9.5	9.0-11.0	80	(S) 3,640 (D) 3,305	33.4	12.3	10.1	17.8	604	72.5	
2021083	LT315/60R20	125/122Q	BSW	10 (E)	9.5	9.5-11.0	65	(S) 3,640 (D) 3,305	35.1	12.6	10.4	18.0	596	79.2	

22

2021085	35X12.50R22LT	120/116Q	BSW	10 (E)	10.0	8.5-11.0	65	(S) 2,835	34.7	12.3	10.5	17.0	601	75.8	
2020796	37X13.50R22LT	123Q	BSW	10 (E)	11.0	9.5-12.0	65	(S) 3,415	36.7	13.4	11.3	18.5	570	88.8	
* 2021418	37X13.50R22LT	128Q	BSW	12 (F)	11.0	9.5-12.0	80	(S) 3,970	36.7	13.4	11.3	18.9	550	87.2	

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

* - New in 2021

Commercial



Vantra LT



Improved durability and internal anti abrasion qualities

A summer radial tyre for commercial vans and transport vehicles, the Vantra LT provides excellent durability, increased mileage as well as excellent wet performance and a balanced footprint. Even under heavy loads, stability is maintained, increasing driver safety.



Dry braking



Dry handling



Low noise



Comfort

S.Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	OE Fitment
							psi	lbs							

14

2001939	185R14C	102/100R	BSW	8(D)	5.5	5.0-6.0	65	(S) 1,875 (D) 1,764	25.5	7.2	5.3	10.0	819	24.2	
2001946	195R14C	106/104R	BSW	8(D)	5.5	5.0-6.0	65	(S) 2,094 (D) 1,984	26.1	7.6	5.5	12.0	800	26.3	

16

2020425	195/75R16C	107/105R	BSW	8(D)	5.5	5.0-6.0	69	(S) 2,150 (D) 2,040	27.3	7.7	6.2	11.5	766	28.9	MERCEDES BENZ Sprinter ('18-'25)
---------	------------	----------	-----	------	-----	---------	----	------------------------	------	-----	-----	------	-----	------	-------------------------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters



Original Equipment Radial Tire

Whatever you drive,
Hankook Tire has the solution.

TIRES

K129, K127, K117, K125, K115, H452, H436, H426, H725,
RA33, RF10, RF11, RH12, K425, K435, EH01, H105, RF08,
H418, H125, H428, H724, RH03, RA18

NOTES

T/T : Tube Type

T/L : Tubeless Type

❄️🌀❄️ : All Season Tire

This List cancels all previous lists and is subject to change without prior notice




Max Performance Summer



ventus S1evo Z



Maximum performance and ultimate handling response for sport driving



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

18

1024867	225/35R18	XL	87Y	BSW	8.0	7.5-9.0	50	1,201	24.1	9.2	8.3	6.5	861	19.5	200/AA/A	MINI COOPER JCW GP 3 ('20~'22)
---------	-----------	----	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	----------	--------------------------------

19

1023876	265/45ZR19	XL	105Y	BSW	9.0	8.5-10.0	50	2,039	28.4	11.1	9.3	9.0	731	30.2	300/AA/A	PORSCHE Panamera G2 ('20~'21)
1023877	295/40ZR19	XL	108Y	BSW	10.5	10.0-11.5	50	2,205	28.3	11.9	10.9	7.5	735	33.1	300/AA/A	PORSCHE Panamera G2 ('20~'21)

20

1027957	275/40ZR20	XL	(106Y)	BSW	9.5	9.0-11.0	50	2,094	28.5	11.9	9.6	8.5	730	32.0	300/AA/A	PORSCHE Panamera ('20~'23)
1027958	315/35ZR20	XL	(110Y)	BSW	11.0	10.5-12.5	50	2,337	28.5	11.9	9.6	8.5	730	35.6	300/AA/A	PORSCHE Panamera ('20~'23)

21

1024833	255/40ZR21	XL	(102Y)	BSW	9.0	8.5-10.0	50	1,847	28.8	10.8	8.6	8.5	721	30.8	240/AA/A	BMW X3 M / X4 M ('20~'25)
1024834	265/40ZR21	XL	(105Y)	BSW	9.5	9.0-10.5	50	2,039	29.0	11.4	9.2	8.5	716	33.4	240/AA/A	BMW X3 M / X4 M ('20~'25)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Road Hazard and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Road Hazard warranty does not apply to Runflat Tires.

Ultra High Performance Summer / Runflat



ventus S1evo³



Performance, safety, and comfort are embodied in our sustainable tires.

- Truly superior handling performance that will transform your driving experience.
- Powerful and responsive braking performance that reduces the braking distance on wet roads or in the event of an emergency.
- Maintains ride comfort, fuel efficiency, and even drive performance.



Pitch



Compound



Dry handling



Wet handling



Mileage



Ride



Hydroplaning



Wear resistance

S-Code	Size		LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
							psi	lbs								
17																
1022632	205/45R17	XL	88W	BSW	7.0	6.5-7.5	50	1,235	24.1	8.6	6.9	8.0	863	16.5	260/A/A	MINI Cooper ('19~'22) BMW 2 Series Active Tourer & Gran Tourer ('19~'21) BMW 3 Series / Z4 ('18-'25) BMW 5 Series ('19)
1022636	205/55R17	XL	95W	BSW	6.5	5.5-7.5	50	1,521	25.7	9.2	6.6	8.5	807	20.8	260/A/A	
1019621	225/50R17	XL	98Y	BSW	7.0	6.0-8.0	50	1,653	25.8	10.0	7.5	9.0	805	22.9	240/A/A	
1024577	225/55R17	XL	101Y	BSW	7.0	6.0-8.0	50	1,819	26.7	9.7	7.2	9.0	779	23.6	240/A/A	
18																
1024441	215/45R18	XL	93W	BSW	7.0	7.0-8.0	50	1,433	25.6	8.9	7.5	9.0	811	20.8	220/A/A	AUDI A1 City Carver ('19~'24)
1020261	225/40R18	XL	92Y	BSW	8.0	7.5-9.0	50	1,389	25.0	9.6	7.6	9.5	832	24.0	300/A/A	AUDI S3 ('16-'21)
19																
1023286	235/35R19	XL	91Y	BSW	8.5	8.0-9.5	50	1,356	25.3	10.2	8.3	9.0	820	22.2	340/A/A	VOLKSWAGEN Golf ('21-'23)
1022614	235/40R19	XL	96W	BSW	8.5	8.0-9.5	50	1,565	26.4	10.1	8.1	8.5	788	25.2	340/AA/A	TESLA Model 3 ('18-'23)
1020540	235/40ZR19		(92Y)	BSW	8.5	8.0-9.5	51	1,389	26.5	9.9	8.3	9.0	785	24.1	400/A/A	PORSCHE Boxter ('20~)
1022264	255/45R19	XL	104Y	BSW	8.5	8.0-9.5	50	1,984	28.1	10.1	8.7	9.5	739	27.2	220/A/A	BENZ S-Class ('20~'27)
1022615	265/35R19	XL	98W	BSW	9.5	9.0-10.5	50	1,653	26.3	11.0	9.1	8.5	789	27.8	340/AA/A	TESLA MODEL 3 ('18-'23)
1020541	265/40ZR19		(98Y)	BSW	9.5	9.0-10.5	51	1,653	27.3	11.4	9.5	8.5	760	29.1	400/A/A	PORSCHE BOXTER ('20~)
1022896	285/40R19	XL	107Y	BSW	10.0	9.5-11.0	50	2,149	28.1	11.6	9.6	9.5	740	29.5	220/A/A	BENZ S-Class ('20~'27)
21																
1026274	275/35ZR21	XL	(103Y)	BSW	9.5	9.0-11.0	50	1,929	28.4	11.8	9.6	9.0	731	32.9	200/AA/A	AUDI RS6/7 ('19~)
22																
1026276	285/30ZR22	XL	(101Y)	BSW	10.0	9.5-10.5	50	1,819	28.5	12.2	9.8	9.0	728	34.0	420/A/A	AUDI RS6/7 ('19~)
K127B																
17																
1022631	205/45R17	XL	88W	BSW	7.0	6.5-7.5	51	1,235	24.1	8.5	6.9	8.5	862	19.3	260/A/A	MINI Hatchbacks / Hardtop / 5 Door / Convertible(2020-2022) MINI Clubman ('20~)
1019613	225/45R17	XL	94Y	BSW	7.5	7.0-8.5	50	1,477	24.8	9.3	7.6	9.0	836	22.5	220/AA/A	
18																
1019630	225/45R18	XL	95Y	BSW	7.5	7.0-8.5	50	1,521	25.7	9.2	7.3	9.5	808	25.7	260/A/A	BMW 3 Series ('18-'25), BMW 2 Series ('19-'25)
1024579	245/45R18	XL	100Y	BSW	8.0	7.5-9.0	50	1,764	26.5	10.0	8.2	8.5	784	29.8	220/A/A	
1019631	255/40R18	XL	99Y	BSW	9.0	8.5-10.0	50	1,709	25.9	10.1	9.0	9.5	801	27.9	260/A/A	BMW 5 Series ('20~'23)
1024580	275/40R18	XL	103Y	BSW	9.5	9.0-11.0	50	1,929	26.5	11.9	9.8	9.0	784	33.3	220/A/A	BMW 3/4 Series ('19-'25) BMW 5 Series ('20-'23)
K127E																
19																
1025134	225/55R19	XL	103Y	BSW	7.0	6.0-8.0	50	1,929	28.7	10.0	7.8	8.0	724	28.4	340/A/A	PORSCHE Taycan ('20-'24)
1025135	275/45R19	XL	108Y	BSW	9.0	8.5-10.5	50	2,205	28.7	11.7	9.8	8.0	724	32.1	340/A/A	PORSCHE Taycan ('20-'24)
22																
1025896	285/35R22	XL	106H	BSW	10.0	9.5-11.0	50	2,094	29.9	12.1	10.0	9.5	695	36.6	380/A/A	AUDI e-tron sport ('20-'25)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Road Hazard and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Road Hazard warranty does not apply to Runflat Tires.

Ultra High Performance Summer / Runflat



ventus S1evo³ SUV



Performance, safety, and comfort are embodied in our sustainable tires.

- Truly superior handling performance that will transform your driving experience.
- Powerful and responsive braking performance that reduces the braking distance on wet roads or in the event of an emergency.
- Maintains ride comfort, fuel efficiency, and even drive performance.



Pitch



Compound



Dry handling



Wet handling



Mileage



Ride



Hydroplaning



Wear resistance

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

K127A**18**

1024840	235/60R18		103W	BSW	7.0	6.5-8.5	51	1,929	29.1	9.9	7.5	9.0	713	29.5	280/AA/A AUDI Q5 ('20-)
1023812	255/55R18	XL	109W	BSW	8.0	7.0-9.0	50	2,271	29.0	11.0	8.7	9.0	716	31.8	520/AA/A BMW X5/X6 ('19-'25)

19

1021315	265/55R19	XL	113Y	BSW	8.5	7.5-9.5	50	2,535	30.5	11.7	9.0	9.5	682	37.8	220/AA/A AUDI Q8 ('19-'22)
---------	-----------	----	------	-----	-----	---------	----	-------	------	------	-----	-----	-----	------	----------------------------

21

1027791	255/35R21	XL	98Y	BSW	9.0	8.5-10.0	50	1,653	27.9	10.7	8.9	9.0	745	30.0	200/A/A VOLKSWAGEN Tiguan R ('20-'25)
1020785	285/40R21	XL	(109Y)	BSW	10.0	9.5-11.0	50	2,271	29.8	12.1	9.4	9.0	697	35.5	420/A/A PORSCHE Cayenne ('17-'22)
1021934	285/45R21	XL	113Y	BSW	9.5	9.0-10.5	50	2,535	31.1	11.9	10.0	9.5	669	40.4	220/AA/A AUDI Q8 ('19-'21)
1021318	285/45R21	XL	113Y	BSW	9.5	9.0-10.5	50	2,535	31.1	11.9	10.1	9.5	669	41.8	220/AA/A AUDI SQ8 ('18-'22)
1020786	315/35ZR21	XL	(111Y)	BSW	11.0	10.5-12.5	50	2,403	29.3	13.4	10.7	9.0	710	37.4	420/A/A PORSCHE Cayenne ('17-'22)

22

1021831	285/40R22	XL	110Y	BSW	10.0	9.5-11.0	50	2,337	31.0	11.7	10.0	9.5	669	42.7	220/AA/A AUDI Q8 ('20~)
1021935	285/40R22	XL	110Y	BSW	10.0	9.5-11.0	50	2,337	31.0	11.7	10.0	9.5	669	41.6	AUDI Q8 / Q2 ('18-'22)
1023851	295/40R22	XL	(112Y)	BSW	10.5	10.0-11.5	50	2,469	31.1	12.3	10.5	9.0	668	40.6	180/AA/A AUDI RSQ8 ('20~)

23

1023852	295/35ZR23	XL	(108Y)	BSW	10.5	10.0-11.5	50	2,250	30.8	12.3	10.3	9.0	674	39.6	180/AA/A AUDI RS Q8 ('20~)
---------	------------	----	--------	-----	------	-----------	----	-------	------	------	------	-----	-----	------	----------------------------

K127C SUV Runflat**19**

1023852	295/35ZR23	XL	(108Y)	BSW	10.5	10.0-11.5	50	2,250	30.8	12.3	10.3	9.0	674	39.6	180/AA/A AUDI RS Q8 ('20~)
---------	------------	----	--------	-----	------	-----------	----	-------	------	------	------	-----	-----	------	----------------------------

20

1023867	275/45R20	XL	110Y	BSW	9.0	8.5-10.5	50	2,337	29.8	10.9	9.0	8.0	698	37.7	220/A/A BMW X5/6 ('20~'25)
1023814	305/40R20	XL	112Y	BSW	11.0	10.0-12.0	50	2,469	29.7	12.5	10.5	8.5	699	42.6	220/A/A BMW X5/6 ('20~'25)

21

1023815	275/40R21	XL	107Y	BSW	9.5	9.0-11.0	50	2,149	29.6	11.2	9.8	9.0	701	38.1	220/A/A BMW X5 ('20-'25)
1023816	315/35R21	XL	111Y	BSW	11.0	10.5-12.5	50	2,403	29.6	12.6	11.7	9.0	701	41.8	220/A/A BMW X6 ('20-'25)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Road Hazard and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Road Hazard warranty does not apply to Runflat Tires.

Ultra-High Performance Summer / Runflat



ventus S1 evo²



The best balance between wet & dry performance!

The Ventus S1 evo² is a premium performance tire that provides precise, controlled cornering at high-speeds and environmentally friendly performance through minimized rolling resistance and optimal profile implementation.



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								
1020560	205/55R17		91W	BSW	6.5	5.5-7.5	51	1,356	25.9	8.7	6.6	9.5	803	21.1	440/A/A MERCEDES BENZ A & B Class ('18-'19)
1014172	225/50R17		94Y	BSW	7.0	6.0-8.0	51	1,477	25.7	10.3	7.4	10.0	809	24.9	280/A/A AUDI A4 ('15-'20)
1015315	225/50R17	XL	98Y	BSW	7.0	6.0-8.0	50	1,653	25.7	10.3	7.4	10.0	809	24.9	280/A/A AUDI A4 ('15-'20)
1013207	225/50ZR17		94W	BSW	7.0	6.0-8.0	51	1,477	25.9	10.2	7.4	10.0	802	24.6	280/AA/A AUDI TT ('14-'20)
1013201	245/45ZR17		95Y	BSW	8.0	7.5-9.0	51	1,521	25.7	10.4	8.5	9.5	809	25.5	280/AA/A AUDI TT ('14-'17)

18

1017080	225/40R18	XL	92Y	BSW	8.0	7.5-9.0	50	1,389	25.0	9.6	7.6	10.0	832	22.3	280/A/A AUDI A3 ('16-'20)
1020730	225/45R18		91W	BSW	7.5	7.0-8.5	51	1,356	25.7	9.4	7.5	9.5	808	21.1	440/A/A MERCEDES BENZ A & B Class ('18-'19)
1014174	245/40R18		93Y	BSW	8.5	8.0-9.5	51	1,433	25.6	10.5	8.4	9.5	810	25.6	280/A/A AUDI A4 ('15-'20)
1020002	245/40R18	XL	97Y	BSW	8.5	8.0-9.5	50	1,609	25.6	10.5	8.4	9.5	810	26.6	280/A/A AUDI A4 ('15-'23)
1015803	245/50R18	100W		BSW	7.5	7.0-8.5	51	1,764	27.3	10.8	8.3	9.5	761	28.0	280/AA/A GENESIS G90('15-'21), KIA 900 ('18-'23)

19

1018809	235/40R19	XL	96Y	BSW	8.5	8.0-9.5	50	1,565	26.4	9.8	8.3	9.0	787	26.5	240/AA/A AUDI Q2 ('17-'22)
1013203	245/35ZR19	XL	93Y	BSW	8.5	8.0-9.5	50	1,433	25.6	10.4	8.7	9.5	810	26.4	280/AA/A AUDI TT ('14-'20)
1020486	245/35ZR19	XL	93Y	BSW	8.5	8.0-9.5	50	1,433	25.7	10.4	9.1	9.0	809	26.8	AUDI TT RS ('15-'20), 260/AA/A AUDI A4 ('15-'22)
1014175	255/35R19	XL	96Y	BSW	9.0	8.5-10.0	50	1,565	26.0	10.7	8.7	10.0	798	28.4	280/AA/A AUDI A4 ('15-'20)
1021261	265/35R19	XL	98Y	BSW	9.5	9.0-10.5	50	1,653	26.2	11.0	9.4	9.0	793	28.4	240/AA/A AUDI RS4/5 ('17-'21)
1019706	265/35R19	XL	98Y	BSW	9.5	9.0-10.5	50	1,653	26.2	11.0	9.4	9.0	793	27.4	240/AA/A AUDI RS4/5 ('17-'21)

20

1021262	275/30R20	XL	97Y	BSW	9.5	9.0-10.0	50	1,609	26.4	11.6	9.8	9.0	787	30.2	240/AA/A AUDI RS4/5 ('17-'21)
1019707	275/30R20	XL	97Y	BSW	9.5	9.0-10.0	50	1,609	26.4	11.6	9.8	9.0	787	29.2	240/AA/A AUDI RS4/5 ('17-'21)

K117B Runflat**17**

1013193	205/45R17	XL	88W	BSW	7.0	6.5-7.5	50	1,235	24.2	8.4	7.1	9.5	859	21.0	280/A/A MINI ('13-'19)
1013666	225/50R17		94W	BSW	7.0	6.0-8.0	51	1,477	25.8	9.8	7.4	9.5	804	28.4	380/A/A MERCEDES BENZ C Class ('13-'20)
1015131	225/55R17		97Y	BSW	7.0	6.0-8.0	51	1,609	26.9	9.6	7.4	9.5	774	30.1	280/A/A MERCEDES BENZ E Class ('15-'22) BMW 5 Series ('16-'23)
1016012	245/45R17		95/W	BSW	8.0	7.5-9.0	51	1,521	25.5	10.2	8.0	9.5	814	29.1	380/A/A MERCEDES BENZ C Class hybrid ('15-'21)

18

1020731	225/45R18		91W	BSW	7.5	7.0-8.5	51	1,356	25.7	9.4	7.5	9.5	808	24.8	440/A/A MERCEDES BENZ A & B Class ('18-'25)
1016691	225/50R18		95W	BSW	7.0	6.0-8.0	51	1,521	26.8	9.8	7.5	9.5	775	28.7	280/A/A BMW X2 ('17-'24) MINI Countryman ('17-'24)
1016054	245/45R18	XL	100Y	BSW	8.0	7.5-9.0	50	1,764	26.6	10.0	8.2	9.5	782	31.3	280/A/A BMW 5 Series ('17-'TBD), Mercedes Benz E Class ('17-'TBD)
1015132	245/45R18	XL	100/Y	BSW	8.0	7.5-9.0	50	1,764	26.6	10.0	8.3	9.5	782	31.2	280/A/A MERCEDES BENZ E Class ('15-'22), BMW 5 Series ('16-'19)
1013884	245/50R18		100/Y	BSW	7.5	7.0-8.5	51	1,764	27.6	10.9	8.1	9.5	752	34.9	280/A/A BMW 7 Series / 5 Series GT ('15-'22)

19

1013885	245/45R19		98/Y	BSW	8.0	7.5-9.0	51	1,653	27.4	10.3	8.4	9.0	758	32.2	280/A/A BMW 7 Series / 6 Series GT ('15-'22)
1013886	275/40R19		101/Y	BSW	9.5	9.0-11.0	51	1,819	27.4	11.8	9.4	9.0	758	36.6	280/A/A BMW 7 Series / 6 Series GT ('15-'22)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions)

Ultra-High Performance Summer / Runflat



ventus S1 evo² SUV



The best balance between wet & dry performance!

The Ventus S1 evo² is a premium performance tire that provides precise, controlled cornering at high-speeds and environmentally friendly performance through minimized rolling resistance and optimal profile implementation.



Fuel efficiency



Dry braking



Low noise



Dry handling

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

17

1013924	235/65R17	104V	BSW	7.0	6.5-8.5	51	1,984	29.1	9.8	7.4	11.0	713	30.9	260/AA/A	MERCEDES BENZ GLC ('15-'22)
---------	-----------	------	-----	-----	---------	----	-------	------	-----	-----	------	-----	------	----------	-----------------------------

18

1021645	235/55R18	100V	BSW	7.5	6.5-8.5	51	1,764	28.1	10.0	7.8	10.0	739	28.2	280/AA/A	AUDI Q3 ('18-'22)
1013925	235/60R18	103/V	BSW	7.0	6.5-8.5	51	1,929	29.1	10.1	7.4	10.5	713	30.6	260/AA/A	MERCEDES BENZ GLC ('15-'19)
1014999	235/60R18	103W	BSW	7.0	6.5-8.5	50	1,929	29.2	10.2	7.4	10.0	711	32.7	220/AA/A	PORSCHE Macan ('13-'18)
1015505	235/60R18	103W	BSW	7.0	6.5-8.5	51	1,929	29.2	10.0	7.6	10.5	711	31.1	280/AA/A	AUDI Q5 ('16-'19)
1022249	235/60R18	103W	BSW	7.0	6.5-8.5	51	1,929	29.1	10.3	7.4	10.5	713	28.6	220/AA/A	PORSCHE Macan ('18-'23)
1022250	255/55R18	105W	BSW	8.0	7.0-9.0	51	2,039	28.9	11.5	8.5	10.0	719	31.3	220/AA/A	PORSCHE Macan ('18-'23)

19

1021647	235/50R19	99V	BSW	7.5	6.5-8.5	51	1,709	28.2	10.3	7.8	10.0	737	28.4	280/AA/A	AUDI Q3 ('18-'22)
1020563	235/55R19	101Y	BSW	7.5	6.5-8.5	51	1,819	29.1	10.4	8.0	10.0	714	34.2	220/AA/A	MERCEDES BENZ GLC Coupe ('16-'19)
1023480	255/45R19	XL 104Y	BSW	8.5	8.0-9.5	50	1,984	28.0	10.4	8.4	9.5	743	31.6	240/AA/A	AUDI Q3 ('18-'22)
1020564	255/50R19	103Y	BSW	8.0	7.0-9.0	51	1,929	29.1	11.3	8.7	10.0	714	34.6	220/AA/A	MERCEDES BENZ GLC Coupe ('16-'19)

20

1023482	255/40R20	XL 101Y	BSW	9.0	8.5-10.0	50	1,819	27.9	10.9	8.4	9.5	744	32.7	240/AA/A	AUDI Q3 ('18-'22)
---------	-----------	---------	-----	-----	----------	----	-------	------	------	-----	-----	-----	------	----------	-------------------

22

1020860	285/35R22	XL 106Y	BSW	10.0	9.5-11.0	50	2,094	29.9	12.2	10.1	10.0	695	37.8	220/AA/A	AUDI Q7 ('16-'22)
---------	-----------	---------	-----	------	----------	----	-------	------	------	------	------	-----	------	----------	-------------------

K117C SUV Runflat**18**

1019370	225/60R18	XL 104W	BSW	6.5	6.0-8.0	50	1,984	28.6	9.5	7.1	9.5	726	35.1	280/AA/A	BMW X3/X4 ('17-'24)
---------	-----------	---------	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	----------	---------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Grand Touring Summer



ventus PRIME³



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

15

1021306	185/65R15	XL	92V	BSW	5.5	5.0-6.5	50	1,389	24.4	7.9	5.8	9.5	851	18.9	280/A/A	AUDI A1 ('18~'23)
---------	-----------	----	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	-------------------

16

1022629	195/55R16		87W	BSW	6.0	5.5-7.0	51	1,201	24.5	8.2	6.3	8.5	848	16.7	240/A/A	MINI Cooper ('19~'22)
1021307	195/55R16	XL	91V	BSW	6.0	5.5-7.0	50	1,356	24.3	8.6	6.3	9.5	854	19.8	280/A/A	AUDI A1 ('18~'23)

17

1017744	235/60R17	XL	106W	BSW	7.0	6.5-8.5	50	2,094	28.1	10.1	8.0	10.0	740	29.1	300/A/A	AUDI A8 ('17~'22)
---------	-----------	----	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------	-------------------

K125B Runflat**16**

1022630	195/55R16		87W	BSW	6.0	5.5-7.0	51	1,201	24.4	8.2	6.3	8.5	852	20.0	240/A/A	MINI Hatchbacks / Hardtop / 5 Door / Convertible (2020-2022)
1019611	205/55R16		91W	BSW	6.5	5.5-7.5	51	1,356	24.8	8.7	6.8	8.5	837	22.2	280/A/A	MINI Cooper ('19~'25)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Grand Touring Summer



ventus PRIME²



Improved driving performance with a smoother ride through cutting-edge technology

Ventus Prime²'s cutting-edge technology provides passengers with the combination of a comfortable, smooth ride and exceptional wet and dry grip.



Dry handling



Wet handling



Grip



Traction



Low noise



Low-RR

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

16

1013117	195/55R16	87W	BSW	6.0	5.5-7.0	51	1,201	24.4	8.4	6.3	9.5	852	18.7	280/A/A	MINI hatch, convertible ('13-22)
---------	-----------	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	----------------------------------

K115B Runflat**16**

1013195	195/55R16	87W	BSW	6.0	5.5-7.0	51	1,201	24.4	8.3	6.3	9.0	852	21.9	280/A/A	MINI hatch, convertible ('13-20)
---------	-----------	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	----------------------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions)

Ultra-High Performance All-Season / Runflat



ventus S1 noble²



The ideal balance of ultra-high performance all-season

Ventus S1 noble² is premium ultra-high performance all-season tire developed for drivers of sports cars seeking a comfortable driving.



Dry handling



Wet handling



Snow handling



Comfort



Low noise



Grip



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

17

1015312	225/55R17		97H	BSW	7.0	6.0-8.0	51	1,609	26.9	9.8	7.2	10.0	773	25.3	400/A/A	BMW X1 ('15-'22)
1015480	225/55R17	XL	101H	BSW	7.0	6.0-8.0	50	1,819	26.6	9.6	7.5	10.0	782	26.5	500/B/A	MERCEDES BENZ Metris ('15-'21)
1014867	235/55R17		99H	BSW	7.5	6.5-8.5	51	1,709	27.4	10.1	7.2	9.0	759	28.0	700/B/A	FORD Mustang ('14-'20)

18

1016111	225/40R18		88W	BSW	8.0	7.5-9.0	51	1,235	24.9	9.5	7.4	10.0	833	21.6	500/AA/A	HYUNDAI Elantra ('15-'21), Elantra GT ('16-'23)
1014873	225/40R18	XL	92H	BSW	8.0	7.5-9.0	50	1,389	24.9	9.4	7.5	10.0	833	22.5	500/A/A	VOLKSWAGEN Golf ('14-'18)
1021835	225/45R18	XL	95H	BSW	7.5	7.0-8.5	50	1,521	25.9	9.0	7.8	9.5	802	22.4	360/A/A	BMW 3/4 Series ('19-'25)
1021755	235/45R18		94V	BSW	8.0	7.5-9.0	51	1,477	26.3	9.5	7.7	10.0	790	25.6	500/A/A	HYUNDAI Kona ('17-'23), Sonata ('14-'16), KIA Soul ('18-)
1022126	245/45R18		96V	BSW	8.0	7.5-9.0	51	1,565	26.5	10.0	8.3	9.5	782	26.5	500/AA/A	HYUNDAI Azera, KIA Cadenza ('16-'20)

19

1015408	235/50R19		99H	BSW	7.5	6.5-8.5	51	1,709	28.3	10.1	8.1	10.0	735	28.5	500/A/A	BUICK Envision, CHEVROLET Equinox ('17-'20)
1014868	245/55R19		103V	BSW	7.5	7.0-8.5	51	1,929	29.8	10.4	8.2	10.0	697	32.2	500/AA/A	FORD Edge ('14-'21)
1022739	255/45R19		100H	BSW	8.5	8.0-9.5	51	1,764	28.1	10.6	8.7	10.0	740	29.8	500/B/A	VOLKSWAGEN Tiguan R-Line ('17-'22)

20

1014869	245/50R20		102V	BSW	7.5	7.0-8.5	51	1,874	29.8	10.4	8.2	10.0	697	33.3	660/A/A	LINCOLN MKX ('14-'21), FORD Edge ('14-'21)
1022658	245/50R20		102V	BSW	7.5	7.0-8.5	51	1,874	29.5	10.5	8.2	10.0	703	31.0	500/A/A	HYUNDAI Palisade ('20-'21)
1022762	255/40R20	XL	101H	BSW	9.0	8.5-10.0	50	1,819	27.9	10.9	8.5	10.0	744	28.9	500/B/A	VOLKSWAGEN Tiguan R-Line ('17-'22)
1017315	255/50R20		105H	BSW	8.0	7.0-9.0	51	2,039	30.2	10.9	8.4	10.0	688	34.0	500/A/A	FORD Explorer ('16-'19)

H452B Runflat**18**

1021836	225/45R18	XL	95H	BSW	7.5	7.0-8.5	50	1,521	25.7	9.5	7.6	8.0	808	25.4	400/A/A	BMW 3 Series ('20-'25)
1015152	245/45R18	XL	100H	BSW	8.0	7.5-9.0	50	1,764	26.6	10.0	6.2	9.5	782	31.7	380/A/A	BMW 5 Series ('17-'23), MERCEDES BENZ E Class ('17-'22)

19

1022328	255/45R19	XL	104H	BSW	8.5	8.0-9.5	50	1,984	28.0	10.4	8.9	10.0	741	33.5	440/A/A	MERCEDES BENZ S Class ('20-'27)
---------	-----------	----	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------	---------------------------------

20

1023793	255/40R20	XL	101H	BSW	9.0	8.5-10.0	50	1,819	27.9	10.6	9.2	10.0	744	34.2	460/A/A	MERCEDES BENZ S Class ('20-'27)
1025595	255/40R20	XL	101H	BSW	9.0	8.5-10.0	50	1,819	27.9	10.6	8.6	10.0	744	35.2	460/A/A	MERCEDES BENZ S Class ('20-'27)
1027181	285/35R20	XL	104H	BSW	10.0	9.5-11.0	50	1,984	27.7	12.3	10.2	10.0	750	37.4	320/A/A	MERCEDES BENZ S Class ('20-'27)
1024646	285/35R20	XL	104H	BSW	10.0	9.5-11.0	50	1,984	27.7	12.3	10.2	10.0	750	36.4	320/A/A	MERCEDES BENZ S Class ('20-'27)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to runflat tires.

Premium Grand Touring All-Season / Runflat



Premium grand touring all-season tire for all road

Kinergy GT satisfies the strict performance requirements of automakers. This is outstanding in all aspects including wet, dry, winter performance. Also, it provides a quiet and comfortable driving experience.



Dry braking



Comfort



Dry handling



Low noise



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

15

1022094	185/65R15	88H	BSW	5.5	5.0-6.5	51	1,235	24.4	7.8	5.7	9.0	850	16.7	500/A/A	HYUNDAI Venue ('19-25)
1015532	195/65R15	91T	BSW	6.0	5.5-7.0	51	1,356	24.7	8.4	6.0	9.5	840	16.9	540/A/A	HYUNDAI Elantra ('15-17)
1024032	195/65R15	91H	BSW	6.0	5.5-7.0	51	1,356	24.8	8.3	6.2	8.5	838	16.9	540/A/A	Hyundai Elantra ('20-25)

16

1014871	205/55R16	91H	BSW	6.5	5.5-7.5	51	1,356	24.8	6.4	6.4	10.0	837	20.4	540/A/A	VOLKSWAGEN Golf ('15-19), VOLKSWAGEN Jetta ('15-19)
1016295	205/55R16	91H	BSW	6.5	5.5-7.5	51	1,356	24.8	9.1	6.2	8.5	839	18.4	520/B/A	CHEVROLET Cruz ('16-19)
1015534	205/55R16	91H	BSW	6.5	5.5-7.5	51	1,356	24.8	8.9	6.5	9.5	837	18.5	540/A/A	HYUNDAI Elantra ('15-17)
1022888	205/55R16	91H	BSW	6.5	5.5-7.5	51	1,356	24.9	8.9	6.5	9.5	834	18.5	500/A/A	TOYOTA Corolla ('19-24)
1019647	205/60R16	92H	BSW	6.0	5.5-7.5	51	1,389	25.8	8.6	6.5	9.5	806	19.6	500/A/A	HYUNDAI Kona ('17-23), KIA Soul ('17-23)
1020211	205/60R16	92H	BSW	6.0	5.5-7.5	51	1,389	25.7	8.8	6.5	10.0	807	20.8	500/B/A	VOLKSWAGEN Jetta ('17-22)
1022795	205/60R16	92H	BSW	6.0	5.5-7.5	51	1,389	25.8	8.7	6.5	9.5	804	20.3	500/A/A	Nissan Sentra ('19 ~ TBD)
1015397	205/65R16	95H	BSW	6.0	5.5-7.5	51	1,521	26.2	8.5	6.4	10.0	793	21.9	500/A/A	HYUNDAI Sonata ('14-19), KIA Optima ('15-19)
1015886	215/55R16	93H	BSW	7.0	6.0-7.5	51	1,433	25.1	9.1	6.5	9.5	827	20.4	500/A/A	HONDA Civic_4DR ('15-24)
1020876	215/55R16	93H	BSW	7.0	6.0-7.5	51	1,433	25.1	9.1	6.5	9.5	827	21.5	500/A/A	HONDA Civic_5DR ('16-21)
1014971	215/60R16	95T	BSW	6.5	6.0-7.5	51	1,521	26.2	8.9	6.7	10.0	793	23.4	540/A/A	VOLKSWAGEN Passat ('14-19), VOLKSWAGEN Beetle ('14-19)
1020898	215/60R16	95H	BSW	6.5	6.0-7.5	51	1,521	26.2	8.9	6.7	10.0	793	21.5	500/A/A	NISSAN Altima ('18-23)
1021931	215/65R16	98H	BSW	6.5	6.0-7.5	51	1,653	27.0	9.0	6.8	10.0	769	23.9	460/B/A	Chevrolet Trailblazer ('20-26)

17

1020212	205/55R17	91H	BSW	6.5	5.5-7.5	51	1,356	25.9	9.2	6.5	10.0	803	20.9	500/B/A	VOLKSWAGEN Jetta ('17-22)
1016785	215/55R17	94V	BSW	7.0	6.0-7.5	51	1,477	26.1	9.3	7.0	10.0	795	22.5	500/A/A	HYUNDAI Sonata ('14-19)
1020513	215/55R17	94V	BSW	7.0	6.0-7.5	51	1,477	26.2	9.3	7.1	10.0	793	23.0	500/A/A	HYUNDAI Kona ('17-23), KIA Soul ('18-~)
1014972	215/55R17	94H	BSW	7.0	6.0-7.5	51	1,477	26.3	9.4	6.7	10.0	789	22.5	540/A/A	VOLKSWAGEN Passat ('14-19), VOLKSWAGEN Beetle ('14-19)
1014872	225/45R17	91H	BSW	7.5	7.0-8.5	51	1,356	24.9	9.3	7.5	10.0	835	21.8	540/A/A	VOLKSWAGEN Golf ('14-18)
1015535	225/45R17	91W	BSW	7.5	7.0-8.5	51	1,356	24.9	9.2	7.2	10.0	836	20.6	540/A/A	HYUNDAI Elantra ('15-17)
1024034	225/45R17	91W	BSW	7.5	7.0-8.5	51	1,356	24.8	9.2	7.9	8.5	839	20.5	540/A/A	Hyundai Elantra ('20-25)
1017808	225/50R17	94V	BSW	7.0	6.0-8.0	51	1,477	25.9	9.4	7.4	9.0	801	22.8	500/A/A	HONDA Accord ('17-22)
1015527	225/60R17	99H	BSW	6.5	6.0-8.0	51	1,709	27.6	9.6	7.1	10.0	751	26.0	540/A/A	HYUNDAI Tucson ('15-21), KIA Sportage ('15-21)
1019226	235/65R17	104H	BSW	7.0	6.5-8.5	51	1,984	29.3	9.1	7.2	10.0	709	28.7	540/A/A	HONDA CR-V ('16-21)
1015891	P225/55R17	95H	BSW	7.0	6.0-8.0	51	1,521	26.7	9.4	7.2	9.0	779	23.3	540/B/A	CHEVROLET Malibu ('15-23)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mpg (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to runflat tires.

Premium Grand Touring All-Season / Runflat



Premium grand touring all-season tire for all road

Kinergy GT satisfies the strict performance requirements of automakers. This is outstanding in all aspects including wet, dry, winter performance. Also, it provides a quiet and comfortable driving experience.



Dry braking



Comfort



Dry handling



Low noise



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

17 cont...

1025644	215/55R17	94V	BSW	7.0	6.0-7.5	51	1,477	26.2	9.3	7.4	9.5	793	22.9	500/A/A	Hyundai Kona ('20-'25)
1028628	225/45R17	91W	BSW	7.5	7.0-8.5	51	1,356	24.8	9.2	7.6	8.5	839	20.2	540/A/A	HYUNDAI ELANTRA HEV ('20-'26)

18

1022797	215/45R18	89V	BSW	7.0	7.0-8.0	51	1,279	25.6	9.1	7.2	9.0	812	21.5	500/A/A	Nissan Sentra ('19 ~ TBD)
1020213	225/45R18	91H	BSW	7.5	7.0-8.5	51	1,356	25.9	9.4	7.0	10.0	802	21.1	540/B/A	VOLKSWAGEN Jetta ('17-'22)
1021933	225/55R18	98H	BSW	7.0	6.0-8.0	51	1,653	27.6	9.6	7.2	10.0	751	26.7	700/B/A	Chevrolet Trailblazer ('20 ~'24)
1020853	235/45R18	94V	BSW	8.0	7.5-9.0	51	1,477	26.3	9.6	7.7	10.0	790	24.4	540/A/A	TOYOTA Camry ('17-'22)
1014973	235/45R18	94H	BSW	8.0	7.5-9.0	51	1,477	26.3	9.7	7.8	10.0	790	24.1	540/A/A	VOLKSWAGEN Passat ('14-), VOLKSWAGEN Beetle ('14-'19)
1017534	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.3	9.8	7.3	10.0	709	30.1	540/A/A	HONDA CR-V ('16-'21)
1022016	255/65R18	111H	BSW	7.5	7.0-9.0	51	2,403	30.8	10.4	8.0	10.5	675	35.2	500/A/A	FORD Explorer ('19-'25)

19

1018940	235/40R19	92V	BSW	8.5	8.0-9.5	51	1,389	26.3	9.8	8.1	10.0	791	25.3	500/A/A	NISSAN Altima ('18-'23)
1015528	245/45R19	98H	BSW	8.0	7.5-9.0	51	1,653	27.4	10.0	8.0	10.0	759	27.7	540/A/A	HYUNDAI Tucson ('15-'21), KIA Sportage ('15-'21)
1024217	235/50R19	99H	BSW	7.5	6.5-8.5	51	1,709	28.2	10.2	8.7	10.0	736	28.1	500/A/A	Chevrolet Equinox, GMC Terrain ('20-'25)

H436B Runflat**17**

1020496	205/55R17	91H	BSW	6.5	5.5-7.5	51	1,356	25.9	8.7	6.5	9.5	803	24.5	500/A/A	MERCEDES BENZ A & B Class ('18-'25)
---------	-----------	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	-------------------------------------

18

1019371	225/60R18	XL	104H	BSW	6.5	6.0-8.0	50	1,984	28.6	9.5	7.1	9.5	726	36.1	500/A/A	BMW X3/X4 ('17-'24)
---------	-----------	----	------	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	---------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mpg (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to runflat tires.

Grand Touring All-Season / Runflat



OPTIMO H426



The premium all-season tire: satisfies the strict performance requirements of automakers

A star product acknowledged by many automakers, the Optimo H426 is outstanding in all aspects including quiet driving, smooth ride, grip, improved fuel economy and snow performance.



Dry braking



Comfort



Dry handling



Low noise



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								
15															
1015406	175/65R15	84H	BSW	5.0	5.0-6.0	51	1,102	23.9	7.2	5.1	9.5	869	15.9	400/A/A	MINI('13-'22)
1011163	185/60R15	84H	BSW	5.5	5.0-6.5	44	1,102	23.7	8.2	6.0	10.0	876	17.3	380/A/A	FORD Fiesta (` 11-'19)
1012851	195/65R15	91S	BSW	6.0	5.5-7.0	51	1,356	24.9	8.2	5.7	9.5	835	17.7	440/A/A	TOYOTA Corolla('13-'18)

16															
1011165	195/50R16	84H	BSW	6.0	5.5-7.0	51	1,102	23.7	8.4	6.9	10.0	876	19.3	440/A/A	FORD Fiesta ('11-'19)
1011352	P205/55R16	89H	BSW	6.5	5.5-7.5	44	1,279	24.8	9.1	6.3	9.5	839	18.8	440/A/A	HYUNDAI Elantra ('10-'15)
1010865	P205/65R16	94H	BSW	6.0	5.5-7.5	44	1,477	26.2	8.4	6.1	10.5	794	20.9	440/A/A	HYUNDAI Hybrid (~'15)
1014719	P215/60R16	94T	BSW	6.5	6.0-7.5	44	1,477	26.1	9.4	6.4	9.5	796	20.8	640/B/A	NISSAN Altima ('13-'16)

17															
1012483	P215/45R17	87H	BSW	7.0	7.0-8.0	44	1,201	24.7	8.7	7.2	9.5	840	19.8	440/A/A	HYUNDAI Elantra ('10-'15)

18															
1012102	P245/45R18	96V	BSW	8.0	7.5-9.0	44	1,565	26.5	10.2	7.9	10.0	785	26.4	440/A/A	HYUNDAI Azera ('11-'17)

19															
1012701	P245/40R19	94V	BSW	8.5	8.0-9.5	44	1,477	26.5	10.4	8.2	10.0	784	27.3	440/A/A	HYUNDAI Azera ('11-'17)

20															
1010281	255/45R20	101V	BSW	8.5	8.0-9.5	51	1,819	29.0	10.4	8.5	10.5	717	32.8	440/A/A	FORD Flex ('10-'21), LINCOLN MKT ('10-'21)
1010505	P255/50R20	104H	BSW	8.0	7.0-9.0	51	1,984	30.2	10.9	8.3	10.5	688	34.5	440/A/A	FORD Explorer ('10-'15)

H426B Runflat

16															
1013249	195/55R16	87V	BSW	6.0	5.5-7.0	51	1,201	24.4	8.4	6.3	9.5	852	21.7	400/A/A	MINI ('13-'22)
17															
1013250	205/45R17 XL	88V	BSW	7.0	6.5-7.5	50	1,235	24.2	8.4	7.1	9.5	859	20.9	400/A/A	MINI ('13-'22)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions).

Mileage and Road Hazard warranties do not apply to Runflat tires.

Standard Touring All-Season



OPTIMO *H725*



High-mileage all-season tire

The high mileage Optimo H725 features a smooth ride and reduced noise levels as well as excellent wet and dry performance.



Comfort



Dry handling



Low noise



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								
15															
1013283	P195/60R15	87T	BSW	6.0	5.5-7.0	51	1,190	24.4	8.2	6.5	9.0	853	17.1	700/A/B	FORD FOCUS (~)
17															
1006957	P235/60R17	100T	BSW	7.0	6.5-8.5	44	1,742	28.3	9.6	7.9	9.5	734	27.1	740/A/B	FORD Flex ('10-'19)
18															
1010731	P235/55R18	99T	BSW	7.5	6.5-8.5	44	1,709	28.1	9.5	7.9	10.5	738	28.5	620/A/B	GM Captiva ('12-'16), CHEVROLET Equinox ('9-'12)
1006986	P235/55R18	99H	BSW	7.5	6.5-8.5	44	1,709	27.9	9.8	7.9	10.5	744	27.0	620/A/B	SATURN Vue ('08-'09)
19															
1007237	P235/55R19	101H	BSW	7.5	6.5-8.5	44	1,819	29.0	9.5	7.9	10.5	716	29.0	600/A/A	FORD Flex ('10-'19), LINCOLN MKT ('10-'19)
1008187	P235/55R19	101H	BSW	7.5	6.5-8.5	44	1,819	29.0	9.8	7.9	10.0	716	29.3	600/A/A	CHEVROLET Equinox ('10-'11), GMC Terrain ('10-'14), CHRYSLER 300C ('12-'13)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage and Road Hazard warranties apply only to replacement tires. Original Equipment tires are excluded.

Standard Touring All-Season



OPTIMO *H725A*

Pattern A



Pattern B



High-mileage all-season tire

The high mileage Optimo H725 features a smooth ride and reduced noise levels as well as excellent wet and dry performance.



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

*Pattern A***17**

1007078	P225/50R17	93S	BSW	7.0	6.0-8.0	44	1,433	25.9	9.4	7.1	10.5	802	23.8	340/A/A	SATURN Aura ('07-'09), CHEVROLET Malibu ('07-'12), PONTIAC G6 ('07-'09)
---------	------------	-----	-----	-----	---------	----	-------	------	-----	-----	------	-----	------	---------	---

*Pattern B***16**

1007836	205/55R16	91H	BSW	6.5	5.5-7.5	44	1,356	24.7	8.7	6.9	10.5	841	20.6	340/A/A	"VOLKSWAGEN Jetta ('10-'14), VOLKSWAGEN Jetta Sport Wagon('10),
---------	-----------	-----	-----	-----	---------	----	-------	------	-----	-----	------	-----	------	---------	---

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage and Road Hazard warranties apply only to replacement tires. Original Equipment tires are excluded.

Performance All-Season



Dynapro HP2



High-performance all-season tire for luxury SUVs.

A high-performance tire for premium SUVs. The Dynapro HP2 meets all the conditions required for premium European SUVs including excellent wet performance, low noise, low rolling resistance and excellent mileage.



Mileage



Dry braking



Comfort



Low noise



Dry handling



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

17

1021940	235/65R17	104H	BSW	7.0	6.5-8.5	51	1,984	29.0	9.5	7.2	10.0	717	28.5	540/A/A	HYUNDAI Santa Fe ('18-'24), KIA Sorento ('15-'21) Sedona ('14-'21)
1024124	235/65R17	104H	BSW	7.0	6.5-8.5	51	1,984	29.0	9.2	7.1	9.5	716	28.4	540/A/A	KIA Sedona ('20-'26)

18

1011758	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.0	9.6	7.3	10.5	716	29.4	540/A/A	KIA Sedona ('14-'20)
1020206	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.1	9.7	7.5	10.0	714	29.2	540/A/A	HYUNDAI Santa Fe ('18-'24)
1025244	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.2	9.9	6.9	8.0	711	25.0	440/A/A	NISSAN Rogue ('20-'25)
1025144	235/60R18	103H	BSW	7.0	6.5-8.5	51	1,929	29.1	9.6	7.5	9.5	715	29.1	540/A/A	HYUNDAI Santa Fe ('20-'24)

19

1020207	235/55R19	101H	BSW	7.5	6.5-8.5	51	1,819	29.1	9.7	7.5	10.0	714	30.1	540/A/A	HYUNDAI Santa Fe ('18-'20)
1015053	235/55R19	101V	BSW	7.5	6.5-8.5	50	1,819	29.1	10.1	7.8	10.0	713	30.5	540/A/A	KIA Sorento ('14-'19)
1025145	235/55R19	101H	BSW	7.5	6.5-8.5	51	1,819	28.8	10.2	7.9	9.5	720	29.8	540/A/A	HYUNDAI Santa Fe ('20-'24)

20

1025265	255/50R20	105H	BSW	8.0	7.0-9.0	51	2,039	30.1	11.0	8.2	9.0	691	31.1	460/A/A	NISSAN Pathfinder ('21-'26)
---------	-----------	------	-----	-----	---------	----	-------	------	------	-----	-----	-----	------	---------	-----------------------------

RA33D**20**

1023844	275/50R20	XL	113H	BSW	8.5	7.5-9.5	50	2,535	30.8	12.1	9.4	10.0	675	41.1	560/A/A	AUDI Q8 ('18-'22)
---------	-----------	----	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------	-------------------

21

1023846	285/45R21	XL	113H	BSW	9.5	9.0-10.5	50	2,535	31.0	12.1	9.7	10.0	670	41.1	560/A/A	AUDI Q8 ('18-'22)
---------	-----------	----	------	-----	-----	----------	----	-------	------	------	-----	------	-----	------	---------	-------------------

22

1023847	285/40R22	XL	110H	BSW	10.0	9.5-11.0	50	2,337	31.2	11.7	9.8	10.0	666	41.6	560/A/A	AUDI Q8 ('18-'22)
1021938	285/40R22	XL	110H	BSW	10.0	9.5-11.0	50	2,337	31.2	11.7	9.8	10.0	666	40.7	560/A/A	AUDI Q8 ('18-'22)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters
Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Premium All-Terrain



Dynapro AT-M



For aggressive all-terrain driving

The best on/off-road tire for 4x4 vehicles, the Dynapro AT-m employs a tough pattern design and block structure to overcome any road.



Meets the severe snow service requirement of the
U.S. Tire Manufacturer's Association (USTMA)



Dry handling



Drainage



Dry braking



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

RF10 P-Metric**16**

1021636	P265/75R16	114T	OWL	7.5	7.0-9.0	51	2,601	31.6	10.3	8.2	13.0	656	37.1	560/A/B	NISSAN Frontier ('15-'20)
---------	------------	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------	---------------------------

17

*1021750	265/65R17	112T	OWL	8.0	7.5-9.5	51	2,469	30.7	10.3	7.6	12.5	677	35.4	500/A/B	FORD Ranger XLT ('18-'21)
----------	-----------	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------	---------------------------

18

*1021749	265/60R18	110T	BSW	8.0	7.5-9.5	51	2,337	30.5	10.6	7.6	12.0	681	35.0	500/A/B	FORD Ranger Lariat ('18-'21)
*1021751	265/60R18	110T	OWL	8.0	7.5-9.5	51	2,337	30.5	10.6	7.6	12.0	681	35.5	500/A/B	FORD Ranger Lariat ('18-'21)

20

*1013373	275/55R20	113T	BSW	8.5	7.5-9.5	51	2,535	32.1	11.1	8.9	12.0	647	40.8	560/A/A	FORD F-150 ('14-'21), Expedition('14-'20), LINCOLN Navigator('14-'20)
----------	-----------	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------	---

RF10 LT-Metric

2020728	LT265/65R17	109T	OWL	8.0	8.0-9.5	50	2,270	31.0	10.6	8.3	13.0	675	45.3	-	FORD Ranger XLT ('18-'21)
---------	-------------	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---	---------------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

*- Does not have Severe Snowmark

Premium All-Terrain



Dynapro AT2



For aggressive all-terrain driving

The best on/off-road tire for 4x4 vehicles, the Dynapro AT2 employs a tough pattern design and block structure to overcome any road.



Traction



Low noise



Off-road



Mileage



Snow traction



S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

17

1025783	225/60R17	99H	BSW	6.5	6.0-8.0	51	1,708	27.7	9.6	7.7	10.5	750	27.2	660/A/A	CHEVROLET Trailblazer ('20-'26)
---------	-----------	-----	-----	-----	---------	----	-------	------	-----	-----	------	-----	------	---------	---------------------------------

20

1024188	275/55R20	113T	BSW	8.5	7.5-9.5	51	2,535	32.1	11.3	8.4	11.5	647	40.7	440/A/A	FORD F-150 ('18-'21)
1024247	275/60R20	115T	BSW	8.0	7.5-9.5	51	2,679	32.8	11.2	10.6	10.5	634	41.3	440/A/A	FORD F-150 XLT, Lariat, Platinum, Limited ('20-'25)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Premium Highway All-Season



Dynapro HT



Combining all-season functionality with performance for highway driving

A sport truck and SUV tire that provides a smooth, powerful ride, the Dynapro HT provides greater mileage through specialized treadwear. Excellent snow traction makes driving possible on winter roads while low-rolling resistance offers excellent fuel economy.



Dry braking



Comfort



Drainage



Mileage



Dry handling



Low noise

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

P-Metric**16**

1021744	255/70R16	111T	BSW	7.5	6.5-8.5	51	2,403	29.9	9.8	6.8	10.0	695	30.4	500/B/A	FORD Ranger XL ('18-'21)
1015220	P245/75R16	109S	BSW	7.0	6.5-8.0	51	2,271	30.4	9.6	6.9	10.5	682	31.4	500/B/B	TOYOTA Tacoma ('15-'21)
1017446	P265/70R16	111T	BSW	8.0	7.0-9.0	51	2,403	30.6	10.9	8.1	12.0	680	35.1	700/A/B	NISSAN Frontier ('15-'20)

17

1014070	225/65R17	102H	BSW	6.5	6.0-8.0	51	1,874	28.5	9.3	6.8	10.0	708	26.8	380/A/A	NISSAN Rogue ('13-'20)
1023527	225/65R17	102H	BSW	6.5	6.0-8.0	51	1,874	28.4	9.3	6.8	10.0	731	27.3	380/A/A	NISSAN Rogue ('17-'20)

18

1013169	265/60R18	110T	BSW	8.0	7.5-9.5	51	2,337	30.6	10.6	7.9	12.0	680	34.3	700/B/A	FORD F-150 ('14-'21)
1024246	265/60R18	110T	BSW	8.0	7.5-9.5	51	2,337	30.4	10.7	7.7	10.0	682	34.3	600/A/B	FORD F-150 ('20-'25)
1016508	275/65R18	116H	BSW	8.0	7.5-9.5	51	2,756	32.1	11.0	8.2	11.0	647	39.5	700/B/A	FORD Expedition ('17-'22), LINCOLN Navigator ('17-'22)
1017448	P265/60R18	109T	BSW	8.0	7.5-9.5	51	2,271	30.5	11.3	8.5	12.0	680	34.5	700/A/B	NISSAN Frontier ('15-'19)

20

1013171	275/55R20	113T	BSW	8.5	7.5-9.5	51	2,535	32.0	11.5	8.9	11.0	649	40.7	700/A/B	FORD Expedition ('14-'17), LINCOLN Navigator ('14-'17)
1013844	P275/60R20	114T	BSW	8.0	7.5-9.5	51	2,601	33.0	11.7	8.9	12.5	629	42.0	700/A/B	RAM 1500 ('16-)

22

1016510	285/45R22	XL	114H	BSW	9.5	9.0-10.5	50	2,601	32.3	11.4	9.1	11.0	643	39.5	700/A/A	FORD Expedition ('17-'22), LINCOLN Navigator ('17-'22)
---------	-----------	----	------	-----	-----	----------	----	-------	------	------	-----	------	-----	------	---------	--

S-Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	OE Application
							psi	lbs							

LT-Metric**16**

2001864	195/75R16C	107/105R	BSW	8 (D)	5.5	5.0-6.0	70	(S) 2,150 (D) 2,040	27.5	7.9	6.1	12.5	761	32.6	FORD Transit 150/250/350 ('14-'19)
2020826	205/75R16C	113/111R	BSW	10 (E)	5.5	5.5-6.5	76	(S) 2,535 (D) 2,403	27.9	8.2	6.5	11.5	750	34.2	FORD Transit 150/250/350 ('19-)
2001863	235/65R16C	121/119R	BSW	10 (E)	7.0	6.5-7.5	85	(S) 3,195 (D) 3,000	28.0	9.4	7.5	12.5	746	40.4	FORD Transit 150/250/350 ('14-'19)
2001831	LT225/75R16	115/112S	BSW	10 (E)	6.0	6.0-7.5	80	(S) 2,680 (D) 2,470	29.2	8.8	6.7	14.5	715	39.9	FORD Econoline E250/E350 ('17-'19)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage warranties apply only to replacement tires. Original Equipment tires are excluded.

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								



KINERGYECO

K425

15

1023874	175/65R15	XL	88H	BSW	5.0	5.0-6.0	50	1,235	23.9	7.2	5.1	9.5	869	16.5	400/A/A	MINI ('19-'22)
1013116	175/65R15		84H	BSW	5.0	5.0-6.0	51	1,102	23.9	7.2	5.1	9.5	869	16.5	400/A/A	MINI hatch, convertible ('13-'19)



KINERGYECO²

K435

15

1022628	175/65R15	XL	88H	BSW	6.0	5.0-6.0	50	1,235	24.0	7.3	5.1	8.5	866	15.9	220/A/A	Mini Cooper ('19~'22)
---------	-----------	----	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	-----------------------



KINERGYAS **ev**

EH01A

19

1025231	235/55R19	XL	105T	BSW	7.5	6.5-8.5	50	2,039	29.3	10.0	7.8	10.0	710	29.1	500/A/A	AUDI e-tron, Volkswagen ID.4 ('20-'27)
1025663	255/50R19	XL	107T	BSW	8.0	7.0-9.5	50	2,149	29.1	11.4	8.6	10.0	713	30.7	500/A/A	AUDI e-tron, Volkswagen ID.4 ('20-'27)



ventus V4 ES

H105

15

1009669	175/55R15		77T	BSW	5.5	5.0-6.0	51	908	22.4	7.6	6.0	9.5	925	14.6	420/A/A	SMART ForTwo Brabus coupe (FR) (~)
---------	-----------	--	-----	-----	-----	---------	----	-----	------	-----	-----	-----	-----	------	---------	------------------------------------

17

1009670	215/35R17		79H	BSW	7.5	7.0-8.5	51	963	22.8	8.9	7.4	9.5	911	16.1	420/A/A	SMART ForTwo Brabus coupe (RR) (~)
---------	-----------	--	-----	-----	-----	---------	----	-----	------	-----	-----	-----	-----	------	---------	------------------------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage warranties apply only to replacement tires. Original Equipment tires are excluded.

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								

ventus S1 AS**H125****15**

1025517	235/40R18	91W	BSW	8.5	8.0-9.5	51	1,356	25.1	9.9	8.0	8.5	826	23.5	560/A/A	HYUNDAI Elantra ('20-'26)
---------	-----------	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	---------------------------

**Dynapro AT****RF08****17**

1002438	P235/75R17	108S	BSW	6.5	6.0-8.0	44	2,205	30.9	9.6	7.2	12.5	673	31.6	460/B/A	FORD F-150 ('04-'14)
---------	------------	------	-----	-----	---------	----	-------	------	-----	-----	------	-----	------	---------	----------------------

**OPTIMO H418****H418****15**

1009127	185/55R15	82V	BSW	6.0	5.0-6.5	44	1,047	22.9	8.1	5.4	10.0	906	15.9	400/A/A	CHEVROLET Aveo ('06-'10)
---------	-----------	-----	-----	-----	---------	----	-------	------	-----	-----	------	-----	------	---------	--------------------------

**OPTIMO H428****H428****15**

1010108	P195/65R15	89H	BSW	6.0	5.5-7.0	44	1,279	24.8	8.2	5.8	9.5	837	19.5	500/A/A	CHEVROLET Sonic ('11-'19)
---------	------------	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	---------------------------

**OPTIMO H724****H724****14**

1013034	P175/70R14	84T	BSW	5.0	4.5-6.0	44	1,102	23.7	7.0	4.6	10.0	877	15.3	400/A/A	HYUNDAI Accent ('11-'16)
---------	------------	-----	-----	-----	---------	----	-------	------	-----	-----	------	-----	------	---------	--------------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage warranties apply only to replacement tires. Original Equipment tires are excluded.

Dynapro AS



Highway all-season truck tire

Highway All-Season light truck tires are for drivers who want a combination of pleasant on-road characteristics, long wear and all-season versatility, including traction in light snow. Highway All-Season tires branded with the M+S symbol are often used as Original Equipment (O.E.) on 2WD and 4WD, light- and medium-duty vans, trucks and pickups, as well as crossover and sport utility vehicles.



Dry braking



Comfort



Drainage



Fuel efficiency



Dry handling



Low noise



Commercial

VanTRA LT



Improved durability and internal anti abrasion qualities

A summer radial tyre for commercial vans and transport vehicles, the Vantra LT provides excellent durability, increased mileage as well as excellent wet performance and a balanced footprint. Even under heavy loads, stability is maintained, increasing driver safety.



Dry braking



Dry handling



Low noise



Comfort

S-Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	OE Application
							psi	lbs							

16Pattern Code **RH03**

2000801	LT245/75R16	120/116R	BSW	10 (E)	7.0	6.5-8.0	80	(S) 3,042 (D) 2,778	30.3	9.9	7.2	14.0	689	44.5	FORD E250, E350 ('03~)
---------	-------------	----------	-----	--------	-----	---------	----	------------------------	------	-----	-----	------	-----	------	------------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

S-Code	Size	LI/SS	Sidewall	Ply Rating	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	OE Application
							psi	lbs							

16Pattern Code **RA18**

2020425	195/75R16C	107/105R	BSW	8 (D)	5.5	5.0-6.0	69	(S) 2,150 (D) 2,040	27.3	7.7	6.2	11.5	766	28.9	MERCEDES BENZ Sprinter ('18-'25)
---------	------------	----------	-----	-------	-----	---------	----	------------------------	------	-----	-----	------	-----	------	-------------------------------------

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters





HRS
HANKOOK RUNFLAT SYSTEM






HRS
HANKOOK RUNFLAT SYSTEM

Hankook Tire's superior Runflat System, HRS is one of the leaders in the world's runflat market since the company started its development in 1998. The HRS employs Hankook Tire's unique SMH technology with three partitioned rubber layers that provides an extra level of safety with each layer carrying out three distinctive functions of shock absorption, extended driving distance, and preventing overheating during low air pressure operation.

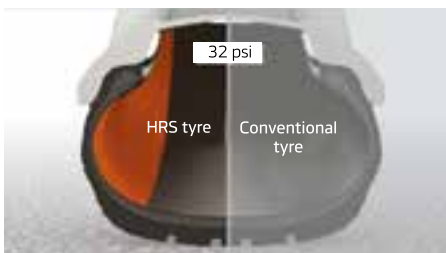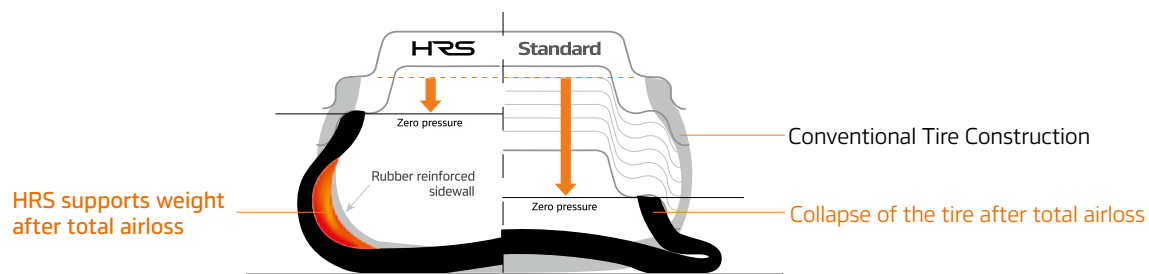

Normal Driving Condition

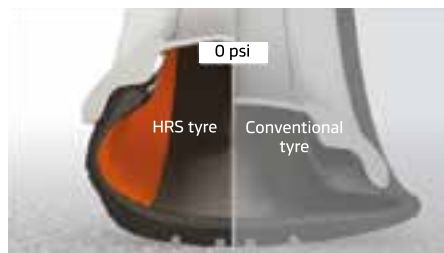

With A Puncture


HRS Tire

Able to drive before servicing the tire.

Conventional Tire

Loss of tire pressure, unable to drive further.

*Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions)



Made only to run, never flat

Hankook New Technology

HRS Performance is unparalleled to existing tires

HRS is the acronym for
HANKOOK RUNFLAT SYSTEM

Hankook Tire's superior Runflat System allows a car to travel at a speed of up to 50 MPH, even after losing internal air pressure due to tire damage (i.e. flat tires).

The installation of a tire pressure monitoring system (TPMS) to sense changes in tire pressure is highly recommended to allow drivers to take appropriate measures in emergency situations.



The ultimate new technology for **driving safety**



- Unlike other tires, our new HRS technology drastically reduces the danger of accidents by lowering the chance of lost control in the case of high-speed tire air loss.
- Moreover, installing SMH reinforces weak sidewall parts to offer the most powerful performance.



Shock absorption (**Absorbs shock** to enhance riding experience)

Maintains Continuity (Offers durability by enabling drivers to travel for **extended distance** after tire suffers air loss)

Heat Resistance (**Prevents overheating** when driving at lower air pressure)

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								



ventus Prime 3

K125B

16

1022630	195/55R16		87W	BSW	6.0	5.5-7.0	51	1,201	24.4	8.2	6.3	8.5	852	20.0	240/A/A	MINI Hatchbacks / Hardtop / 5Door / Convertible(2020-2022)
1019611	205/55R16		91W	BSW	6.5	5.5-7.5	51	1,356	24.8	8.7	6.8	8.5	837	22.2	280/A/A	



ventus S1 noble 2

H452B

18

1021836	225/45R18	XL	95H	BSW	7.5	7.0-8.5	50	1,521	25.7	9.5	7.6	8.0	808	25.4	400/A/A	BMW 3 Series ('20-'25)
1015152	245/45R18	XL	100H	BSW	8.0	7.5-9.0	50	1,764	26.6	10.0	6.2	9.5	782	31.7	380/A/A	BMW 5 Series ('17-'23), MERCEDES BENZ E Class ('17-'22)

19

1022328	255/45R19	XL	104H	BSW	8.5	8.0-9.5	50	1,984	28.0	10.4	8.9	10.0	741	33.5	440/A/A	MERCEDES BENZ S Class ('20-'27)
---------	-----------	----	------	-----	-----	---------	----	-------	------	------	-----	------	-----	------	---------	---------------------------------

20

1023793	255/40R20	XL	101H	BSW	9.0	8.5-10.0	50	1,819	27.9	10.6	9.2	10.0	744	34.2	460/A/A	MERCEDES BENZ S Class ('20-'27)
1025595	255/40R20	XL	101H	BSW	9.0	8.5-10.0	50	1,819	27.9	10.6	8.6	10.0	744	35.2	460/A/A	MERCEDES BENZ S Class ('20-'27)
1027181	285/35R20	XL	104H	BSW	10.0	9.5-11.0	50	1,984	27.7	12.3	10.2	10.0	750	37.4	320/A/A	MERCEDES BENZ S Class ('20-'27)
1024646	285/35R20	XL	104H	BSW	10.0	9.5-11.0	50	1,984	27.7	12.3	10.2	10.0	750	36.4	320/A/A	MERCEDES BENZ S-Class ('20-'27)



ventus S1 evo 3

K127B

17

1022631	205/45R17	XL	88W	BSW	7.0	6.5-7.5	51	1,235	24.1	8.5	6.9	8.5	862	19.3	260/A/A	MINI Hatchbacks / Hardtop / 5Door / Convertible(2020-2022)
1019613	225/45R17	XL	94Y	BSW	7.5	7.0-8.5	50	1,477	24.8	9.3	7.6	9.0	836	22.5	220/AA/A	

18

1019630	225/45R18	XL	95Y	BSW	7.5	7.0-8.5	50	1,521	25.7	9.2	7.3	9.5	808	25.7	260/A/A	BMW 3 Series ('18-'25), BMW 2 Series ('19-'25)
1024579	245/45R18	XL	100Y	BSW	8.0	7.5-9.0	50	1,764	26.5	10.0	8.2	8.5	784	29.8	220/A/A	
1019631	255/40R18	XL	99Y	BSW	9.0	8.5-10.0	50	1,709	25.9	10.1	9.0	9.5	801	27.9	260/A/A	BMW 3/4 Series ('19-'25)
1024580	275/40R18	XL	103Y	BSW	9.5	9.0-11.0	50	1,929	26.5	11.9	9.8	9.0	784	33.3	220/A/A	BMW 5 Series ('20-'23)



ventus S1 evo 3 SUV

K127C SUV

19

1020904	265/50R19	XL	110W	BSW	8.5	7.5-9.5	50	2,337	29.4	11.6	9.1	9.0	706	40.7	220/A/A	BMW X5/X6 ('18-'25)
---------	-----------	----	------	-----	-----	---------	----	-------	------	------	-----	-----	-----	------	---------	---------------------

20

1023867	275/45R20	XL	110Y	BSW	9.0	8.5-10.5	50	2,337	29.8	10.9	9.0	8.0	698	37.7	220/A/A	BMW X5/6 ('20-'25)
1023814	305/40R20	XL	112Y	BSW	11.0	10.0-12.0	50	2,469	29.7	12.5	10.5	8.5	699	42.6	220/A/A	BMW X5/6 ('20-'25)

21

1023815	275/40R21	XL	107Y	BSW	9.5	9.0-11.0	50	2,149	29.6	11.2	9.8	9.0	701	38.1	220/A/A	BMW X5 ('20-'25)
1023816	315/35R21	XL	111Y	BSW	11.0	10.5-12.5	50	2,403	29.6	12.6	11.7	9.0	701	41.8	220/A/A	BMW X6 ('20-'25)

Technical data subject to change without prior notice.

XL : Extra Load BSW : Black Sidewall WSW : White Sidewall OWL : Outlined White Letters RWL : Raised White Letters

Mileage, Road Hazard, and 30 Day Free Trial warranties apply only to replacement tires. Original Equipment tires are excluded.

Mileage and Road Hazard warranties do not apply to runflat tires.

Runflat Tires can be driven on up to 50 miles on a deflating or deflated tire at a top speed of 50 mph (subject to application and operating conditions)

S-Code	Size	LI/SS	Sidewall	Measuring Rim	Rim Width Range	Max. Load		Overall Diameter	Section Width	Tread Width	Tread Depth	Revs/ Mile	Weight	UTQG	OE Application
						psi	lbs								



ventus S1 evo²

K117B

17

1013193	205/45R17	XL	88W	BSW	7.0	6.5-7.5	50	1,235	24.2	8.4	7.1	9.5	859	21.0	280/A/A	MINI ('13-'19)
1013666	225/50R17		94W	BSW	7.0	6.0-8.0	51	1,477	25.8	9.8	7.4	9.5	804	28.4	380/A/A	MERCEDES BENZ C Class ('13-'20)
1015131	225/55R17		97Y	BSW	7.0	6.0-8.0	51	1,609	26.9	9.6	7.4	9.5	774	30.1	280/A/A	MERCEDES BENZ E Class ('15-'22) BMW 5 Series ('16-'23)
1016012	245/45R17		95W	BSW	8.0	7.5-9.0	51	1,521	25.5	10.2	8.0	9.5	814	29.1	380/A/A	MERCEDES BENZ C Class hybrid ('15-'21)

18

1020731	225/45R18		91W	BSW	7.5	7.0-8.5	51	1,356	25.7	9.4	7.5	9.5	808	24.8	440/A/A	MERCEDES BENZ A & B Class ('18-'25)
1016691	225/50R18		95W	BSW	7.0	6.0-8.0	51	1,521	26.8	9.8	7.5	9.5	775	28.7	280/A/A	BMW X2 ('17-'24) MINI Countryman ('17-'24)
1016054	245/45R18	XL	100Y	BSW	8.0	7.5-9.0	50	1,764	26.6	10.0	8.2	9.5	782	31.3	280/A/A	BMW 5 Series ('17-'TBD), MERCEDES BENZ E Class ('17-'TBD)
1015132	245/45R18	XL	100/Y	BSW	8.0	7.5-9.0	50	1,764	26.6	10.0	8.3	9.5	782	31.2	280/A/A	MERCEDES BENZ E Class ('15-'22) BMW 5 Series ('16-'19)
1013884	245/50R18		100/Y	BSW	7.5	7.0-8.5	51	1,764	27.6	10.9	8.1	9.5	752	34.9	280/A/A	BMW 7 Series / 5 Series GT ('15-'22)

19

1013885	245/45R19		98/Y	BSW	8.0	7.5-9.0	51	1,653	27.4	10.3	8.4	9.0	758	32.2	280/A/A	BMW 7 Series / 6 Series GT ('15-'22)
1013886	275/40R19		101/Y	BSW	9.5	9.0-11.0	51	1,819	27.4	11.8	9.4	9.0	758	36.6	280/A/A	BMW 7 Series / 6 Series GT ('15-'22)



ventus Prime²

K115B

16

1013195	195/55R16		87W	BSW	6.0	5.5-7.0	51	1,201	24.4	8.3	6.3	9.0	852	21.9	280/A/A	MINI hatch, convertible ('13-'20)
---------	-----------	--	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	-----------------------------------



ventus S1 evo² SUV

K117C SUV

18

1019370	225/60R18	XL	104W	BSW	6.5	6.0-8.0	50	1,984	28.6	9.5	7.1	9.5	726	35.1	280/AA/A	BMW X3/X4 ('17-'24)
---------	-----------	----	------	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	----------	---------------------



KINERGY^{GT}

H436B

17

1020496	205/55R17		91H	BSW	6.5	5.5-7.5	51	1,356	25.9	8.7	6.5	9.5	803	24.5	500/A/A	MERCEDES BENZ A & B Class ('18-'25)
---------	-----------	--	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	-------------------------------------

18

1019371	225/60R18	XL	104H	BSW	6.5	6.0-8.0	50	1,984	28.6	9.5	7.1	9.5	726	36.1	500/A/A	BMW X3/X4 ('17-'24)
---------	-----------	----	------	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	---------------------



OPTIMO H426

H426B

16

1013249	195/55R16		87V	BSW	6.0	5.5-7.0	51	1,201	24.4	8.4	6.3	9.5	852	21.7	400/A/A	MINI ('13-'22)
---------	-----------	--	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	----------------

17

1013250	205/45R17	XL	88V	BSW	7.0	6.5-7.5	50	1,235	24.2	8.4	7.1	9.5	859	20.9	400/A/A	MINI ('13-'22)
---------	-----------	----	-----	-----	-----	---------	----	-------	------	-----	-----	-----	-----	------	---------	----------------

Warranty Program

for Passenger and Light Truck
Replacement Tires

Important Safety Warning

Limited Warranty

Claim Adjustment Procedure

Claim Procedure Flow Chart

Claim Form Sample

Adjustment Percentage for Customer

Load Inflation Pressure Tables





Important Safety Warning

For your safety and protection against serious injury or death, the following safety precaution and maintenance instruction must be observed at all times.

IMPORTANT SAFETY CHECK LISTS:

- Check tire air pressure periodically.
- Inspect tire for uneven treadwear, cracks, bulges or any sign of foreign material or trauma.
- Remember to check your tire load carrying capacity and speed ratings.
- Check your tire life. Tires must be replaced when tread is worn down to 2/32^{nds}.
- Never overload your vehicle, check tire load carrying capacity or vehicle owner's manual for the maximum recommended load.

TIRE INFLATION

⚠WARNING Under inflated and/or overloaded tires pose a safety risk. The National Highway Traffic Safety Administration (NHTSA) estimates that under inflated tires contribute to more than 600 fatalities and 33,000 injuries each year. A tire can lose up to half of its air pressure and not appear to be flat! Do you know your tires are more likely than not under-inflated? Results of a tire pressure survey conducted by U.S. Tire Manufacturers Association show:

- 9% of vehicles had all 4 tires properly inflated.
- 50% of vehicles had at least 1 tire under inflated.
- 19% of vehicles had at least 1 tire under inflated by 8 PSI.
- 26% of vehicles had at least 1 tire under inflated by 6 PSI.
- 38% of vehicles had at least 1 tire under inflated by 4 PSI.

Under Inflation

Under inflation (or tire over loading) lead to tire failures, which often result in serious personal injury or death. Among the modes of tire failures are tread/belt separations, sidewall flex breaks and crack formation, among others. Tires run hotter when under inflated which can lead or contribute to tire failure. Under Inflation also adversely affect fuel economy, tire wear and vehicle handling.

Proper Inflation

Proper tire inflation is essential for optimum performance and longevity of the tire. A U.S. Department of Energy study shows that "properly inflated tires can improve fuel efficiency by 3.3%." So, what is the proper inflation for my tires and where can I find it? For original equipment tires or replacement tires with the same size and load rating, proper inflation is specified by the vehicle manufacturer shown on a placard that can be found on the door edge, door post, glove compartment door or gas tank door. It can also be found in the owner's manual. For plus sized replacement tires consult your local dealer or tire manufacturer. Proper inflation information is NOT stamped on the sidewall of the tire. The inflation pressure shown on the sidewall of the tire is the maximum inflation pressure for that tire.

Check Tire Inflation Pressure Regularly

Tire inflation pressure must be checked at least once a month and before each and every long trip. The tire air pressure must be checked when the tires are cold, in the morning, before doing any driving. At all times visually check tires for nails or other objects embedded in the tread which can cause air leak. Also never bleed or reduce inflation pressure when tires are hot. Over inflation must also be avoided as it can cause uneven wear at the center of tire tread and make the tire more susceptible to road hazards.

Tire Pressure Monitoring System (TPMS)

All new passenger, SUV, and light truck vehicles manufactured on

or after September 1, 2007 are required to be equipped with a tire pressure monitoring system. This system will warn drivers when a tire is 25% (8 PSI if the recommended inflation pressure is 32 PSI) under inflated. This warning may be too late to prevent tire damage caused by under inflation. TPMS units are NOT a replacement for monthly tire pressure checks with a tire gauge.

SPEED RATING

⚠WARNING It is recommended that the replacement tire speed rating be equal to or greater than the OEM tire speed rating. If a lower speed rated tire is selected, then the vehicle top speed becomes limited to that of the lower speed rating selected. The customer must be informed of the new speed restriction & the vehicle's handling may be adversely impacted. When replacing tires, consult the placard or the owner's manual for correct size and speed rating. The speed rating of the replacement tires must be equal to or greater than the speed rating of the tire being replaced to maintain the speed capability of the vehicle. Speed ratings do not imply that the vehicle can be safely driven at the maximum speeds for which the tire is rated.

Serious injury or death may take place if you drive your vehicle in an unsafe or unlawful manner. Hankook's speed symbol designations are verified and comply with regulatory indoor test in accordance with ECE-R30,54 test (Economic Council for Europe : Procedure load / Speed performance test for tires). These symbols are not applicable to repaired tires.


Category	Maximum Speed	
G	90 km/h	55 mph
J	100 km/h	62 mph
K	110 km/h	68 mph
L	120 km/h	74 mph
M	130 km/h	80 mph
N	140 km/h	87 mph
P	150 km/h	93 mph
Q	160 km/h	99 mph

Speed symbol can be shown from the tire size for example: P205/60R15 90 (H)

Category	Maximum Speed	
R	170 km/h	105 mph
S	180 km/h	112 mph
T	190 km/h	118 mph
U	200 km/h	124 mph
H	210 km/h	130 mph
V	240 km/h	149 mph
W	270 km/h	168 mph
Y	300 km/h	186 mph

TIRE LOAD

The load carrying capacity of the replacement tire must always equal or exceed the load carrying capacity of the original equipment tire. Tires that are loaded in excess of allowable maximum can build up heat to cause sudden air loss.

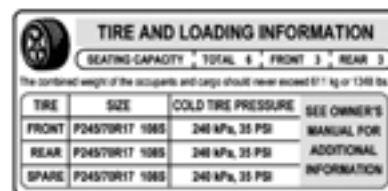

CHECK TIRE LIFE

Tires have six built-in treadwear indicators that warn you when it is time to replace your tires. These indicators are raised ribs 2/32^{nds} inches height sections spaced intermittently in the

bottom of the tread grooves. When they appear even with the outside of the tread, it is time to replace your tires immediately.

TIRE DAMAGE

Inspect your tires frequently for uneven wear, scrapes, bulges, separations, cuts, snags and other damage from road hazards. Damage from impact can occur to the inner part of your tire without being visible to the outside. If you have any doubt that your tire has been damaged from hitting a pothole, curb or debris on the road, tires must be removed from the wheel and inspected for damage by a qualified person such as Hankook authorized dealer. Uneven wear can lead to internal damage or separation.

TIRE REPAIR

⚠WARNING

Tire repairs should only be completed by a qualified trained tire service professional. Improper repairs are dangerous and may cause a tire to suddenly fail.

Tire repairs should be done following the U.S. Tire Manufacturers Association established guidelines. Hankook warranty does not cover any repair or inspection.

Tire must be removed from wheel assembly for inspection and repair.

Repairs should only be made in the tread area (puncture repair area). None of the repair should extend into shoulder area.

Puncture must be $\frac{1}{4}$ inch (6mm) or smaller in diameter.

Plug/stem and patch combination is only proper repair method. Repairs cannot overlap.

Never repair an existing improper repair or tire worn down to 2/32^{nds} of an inch.

Contact Hankook Tire Technical Services for any repair on non-conventional tires (eg. runflat, foam-lined)



MOUNTING RECOMMENDATION

Tire mounting and inflation can be dangerous and shall be done only by specially trained persons using proper tools and procedures. Always refer to the U.S. Tire Manufacturers Association mounting procedure. Serious physical injury or death may result from explosion of tire/rim assembly due to improper mounting. A tire bead diameter must always match the diameter of the rim on which it is being mounted. When inflating/dismounting RV tires, approved OSHA safety cages must be used. Never stand, lean or reach over the assembly while inflating tires.

Mounting Precaution

There is extreme danger in attempting to install a tire of one rim diameter on a rim of a different rim diameter. Always replace a tire on a rim with another tire of exactly the same diameter tire designation and suffix letters. For example, a 16" tire goes with a 16" rim. Never mount a 16" size diameter tire on a 16.5" rim. While it is possible to pass a 16" diameter tire over the lip or flange of a 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tire bead by inflating, the tire bead may break with explosive force

and could cause serious bodily injury or death. Rims of different diameters and tapers cannot be interchanged.

DEATH OR SERIOUS INJURY MAY RESULT FROM:

TIRE FAILURE DUE TO UNDER-INFLATION/OVER LOADING.

FOLLOW OWNER'S MANUAL OR TIRE PLACARD IN VEHICLE.

EXPLOSION OF TIRE/RIM ASSEMBLY MAY RESULT FROM IMPROPER MOUNTING.

DO NOT EXCEED 40 PSI TO SEAT BEADS.

Only Specially Trained Persons Should Mount Tires.

TIRE MOUNTING PRECAUTIONS. WARNING TO AVOID INJURY.

1. CLEAN RIM. LUBRICATE RIM AND BEADS.
2. BE SURE BEADS ARE CENTERED.
3. DO NOT STAND OVER TIRE WHILE INFLATING.
4. AFTER BEADS SEAT, ADJUST TO RECOMMENDED INFLATION.

TIRE MOUNTING PRECAUTIONS. WARNING TO AVOID INJURY.

Moisture trapped inside tires can cause damage.

1. STORE TIRES IN DRY AREA.
2. DRY INTERIOR BEFORE MOUNTING.
3. INFLATE WITH COLD DRY AIR.

SUV / LIGHT TRUCK / TRUCK ROLLOVER HAZARD

Due to their size, weight and higher center of gravity, vehicles such as SUVs and light trucks do not have the same handling characteristics as automobiles. Because of these different characteristics, failure to operate your SUV/truck in a proper and safe manner can increase the likelihood of vehicle rollover. Modifications to your SUV/truck tire size, tire type, wheels or suspension can change your vehicle's handling characteristics and further increase the likelihood of vehicle rollover. Whether your SUV/truck has the original equipment configuration for tires, wheels and suspension or whether any of these items have been modified, always drive safely, avoid sudden sharp turns or lane changes and obey traffic laws. Failure to do so may result in loss of vehicle control leading to an accident and serious injury or death.

TIRE MIXING

⚠WARNING

Driving your vehicle with an improper mix of tires is dangerous. Your vehicle's handling characteristics may be seriously affected. You could have an accident resulting in serious personal injury or death. Consult your vehicle owner's manual, tire information placard, and a qualified tire service professional for proper tire replacement.

Unless otherwise specified by the vehicle manufacturer, it is recommended that all road tires be the same size, type, and speed rating. Never mix different size tires on an axle, except for temporary use of a spare.

When it is necessary to replace one or more tires, consider that applying new tires in pairs on an axle, or to all wheel positions, helps to optimize vehicle performance and avoid malfunction of mechanical or electronic vehicle systems (i.e. drive-train transmission, anti-lock brakes, traction control).

Important Safety Warning

Replace Fewer than Four Tires: Whether your vehicle is front-, rear-, or all-wheel drive, if your rear tires lose traction because of hydroplaning on a wet road, an oversteer skidding condition may result and lead to loss of control, particularly in a turn. Generally, new tires provide increased resistance to hydroplaning due to their full tread depth. With the new tires on the rear, oversteer skidding condition may be more easily avoided.

Therefore, if replacing only one or two tires at a time:

- Two new tires should be placed on the rear axle.
- One new tire should be paired with another tire from the vehicle with the deepest tread depth, and then both should be placed on the rear axle.
- Additional or alternate recommendations may apply for some vehicles. Always refer to and follow the vehicle manufacturer's tire replacement and tire application recommendations; consult your vehicle owner's manual and tire information placard.

SERVICE LIFE OF A TIRE

There is no hard and fast rule to measure service life of a tire. Tires are made with various types of raw materials and a variety of rubber compounds all having varying performance properties. Once a tire is designed and manufactured to achieve given performance property and put into use, it is still subjected to varying conditions such as weather, storage, and still further varying use conditions such as load, speed, inflation pressure, maintenance and road condition. Since all these factors affect the service life of a tire, it just is not possible to predict with accuracy or scientific validity service life of a tire.

Tires unquestionably degrade over time, whether in use or not in use. Some tire and vehicle manufacturers published warnings to consumers of their products to the effect that tires should be replaced after six years of manufacture. Certain industry organizations issued statements concurring with six year service life for tires. Depending on severity of adverse use conditions or non-use, many tires degrade fast enough to require replacement before 6 years of service life. Others in perfectly favorable use conditions may enjoy service life of more than six years.

General Recommendations

The following recommendations are intended to give consumers some idea concerning service life of a tire. Hankook always insists and mandates that consumers properly maintain and periodically inspect their tires. Even if a consumer properly maintains and periodically inspects the tire, most tires will require replacement before 10 years of manufacture regardless of tread-wear. It is recommended that tires in service 10 years or more from the date of manufacture must be replaced even if it was never used. Date of manufacture can be determined by reading the Department of Transportation (DOT) code on the sidewall. The entire code will be printed on outbound side of the tire. The DOT code will end with the week and year of manufacture. For example, a tire with DOT code reading 1GFN AVN 1408, was manufactured during the 14th week of 2008. Consumers must regularly have tires inspected by qualified tire dealers throughout its life. Furthermore, tires that are over five years of age should be inspected at least twice a year and more frequently if the use is heavy.


Consumers must always be vigilant of their tires performance, condition, inflation pressure, and any other issues that could affect the life of a tire.

Consumers must properly maintain, including proper inflation pressures, and periodically inspect your tires. Failure to do so might result in separation or performance loss resulting in vehicle damage, injury or even death.

For original equipment tires, acquired when purchasing a new vehicle, consumers should follow all of the vehicle manufacturer's recommendations.

TIRE REGISTRATION

Registration of your tires is an important safety precaution since it enables the manufacturer to notify you in the event of a recall. When you purchase replacement tires, the retailer will provide a registration card on which the tire identification numbers have been recorded; fill in your name and address on the card and mail it promptly. Some retailers may submit the registration for you. You do not need to register tires which come as original equipment on new vehicles—the vehicle and tire manufacturers handle that for you.

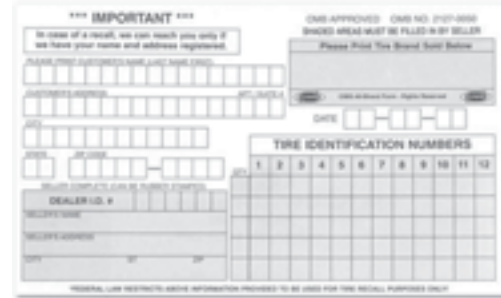


Sample Tire Registration Card



Use the QR code above to quickly register your tires.

TIRE ROTATION

For safety and maximizing tire life, rotate your tires at least every 7,500 miles or at the vehicle manufacturer's recommended mileage, if sooner. Each tire pressure must be checked after rotation and adjusted to the vehicle recommendation for the tire's new location on the vehicle. If irregular wear is evident, vehicle alignment or other mechanical problem should be checked.

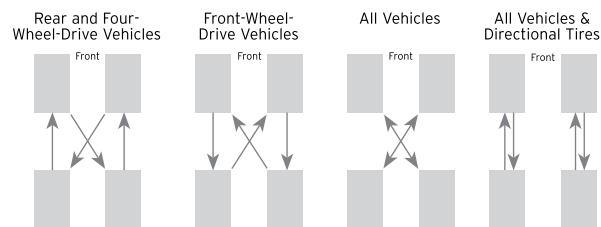


*Tire Rotation variation patterns; refer to proper pattern for asymmetrical, directional tires

WHEEL ALIGNMENT


The vehicle center line of the chassis/body is found by measuring in equal distance from both sides of the vehicle. The geometric center line is something a little different. It is determined by the midpoint between the front wheels and rear wheels. If the wheels or axles are not offset to one side, the geometric center line and vehicle center line will be identical. Should the front wheels or rear axle be slightly off center, however, the geometric center line will be at an angle to the vehicle center line. When the two lines do not coincide, tracking problems result. The rear wheels will not follow the front wheels because one set of wheels is offset from true center.

The third line we must deal with is the thrust line. This imaginary line also runs the length of the vehicle, and is determined by the


total toe of the rear wheels. The thrust line divides the total toe in half. If toe for both rear wheels is zero (which is where it should be), the thrust line would be 90 degrees to the rear axle right up the center of the car.

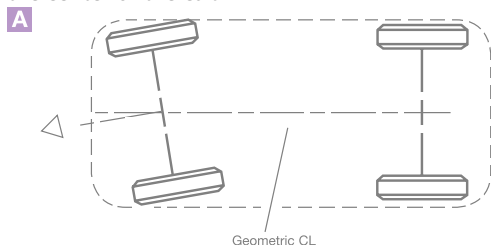

The geometric and vehicle center lines are one in the same in a properly aligned vehicle - shown in **A**

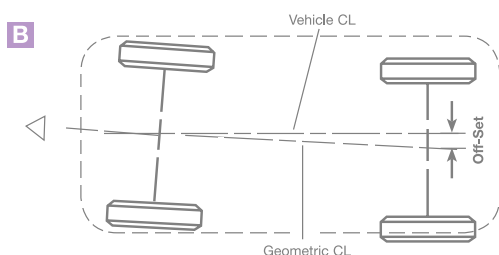

If the rear axle is offset to one side **B** the geometric and vehicle center lines will be at an angle.

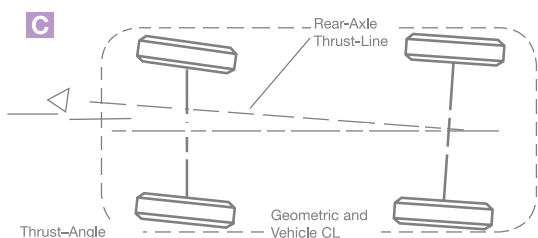

If the rear axle or wheels are toed to one side **C**, the thrust line will not match up with the center line and the vehicle will pull—in this case—to the left.

Out-of-alignment conditions occur when the suspension and steering systems are not operating at their desired angles. Out-of-alignment conditions are most often caused by spring sag or suspension wear (ball joints, bushing, etc.) on an older vehicle. They can also be the result of an impact with a pothole or curb or a change in vehicle ride height (lowered or raised) on any vehicle regardless of age. Incorrect alignment settings will usually result in more rapid tire wear.

CONTROLLING A VEHICLE WHEN TIRE FAILURE OCCURS

If a tire failure occurs, you may hear a loud noise, feel a vibration, and/or the vehicle may pull toward the side of the failed tire. It is most important that you. **DO NOT BRAKE OR ABRUPTLY TURN THE STEERING WHEEL.** Slowly remove your foot from the accelerator and hold the steering wheel firmly while steering to remain in your lane. Once the vehicle has slowed and is fully under control, apply the brakes gently; safely pull over to the shoulder and come to a stop. Inspect the tires. If one or more looks flat or low, shows detachment or other damage, remove tire assembly and replace it with a properly inflated spare. Bumps or bulges may indicate detachment within the tire body and require inspection by a qualified tire technician.

TIRE SPINNING

Spinning a tire to extract a vehicle stuck in mud, ice, snow, or wet grass can be dangerous. A tire spinning at a speedometer reading above 35 mph (55 km/h) can in a matter of seconds, reach a rotation speed capable of disintegrating a tire with explosive force. Under some conditions, a tire may be spinning at a speed twice that shown on the speedometer. This could cause serious personal injury or death to a bystander or passenger. Never spin a tire above a speedometer reading of 35 mph (55 km/h).

WINTER DRIVING

Tires which meet the U.S. Tire Manufacturers Association definition of snow tires are marked M/S, M+S, or M&S. On such tires, this designation is molded into the sidewall. Tires without this notation are not recommended for winter driving. While All-Season tires are designed to provide reliable performance in some winter conditions, the use of 4 winter tires is recommended for optimal performance. Tires designated for use in severe winter conditions are marked on at least one sidewall with the letter "M" and "S" plus a pictograph of a mountain with a snowflake on it.

TIRE STORAGE

Tires should be stored indoors in a cool, dry place. Water should not be allowed to collect inside them. Tires should be placed away from electric generators/motors and sources of heat such as hot pipes. Storage surfaces should be clean and free of grease, gasoline or other substances which can deteriorate the rubber. Tires should not be kept on a vehicle if the vehicle is not being used for a long period of time.

⚠ WARNING

Improper storage can damage your tires in ways that may not be visible and can lead to a failure resulting in serious injury or death.

ADDITIONAL INFORMATION • CUSTOMER SERVICE

If you have any questions or concerns regarding product warranty, please first contact your nearest Hankook Tire Dealer. For dealer information, or if your question has not been handled to your satisfaction, contact the Hankook Tire Technical Department.

Limited Warranty

Limited Warranty

TERMS AND CONDITIONS FOR HANKOOK TIRES

WARRANTY TERMS

This limited warranty applies to the original purchaser of any new tire manufactured by HANKOOK Tire and Technology bearing Department of Transportation prescribed tire identification numbers. Eligible tires shall be used on the vehicle on which they were originally installed according to the vehicle manufacturer's or Hankook's recommendation. This warranty applies if all following qualification requirements are met:

- The tire was purchased after January 1, 2021.
- The tire is a size, load rating and speed rating equal to or greater than that recommended by the vehicle manufacturer.
- The tire has not become unserviceable due to a condition listed under WHAT IS NOT COVERED.
- The tire is 6 years from the date of manufacture or 6 years from the date of purchase, whichever benefits the customer.

WHAT IS WARRANTED AND FOR HOW LONG

Should any tire covered by this limited warranty become unusable due to a workmanship or material related condition during its usable tread life (more than 2/32^{nds} remaining tread), Hankook will give a credit on the following conditions:

1. During the first 2/32^{nds} of the original usable tread and one year from date of purchase: Tire will be replaced with a comparable new Hankook produced tire free of charge, including mounting and balancing charges. Applicable taxes on the new tire and cost of any other charges in connection with the replacement of the tire are required to be paid by the owner.
2. After the first 2/32^{nds} of the original usable tread or after one year from date of purchase, whichever occurs first: The amount of the credit will be determined by multiplying the Dealer's current selling price for the same tire (excluding taxes) by the percentage of tread remaining, based on the original tread depth.

*Free replacement workmanship warranty not applicable to snow tires.

WHAT IS NOT COVERED

This limited warranty does not apply to tires which are being serviced under the following conditions:

- Originally purchased or used outside the United States of America or Puerto Rico.
- Willful Abuse / Collision / Wreck / Fire.
- Continued use while flat or severe under/over inflation.
- Road Hazards including without limitation, puncture, cut, impact break, stone drill, bruise, bulge, snag, collision.
- Premature / irregular wear due to vehicle mechanical reason and/or improper maintenance
- Conditions resulting from without limitation, improper mounting/ demounting, under inflation, improper tire size, improper repair, defect in vehicle, abuse, improper storage
- Cosmetic ozone or weather cracking
- Ozone or weather cracking on tires over 4 years old from the date of manufacture.
- Ride disturbance complaints after 2/32^{nds} tread wear or 1 year from date of purchase, whichever occurs first.
- With tread depth of 2/32^{nds} or less remaining depth.
- With the serial number cut or buffed.
- Racing & off road use and Misapplication.
- Loss of time or use, inconvenience or any incidental or consequential damage.
- Used in commercial service, excluding truck & bus tires.
- Note: Consequential damage mentioned above may not apply to you based on States limitation.

OWNER'S GENERAL OBLIGATION

In order to be eligible for HANKOOK's limited warranty program, the owner must observe the following:

- Present the tire to an authorized Hankook dealer in the United States of America or Puerto Rico.
- Submit or present a copy of the original purchase receipt.
- Sign a completed Hankook Claim Form filled by any authorized dealer.
- End users should complete the warranty card which is available at authorized Hankook dealers for tread wear mileage warranty and mail it to Hankook Tire America Corp. (333 Commerce St. Suite, 600 Nashville, TN 37201. Attn: Technical Department) within 30 days from the date of purchase.
- In order to take advantage of mileage warranty, you must submit tire rotation record which proves that all tires are rotated once every 7,500 miles or fewer between rotations.
- If the tire owner abuses the tires by failing to do the following, but not limited to observing safety warnings, maintain proper inflation pressure, maintain vehicle alignment and tire rotation, expected tire performance or life may not be achieved and your safety cannot be ensured.

ROAD HAZARD WARRANTY

If a tire is rendered unserviceable due to a non-repairable road hazard, it must meet following guidelines:

- Tire must be listed in eligible products for Road Hazard
- Tire must be within first 2/32^{nds} of its original tread depth
- Tire must be within one year from date of purchase.

Qualifying tires will be replaced free of charge with a comparable Hankook produced tire. Adjustment procedure is prescribed in the Owner's General Obligation section. Taxes, mounting, balancing and service charges are not included.

The eligible product lines for Road Hazard warranty are as follows:

- VENTUS: V12 evo2, S1 Noble2, V2 Concept2, V4 ES, V12 evo, AS
- KINERGY: GT, PT, ST, 4s2, 4s2 X
- OPTIMO: H727, H426, H725,
- DYNAPRO: HP2, AT-m (P-metric), HT (P-metric). AT2 (P-metric)

*Exclusion:

- A. This warranty is not applicable to Original Equipment (OE) tires.
- B. Repairable punctures are not covered under this warranty.
- C. Tire(s) replaced free under Road Hazard Warranty are not eligible for Road Hazard Warranty in the future

TREADWEAR MILEAGE WARRANTY

Hankook provides very competitive treadwear mileage Warranty as follows:

TREADWEAR MILEAGE WARRANTY*	TIRE TYPE	REMARKS
100,000	Optimo H727	
90,000	KINERGY PT	
80,000	Optimo H725	
75,000	KINERGY PT (V-Speed Rated)	
70,000	Optimo H724, Kinergy GT, Dynapro HT, Kinergy ST	P-Metric
65,000	Dynapro HP2, Ventus AS	
60,000	Optimo H426, Dynapro AT2, Kinergy 4s2, Kinergy 4s2 X	
50,000	Ventus H101, Ventus S1 Noble2*, Ventus ST**, Ventus V4 ES*, Optimo H431, Optimo H725A	P-Metric
45,000	Dynapro AS, Dynapro AT, Dynapro AT-M, Ventus V2 Concept2	
40,000	Dynapro HT, Dynapro AS, Winter i*cept iZ2***	LT-Metric
30,000	Winter i*cept evo2***, Winter i*cept evo2 SUV***	

*Ventus S1 Noble2: *40 series and over only (Not applicable to 35 series and below).

**Ventus ST: 24 inches and under.

***Additional conditions apply

1. If an eligible tire wears out (wears down to 2/32nds remaining depth) before the warranty miles under the normal passenger use, and within the Limited Warranty time period, Hankook will make an allowance for unused service toward the purchase of a new tire of the same size and type, prorated on warranted miles.
2. The replacement allowance will be calculated by percentage of the warranted miles not received, multiplied by the Dealer's current selling price of the same tire at the time and place of the adjustment. A mileage projection will be calculated based on average wear per 1/32nd to calculate the remaining miles before the tire is worn out (2/32nds remaining).
3. To take advantage of this warranty, the owner shall submit warranty card within 30 days from the date of purchase, which records the purchasing and vehicle information (Warranty card must be mailed to Hankook Tire America Corp.)
4. To make a claim, installation record, tire rotation record, and the removal record must all be forwarded with the claimed tire. (The cost of mounting, balance and other service charges or taxes shall be paid by the customer)
5. For vehicles with a staggered fitment (different size on the front and rear axles), Hankook will cover half the number of warranted miles as the mileage warranty when the end user cannot rotate tires at least once every 7,500 miles.
6. This warranty is not applicable to original equipment tires.
7. Treadwear Mileage Warranty only applies to the original purchaser/owner of the tires

HANKOOK '30 DAY FREE TRIAL' PLAN

Hankook is offering a 30 Day Free Trial to the following eligible tires:

- | | |
|----------------------|----------------------|
| • Kinergy ST | H735 |
| • Kinergy PT | H737 |
| • Kinergy GT | H436 |
| • Kinergy 4s2 | H750 |
| • Kinergy 4s2 X | H750A |
| • Dynapro HP2 | RA33 |
| • Dynapro AT2 | RF11 |
| • Dynapro MT2 | RT05 |
| • Ventus V12 evo2 | K120 |
| • Ventus S1 Noble2 | H452 |
| • Ventus V2 Concept2 | H457 |
| • Dynapro AT-m | RF10 (P-Metric only) |
| • Dynapro HT | RH12 (P-Metric only) |

If you are not 100% satisfied for any reason with your purchase, simply bring the tires and proof of purchase back to the place purchase within 30 days for a new set of Hankook Tires and we will take care of the rest.

REQUIREMENTS AND LIMITATIONS:

- 30 Day Free Trial only applies to 4 ~ 6 tires per vehicle (Purchases of 1 ~ 3 tires are not eligible).
- Customer may exchange 1 ~ 4 tires from the set, for an equivalent number of the same tire or a different Hankook Tire.
- Mounting and balancing cost are included. (Valve Stems are extra)
- Tires must be free of any damage due to misuse, road hazard, mechanical issue, and/or any racing activity wear.
- Replacement tire must be installed on original purchase Vehicle.
- Only original purchase is covered by 30 Day Free Trial. Replacement set is not covered by 30 Day Free Trial.
- Original purchaser must present proof of purchase.
- Replacement must be done at original place of purchase.
- If replacing with more expensive tire, difference is paid by Customer (including sales tax). If exchanges is less, you will be given a credit for the difference.

- Customer is responsible for all applicable taxes.
- Please contact Hankook Customer Service if you have any questions at 1-800-HANKOOK - option 1
- This warranty does not apply to tires when Original Equipment on a new vehicle

DISCLAIMER

- THIS WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND HANKOOK EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SOME U.S. STATES AND/OR CANADIAN PROVINCES DO NOT ALLOW LIMITATIONS IN THE DURATION OF AN IMPLIED WARRANTY, SO THE ABOVE MAY NOT APPLY TO YOU.
- TO THE EXTENT PERMITTED BY LAW, HANKOOK DISCLAIMS LIABILITY FOR ALL CONSEQUENTIAL AND INCIDENTAL DAMAGES. THE REMEDIES SET FORTH IN THIS LIMITED WARRANTY ARE THE SOLE AND EXCLUSIVE REMEDIES FOR BREACH OF WARRANTY. Some U.S. States and/or Canadian provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This Limited Warranty gives you specific legal rights, and you may also have other rights which vary from U.S. State or Canadian province to province.
- THIS IS THE ONLY EXPRESS WARRANTY MADE BY HANKOOK. NO HANKOOK EMPLOYEE, RETAILER, OR DEALER HAS THE AUTHORITY TO MAKE ANY WARRANTY, REPRESENTATION, PROMISE OR AGREEMENT ON BEHALF OF HANKOOK EXCEPT AS EXPRESSLY WRITTEN IN THIS TOTAL WARRANTY. IN OBSERVANCE OF U.S. FEDERAL LAW, THIS WARRANTY HAS BEEN DESIGNATED A "LIMITED WARRANTY."

Claim Adjustment Procedure

For all claims for adjustment, a claim form must be filled out. Completed claim form shall be mailed to Hankook Tire America Corp. office. Do not ship tires to Hankook. Hankook reserves the right to demand physical inspection of the tires on which adjustment is claimed. If Hankook exercises its right to inspect, it will do so by sending a written request to ship the tires to Hankook's Claim Center. In determining the cause for removal from service, always examine both the inside and outside of the tire body. If the tire is not entitled to adjustment, Hankook will advise the dealer; explain the reason for the failure and advise him/her of preventive maintenance.

A. If the examination shows that the tire is adjustable under the terms of our Warranty :

1. Be sure that the tire returned by the consumer bears our name and DOT number.
2. Measure the remaining tread depth in 32nds of an inch. Be sure to measure in grooves nearest the center line of the tire.
3. Refer to ORIGINAL TREAD DEPTH for the size and type of the returned tire.

Use the ORIGINAL TREAD DEPTH CHART to determine the percentage of credit due based on remaining tread depth.

4. Fill out the CLAIM ADJUSTMENT FORM completely, sign it yourself and have it signed by the owner of the tire

B. Fill out each claim form with the following information for each tire being adjusted :

- | | |
|--|--|
| 1. Pattern Name | 16. VIN Number |
| 2. Month, Day, & Year of Claim | 17. Size, Type, Ply-Rating of Tire |
| 3. Distributor's Contact Information | 18. Material Number |
| 4. Dealer's Contact Information | 19. MFG's Serial Number (commercial use only) |
| 5. Fleet (commercial use only) Contact Information | 20. D.O.T. Number of Tire |
| 6. Owner's Contact Information | 21. Air Pressure Used |
| 7. Vehicle Year | 22. Remaining Tread Depth (Inch) |
| 8. Vehicle Make | 23. Road Force Measurement or Total Balance Weight |
| 9. Vehicle Model | 24. Tire Position |
| 10. Tire Installation Date | 25. Claim Reason |
| 11. Install Miles | 26. Number of Retreads |
| 12. Removal Miles | 27. Additional Notes Regarding Claim |
| 13. Total Miles | 28. Signature of Dealer |
| 14. Vehicle Usage | 29. Signature of Owner (User) |
| 15. Original Equipment (Yes/No) | |

This form must be accurately completed by the dealer and signed by the owner of the product. Incomplete forms will not be accepted.

C. Marking tires for physical inspection :

Please mark all tires being shipped to our claim center in the following manner.

1. Clearly state dealer's name.
2. Mark over identification (DOT) number with crayon and make clearly legible (Disregard if DOT has been cut & sent in with claim).
3. Tire condition - circle area of failure (a two-inch crayon mark around the condition). Ride complaints should be marked as "O.R."
4. Claim number close to identification number using the last two digits of claim number. Example: If claim number is "H-00123" and the item is number "1", then the number you would mark on the tire would be "23-1".
5. Attach a copy of all claim forms to the packing list. Vehicle alignment and tire rotation, expected tire packing list.

D. Forwarding claim forms to Hankook :

Retain "Dealer's Copy" and retain copies of any other supporting documents and/or photos for dealer records, and forward all other copies to:

Forward all copies to:

Hankook Tire America Corp.
ATTN: TECHNICAL DEPARTMENT
333 Commerce St. Suite 600
Nashville, TN 37201

E. For photo inspection :


Accumulation of 29 tires or less: Enclose cut-out DOT numbers and a photograph of each tire, showing the claimed condition, with the claim form. When an adjustment is received, Hankook will: Review the claim and either issue credit or request the tires to be shipped to our claim center for physical inspection. If we decide a physical inspection is necessary, we will send you a written request to ship the tires to a designated location. (NOTE: DO NOT send tires to our claim center unless you are requested to do so OR the minimum requirements are met per Hankook's Freight Policy (page 112).

Tires must be held by you for thirty days, or until credit or further notice has been received whichever is later. If tires are requested to be shipped for inspection during this period and are not available, claim will be disallowed and adjustment credit will not be issued.

Claim Procedure Flow Chart

Remember:

- Adjustments will be made on a pro-rata basis, calculated on remaining usable tread depth and the predetermined adjustment price if there is no applicable special warranty program.
- Usable tread depth is the original depth less 2/32nds of an inch.
- When the tire is worn down to 2/32nds, the tire is considered worn out and the warranty expires.
- Tires having had DOT or serial numbers previously cut or mutilated will not be adjusted.
- The result of physical inspections by Hankook will prevail over your findings to the contrary subject to your right to legally contest our findings. A instruction and for tire marking.

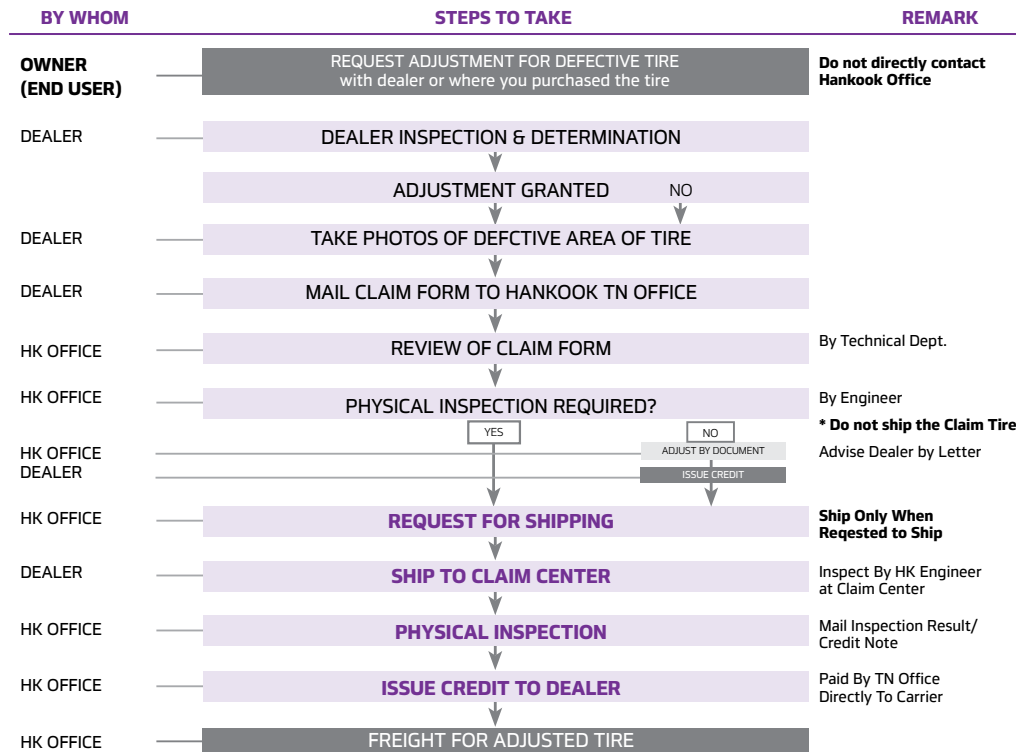

NOTE: No freight will be paid where shipment of tires was not required. Where tires are shipped to wrong address or shipped where not requested, freight will be paid by shipper.

Claim Form Sample



TIRE CLAIM FORM
HANKOOK TIRE AMERICA CORP.
Technical Department
333 Commerce Street, Suite 600
Nashville, TN 37201
Tel: 1-800-HANKOOK (426-5665), opt 1

DATE OF CLAIM
2

H

Pattern Name: 1

THIS FORM MUST BE ACCURATELY COMPLETED BY THE DEALER AND SIGNED BY OWNER USING THE PRODUCT. INCOMPLETE FORMS WILL NOT BE ACCEPTED.

DISTRIBUTOR 3		DEALER 4		FLEET (Commercial Use Only) 5		OWNER-USER 6	
NAME:		NAME:		NAME:		NAME:	
ADDRESS:		ADDRESS:		ADDRESS:		ADDRESS:	
PHONE NUMBER:		PHONE NUMBER:		PHONE NUMBER:		PHONE NUMBER:	
ACCT#:		ACCT#:		ACCT#:		ACCT#:	

VEHICLE INFORMATION													
YEAR	7	MAKE	8	MODEL	9	INSTALL DATE	10	INSTALL MILES	11	REMOVAL MILES	12	TOTAL MILES	13
VEHICLE USAGE (NORMAL/ COMMERCIAL/ OFFROAD/ RACING/ ETC.):				14	ORIGINAL EQUIPMENT		YES	15	NO	VIN NUMBER	16		

ITEM NO.	SIZE/ TYPE/ PLY	FOR OFFICE USE ONLY	MATERIAL NO.	MFG'S SERIAL NO. (Commercial Use Only)	D.O.T. NUMBER	PSI	32NDS REMAINING	RFV or Balance WT (OZ/GR)	Tire Position (L,F,L.R,R,F, R,R)	CLAIM REASON	# OF RETREADS
1											
2											
3	17		18	19	20	21	22	23	24	25	26
4											
5											
6											

IF OTHER, PLEASE DESCRIBE: 27

I hereby certify that the above described merchandise was sold in New/Unused condition to the Owner-User identified above and that all the foregoing statements are actually correct. Having discussed this adjustment claim in detail with the Owner-User, I am convinced that the merchandise presented for adjustment was not involved in a motor vehicle accident.

DEALER'S SIGNATURE 28

I hereby certify that I am the original Owner-User of the above described merchandise and was not involved in a motor vehicle accident and that all the foregoing statements are factually correct.

OWNER-USER'S SIGNATURE 29

TIRES MUST BE HELD UNTIL FURTHER NOTICE, OR UNTIL CREDIT IS RECEIVED. SHOULD TIRES BE REQUESTED FOR INSPECTION AND BE UNAVAILABLE, ADJUSTMENTS CREDIT WILL NOT BE ISSUED.

INSTRUCTIONS:

- 30+ PLY, OR 6+ COMMERCIAL TRUCK TIRES CALL TECHNICAL DEPARTMENT.
- PLEASE INSERT:
 - CUT OUT ONE COMPLETE D.O.T. NO. PER TIRE (NOT APPLICABLE TO COMMERCIAL TRUCK TIRE CLAIMS)
 - PHOTOS CLEARLY SHOWING CLAIMED CONDITION (MIN 1 PER TIRE)
 - ALL SUPPORTING DOCS (PURCHASE, MAINTENANCE, REMOVAL, ETC)
- RETAIN COPY FOR YOUR RECORDS.
- RETURN DOCUMENTATION TO: HANKOOK TIRE AMERICA CORP.

4401_0120_01

NOTE : Please fill in completely the following items:

- Pattern Name
- Month, Day, & Year of Claim
- Distributor's Contact Information
- Dealer's Contact Information
- Fleet (commercial use only) Contact Information
- Owner's Contact Information
- Vehicle Year
- Vehicle Make
- Vehicle Model
- Tire Installation Date
- Install Miles
- Removal Miles
- Total Miles
- Vehicle Usage
- Original Equipment (Yes/No)
- Vin Number
- Size, Type, Ply-Rating of Tire
- Material Number
- MFG's Serial Number (commercial use only)
- D.O.T. Number of Tire
- Air Pressure Used
- Remaining Tread Depth (Inch)
- Road Force Measurement or Total Balance Weight
- Tire Position
- Claim Reason
- Number of Retreads
- Additional Notes Regarding Claim
- Signature of Dealer
- Signature of Owner (User)

Marketing Policy

This Marketing Policy applies to all Hankook brand tires distributed by Hankook Tire America Corp. In this Marketing Policy, discounts and credits vary on the categories of products.

Following categories are used:

- PCR** : Passenger Car Radial Tires (Including Z36: P235/75R15 XL, Dynapro AT & Dynapro AS: P-Metric, Radial RA08)
- LTR** : Light Truck Radial Tires
- TBR** : Medium Truck Radial Tires (Tires over 17.5")

Credit Percentage Table 1 & 2

(1/32")	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5	18.0	18.5
2.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2.5	8	7	7	6	6	6	5	5	5	5	4	4	4	4	4	4	3	3	3	3	3
3.0	15	14	13	13	12	11	11	10	10	9	9	8	8	8	7	7	7	7	6	6	6
3.5	23	21	20	19	18	17	16	15	14	14	13	13	12	12	11	11	10	10	10	9	9
4.0	31	29	27	25	24	22	21	20	19	18	17	17	16	15	15	14	14	13	13	13	12
4.5	39	36	33	31	29	28	26	25	24	23	22	21	20	19	19	18	17	17	16	16	15
5.0	46	43	40	38	35	33	32	30	29	27	26	25	24	23	22	21	21	20	19	19	18
5.5	54	50	47	44	41	39	37	35	33	32	30	29	28	27	26	25	24	23	23	22	21
6.0	62	57	53	50	47	44	42	40	38	36	35	33	32	31	30	29	28	27	26	25	24
6.5	69	64	60	56	53	50	47	45	43	41	39	38	36	35	33	32	31	30	29	28	27
7.0	77	71	67	63	59	56	53	50	48	45	43	42	40	38	37	36	34	33	32	31	30
7.5	85	79	73	69	65	61	58	55	52	50	48	46	44	42	41	39	38	37	35	34	33
8.0	92	86	80	75	71	67	63	60	57	55	52	50	48	46	44	43	41	40	39	38	36
8.5	100	93	87	81	76	72	68	65	62	59	57	54	52	50	48	46	45	43	42	41	39
9.0		100	93	88	82	78	74	70	67	64	61	58	56	54	52	50	48	47	45	44	42
9.5			100	94	88	83	79	75	71	68	65	63	60	58	56	54	52	50	48	47	45
10.0				100	94	89	84	80	76	73	70	67	64	62	59	57	55	53	52	50	48
10.5					100	94	89	85	81	77	74	71	68	65	63	61	59	57	55	53	52
11.0						100	95	90	86	82	78	75	72	69	67	64	62	60	58	56	55
11.5							100	95	90	86	83	79	76	73	70	68	66	63	61	59	58
12.0								100	95	91	87	83	80	77	74	71	69	67	65	63	61
12.5									100	95	91	88	84	81	78	75	72	70	68	66	64
13.0										100	96	92	88	85	81	79	76	73	71	69	67
13.5											100	96	92	88	85	82	79	77	74	72	70
14.0												100	96	92	89	86	83	80	77	75	73
14.5													100	96	93	89	86	83	81	78	76
15.0														100	96	93	90	87	84	81	79
15.5															100	96	93	90	87	84	82
16.0																100	97	93	90	88	85
16.5																	100	97	94	91	88
17.0																		100	97	94	91
17.5																			100	97	94
18.0																				100	97
18.5																					100

(1/32")	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3	9	8	8	7	7	6	6	6	5	5	5	5	4	4	4	4	4	4
4	18	17	15	14	13	13	12	11	11	10	10	9	9	8	8	8	7	7
5	27	25	23	21	20	19	18	17	16	15	14	14	13	13	12	12	11	11
6	36	33	31	29	27	25	24	22	21	20	19	18	17	17	16	15	15	14
7	45	42	38	36	33	31	29	28	26	25	24	23	22	21	20	19	19	18
8	55	50	46	43	40	38	35	33	32	30	29	27	26	25	24	23	22	21
9	64	58	54	50	47	44	41	39	37	35	33	32	30	29	28	27	26	25
10	73	67	62	57	53	50	47	44	42	40	38	36	35	33	32	31	30	29
11	82	75	69	64	60	56	53	50	47	45	43	41	39	38	36	35	33	32
12	91	83	77	71	67	63	59	56	53	50	48	45	43	42	40	38	37	36
13	100	92	85	79	73	69	65	61	58	55	52	50	48	46	44	42	41	39
14		100	92	86	80	75	71	67	63	60	57	55	52	50	48	46	44	43
15			100	93	87	81	76	72	68	65	62	59	57	54	52	50	48	46
16				100	93	88	82	78	74	70	67	64	61	58	56	54	52	50
17					100	94	88	83	79	75	71	68	65	63	60	58	56	54
18						100	94	89	84	80	76	73	70	67	64	62	59	57
19							100	94	89	85	81	77	74	71	68	65	63	61
20								100	95	90	86	82	78	75	72	69	67	64
21									100	95	90	86	83	79	76	73	70	68
22										100	95	91	87	83	80	77	74	71
23											100	95	91	88	84	81	78	75
24												100	96	92	88	85	81	79
25													100	96	92	88	85	82
26														100	96	92	89	86
27															100	96	93	89
28																100	96	93
29																	100	96
30																		100

Adjustment Percentage For Customer

TABLE 3

MILEAGE RUN	CREDIT % TO CUSTOMER						
	40,000	50,000	60,000	65,000	70,000	80,000	100,000
Under 999 Miles	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%
1,000 - 1,999	97.5%	98.0%	98.3%	98.46%	98.6%	98.8%	99.0%
2,000 - 2,999	95.0%	96.0%	96.7%	96.92%	97.1%	97.5%	98.0%
3,000 - 3,999	92.5%	94.0%	95.0%	95.38%	95.7%	96.3%	97.0%
4,000 - 4,999	90.0%	92.0%	93.3%	93.85%	94.3%	95.0%	96.0%
5,000 - 5,999	87.5%	90.0%	91.7%	92.31%	92.9%	93.8%	95.0%
6,000 - 6,999	85.0%	88.0%	90.0%	90.77%	91.4%	92.5%	94.0%
7,000 - 7,999	82.5%	86.0%	88.3%	89.23%	90.0%	91.3%	93.0%
8,000 - 8,999	80.0%	84.0%	86.7%	87.69%	88.6%	90.0%	92.0%
9,000 - 9,999	77.5%	82.0%	85.0%	86.15%	87.1%	88.8%	91.0%
10,000 - 10,999	75.0%	80.0%	83.3%	84.62%	85.2%	87.5%	90.0%
11,000 - 11,999	72.5%	78.0%	81.7%	83.08%	84.3%	86.3%	89.0%
12,000 - 12,999	70.0%	76.0%	80.0%	81.54%	82.9%	85.0%	88.0%
13,000 - 13,999	67.5%	74.0%	78.3%	80.00%	81.4%	83.8%	87.0%
14,000 - 14,999	65.0%	72.0%	76.7%	78.46%	80.0%	82.5%	86.0%
15,000 - 15,999	62.5%	70.0%	75.0%	76.92%	78.6%	81.3%	85.0%
16,000 - 16,999	60.0%	68.0%	73.3%	75.38%	77.1%	80.0%	84.0%
17,000 - 17,999	57.5%	66.0%	71.7%	73.85%	75.7%	78.8%	83.0%
18,000 - 18,999	55.0%	64.0%	70.0%	72.31%	74.3%	77.5%	82.0%
19,000 - 19,999	52.5%	62.0%	68.3%	70.77%	72.9%	76.3%	81.0%
20,000 - 20,999	50.0%	60.0%	66.7%	69.23%	71.4%	75.0%	80.0%
21,000 - 21,999	47.5%	58.0%	65.0%	67.69%	70.0%	73.8%	79.0%
22,000 - 22,999	45.0%	56.0%	63.3%	66.15%	68.6%	72.5%	78.0%
23,000 - 23,999	42.5%	54.0%	61.7%	64.62%	67.1%	71.3%	77.0%
24,000 - 24,999	40.0%	52.0%	60.0%	63.08%	65.7%	70.0%	76.0%
25,000 - 25,999	37.5%	50.0%	58.3%	61.54%	64.3%	68.8%	75.0%
26,000 - 26,999	35.0%	48.0%	56.7%	60.00%	62.9%	67.5%	74.0%
27,000 - 27,999	32.5%	46.0%	55.0%	58.46%	61.4%	66.3%	73.0%
28,000 - 28,999	30.0%	44.0%	53.3%	56.92%	60.0%	65.0%	72.0%
29,000 - 29,999	27.5%	42.0%	51.7%	55.38%	58.6%	63.8%	71.0%
30,000 - 30,999	25.0%	40.0%	50.0%	53.85%	57.1%	62.5%	70.0%
31,000 - 31,999	22.5%	38.0%	48.3%	52.31%	55.7%	61.3%	69.0%
32,000 - 32,999	20.0%	36.0%	46.7%	50.77%	54.3%	60.0%	68.0%
33,000 - 33,999	17.5%	34.0%	45.0%	49.23%	52.9%	58.8%	67.0%
34,000 - 34,999	15.0%	32.0%	43.3%	47.69%	51.4%	57.5%	66.0%
35,000 - 35,999	12.5%	30.0%	41.7%	46.15%	50.0%	56.3%	65.0%
36,000 - 36,999	10.0%	28.0%	40.0%	44.62%	48.6%	55.0%	64.0%
37,000 - 37,999	7.5%	26.0%	38.3%	43.08%	47.1%	53.8%	63.0%
38,000 - 38,999	5.0%	24.0%	36.7%	41.54%	45.7%	52.5%	62.0%
39,000 - 39,999	2.5%	22.0%	35.0%	40.00%	44.3%	51.3%	61.0%
40,000 - 40,999	0.0%	20.0%	33.3%	38.46%	42.9%	50.0%	60.0%
41,000 - 41,999		18.0%	31.7%	36.92%	41.4%	48.8%	59.0%
42,000 - 42,999		16.0%	30.0%	35.38%	40.0%	47.5%	58.0%
43,000 - 43,999		14.0%	28.3%	33.85%	38.6%	46.3%	57.0%
44,000 - 44,999		12.0%	26.7%	32.31%	37.1%	45.0%	56.0%
45,000 - 45,999		10.0%	25.0%	30.77%	35.7%	43.8%	55.0%
46,000 - 46,999		8.0%	23.3%	29.23%	34.3%	42.5%	54.0%
47,000 - 47,999		6.0%	21.7%	27.69%	32.9%	41.3%	53.0%
48,000 - 48,999		4.0%	20.0%	26.15%	31.4%	40.0%	52.0%
49,000 - 49,999		2.0%	18.3%	24.62%	30.0%	38.8%	51.0%
50,000 - 50,999		0.0%	16.7%	23.08%	28.6%	37.5%	50.0%
51,000 - 51,999			15.0%	21.54%	27.1%	36.3%	49.0%
52,000 - 52,999			13.3%	20.00%	25.7%	35.0%	48.0%

Adjustment Percentage For Customer

BASED ON MILEAGE RUN FOR MILEAGE WARRANTY TIRE

TABLE 3							
MILEAGE RUN	CREDIT % TO CUSTOMER						
	40,000	50,000	60,000	65,000	70,000	80,000	100,000
53,000 - 53,999			11.7%	18.46%	24.3%	33.8%	47.0%
54,000 - 54,999			10.0%	16.92%	22.9%	32.5%	46.0%
55,000 - 55,999			8.3%	15.38%	21.4%	31.3%	45.0%
56,000 - 56,999			6.7%	13.85%	20.0%	30.0%	44.0%
57,000 - 57,999			5.0%	12.31%	18.6%	28.8%	43.0%
58,000 - 58,999			3.3%	10.77%	17.1%	27.5%	42.0%
59,000 - 59,999			1.7%	9.23%	15.7%	26.3%	41.0%
60,000 - 69,000			0.0%	7.69%	14.3%	25.0%	40.0%
61,000 - 61,999				6.15%	12.9%	23.8%	39.0%
62,000 - 62,999				4.62%	11.4%	22.5%	38.0%
63,000 - 63,999				3.08%	10.0%	21.3%	37.0%
64,000 - 64,999				1.54%	8.6%	20.0%	36.0%
65,000 - 65,999				0.00%	7.1%	18.8%	35.0%
66,000 - 66,999					5.7%	17.5%	34.0%
67,000 - 67,999					4.3%	16.3%	33.0%
68,000 - 68,999					2.9%	15.0%	32.0%
69,000 - 69,999					1.4%	13.8%	31.0%
70,000 - 70,999					0.0%	12.5%	30.0%
71,000 - 71,999						11.3%	29.0%
72,000 - 72,999						10.0%	28.0%
73,000 - 73,999						8.8%	27.0%
74,000 - 74,999						7.5%	26.0%
75,000 - 75,999						6.3%	25.0%
76,000 - 76,999						5.0%	24.0%
77,000 - 77,999						3.8%	23.0%
78,000 - 78,999						2.5%	22.0%
79,000 - 79,999						1.3%	21.0%
80,000 - 89,999						0.0%	20.0%
81,000 - 81,999							19.0%
82,000 - 82,999							18.0%
83,000 - 83,999							17.0%
84,000 - 84,999							16.0%
85,000 - 85,999							15.0%
86,000 - 86,999							14.0%
87,000 - 87,999							13.0%
88,000 - 88,999							12.0%
89,000 - 89,999							11.0%
90,000 - 90,999							10.0%
91,000 - 91,999							9.0%
92,000 - 92,999							8.0%
93,000 - 93,999							7.0%
94,000 - 94,999							6.0%
95,000 - 95,999							5.0%
96,000 - 96,999							4.0%
97,000 - 97,999							3.0%
98,000 - 98,999							2.0%
99,000 - 99,999							1.0%
100,000 & Over							0.0%

Adjustment Credit for Treadwear Warranty

• **To Customer :** Customer must submit the worn-out (2/32nds remaining tread) tire, warranty registration card and verification card. The adjustment credit to the customer for a replacement tire will be calculated by dividing the difference between warranted miles and actual mileage run by warranted miles (see table 3) and then multiplying by the Dealer's then current selling price of the same tire at the time and place of adjustment. Tires submitted above 2/32nds and below 4/32nds must have the tire's miles projected to when it would be worn out (2/32nds remaining). Mounting and balancing costs and applicable taxes must be paid by the customer. Fill out adjustment form as per instructions.

• **To Dealer :** The dealer credit amount will be calculated by the following formula:

$$*C = \frac{\text{Warranted Miles} - \text{Actual Mileage Run}}{\text{Warrant Miles}} \times P$$

Warrant Miles

C: Credit Amount

P: The Predetermined Adjustment Price

Load Inflation Pressure Tables

Wide Base, Tubeless										
Tire size Tire Designation		The Load Limits (lbs.) at Various Cold Inflation Pressures (psi) (The pressure is minimum for the load)								
		80	85	90	95	100	105	110	120	130
385/65R22.5	S	6940	7350	7650	8050	8230	8510	8820	9050	9370(J)
425/65R22.5	S	8270	8740	9100	9370	9790	10100	10500(J)	10700	11400(L)
445/65R22.5	S	9090	9480	9870	10200	10600	11000	11400	11700	12300(L)

Tube Type												
Tire size Tire Designation		The Load Limits (lbs.) at Various Cold Inflation Pressures (psi) (The pressure is minimum for the load)										
		80	85	90	95	100	105	110	115	120	125	130
7.50R15TR	D	2460	2550	2640	2755(E)	2865	2975	3085(F)				
	S	2580	2690	2800	2910(E)	3040	3170	3305(F)				
8.25R15TR	D	2930	3040	3150	3260	3360	3470	3570(G)				
14PR	S	3080	3200	3340	3470	3590	3720	3830	3960	4070(G)		
8.25R15TR*	D				4080	4215	4340	4465	4590	4710	4830(J)	
18PR	S				4125	4275	4420	4565	4700	4835	4970(J)	
10.00R15TR	D	3980	4130	4300	4470(G)	4640	4805(G)	4990	5175	5355(H)	5435(J)	
	S	4170	4370	4540(F)	4715	4890	5070(G)	5270	5470	5670(H)	5905(J)	
8.25R20	D	3550(E)	3690	3820	3950(F)	4070	4200	4320(G)				
	S	3730	3890	4050(E)	4210	4350	4500(F)	4640	4790	4920(G)		
9.00R20	D	4200	4360	4520(F)	4670	4820	4970(G)					
	S	4410	4610(E)	4790	4970	5150(F)	5320	5490	5670(G)			
10.00R20	D	4760	4950	5205	5415(G)	5625	5840(G)	5895	5950	6005(H)		
	S	4990	5220	5510(F)	5730	5950	6175	6320	6465	6610(H)		
10.00R22	D	5070	5260	5510	5675(G)	5840	6005(G)	6205(H)	6405	6610(H)		
	S	5310	5550	5840(F)	6095	6350	6610(G)	6790	6970	7160(H)		
11.00R20	D	5190	5390	5675(F)	5785	5895	6005	6265	6525	6780(H)		
	S	5450	5690	6005(F)	6205	6405	6610(G)	6870	7130	7390(H)		
11.00R22	D	5520	5730	5840(F)	6095	6350	6610(G)	6790	6970	7160(H)		
	S	5790	6040	6395(F)	6650	6910	7160(G)	7380	7600	7830(H)		
12.00R20	D	5910	6140	6360	6610(G)	6790	6970	7160(H)	7390	7610(J)		
	S	6200	6480	6740	7160(G)	7380	7600	7830(H)	8050	8270(J)		
12.00R24	D	6650	6910	7160	7390(G)	7610	7830	8050(H)	8300	8540(V)		
	S	6980	7280	7580	8050(G)	8310	8570	8820(H)	9100	9370		
13/80R20	D			6315	6535	6745	6955	7165(J)				
	S			7085	7340	7570	7815	8045(J)				
14/80R20	S			7595	7860	8110	8365	8610	8850	9095(J)		

Tubeless												
Tire size Tire Designation		The Load Limits (lbs.) at Various Cold Inflation Pressures (psi) (The pressure is minimum for the load)										
		80	85	90	95	100	105	110	115	120	125	130
8R19.5	D	2610	2755	2865	2975	3085	3195	3305				
	S	2835	2955	3075	3195	3305	3415	3525				
215/75R17.5	D	3198	3350	3500	3648	3798	3945	4095	4245	4393	4540	
	S	3375	3540	3695	3860	4010	4180	4330	4495	4650	4805	
235/75R17.5	D	3970	4170	4365	4555	4745	4935	5125	5310	5495	5675	
	S	4200	4410	4615	4820	5025	5225	5420	5620	5810	6005	
245/70R17.5	D	3970	4170	4365	4555	4745	4935	5125	5310	5495	5675	
	S	4200	4410	4615	4820	5025	5225	5420	5620	5810	6005	
10R22.5	D	4230	4410	4585(F)	4760	4940(F)	5075(G)	5210	5355			
	S	4480	4675(E)	4850	5025	5205(F)	5360	5515	5675(G)			
11R22.5	D	4760(F)	4950	5205(F)	5415	5625	5840(G)	5895	5950	6005(H)		
	S	4990	5220	5510(F)	5730	5950	6175(G)	6320	6465	6610(H)		
11R24.5	D	5070	5260	5510	5675	5840	6005(G)	6205	6405	6610(H)		
	S	5310	5550	5840	6095	6350	6610(G)	6790	6970	7160		
12R22.5	D	5190	5390	5675(F)	5785	5895	6005(G)	6265(H)	6525	6780(H)		
	S	5450	5690	6005	6205	6405	6610	6870	7130	7390(H)		
225/70R19.5	D	3000(E)	3115	3245	3415(F)	3490	3615	3750(G)				
	S	3195(E)	3315	3450	3640(F)	3715	3845	3970(G)				
245/70R19.5	D	3415	3515	3655	3860(F)	3940	4075	4300(G)	4345	4540(H)		
	S	3640	3740	3890	4080(F)	4190	4335	4540(G)	4620	4805(H)		
265/70R19.5	D	3750	3930	4095	4300	4405	4415	4675(G)				
	S	3970	4180	4355	4540	4685	4850	5070(G)				
285/70R19.5	D				4850	5070	5290	5435	5555	6575(H)		
	S				5160	5395	5635	5785	5980	6175(H)		
245/75R22.5	D	3640	3615	3765	3970	4055(G)						
	S	3860	3975	4140	4300	4455	4610	4675(G)				
265/75R22.5	D	3860	4040	4205	4410	4525	4685	4805(G)				
	S	4300	4440	4620	4805	4975	5150	5205(G)				
255/70R22.5	D	3970	4110	4275	4410	4455	4610	4675(G)	4915	5070(H)		
	S	4190	4370	4550	4675	4895	5065	5205(G)	5400	5510(H)		
275/70R22.5	D	4190	4410	4685	4905	5115	5400	5610	5895	6105	6395(H)	
16PR	S	4550	4785	5095	5325	5555	5865	6095	6405	6635	6940(H)	
295/75R22.5	D	4540	4690	4885	5070(F)	5260	5440	5675(G)	5795	6005(H)		
	S	4940	5155	5370	5510(F)	5780	5980	6175(G)	6370	6610(H)		
315/80R22.5*	D	5535	5750	5960	6165	6370	6570	6770	6965	7160(J)	8025	8225(L)
	S	6225	6495	6760	7020	7280	7530	7780	8025	8270(J)	8275	9000(L)
315/80R22.5*	D		6140	6360	6645	6855	7065	7330	7540	7805	7935	8255(M)
	S		7450	7705	8045	8300	8555	8885	9125	9445	9610	10000(M)
285/75R24.5	D	4540	4740	4930	5205(F)	5310	5495	5675(G)	5860	6175(H)		
	S	4940	5210	5420	5675(F)	5835	6040	6175(G)	6440	6780(H)		

*OPERATING SPEED LESS THAN 55 MPH

Tire load limits at various inflation pressures are based upon Tire and Rim Association (TRA) standards and tables, except where there is no specification established by the TRA. In these few cases, the tire design is based upon the European Tire and Rim Technical Organization (ETRTO) whose standards govern these tire designs. To obtain recommendations for tires run in non-standard applications, customers and dealers should contact the Hankook Technical Service Department.