

Luminator LED
Rallye 4000 LED




Tools required







Ø 3,5 / 10,5 mm















Kit includes

Accessories

(not included with kit)




1F8 181 541-011



8XS 147 945-011

Mounting

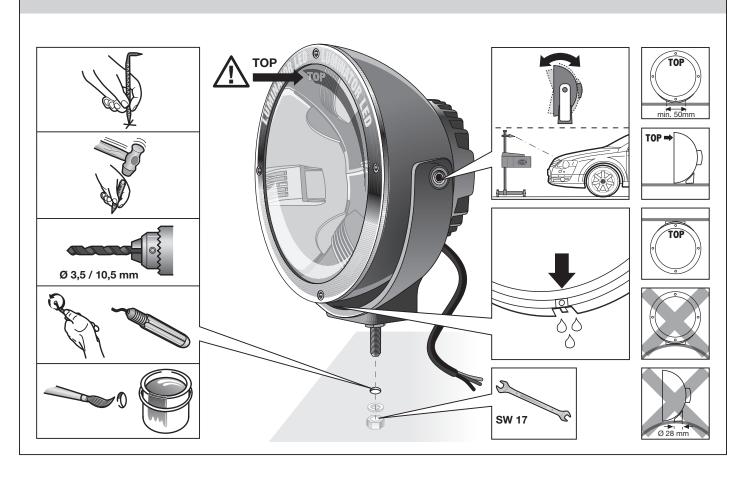

Mounting

Electrical connection Ø 12 mm schwarz zwart black negro noir nero 58 svart musta bruin braun brown marrón marron marrone ruskea **⊥** brun grau grijs gris grey grigio gris 87 grå harmaa


Subject to alteration without notice	


Installation dimensions

Important:

Before mounting check whether the air supply to the radiator grille will still be sufficient (for cooling engine). Mount both lamps above the bumper. Lamps may not vibrate or extend above the bonnet and must be attached symmetrically.

The use of an additional pair of parking lamps is not allowed in Great Britain. This means that the additional mounting instructions do not apply for Great Britain.





Electrical connection: Fig. page 4

Use the Hella wiring harness developed especially for this purpose or connect the headlamps as follows: Install the correct Hella relay (available as an accessory from stockists) with the connection terminals pointing downwards to protect it against splashwater.

24 V headlamps Relay part no.: 4RA 003 530-051 12 V headlamps Relay part no.: 4RA 003 530-001

Lay and connect the cables in accordance with the circuit diagram. According to circuit diagram II, the auxiliary lights are switched on together with the existing spotlights. According to circuit diagram III, the auxiliary lights are switched on in addition

to the existing headlights via a separate switch.

It is however essential that country-specific laws are observed.

Check the lighting system, fasten the connection cables securely.

Have the spotlights adjusted at a specialist garage.

Only correctly adjusted lights provide optimum light.