


#41144

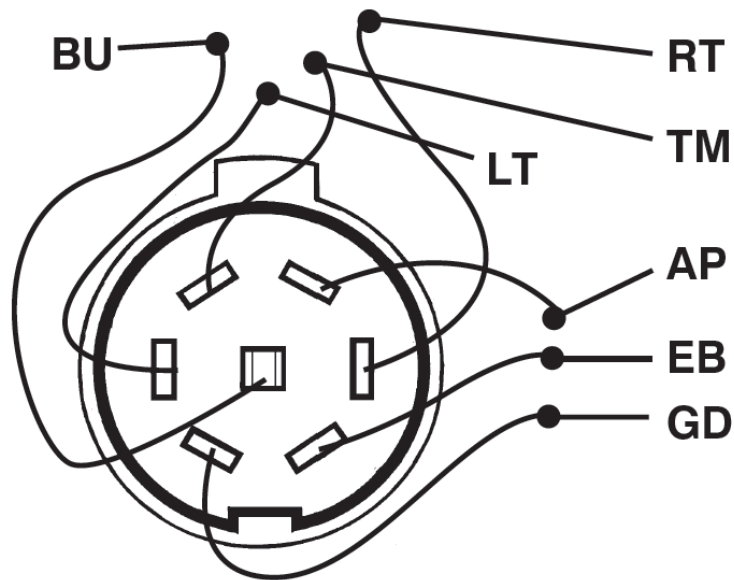

VIEW LOOKING AT FRONT OF PLUG

	Function	#41144	Vehicle
GD	Ground	White	Black
TM	Taillights	Brown	Brown
LT	Left Turn	Yellow	Yellow
RT	Right Turn	Green	Green
BU	Backup	Purple	Gray
EB	Electric Brakes	Blue	Blue
AX	Auxiliary Power	Red	Orange

NOTE: Locate wires and pin location by function only. Color coding is not standard among all manufacturers.



1. Locate vehicle wiring harness, approximately 8 inches behind the rear bumper. The wires will look like Fig A.
2. There should be 7 wires exposed slightly from the tube. Using wire strippers, strip wires 1/4" from each end.
3. Join the harness wires to the vehicle's corresponding wires (see chart).
4. Drill 1/8" hole in frame. Attach white (Ground) wire to vehicle frame with screw or attach to corresponding wire in harness. (See Chart)
5. Apply grease to all terminals to help prevent corrosion.
6. Replace oval plug shown in figure B. Replace it with This part 41144.
7. Plug wire harness into 41144.