

THANK YOU FOR SELECTING A HUSKY FLOOR LINER



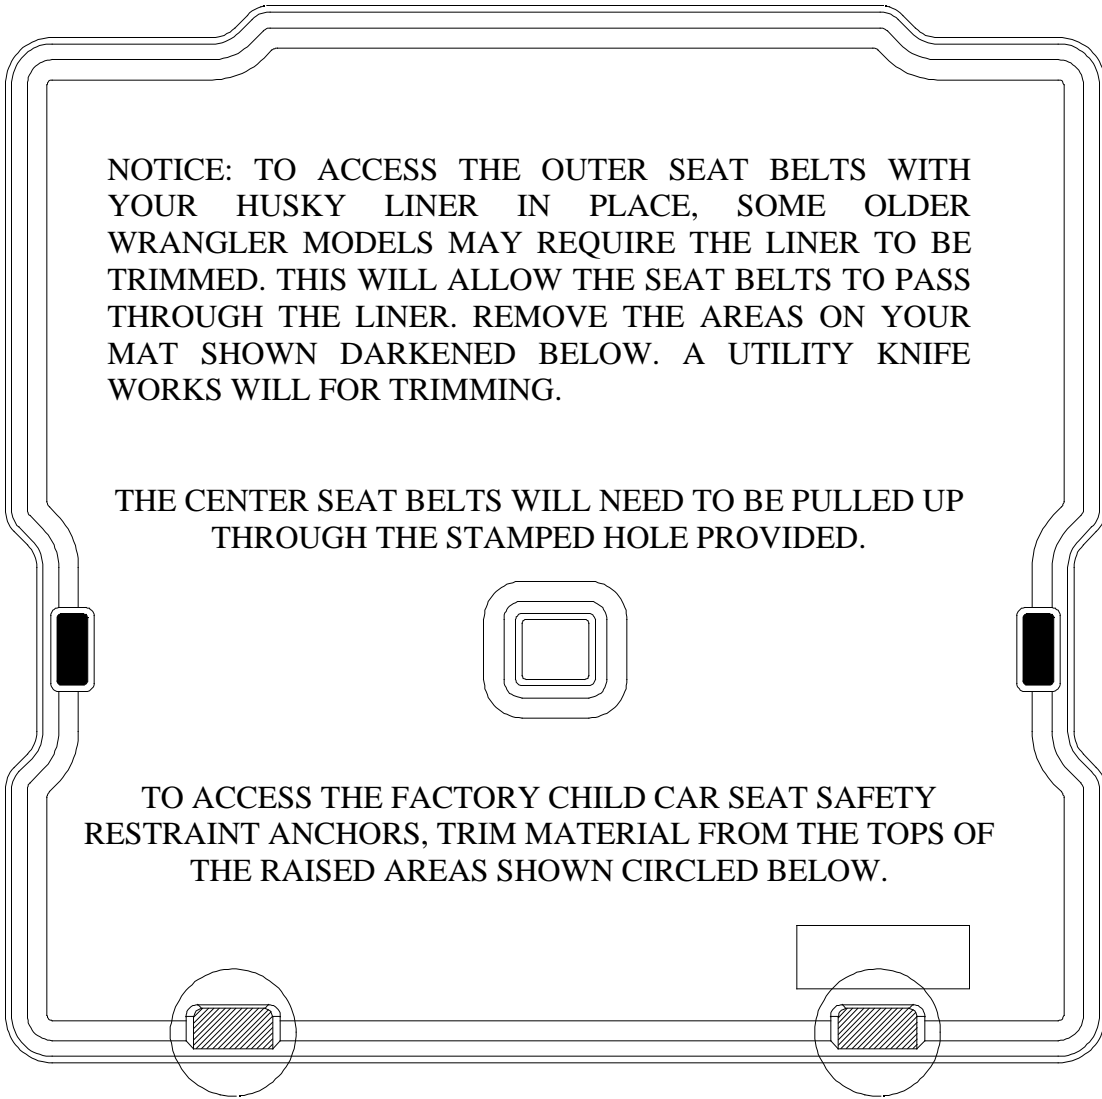
FROM WINFIELD CONSUMER PRODUCTS  
CARE AND USE INSTRUCTIONS

---

Your new liner is custom molded to fit your vehicle. Upon removal from the box your liner will not completely unroll and lay flat. This is normal and only temporary. Just place the liner on the floor or in the back of your vehicle with a weight in each corner (a book works well). After about 15 minutes, your liner will remain flat. In colder climates this “relaxing” may take longer; moving the liner inside will speed up the process.

Your liner is manufactured using an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liner is with a damp cloth or sponge. If using a cleaner, 409® or Glass Plus® work well. Use of Armor All®, Son-of-a-Gun® or similar items is discouraged as these products make the liner slick.

## INSTALLATION INSTRUCTIONS FOR YOUR JEEP WRANGLER CARGO LINER

A diagram of a Jeep Wrangler cargo liner, shown as a rectangular mat with rounded corners and a double-line border. The mat is oriented vertically. In the center, there is a square hole with a smaller square hole inside it. On the left and right sides, there are two rectangular tabs. At the bottom, there are two circular areas, each containing a rectangular shape. The text is placed within the mat's boundary.

NOTICE: TO ACCESS THE OUTER SEAT BELTS WITH YOUR HUSKY LINER IN PLACE, SOME OLDER WRANGLER MODELS MAY REQUIRE THE LINER TO BE TRIMMED. THIS WILL ALLOW THE SEAT BELTS TO PASS THROUGH THE LINER. REMOVE THE AREAS ON YOUR MAT SHOWN DARKENED BELOW. A UTILITY KNIFE WORKS WILL FOR TRIMMING.

THE CENTER SEAT BELTS WILL NEED TO BE PULLED UP THROUGH THE STAMPED HOLE PROVIDED.

TO ACCESS THE FACTORY CHILD CAR SEAT SAFETY RESTRAINT ANCHORS, TRIM MATERIAL FROM THE TOPS OF THE RAISED AREAS SHOWN CIRCLED BELOW.