

# HUSKYLINERS®

## weatherBEATER

### CARE AND USE INSTRUCTIONS

---

Thank you for selecting a WeatherBeater® Floor Liner from Winfield Consumer Products. Your new front floor liners are custom molded to fit your Nissan Juke. The liners are made to take the place of your factory floor mats. **For correct fit, it is necessary to remove the factory floor mats before installing your new floor liners.** However, do not remove the factory-installed carpeting.

Your liners are made from an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liners is with a damp cloth or sponge. If using a cleaner, 409® or Glass Plus® work well. Use of Armor All®, Son-of-a-Gun® or similar items is discouraged as these products make the liners slick.

### INSTALLATION INSTRUCTIONS FOR YOUR NISSAN JUKE FRONT HUSKY LINERS® WeatherBeater [FLOOR LINERS](#)



LEFT OR DRIVER'S SIDE



RIGHT OR PASSENGER'S SIDE

THE FACTORY CARPET HOOKS LOCATED IN THE CARPETED AREAS OF THE FLOOR PANS NEED TO BE REMOVED TO ALLOW YOUR LINER TO LAY COMPLETELY FLAT. TO REMOVE, APPLY FIRM PRESSURE WHILE LIFTING THE END OF THE HOOK ARM STRAIGHT UP.

TO EASE INSTALLATION OF YOUR JUKE FRONT LINERS, MOVE THE FRONT SEATS TO THEIR MOST REARWARD POSITION. THEN, WITH THIS DONE, YOU CAN EASILY INSTALL THE LINERS. ONCE LINERS ARE IN PLACE, REPOSITION THE FRONT SEATS AS DESIRED.

# HUSKY LINERS®

## weatherBEATER

### CARE AND USE INSTRUCTIONS


---

Thank you for selecting a WeatherBeater® Floor Liner from Winfield Consumer Products. Your new rear floor liner is custom molded to fit your Nissan Juke. The liner is made to take the place of your factory floor mats. **For correct fit, it is necessary to remove the factory floor mats before installing your new floor liners.** However, do not remove the factory-installed carpeting.

Your liner is made from an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liner is with a damp cloth or sponge. If using a cleaner, 409® or Glass Plus® work well. Use of Armor All®, Son-of-a-Gun® or similar items is discouraged as these products make the liner slick.

### INSTALLATION INSTRUCTIONS FOR YOUR NISSAN JUKE REAR SEAT HUSKY LINERS® WeatherBeater FLOOR LINERS

FRONT OF VEHICLE

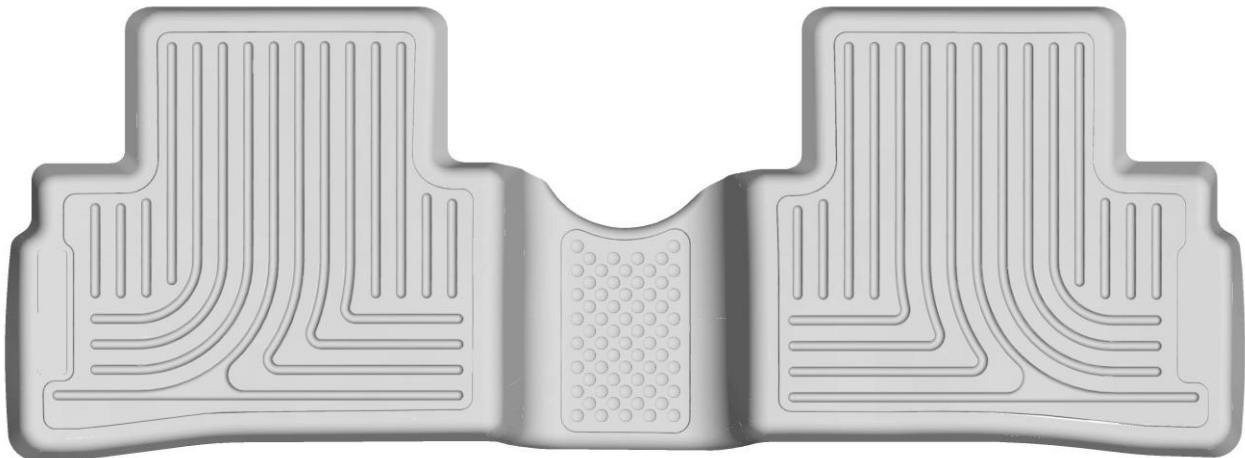

THE FACTORY CARPET HOOKS LOCATED IN THE CARPETED AREA OF THE FLOOR PANS NEED TO BE REMOVED TO ALLOW YOUR LINER TO LAY COMPLETELY FLAT. TO REMOVE, APPLY FIRM PRESSURE WHILE LIFTING THE END OF THE HOOK ARM STRAIGHT UP.

TO EASE INSTALLATION OF YOUR JUKE SECOND SEAT LINER, MOVE THE FRONT SEATS TO THEIR MOST FORWARD POSITIONS. WITH THIS DONE, INSERT LINER IN VEHICLE ANGLING IT SO THAT THE BACK EDGE OF THE LINER IS SEATED INTO PLACE FIRST, THEN LOWER FRONT PORTION. ONCE LINER IS INSTALLED, REPOSITION THE FRONT SEATS AS DESIRED.