




## Wheel Well Guards

79011 - Installation Instructions  
Chevrolet Silverado 1500/2500/3500

### PACKAGE CONTENTS:



Wheel Well Guard  
Driver's Side (1)

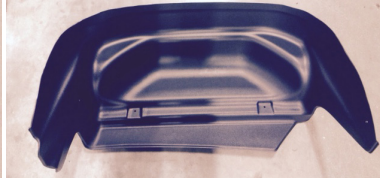


Wheel Well Guard  
Passenger's Side (1)

### TOOLS REQUIRED:

- Torx T15 Socket Bit
- Socket Driver

### VEHICLE PREPARATION:

Your vehicle's rear fender wells should be cleaned prior to the installation of your new Husky Wheel Well Guards.

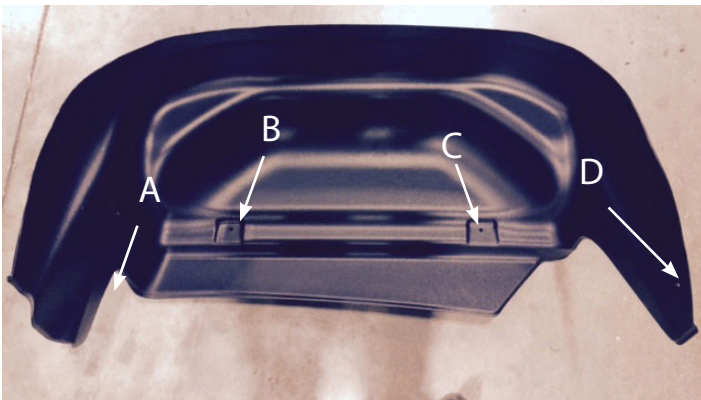

### Installation

Read all directions thoroughly prior to the installation of your Wheel Well Guards.

A, B, C & D are pre-drilled fastener locations for installation.



1. Remove all factory fasteners that hold the factory wheel well liner in-place with the Torx 15 bit and driver and remove the factory liner.  
(13 locations per side)



2. Reinstall 2 factory screws that hold the factory rock guard on the front side of the fender and tighten.  
(2 places per side)



3. Verify that you are installing the correct Wheel Well Guard by checking the part no. located on the backside of the part.

- 7901 DS installs on the driver's side.
- 7901 PS installs on the passenger's side.



4. Insert the Wheel Well Guard into the rear wheel well opening over the tire.

NOTE: It is not necessary to remove the tire.



5. Push The Wheel Well Guard up into the wheel well opening.



6. Insert the lower flap sections of the Wheel Well Guard into the fender well behind the fender well lip. Perform this step for both the front and rear lower flap sections.



7. Tuck the remaining portion of the Wheel Well Guard behind the fender lip all the way around the fenderwell opening.



8. Align the 4 holes in the Wheel Well Guard with the factory screw locations and install the factory torx head screws.  
Note: Install all screws before tightening.



9. Once all fasteners at locations A,B,C & D are installed, tighten with the Torx 15 bit / driver.
10. Repeat steps 1-9 on the other side of the vehicle.