



TE-BFC


Product Manual



I. Specifications

	CMOS 7070
Effective Pixel	648 H x 488 V
Video Signal	PAL / NTSC
Resolution	480 TV Lines
S/N Ratio	More than 48 dB
Current Consumption	110 mA
Power Supply	
Operating temperature	- °C °C
Storage temperatur	- °C~ °C
View Angle	110°
-	
Minimum Illumination	0.6 Lux

II. Connection

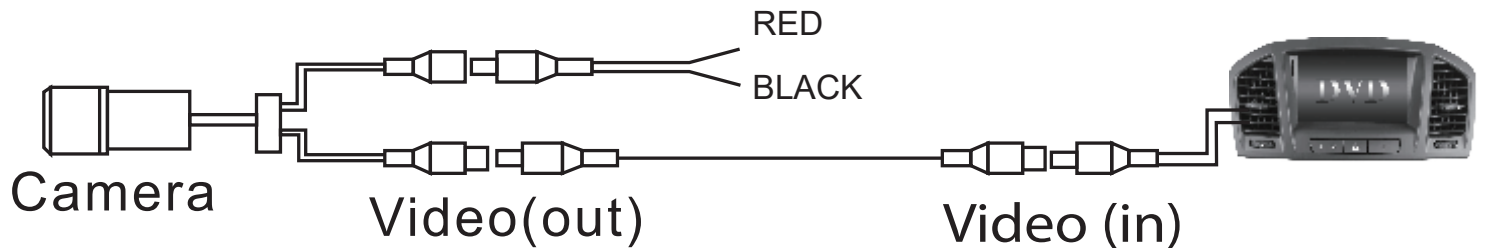

1. Find a suitable location to surface mount install the camera. Make sure the camera's view is unobstructed and be careful not to drill into any wires that might damage the vehicle. When all connections have been made and before mounting the camera, verify the camera is working and has good view of the area. Then mount the camera down with the supplied two screws.
2. Connect the RED wire to the +12 volt reverse wire
3. Connect the BLACK wire to ground (a metal, non-painted surface).
4. Run video cable though vehicle, up to video display. (Avoid placing video cable where it can get pinched or damaged).
5. Attach the YELLOW video rca to camera's output and to the reverse camera input of the radio or video display.