


■ RunFile_002.drf - BASELINE - Run Conditions: 77.96 °F, 29.36 in-Hg, SAE: 1.01
■ RunFile_018.drf - PF2056 - Run Conditions: 87.20 °F, 29.34 in-Hg, SAE: 1.02
■ RunFile_006.drf - WITHOUT MR-TECHNOLOGY - Run Conditions: 79.76 °F, 29.38 in-Hg, SAE: 1.01

DYNOJET RESEARCH

CFI SAE Smoothing: 3

INJEN TECHNOLOGY

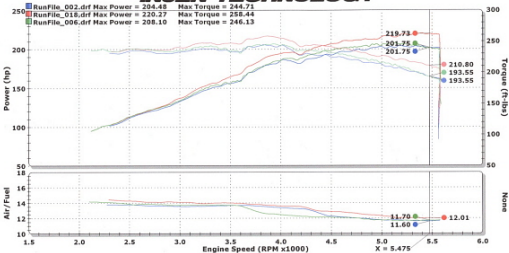

MGA-RAM TECHNOLOGY

RunFile_002.drf - BASELINE - Run Conditions: 77.96 °F, 29.36 in-Hg, SAE: 1.01

Run Type: RO Date: 5/23/2008 10:40:02 AM

2005 XRUNNER 4.0L V6 6-SPEED

RunFile_018.drf - PF2056 - Run Conditions: 87.20 °F, 29.34 in-Hg, SAE: 1.02

Run Type: RO Date: 5/23/2008 4:12:20 PM

2005 XRUNNER 4.0L V6 6-SPEED

RunFile_006.drf - WITHOUT MR-TECHNOLOGY - Run Conditions: 79.76 °F, 29.38 in-Hg, SAE: 1.01

Run Type: RO Date: 5/23/2008 10:59:48 AM

2005 XRUNNER 4.0L V6 6-SPEED