

LED Bumper Upgrade Kit


OP3R-ICKIT



SPECIFICATIONS

WARRANTY	Extended
AVAILABLE HOUSING COLOR	Black
AVAILABLE BEAM PATTERNS	10°
RAW LUMENS	1,720 lm
EFFECTIVE LUMENS	1,204 lm
WATTAGE	20
WEIGHT	3.06 lb/1390 g
LED LIFESPAN	50,000 Hours

IMAGES

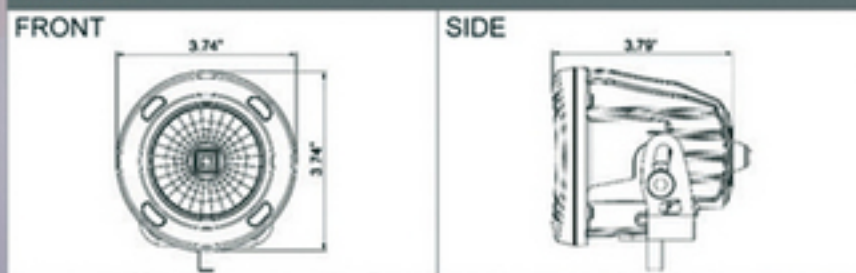

TECHNICAL DETAILS

DIMENSIONS	3.74" x 3.79" x 3.74" ea 95 mm x 96.5 mm x 95 mm ea
OPTIC PURITY	90%
DRIVEN AT	90%
INPUT VOLTAGE	9-32V DC
AMP DRAW (12V)	1.67A
IP RATING	IP-68
VIBRATION RATING	15.6 G _{rms}
OPERATING TEMP	-40 Celsius ~ +85 Celsius

ADDED FEATURES

- Weatherproof Deutsch Connector with Plug-and-Play Harness
- Die-Cast Aluminum Housing
- Polycarbonate Lens

- Complete Plug and Play Kit
- Proprietary IRIS Reflector Technology
- 693' of Usable Light form a 10 Watt LED

Optimus Comparison vs Factory

Halogen 55 Watt Low Beam Headlight



88 Feet

Halogen 65 Watt High Beam Headlight



153 Feet

Optimus Round LED Driving Light



693 Feet

10
WATT
LED'S

P
PRIME
TECHNOLOGY

Multi-Volt
9-32V
DC INPUT

DC
DIE-CAST
HOUSING

IP-68
WATERPROOF

EX
EXTENDED
WARRANTY