

Honda Accord 2004-2006


Non-Navigation Radios Satellite Radio Operation

READ THIS FIRST

Changing Sources (Factory SAT and Bluetooth


- Press the XM or AUX button.
- XM1 remains Factory SAT (if equipped).
- XM2 becomes the Bluetooth source.

(Actual radio appearance may differ from representation.)

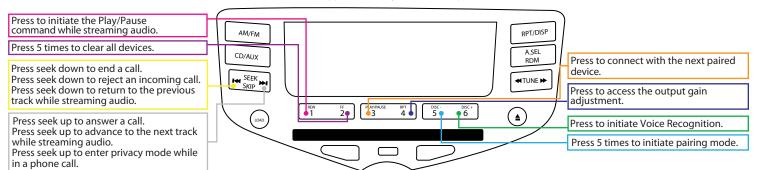


Example:

Adjusting the output gain





Honda Accord 2008-2011 Non-Navigation Radios CD Changer Operation

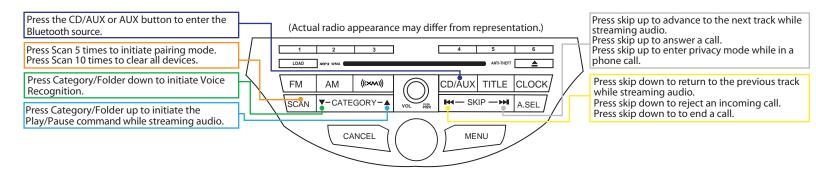

Example: Adjusting the output gain 1) Press the Repeat button to 2) Within 7 seconds press 3) 7 seconds after the last Disc - to lower the gain access the output gain button press the level will and Disc + to raise the adjustment. be stored and the track number will change to the gain. The track number will change number of the current track. to the current gain level. The The track number on level can be adjusted from the radios display will. 1 - 9 with 1 being the lowest change accordingly. level and 9 being the highest.




Honda Accord 2008-2011 Non-Navigation Radios Satellite Radio Operation

READ THIS FIRST

Changing Sources (Factory SAT and Bluetooth

- Press the XM or AUX button.
- XM1 remains Factory SAT (if equipped).
- XM2 becomes the Bluetooth source.

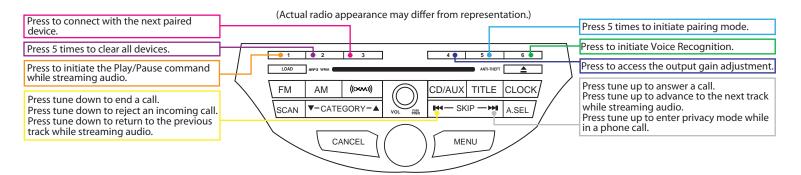

Example:


Adjusting the output gain





Honda/Acura Non-Navigation Radios CD Changer Operation



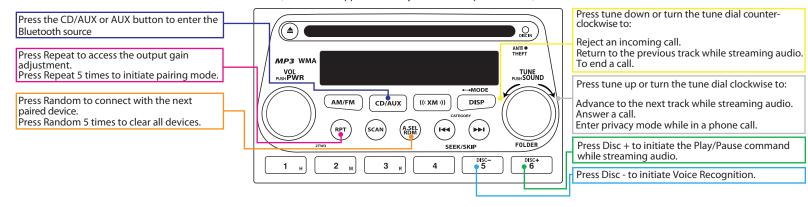

Example:

Adjusting the output gain 1) Press the Repeat button to 2) Within 7 seconds press access the output gain Disc - to lower the gain and Disc + to raise the adjustment. gain. The track number will change to the current gain level. The The track number on level can be adjusted from the radios display will. 1 - 9 with 1 being the lowest change accordingly. level and 9 being the highest.

3) 7 seconds after the last button press the level will be stored and the track number will change to the number of the current track.




Honda/Acura Non-Navigation Radios Satellite Radio Operation

READ THIS FIRST

Changing Sources (Factory SAT and Bluetooth

- Press the XM or AUX button.
- XM1 remains Factory SAT (if equipped).
- XM2 becomes the Bluetooth source.

(Actual radio appearance may differ from representation.)

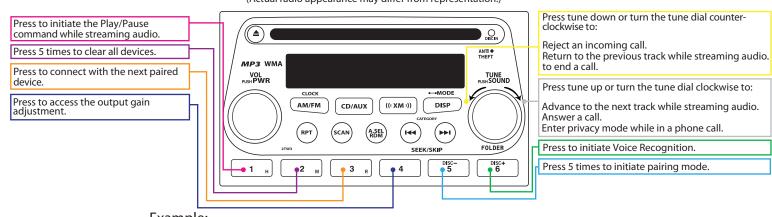

Example:

Adjusting the output gain

output gain adjustment.

Radio text will clear and the channel number will be the current gain level. The level can be adjusted from 1 - 9 with 1 being the lowest and 9 being the highest.

1) Press Preset 4 to access the

2) Within 7 seconds press preset 5 to lower the gain and preset 6 to raise the gain.

The channel number on the radios display will. change accordingly.

 7 seconds after the last button press the level will be stored and the track text will reappear on the radios display.



Honda Accord 2004-2006


Non-Navigation Radios Satellite Radio Operation

READ THIS FIRST

Changing Sources (Factory SAT and Bluetooth


- Press the XM or AUX button.
- XM1 remains Factory SAT (if equipped).
- XM2 becomes the Bluetooth source.

(Actual radio appearance may differ from representation.)

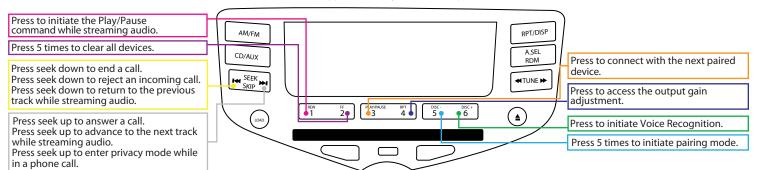

Example:


Adjusting the output gain





Honda

Accord 2004-2006 Non-Navigation Radios CD Changer Operation

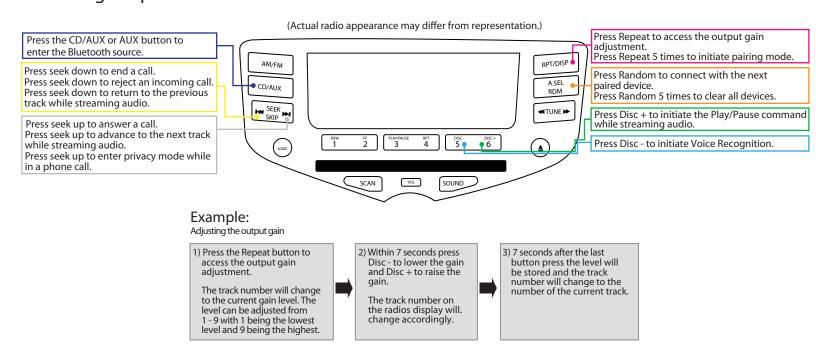

Learn more about other car stereo / video installation parts by iSimple on our website.