PRODUCT INFORMATION

Description 12-24V DOT LED Heated Amber Front

Position & Front Turn Signal Light

 Height
 57.00 mm / 2.24 in

 Width
 165.50 mm / 6.52 in

 Depth
 21.00 mm / 0.83 in

Shape Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Bezel Color Amber

Mounting TypeGrommet/Flange BracketRetrofitsStandard 2" x 6" Signal Lights

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating 50 °C / 122 °F

Temperature

Mating Connector 3-Pin AMP Connector (282087-1)


Product Weight 0.35 lbs / 0.16 kgs **Shipping Weight** 1.35 lbs / 0.61 kgs








PRODUCT DIMENSIONS

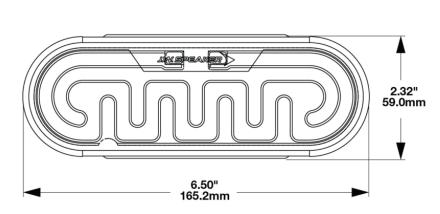

1.56" 39.8mm

0.82" 20.8mm

Pin Out Information



WIRE HARNESS*



*Wire harness sold separately on Part # 0346781. Wire harness included on Part # 0346784. Also available as a single accessory (Part # 3270501)

ELECTRICAL SPECIFICATIONS

Input Voltage10-30V DCOperating Voltage12-24V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pul

Current Draw 0.7A @ 12V DC (Front Turn)
0.7A @ 24V DC (Front Turn)

1.5A @ 12V DC (Front Position Heated) 1.5A @ 24V DC (Front Position Heated)



REGULATORY STANDARDS COMPLIANCE











Buy America Standards FMVSS 108 s7.1 (Table VI) SAE J222 Tested to ECE Reg. 10

(Radiated Emissions only)

Eco Friendly FMVSS 108 s7.8 (Table XIV) SAE J588

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s) Signalization - Front Position Signalization - Turn (Front)

APPLICATIONS











INSTALLATION & APPLICATION INFORMATION

Installation requires the black wire (Front Position w/ Heater) to be powered in order for the heater to work. Only power supplied to the black wire will power the heater. If power is not supplied to the heater, the light will not be heated. Current Draws will differ based upon whether or not the heater is powered and activated. Turn off power before installing.

PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm



ACCESSORIES



<u>Part Number</u> <u>4242891</u>

Rubber Mounting Grommet for Model 274



<u>Part Number</u> <u>5870261</u>

Plastic Mounting Flange for Model 274



Part Number 8200581

Steel L-Shaped Mounting Bracket for Model 274



Part Number 8200591

Chrome Plastic Trim Ring for Model 274



<u>Part Number</u> <u>3270501</u>

3-Pin AMP Connector Wire Harness Assembly



RELATED PRODUCTS



Part Number 0346701

12-24V DOT LED Heated Red Stop, Tail, & Turn Light



Part Number 0346704

12-24V DOT LED Heated Red Stop, Tail, & Turn Light with Harness



<u>Part Number</u> 0346711

12-24V DOT LED Heated Amber Rear Turn Light



Part Number 0346714

12-24V DOT LED Heated Amber Rear Turn Light with Harness



<u>Part Number</u> 0346721

12-24V DOT LED Heated White Reverse Light



<u>Part Number</u> <u>0346724</u>

12-24V DOT LED Heated White Reverse Light with Harness



Part Number 0346784

12-24V DOT LED
Heated Amber Front
Position & Front Turn
Signal Light with
Harness



<u>Part Number</u> 0346791

12-24V DOT LED Heated Amber Side Marker Light

