



PRODUCT INFORMATION

Description	12V LED Work Light with Flood Beam Pattern & Fender Mount
Height	130.30 (mm) / 5.13 (in)
Width	143.26 (mm) / 5.64 (in)
Depth	60.45 (mm) / 2.38 (in)
Shape	Rectangular
Outer Lens Material	Glass
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Type	Fender Mount
Minimum Operating Temperature	-40 (°C) / -40 (°F)
Maximum Operating Temperature	65 (°C) / 149 (°F)
Mating Connector	Packard (#12020599)
Product Weight	1.95 (lbs) / 0.88 (kgs)
Spec Sheet Printed	2016-07-07

ELECTRICAL SPECIFICATIONS

Input Voltage	12 V DC
Operating Voltage	9-16 V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	1.5A @ 12V DC


REGULATORY STANDARDS COMPLIANCE



Buy America Standards	Eco Friendly
IEC IP67	SAE J1113-21
Tested to ECE Reg. 10 (Radiated Emissions only)	

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,900
Effective Lumen Output 780
Nominal LED Color Temperature 5000 (K)
Beam Pattern(s) Forward Lighting - Flood (Standard)

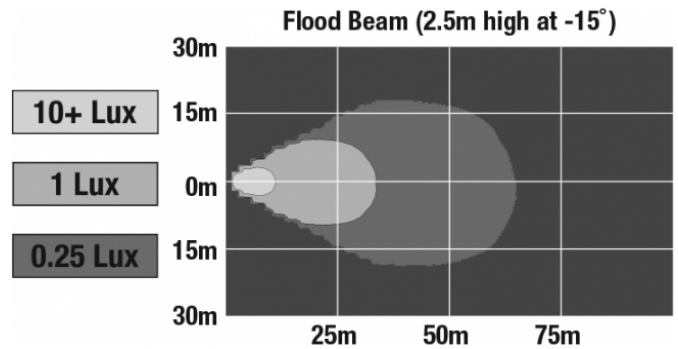

APPLICATIONS



RELATED PRODUCTS



[Part Number 0545971](#)

12V LED Work Light with Flood Beam Pattern & Bottom Mount



[Part Number 0545981](#)

12V LED Work Light with Flood Beam Pattern & Side Mount



[Part Number 0547431](#)

12V LED Work Light with Flood Beam Pattern & Combine Retrofit Mount



[Part Number 0548311](#)

12V LED Work Light with Flood Beam Pattern & 10 degree Mounting Plate