PRODUCT INFORMATION

Description 12-24V DOT/ECE LED RHT High & Low

Beam Heated Headlight with Black Inner

Bezel - Single Light

 Height
 141.99 mm / 5.59 in

 Width
 199.90 mm / 7.87 in

 Depth
 95.00 mm / 3.74 in

ShapeRectangularOuter Lens MaterialPolycarbonate

Outer Lens Color Clear

Housing Material Die-Cast Aluminum

Housing ColorBlackBezel ColorBlack

Retrofits 2B1 5" X 7" Headlights

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating 65 °C / 149 °F

Temperature

Connector or Wiring

Mating ConnectorH4 AMP#172615-2Product Weight2.74 lbs / 1.24 kgsShipping Weight3.89 lbs / 1.76 kgs












PRODUCT DIMENSIONS







ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage10-32V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Black WireGroundYellow WireLow BeamWhite WireHigh BeamRed WireFront Position*

Current Draw 5.35A @ 12V DC (High Beam)

4.30A @ 12V DC (Low Beam) 2.80A @ 12V DC (Front Position) 2.50A @ 24V DC (High Beam) 2.10A @ 24V DC (Low Beam) 1.32A @ 24V DC (Front Position)



REGULATORY STANDARDS COMPLIANCE













Buy America Standards ECE Reg 10 ECE Reg 112 ECE Reg 7

Eco Friendly FMVSS 108 s10.1 (Table XIX)

FMVSS 108 s10.1 (Table XVIII) IEC IP69K

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3,015 (High Beam); 2,250 (Low

Beam)

Effective Lumen

Beam Pattern(s)

Output

1,320 (High Beam); 975 (Low Beam)


Forward Lighting - High Beam


(DOT/ECE)

Forward Lighting - Low Beam

(DOT/ECE)

Signalization - Front Position

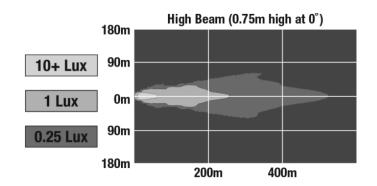

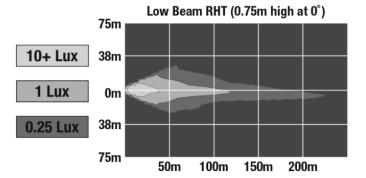



APPLICATIONS





















ADDITIONAL INFORMATION

*Front position light is a requirement outside of North America. If your vehicle is operated in North America, you do not need to connect this wire unless your vehicle is equipped with a front position light.

SMARTHEAT™ HEATING SYSTEM

The SmartHeat™ heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- · Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm



ACCESSORIES



Part Number 8000381

H4/H4 Anti-Flicker Harness for J.W. Speaker LED headlights

RELATED PRODUCTS



<u>Part Number</u> <u>0554421</u>

12-24V ECE LED LHT High & Low Beam Heated Headlight with Chrome Inner Bezel -Single Light



<u>Part Number</u> <u>0554441</u>

12-24V ECE LED LHT High & Low Beam Heated Headlight with Black Inner Bezel -Single Light



<u>Part Number</u> 0554461

12-24V DOT/ECE LED RHT High & Low Beam Heated Headlight with Chrome Inner Bezel -Single Light

Learn more about custom and factory headlights we have.

