#### PRODUCT INFORMATION

**Description** 12-24V ECE LED RHT High & Low Beam

Heated Headlight with Black Inner Bezel

- Single Light

 Height
 176.53 mm / 6.95 in

 Width
 176.53 mm / 6.95 in

 Depth
 99.82 mm / 3.93 in

**Shape** Round

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorGreyBezel ColorBlack

**Retrofits** 2D1 "PAR56" or 7" round headlights

Minimum Operating -40 °C / -40 °F

**Temperature** 

**Maximum Operating** 65 °C / 149 °F

Temperature

**Connector or Wiring** H4

Mating ConnectorH4 AMP#172615-2Product Weight2.31 lbs / 1.05 kgsShipping Weight3.35 lbs / 1.52 kgs










### **PRODUCT DIMENSIONS**

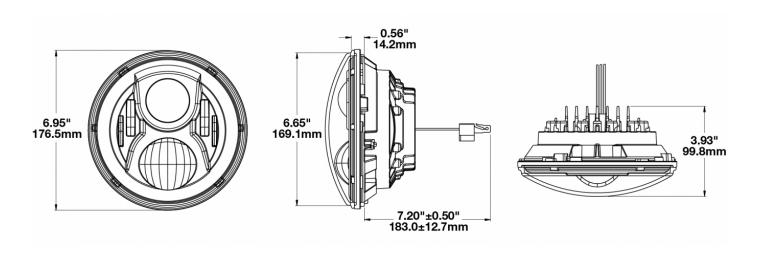

#### **ELECTRICAL SPECIFICATIONS**

Input Voltage12-24V DCOperating Voltage9-32V DC

**Transient Spike Protection** 150V Peak @ 1 HZ-100 Pul

Black WireGroundYellow WireLow BeamWhite WireHigh BeamRed WireFront Position

Blue Wire DRL

 Current Draw
 4.20A @ 12V DC (High Beam)

 2.00A @ 12V DC (Low Beam)

 2.30A @ 24V DC (High Beam)

 1.10A @ 24V DC (Low Beam)

1.10A @ 24V DC (Low Be 1.60A @ 12V DC (DRL) 0.80A @ 24V DC (DRL)

0.16A @ 12V DC (Front Position) 0.10A @ 24V DC (Front Position)



#### REGULATORY STANDARDS COMPLIANCE







Buy America Standards ECE Reg 112 ECE Reg 87 IEC IP67 ECE Reg 10
ECE Reg 7
Eco Friendly

Tested to ECE Reg. 10 (Radiated Emissions only)

### PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3,200 (High Beam); 1,770 (Low

Beam

**Effective Lumen** 

Output

1,260 (High Beam); 750 (Low Beam)

**Candela Output** 54,000 (High Beam) 35,003 (Low

Beam) 5000 K

**Nominal LED Color** 

Temperature

Beam Pattern(s)


Forward Lighting - Daytime


Running Light

Forward Lighting - High Beam (ECE) Forward Lighting - Low Beam (ECE

Right Hand)

Signalization - Front Position

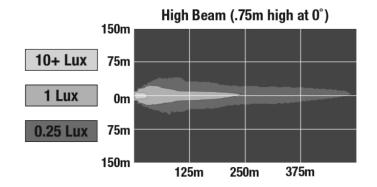

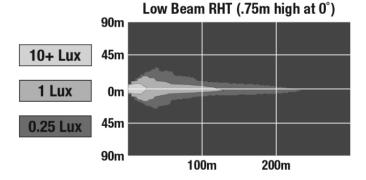



#### **APPLICATIONS**

















### **ADDITIONAL INFORMATION**

#### This light has been updated with Dual Burn™ high beam optics.

This technology combines your high and low beam when turning on your high beam, providing the driver with both widespread visibility along with a powerful punch of light down the road.



**LOW BEAM** 



STANDARD HIGH BEAM



DUAL BURN™ HIGH BEAM

#### Installation:

Headlight must be securely mounted and properly aimed such that the beam pattern cut off line complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.



### **ACCESSORIES**



<u>Part Number</u> <u>8000381</u>

H4/H4 Anti-Flicker Harness for J.W. Speaker LED headlights



<u>Part Number</u> <u>3156351</u>

Mounting Ring Kit for 7" Round (PAR56) Headlights



Part Number 3156561

Panel Mount Bucket Assembly for 8700 Evolution & 8710 Series



## Part Number 3266081

Jumper Harness H4/H13 for 8700 Evolution & 8710 Series



#### Part Number 8000311

Anti-Flicker Harness H4/H13 for 8700 Evolution Series Headlights



#### Part Number 8200411

Wire Harness H4 for 7" Round (PAR56) Headlights

#### **RELATED PRODUCTS**



Part Number 0552751

12-24V ECE LED LHT High & Low Beam Headlight with FP, DRL, Black Inner Bezel -Single Light



## Part Number 0552761

12-24V ECE LED RHT High & Low Beam Headlight with FP, DRL, Black Inner Bezel -Single Light



## Part Number 0553311

12-24V ECE LED LHT High & Low Beam Headlight with FP, DRL, Chrome Inner Bezel -Single Light



### <u>Part Number</u> 0553321

12-24V ECE LED RHT High & Low Beam Headlight with FP, DRL, Chrome Inner Bezel -Single Light



#### <u>Part Number</u> 0554941

12-24V DOT LED High & Low Beam Headlight with Black Inner Bezel -Single Light



## Part Number 0554961

12-24V DOT LED High & Low Beam Headlight with Chrome Inner Bezel - Single Light



## Part Number 0554981

12-24V DOT LED High & Low Beam Headlight with Black Inner Bezel & Mounting Ring -Single Light



## <u>Part Number</u> 0554991

12-24V DOT LED High & Low Beam Headlight with Chrome Inner Bezel & Mounting Ring - Single Light

