PRODUCT INFORMATION

Description 24V LED Work Light with Medium Flood

Beam Pattern

 Height
 177.55 mm / 6.99 in

 Width
 253.75 mm / 9.99 in

 Depth
 88.90 mm / 3.5 in

 Shape
 Rectangular

Outer Lens MaterialGlassOuter Lens ColorClear

Housing Material Die-Cast Aluminum

Housing Color Black

Mounting Hardware Description Mounting Bolt

Mounting Type Universal Pedestal Mount

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating 65 °C / 149 °F

Temperature

Connector or Wiring Integrated 2-Pin Deutsch Weather-Proof

Socket (DT04-2P)

Mating ConnectorDeutsch DT06-2SProduct Weight6.72 lbs / 3.05 kgsShipping Weight7.50 lbs / 3.4 kgs

Additional Information Wire Harness: JWS part number


3267891.







PRODUCT DIMENSIONS

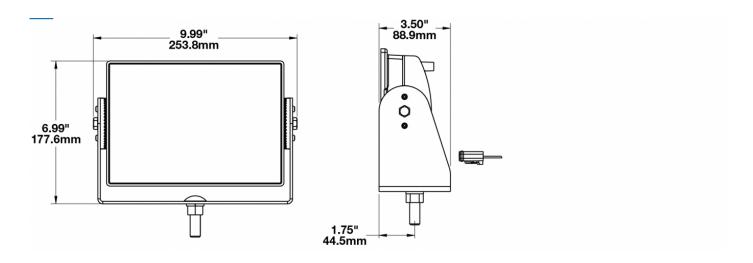

ELECTRICAL SPECIFICATIONS

Input Voltage24V DCOperating Voltage16-32V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Current Draw 3.60A @ 24V DC

REGULATORY STANDARDS COMPLIANCE



IEC IP67



PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 8,100 **Effective Lumen** 3,900

Output


Nominal LED Color

Temperature

Beam Pattern(s)

5000 K

Forward Lighting - Flood (Medium)

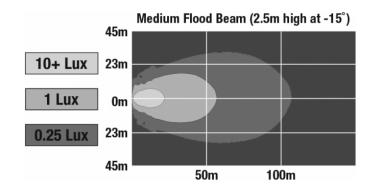

APPLICATIONS















PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm

AVERTISSEMENT: Cancer et effet nocif sur la reproduction

RELATED PRODUCTS



Part Number 0543881 12-24V LED Work Light with Wide Flood Beam

Pattern



Part Number 0549631 with Wide Flood Beam Pattern & Yellow

Housing



Part Number

0549641 12-24V LED Work Light 12-24V LED Work Light 12-24V LED Work Light with Narrow Flood Beam Pattern & Yellow Beam Pattern Housing



Part Number 0551431 with Medium Flood



Part Number 0551441 12-24V LED Work Light with Narrow Flood Beam Pattern



Part Number 0551451 12-24V LED Work Light with Wide Flood Beam Pattern



Part Number 0557911 24V LED Work Light with Narrow Flood Beam Pattern



Part Number 0557931 24V LED Work Light with Wide Flood Beam Pattern

