




**PRODUCT INFORMATION**

<b>Description</b>	12-24V LED Work Light with Trapezoid Beam Pattern & Low Profile Mount
<b>Height</b>	105.92 (mm) / 4.17 (in)
<b>Width</b>	165.10 (mm) / 6.5 (in)
<b>Depth</b>	44.45 (mm) / 1.75 (in)
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Polycarbonate
<b>Housing Color</b>	Chrome
<b>Mounting Hardware Description</b>	(x3) 10-16 x 2.37 Screws
<b>Mounting Type</b>	Low Profile Mount
<b>Minimum Operating Temperature</b>	-40 (°C) / -40 (°F)
<b>Maximum Operating Temperature</b>	65 (°C) / 149 (°F)
<b>Connector or Wiring</b>	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
<b>Mating Connector</b>	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
<b>Product Weight</b>	1.00 (lbs) / 0.45 (kgs)
<b>Shipping Weight</b>	1.25 (lbs) / 0.57 (kgs)
<b>Spec Sheet Printed</b>	2016-07-07

**PRODUCT DIMENSIONS**

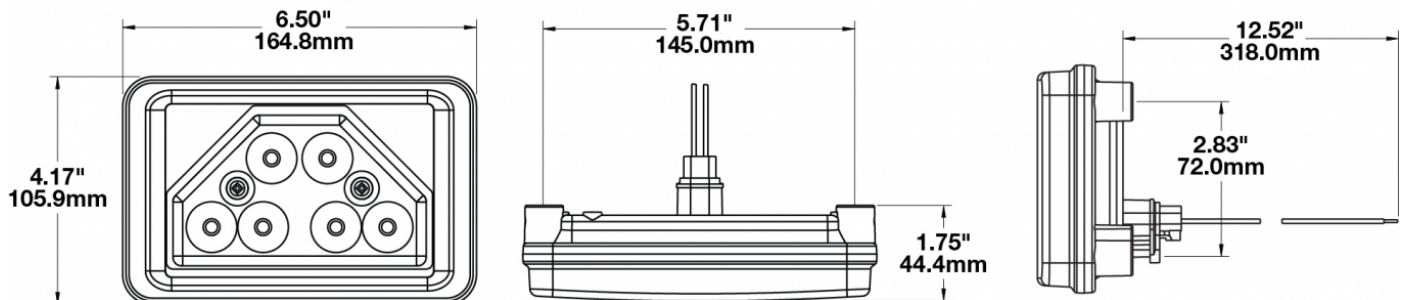

**ELECTRICAL SPECIFICATIONS**

<b>Input Voltage</b>	12-24 V DC
<b>Operating Voltage</b>	9-32 V DC
<b>Transient Spike Protection</b>	330V Peak @ 1 HZ-100 Pulses
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative
<b>Current Draw</b>	1.6A @ 12V DC 0.8A @ 24V DC

**REGULATORY STANDARDS COMPLIANCE**




Buy America Standards  
IEC IP69K


Eco Friendly

**PHOTOMETRIC SPECIFICATIONS**

<b>Raw Lumen Output</b>	1,700
<b>Effective Lumen Output</b>	1,000
<b>Nominal LED Color Temperature</b>	5000 (K)
<b>Beam Pattern(s)</b>	Forward Lighting - Trapezoid

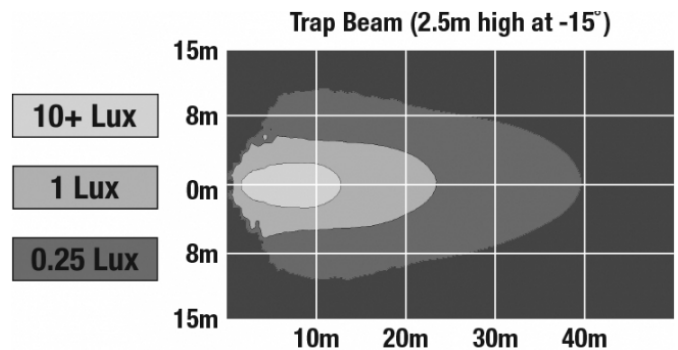

**APPLICATIONS**

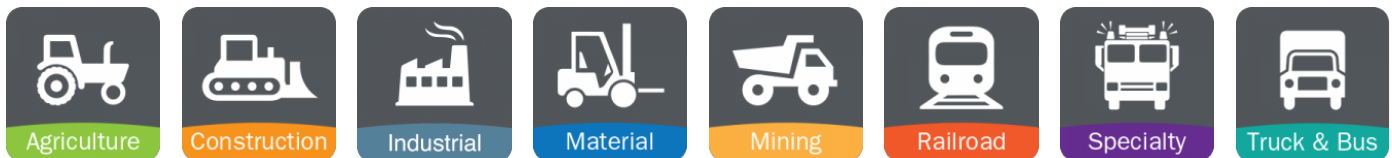

**RELATED PRODUCTS**



[Part Number 1300281](#)

**12-24V LED Work Light  
with Flood Beam Pattern  
& Low Profile Mount**



[Part Number 1300392](#)

**12-24V LED Work Light  
with Trapezoid Beam  
Pattern & Rubber Shock  
Mount**