


Part Number 1603311



PRODUCT INFORMATION

Description	12-24V LED Work Light with Spot Beam Pattern & On/Off Switch
Height	133.35 (mm) / 5.25 (in)
Width	137.16 (mm) / 5.4 (in)
Depth	47.75 (mm) / 1.88 (in)
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 (°C) / -40 (°F)
Maximum Operating Temperature	65 (°C) / 149 (°F)
Connector or Wiring	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
Mating Connector	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
Product Weight	1.16 (lbs) / 0.53 (kgs)
Spec Sheet Printed	2016-07-07

PRODUCT DIMENSIONS

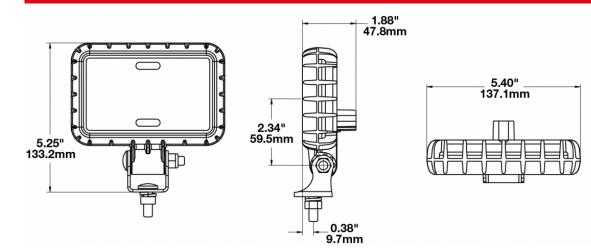



Part Number 1603311

LED Work Light - Model 880 XD

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24 V DC
Operating Voltage	9-32 V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	1.20A @ 12V DC 0.60A @ 24V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards IEC IP69K Tested to ECE Reg. 10 (Radiated Emissions only) Eco Friendly SAE J1455

PHOTOMETRIC SPECIFICATIONS



50m 100m

150m 200m

APPLICATIONS







Part Number 1603311

LED Work Light - Model 880 XD

ACCESSORIES



Part Number 8200101

Stainless Steel Mounting Kit for Work Lights & Marine Lights

RELATED PRODUCTS



Part Number 1603241

12-24V LED Work Light with Spot Beam Pattern



Part Number 1603251

12-24V LED Work Light with Trapezoid Beam Pattern



Part Number 1603261

12-24V LED Work Light with Flood Beam Pattern



Part Number 1603321

12-24V LED Work Light with Trapezoid Beam Pattern & On/Off Switch



Part Number 1603331

12-24V LED Work Light with Flood Beam Pattern & On/Off Switch