

LED Work Light – Model 791


PRODUCT INFORMATION

Description	12-24V LED Driving Light with Flood Beam Pattern
Height	48.00 mm / 1.89 in
Width	150.00 mm / 5.91 in
Depth	62.90 mm / 2.48 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Bezel Color	Chrome
Mounting Hardware Description	(x1) Bracket
Mounting Type	Bracket
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Deutsch DT04-2P
Mating Connector	Deutsch DT06-2S
Product Weight	0.87 lbs / 0.39 kgs
Shipping Weight	0.90 lbs / 0.41 kgs



LED Work Light – Model 791

PRODUCT DIMENSIONS

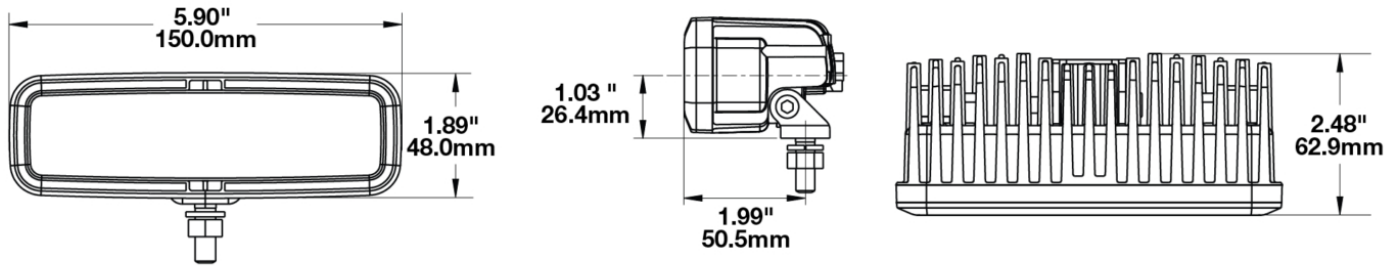

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-32V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Current Draw	1.27A @ 12V DC 0.78A @ 24V DC

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
IEC IP67

Eco Friendly

LED Work Light – Model 791

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,820
 Effective Lumen Output 1,200
 Nominal LED Color Temperature 5000 K
 Beam Pattern(s) Forward Lighting - Flood (Standard)

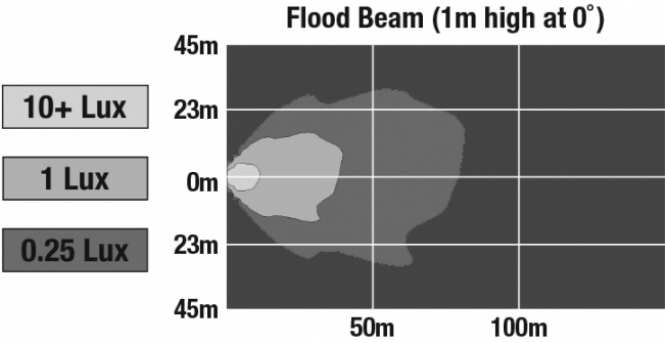

APPLICATIONS



RELATED PRODUCTS



Part Number
1603511
 12-24V LED Driving Light



Part Number
1603601
 12V DOT/ECE LED Fog Light



Part Number
1603603
 12V DOT/ECE LED Fog Light - 2 Light Kit