




**PRODUCT INFORMATION**

<b>Description</b>	12-24V LED Work Light with Polycarbonate Lens & Spot Beam Pattern
<b>Height</b>	155.96 (mm) / 6.14 (in)
<b>Width</b>	172.47 (mm) / 6.79 (in)
<b>Depth</b>	77.11 (mm) / 3.04 (in)
<b>Shape</b>	Oval
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) 1/2"-13 x 1"
<b>Minimum Operating Temperature</b>	-40 (°C) / -40 (°F)
<b>Maximum Operating Temperature</b>	65 (°C) / 149 (°F)
<b>Connector or Wiring</b>	Deutsch DT04-2P
<b>Mating Connector</b>	Deutsch DT06-2S
<b>Spec Sheet Printed</b>	2016-07-07

**PRODUCT DIMENSIONS**

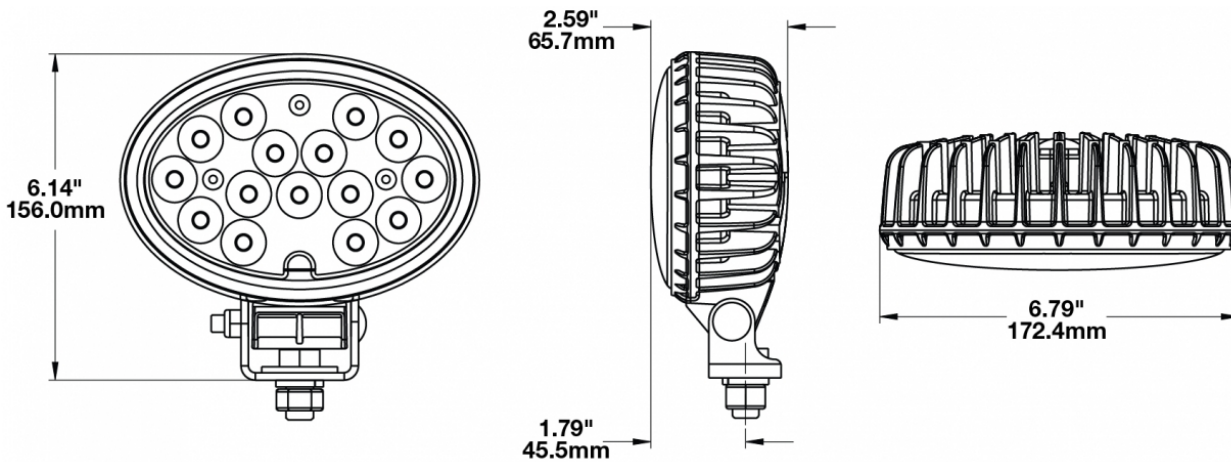

**ELECTRICAL SPECIFICATIONS**

<b>Input Voltage</b>	12-24 V DC
<b>Operating Voltage</b>	10-32 V DC
<b>Transient Spike Protection</b>	330V Peak @ 1 HZ-100 Pulses
<b>Red Wire</b>	Power - Positive
<b>Black Wire</b>	Ground - Negative
<b>Current Draw</b>	5.50A @ 12V DC 3.20A @ 24V DC


**REGULATORY STANDARDS COMPLIANCE**




Buy America Standards	CE CISPR 12
CE CISPR 22	Eco Friendly
IEC IP69K	SAE J1113-13

**PHOTOMETRIC SPECIFICATIONS**

<b>Raw Lumen Output</b>	5,250
<b>Effective Lumen Output</b>	4,500
<b>Nominal LED Color Temperature</b>	5000 (K)
<b>Beam Pattern(s)</b>	Forward Lighting - Spot

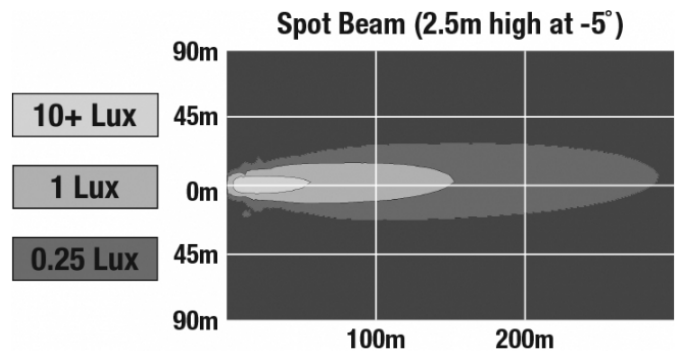

**APPLICATIONS**

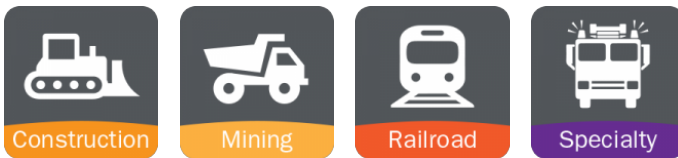

**RELATED PRODUCTS**



[Part Number 1801571](#)

**12-24V LED Work Light  
with Polycarbonate Lens  
& Trapezoid Beam  
Pattern**



[Part Number 1801581](#)

**12-24V LED Work Light  
with Polycarbonate Lens  
& Flood Beam Pattern**



[Part Number 1801781](#)

**12-24V LED Work Light  
with Glass Lens &  
Trapezoid Beam Pattern**



[Part Number 1801791](#)

**12-24V LED Work Light  
with Glass Lens & Flood  
Beam Pattern**